



MOTOROLA

MHW2821-1
MHW2821-2

UHF Silicon FET
Power Amplifiers

Designed for 12.5 V UHF power amplifier applications in industrial and commercial FM equipment operating from 806 to 950 MHz.


- Specified 12.5 V Characteristics:
 - RF Input Power: ≤ 250 mW (MHW2821-1)
 - ≤ 300 mW (MHW2821-2)
 - RF Output Power: 20 W (MHW2821-1)
 - 18 W (MHW2821-2)
- LDMOS FET Technology
- Epoxy Glass Substrate Eliminates Possibility of Substrate Fracture
- 50 Ω Input/Output Impedance
- Guaranteed Stability and Ruggedness
- Cost Effective

RF POWER AMPLIFIER
20 W, 806 to 870 MHz (-1 suffix)
18 W, 890 to 950 MHz (-2 suffix)

SEMICONDUCTOR
TECHNICAL DATA


ARCHIVE INFORMATION

ARCHIVE INFORMATION




CASE 301AB

PIN CONNECTIONS



(Top View)

Simplified Block Diagram

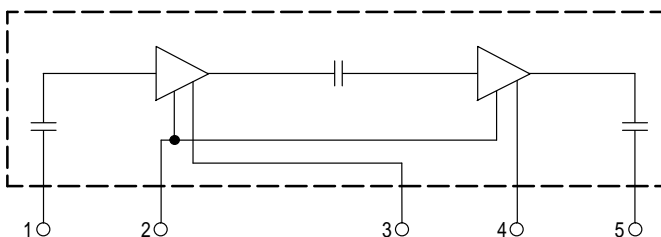

This device contains 2 active transistors

ORDERING INFORMATION

Device	Operating Temperature Range	Package
MHW2821-1	$T_A = -30$ to 100°C	Power Module
MHW2821-2		

MAXIMUM RATINGS (Flange Temperature = 25°C, unless otherwise noted.)

Rating	Symbol	Value	Unit
DC Supply Voltages	V_{bias} , V_{S2} , V_{S3}	12.5 16	Vdc
RF Input Power	P_{in}	400	mW
RF Output Power	P_{out}	23	W
Operating Case Temperature Range	T_C	-30 to 100	°C
Storage Temperature Range	T_{stg}	-30 to 100	°C

NOTES: 1. Meets Human Body Model (HBM) ≤ 3000 V.
2. ESD data available upon request.

ELECTRICAL CHARACTERISTICS ($V_{S2} = V_{S3} = 12.5$ Vdc; $V_{bias} = 12.5$ Vdc; $T_C = 25^\circ\text{C}$, 50 Ω system, unless otherwise noted.)


Characteristic	Symbol	Min	Typ	Max	Unit
Frequency Range MHW2821-1 MHW2821-2	BW	806 890	- -	870 950	MHz
Input Power MHW2821-1 ($P_{out} = 20$ W) [Note] MHW2821-2 ($P_{out} = 18$ W) [Note]	P_{in}	- -	- -	250 300	mW
Power Gain MHW2821-1 ($P_{out} = 20$ W) [Note] MHW2821-2 ($P_{out} = 18$ W) [Note]	G_p	19 17.9	- -	- -	dB
Efficiency (Rated P_{out})	η	35	-	-	%
Harmonics (Rated P_{out} Reference) [Note]	$2f_o$ $3f_o$	- -	- -	-40 -45	dBc
Input VSWR (Rated P_{out}) [Note]	$VSWR_{in}$	-	-	3:1	-
Load Mismatch Stress ($V_{supply} = 16$ Vdc; $P_{out} = 20$ W for MHW2821-1; $P_{out} = 18$ W for MHW2821-2; Load VSWR = 20:1, All Phase Angles at Frequency of Test) [Note]	ψ	No Degradation in Output Power Before and After Test			
Stability ($V_{supply} = 10.8$ to 16 Vdc; $P_{in} = 0$ to 250 mW for MHW2821-1; $P_{in} = 0$ to 300 mW for MHW2821-2; Load VSWR = 4:1, All Phase Angles at Frequency of Test)	-	All Spurious Outputs More than 60 dB Below Desired Signal			
Quiescent Current (With No RF Applied, $V_{S2} = V_{S3} = 12.5$ Vdc; $V_{bias} = 12.5$ Vdc)	I_{sq}	-	-	500	mA
Leakage Current (With No RF Applied, $V_{S2} = V_{S3} = 12.5$ Vdc; $V_{bias} = 0$ Vdc)	I_L	-	-	0.6	mA
Bias P_{in} Current (Rated P_{out}) [Note]	I_{bias}	-	-	3.0	mA

NOTE: Adjust P_{in} for specified P_{out} .

ARCHIVE INFORMATION

ARCHIVE INFORMATION

Figure 1. Test Circuit Diagram

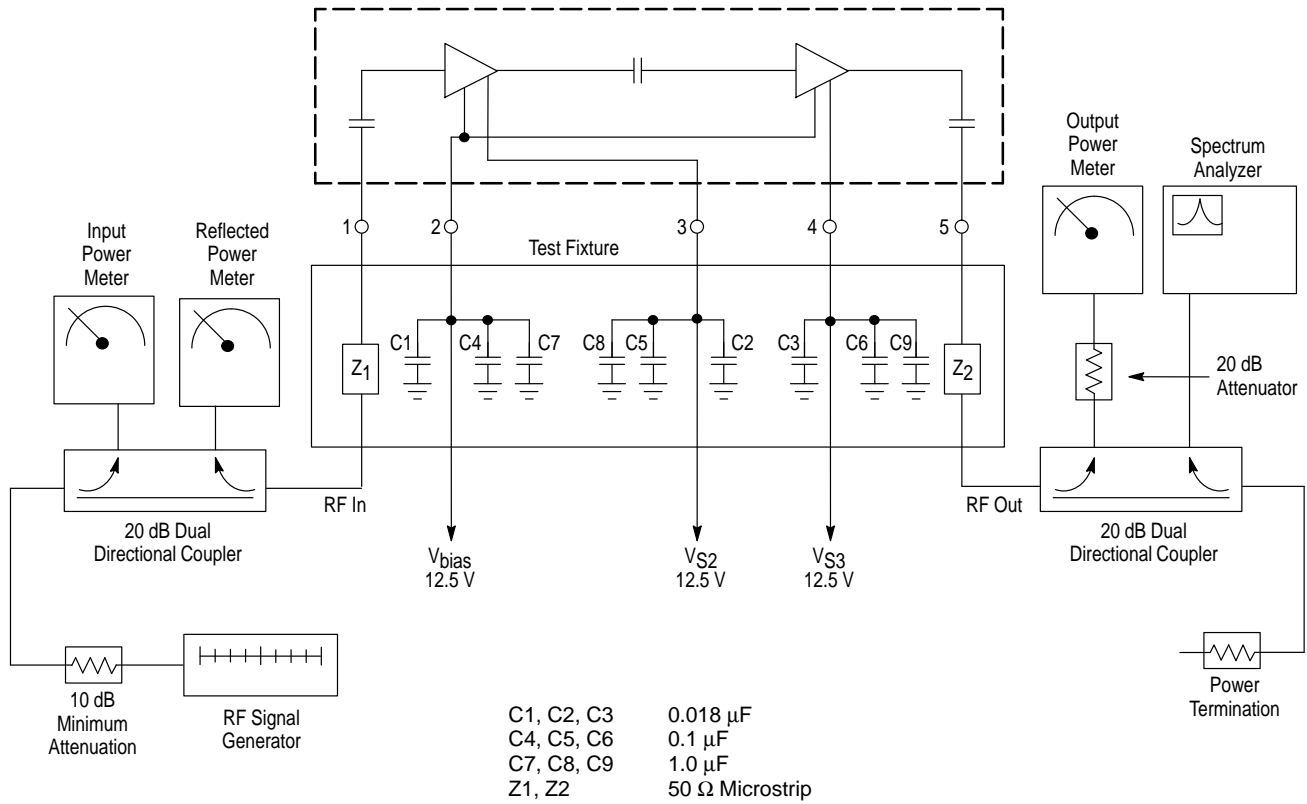

ARCHIVE INFORMATION

ARCHIVE INFORMATION

TYPICAL CHARACTERISTICS (MHW2821-1)

Figure 2. Input Power, Efficiency and VSWR versus Frequency

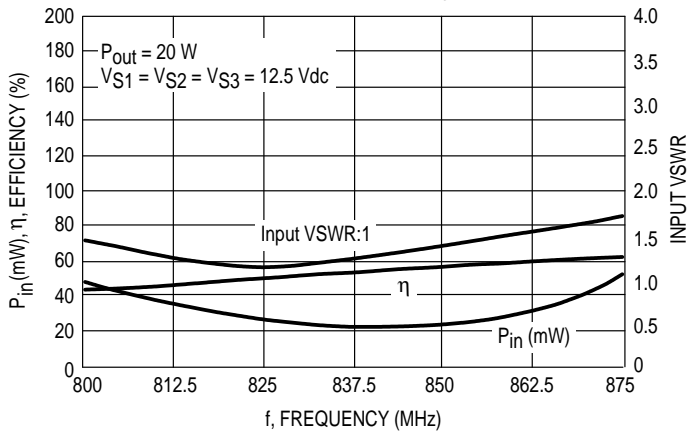


Figure 3. Output Power versus Input Power

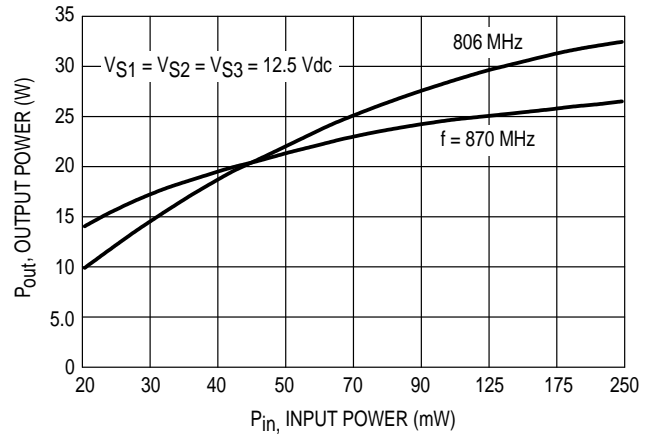


Figure 4. Output Power versus Supply Voltage

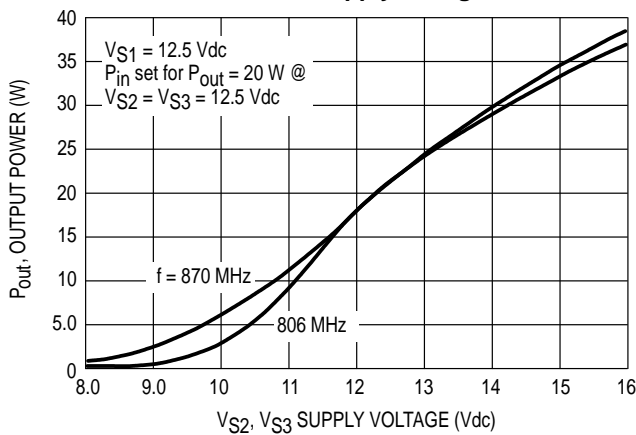


Figure 5. Efficiency versus Supply Voltage

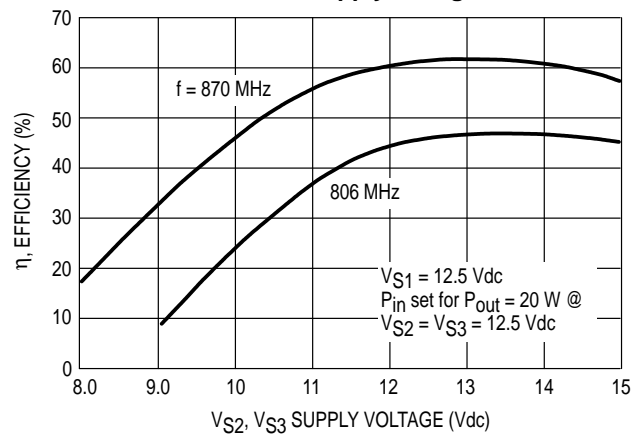


Figure 6. Output Power versus Supply Voltage to First Stage (V_{S1})


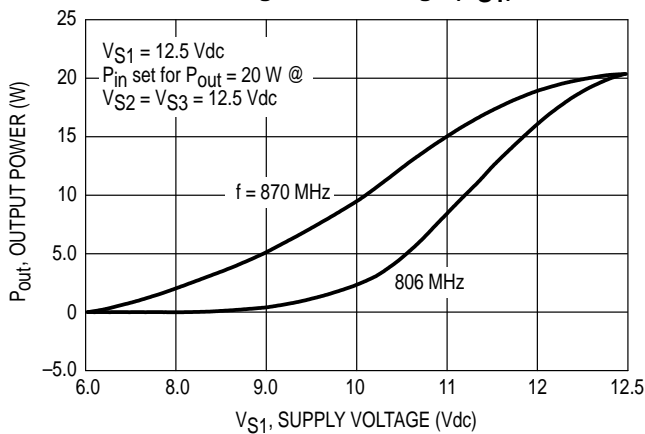


Figure 7. Input Power versus Case Temperature

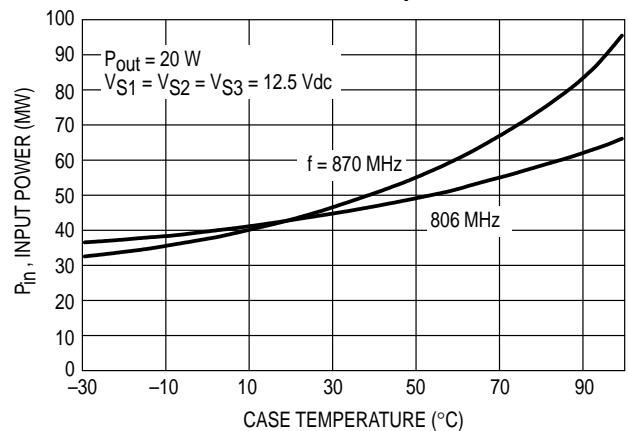

ARCHIVE INFORMATION

ARCHIVE INFORMATION

MHW2821-1 MHW2821-2
 TYPICAL CHARACTERISTICS (MHW2821-2)

Figure 8. P_{in} VSWR, and Efficiency versus Frequency

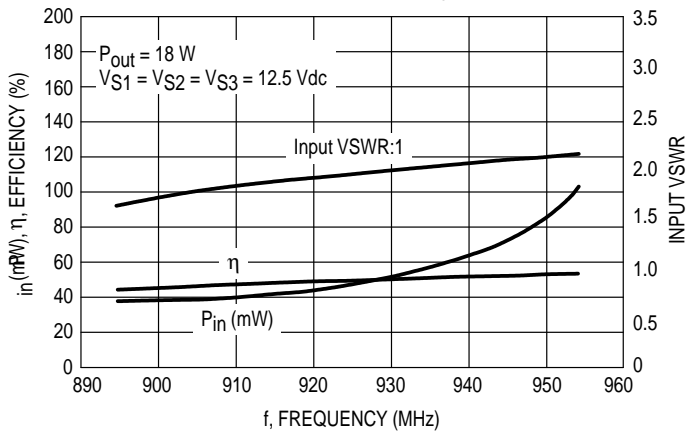


Figure 9. Output Power versus Input Power

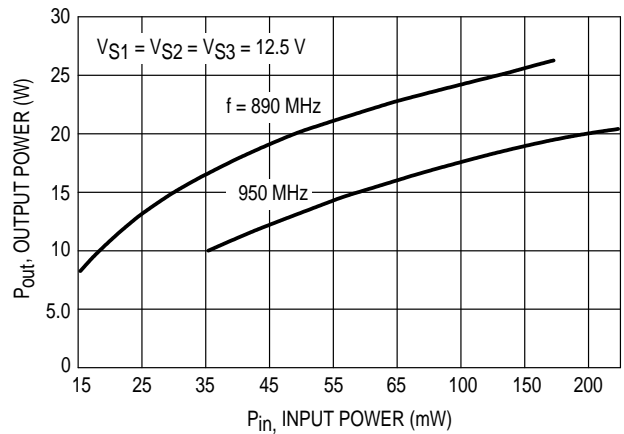


Figure 10. P_{out} versus Supply Voltage


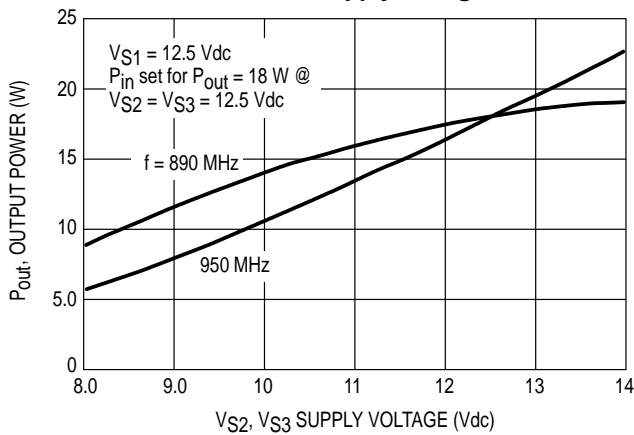



Figure 11. Efficiency versus Supply Voltage

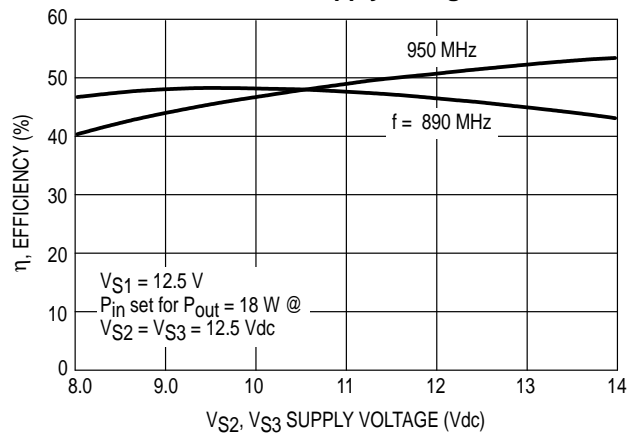

ARCHIVE INFORMATION

ARCHIVE INFORMATION

OUTLINE DIMENSIONS

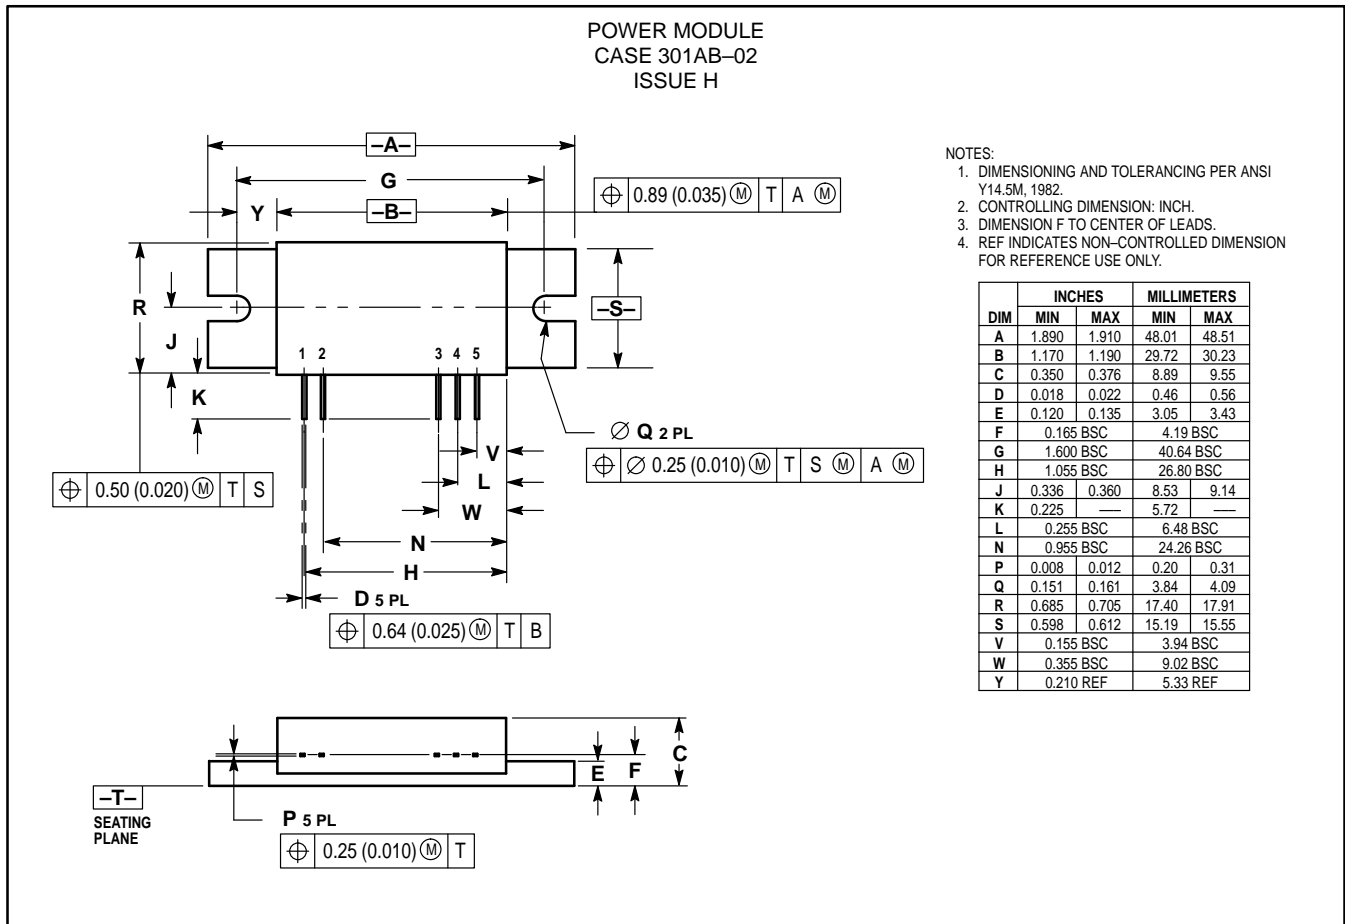

ARCHIVE INFORMATION

ARCHIVE INFORMATION

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
P.O. Box 5405, Denver, Colorado 80217. 1-303-675-2140 or 1-800-441-2447

JAPAN: Nippon Motorola Ltd.; SPD, Strategic Planning Office, 141,
4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan. 81-3-5487-8488

Customer Focus Center: 1-800-521-6274

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 1-602-244-6609
Motorola Fax Back System – US & Canada ONLY 1-800-774-1848
– http://sps.motorola.com/mfax/

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

HOME PAGE: <http://motorola.com/sps/>

