

# DN74LS55 *DN74LS55*



2-wide 4-input AND-OR-INVERT Gates

■ **Description**

DN74LS55 contains two 4-input AND-OR-INVERT gates.

■ **Features**

- Low power consumption ( $P_d = 2.75\text{mW}$  typical)
- High speed ( $t_{pd} = 12\text{ns}$  typical)
- Low output impedance
- Wide operating temperature range ( $T_a = -20$  to  $+75^\circ\text{C}$ )

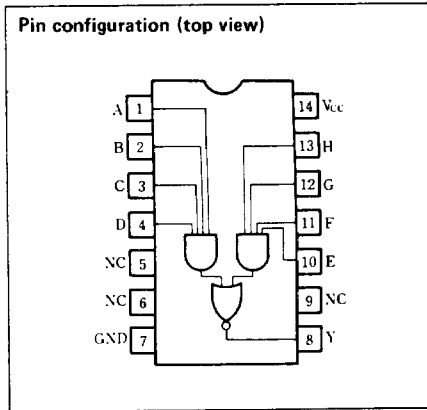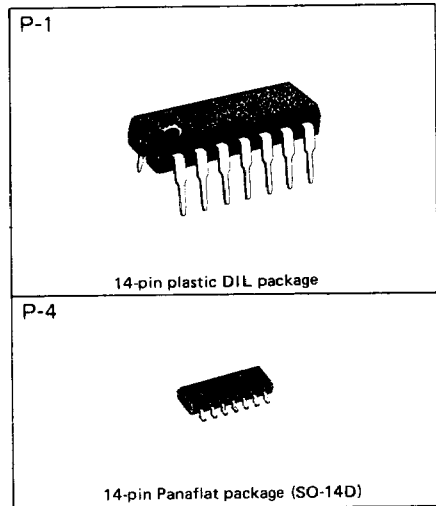

■ **Recommended operating conditions**

Parameter	Sym	Min	Typ	Max	Unit
Supply voltage	$V_{CC}$	4.75	5.00	5.25	V
Output current	$I_{OH}$			-400	$\mu\text{A}$
	$I_{OL}$			8	$\text{mA}$
Operating temperature range	$T_{opr}$	-20	25	75	$^\circ\text{C}$

LR

■ DC characteristics (Ta = -20 ~ +75°C)

Parameter	Sym	Test conditions	Min	Typ*	Max	Unit
Input voltage	V <sub>IH</sub>		2.0			V
	V <sub>IL</sub>				0.8	V
Output voltage	V <sub>OH</sub>	V <sub>CC</sub> = 4.75 V, V <sub>IL</sub> = 0.8 V I <sub>OH</sub> = -400 μA	2.7	3.4		V
	V <sub>OL1</sub>	V <sub>CC</sub> = 4.75 V		0.25	0.4	V
	V <sub>OL2</sub>	V <sub>IH</sub> = 2 V		0.35	0.5	V
Input current	I <sub>IH</sub>	V <sub>CC</sub> = 5.25 V V <sub>I</sub> = 2.7 V			20	μA
	I <sub>IL</sub>	V <sub>CC</sub> = 5.25 V V <sub>I</sub> = 0.4 V			-0.4	mA
	I <sub>I</sub>	V <sub>CC</sub> = 5.25 V V <sub>I</sub> = 7 V			0.1	mA
Output short circuit current**	I <sub>OS</sub>	V <sub>CC</sub> = 5.25 V, V <sub>O</sub> = 0 V	-15		-100	mA
Input clamp voltage	V <sub>IK</sub>	V <sub>CC</sub> = 4.75 V I <sub>I</sub> = -18 mA			-1.5	V
Supply current	I <sub>CCH</sub>	V <sub>CC</sub> = 5.25 V		0.4	0.8	mA
	I <sub>CCL</sub>	V <sub>CC</sub> = 5.25 V		0.7	1.3	mA

\* When constant at V<sub>CC</sub> = 5V, Ta = 25°C.

\*\* Only one output at a time short circuited to GND. Also, short circuit time to GND within 1 second.


LR

■ Switching characteristics (V<sub>CC</sub> = 5 V, Ta = 25°C)


Parameter	Sym	Test conditions	Min	Typ	Max	Unit
Propagation delay time	t <sub>PLH</sub>	C <sub>L</sub> = 15 pF, R <sub>L</sub> = 2 kΩ		12	20	ns
	t <sub>PHL</sub>			12.5	20	ns

※ Switching parameter measurement information

1. Measurement circuit

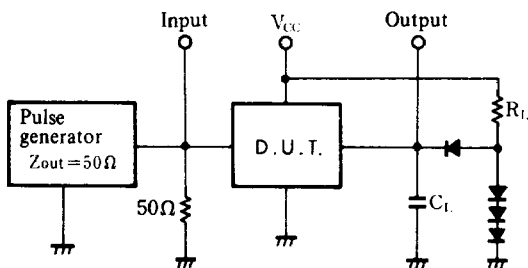

2. Waveforms

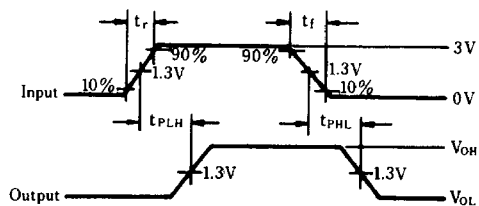

Notes

- C<sub>L</sub> includes probe and tool floating capacitance.
- Diodes are all MA161 or equivalent.

Notes

- Input waveform: t<sub>r</sub> ≤ 15 ns, t<sub>f</sub> ≤ 6 ns, PRR = 1 MHz, duty cycle = 50%.