

M61518FP

Audio Signal Processor with Rec/Play Back Amplifier

REJ03F0205-0201

Rev.2.01

Mar 31, 2008

Description

The M61518FP is an audio signal processor suitable for the mini component system with the cassette tape.

The circuit includes Selector for selecting input source, REC/Play back amp., Tone control and 2ch Electronic Volume.

Features

- Input selector
Built-in 3 Input selector + Tape Input
- Play Back Amp.
Built-in Low noise P. B Amp
- REC Amp.
Built-in Low noise REC Amp (Mute function built-in)
- Tone Control
Bass/Mid/Treble -10 to $+10$ dB/2 dB step
- Electronic Volume with high voltage transistor
 0 to -86 dB, $-\infty$ dB
(Input Vol: 0 to -70 dB, $-\infty$ dB)
(Output Vol: $+18$ to $+2$ dB)


Application

Mini Stereo, Receiver, etc.


Recommended Operating Conditions

Recommended supply voltage: $V_{CC} = 4.5$ V (Typ), $V_{EE} = -4.5$ V (Typ)

System Block Diagram

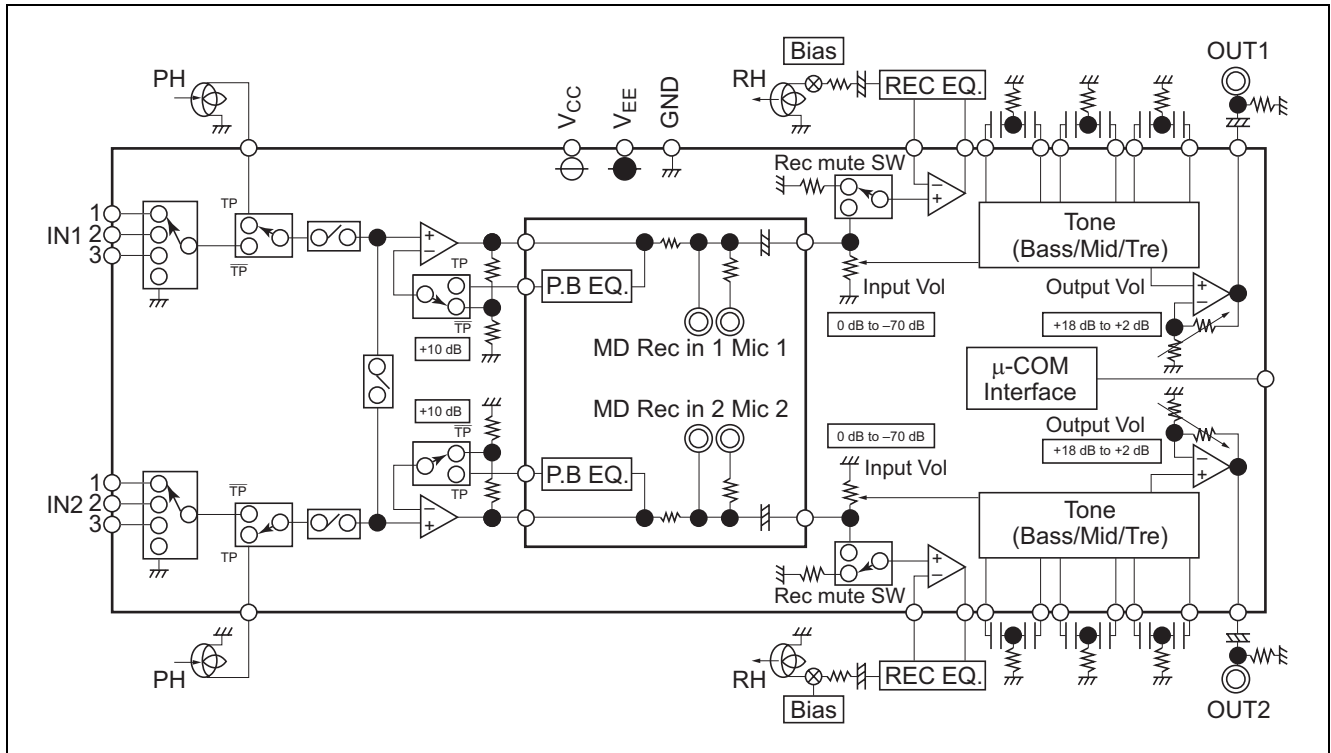

Block Diagram And Pin Configuration (Top View)

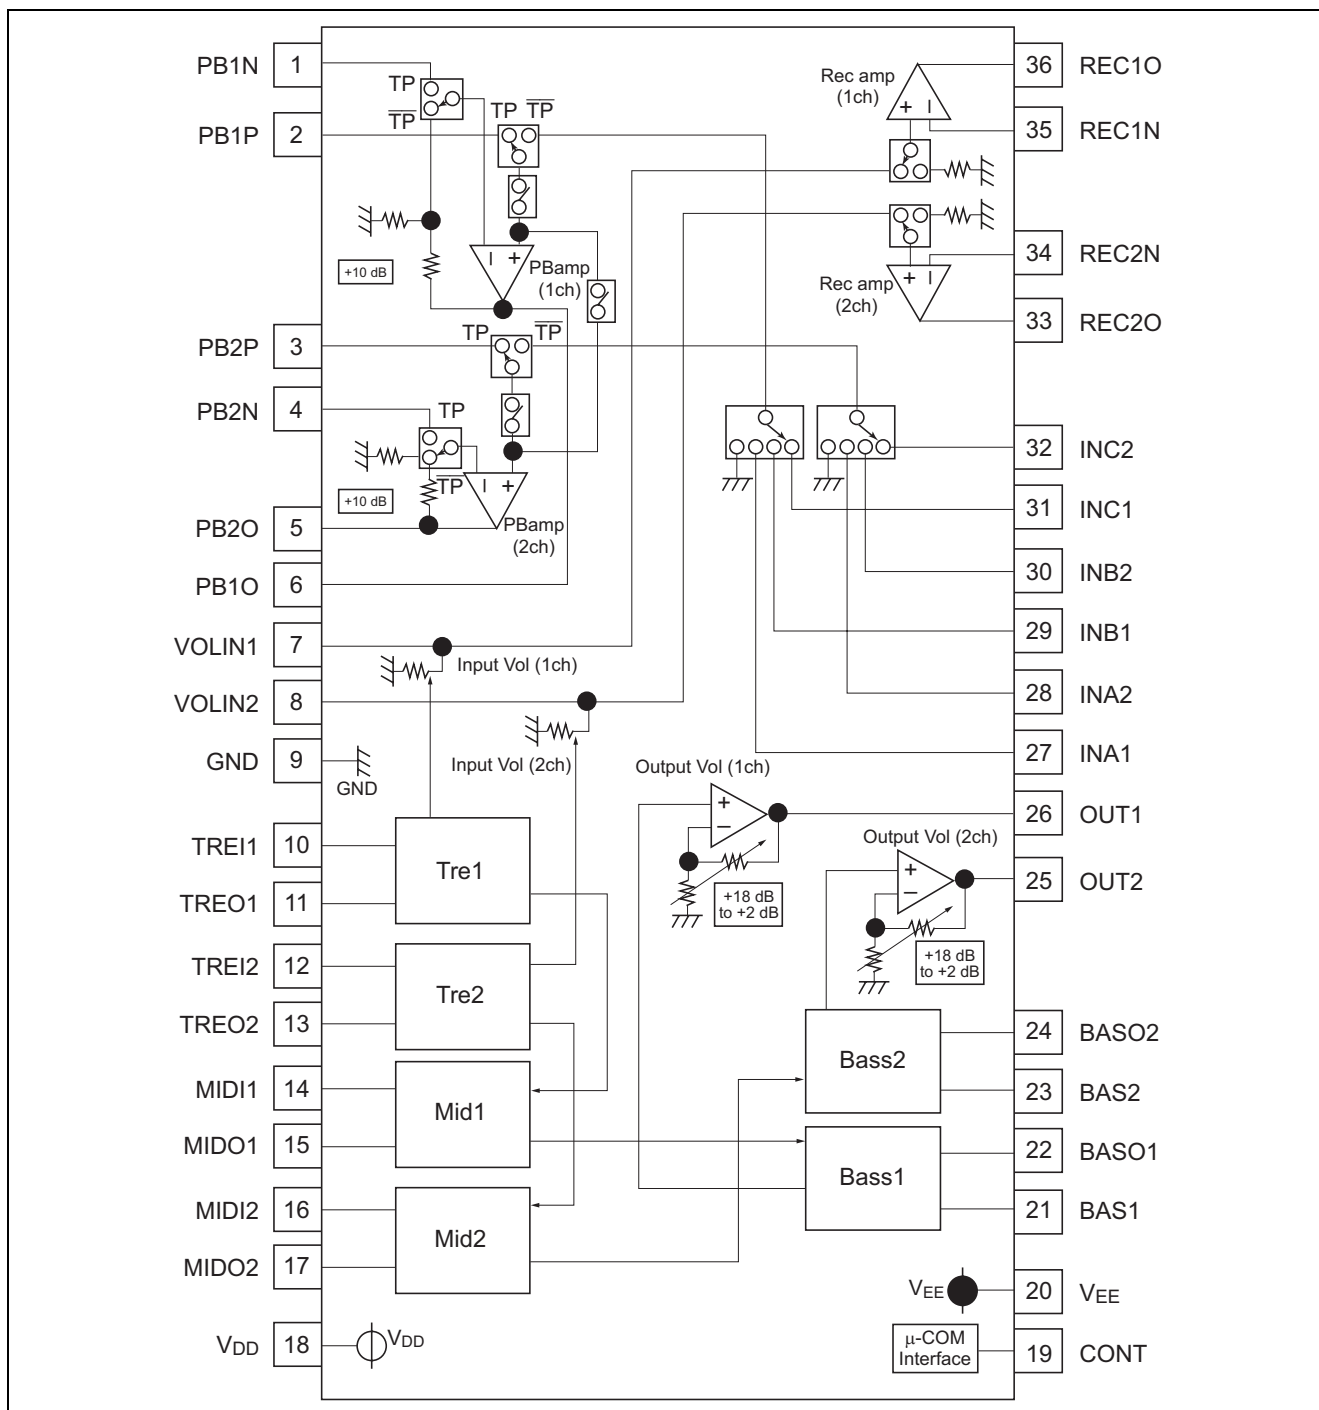

Pin Description

Pin No.	Name	Function
1, 4	PB1N, PB2N	Input pin of PB amp (Negative)
2, 3	PB1P, PB2P	Input pin of PB amp (Positive)
5, 6	PB1O, PB2O	Output pin of PB amp
7, 8	VOLIN1, VOLIN2	Input pin of volume
9	GND	GND pin
10, 11, 12, 13	TREI, TREO	Frequency setting pin in the tone control (Tre)
14, 15, 16, 17	MIDI, MIDO	Frequency setting pin in the tone control (Mid)
18	VDD	Positive power supply
19	CONT	Microcomputer data Input pin
20	VEE	Negative supply pin
21, 22, 23, 24	BASI, BASO	Frequency setting pin in the tone control (Bass)
25, 26	OUT1, OUT2	Output pin
27, 28	INA1, INA2	Selector A Input pin
29, 30	INB1, INB2	Selector B Input pin
31, 32	INC1, INC2	Selector C Input pin
33, 34	REC1O, REC2O	Output pin of REC amp
35, 36	REC1N, REC2N	Input pin of REC amp

Absolute Maximum Ratings

Item	Symbol	Ratings	Unit	Condition
Plus and minus power supply difference	VDD-VEE	+10.5	V	
Power dissipation	Pd	1080	mW	Ta ≤ 25°C
Thermal derating	Kθ	10.8	mW/°C	Ta > 25°C* Circuit board
Operating temperature	Topr	−20 to +75	°C	
Storage temperature	Tstg	−40 to +125	°C	

Note: Circuit board

Print circuit board size: 70 mm × 70 mm


Print circuit board thickness: 1.6 mm

Print circuit board quality of the material: Glass epoxy

Single Cu pattern

Thickness of Cu: 18 μm

Pattern size of Cu: 0.25 mm (Width) × 25 mm (Length) / Lead

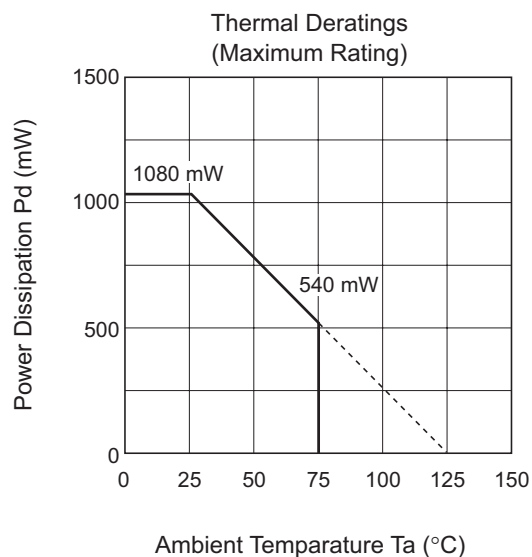

Recommended Operating Conditions


(Ta = 25°C unless otherwise noted)

Item	Symbol	Min	Typ	Max	Unit
Positive supply voltage	VDD	4.25	4.5	4.75	V
Negative supply voltage	VEE	−4.75	−4.5	−4.25	V

Serial Data Control Format

(1) Signal wave shape

(CLOCK, DATA, STROBE)

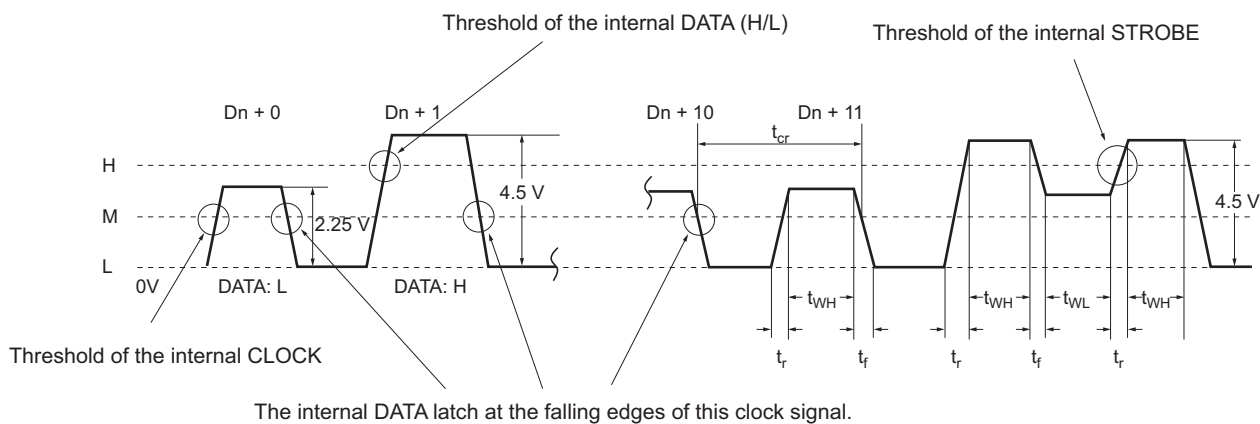

(2) Control signal voltage regulation

Digital signal		Condition	Limits			Unit
			Min	Typ	Max	
L signal	L	VDD = 4.5 V, VEE = -4.5 V	GND	—	0.2 × VDD	V
M signal	M	VDD = 4.5 V, VEE = -4.5 V	0.3 × VDD	0.5 × VDD	0.7 × VDD	
H signal	H	VDD = 4.5 V, VEE = -4.5 V	0.8 × VDD	—	VDD	

(3) Control signal timing regulation

Item	Symbol	Limits			Unit
		Min	Typ	Max	
Cycle time of the digital signal	t _{cr}	4	—	—	μs
Pulse width of the digital signal ("H" level)	t _{WH}	1.6	—	—	
Pulse width of the digital signal ("L" level)	t _{WL}	1.6	—	—	
Rising time of digital signal	t _r	—	—	0.4	
Falling time of digital signal	t _f	—	—	0.4	

Data Control Specification

(1) Data input address

- Notes: 1. The interval of data transmission from the micro controller is over 0.1 s.
This is waiting time for soft-switching to reduce the shock noise.
2. Input only the control data at slot0 (slot1).

(MSB) ← Input direction

D140	D130	D120	D110	D100	D90	D80	D70	D60	D50	D40	D30	D20	D10	D00	
Selector			Karaoke		Input volume					Output volume				0	slot0

D141	D131	D121	D111	D101	D91	D81	D71	D61	D51	D41	D31	D21	D11	D01	slot1
Tone control Bass				Tone control Mid				Tone control Treble				REC Mute	0	1	

Initial setting
Output Volume Control

	D40	D30	D20	D10
+18 dB	0	0	0	0
+16 dB	0	0	0	1
+14 dB	0	0	1	0
+12 dB	0	0	1	1
+10 dB	0	1	0	0
+8 dB	0	1	0	1
+6 dB	0	1	1	0
+4 dB	0	1	1	1
+2 dB	1	0	0	0

Note: Do not input other data than the above.

Input Volume Control

	D90	D80	D70	D60	D50
0 dB	0	0	0	0	0
-2 dB	0	0	0	0	1
-4 dB	0	0	0	1	0
-6 dB	0	0	0	1	1
-8 dB	0	0	1	0	0
-10 dB	0	0	1	0	1
-12 dB	0	0	1	1	0
-14 dB	0	0	1	1	1
-16 dB	0	1	0	0	0
-18 dB	0	1	0	0	1
-20 dB	0	1	0	1	0
-22 dB	0	1	0	1	1
-26 dB	0	1	1	0	0
-30 dB	0	1	1	0	1
-34 dB	0	1	1	1	0
-38 dB	0	1	1	1	1
-42 dB	1	0	0	0	0
-46 dB	1	0	0	0	1
-50 dB	1	0	0	1	0
-54 dB	1	0	0	1	1
-58 dB	1	0	1	0	0
-62 dB	1	0	1	0	1
-66 dB	1	0	1	1	0
-70 dB	1	0	1	1	1
-∞ dB	1	1	1	1	1

Note: Do not input other data than the above.

Karaoke Control

	D110	D100
Stereo	0	0
Mono 1	0	1
Mono 2	1	0
Mono 1 + 2	1	1

Selector Control

Selector	D140	D130	D120
TP	0	0	0
IN A	0	0	1
IN C	0	1	0
IN B	0	1	1
IN mute	1	1	1
Supply OFF	1	1	0

Note: Do not input other data than the above.

REC Mete Control

REC MUTE	D21
OFF	0
ON	1

Tone Control

Bass	D141	D131	D121	D111
Mid	D101	D91	D81	D71
Treble	D61	D51	D41	D31
+10 dB	0	1	0	1
+8 dB	0	1	0	0
+6 dB	0	0	1	1
+4 dB	0	0	1	0
+2 dB	0	0	0	1
0 dB	0	0	0	0
-2 dB	1	0	0	1
-4 dB	1	0	1	0
-6 dB	1	0	1	1
-8 dB	1	1	0	0
-10 dB	1	1	0	1

Note: Do not input other data than the above.

Power Off Setting Data

It's necessary to set up the Power off setting data when power off before 0.1 s.

Power off setting data reduce the power off shock noise.

Power off setting data

(MSB) ← Input direction

D140	D130	D120	D110	D100	D90	D80	D70	D60	D50	D40	D30	D20	D10	D00	
1	1	0	*		1	1	1	1	1		*			0	slot0
Selector			Karaoke		Input volume ($-\infty$ dB)					Output volume					

Note: Karaoke is same data before the Power off setting.

Output volume is same data before the Power off setting.

Selector Control

Selector	D140	D130	D120
TP	0	0	0
IN A	0	0	1
IN C	0	1	0
IN B	0	1	1
IN mute	1	1	1
Supply off	1	1	0


Note: Do not input other data than the above.

Electrical Characteristics

Ta = 25°C, VDD = 4.5 V, VEE = -4.5 V, f = 1 kHz, Vi = 100 mVrms, Input Vol = 0 dB, Output Vol = 18 dB,
Bass = 0 dB, Mid = 0 dB, Treble = 0 dB, RL = 10 kΩ unless otherwise noted.

Item	Symbol	Limits			Unit	Condition
		Min	Typ	Max		
Positive power current	IDD	—	10	20	mA	No Input signal
Negative power current	IEE	-20	-10	—	mA	No Input signal
Pass gain	Gv1	8	10	12	dB	INA/B/C (Pin 27 to 32) → PBP (Pin 5, 6)
	Gv2	16	18	20	dB	VOLIN (Pin 7, 8) → OUT (Pin 25, 26)
Maximum output voltage	VOM1	2.2	2.4	—	Vrms	OUT (Pin 25, 26), THD = 1%
	VOM2	2.2	2.4	—	Vrms	RECO (Pin 33, 36), THD = 1 %
	VOM3	1.4	1.6	—	Vrms	PBO (Pin 5, 6), THD = 1%
Distortion	THD	—	0.02	0.08	%	INA/B/C (Pin 27 to 32) → OUT (Pin 25, 26), Vo = 0.5 Vrms, BW = 400 to 30 kHz
Output noise voltage	VON1	—	6	15	μVrms	VOLIN (Pin 7, 8) → OUT (Pin 25, 26) Input VOL = -∞ dB, Output VOL = 2 dB, JIS-A, Rg = 0 Ω
	VON2	—	35	70	μVrms	VOLIN (Pin 7, 8) → RECO (Pin 33, 36) JIS-A, Rg = 0 Ω
Input conversion noise voltage	VIN	—	1.0	1.9	μVrms	PB1P/2P (Pin 2, 3) → PBO (Pin 5, 6) JIS-A, Rg = 0 Ω
Channel cross talk	CT	—	-70	-60	dB	INA/B/C (Pin 27 to 32) → OUT (Pin 25, 26), Vo = 2 Vrms, JIS-A, Rg = 0 Ω
Input impedance	Rvin	14	20	26	kΩ	VOLIN (Pin 7, 8)
Maximum attenuation	Volmin	—	-95	-90	dB	VOLIN (Pin 7, 8) → OUT (Pin 25, 26), JIS-A, Input VOL = -∞ dB, Output VOL = 2 dB, Vo = 2 Vrms
Boost amount (Bass)	GBB	7	10	13	dB	OUT (Pin 25, 26), Vo = 0.5 Vrms (Bass: 0 dB), Bass: 10 dB, f = 100 Hz
Cut amount (Bass)	GBC	-13	-10	-7	dB	OUT (Pin 25, 26), Vo = 0.5 Vrms (Bass: 0 dB), Bass: -10 dB, f = 100 Hz
Boost amount (Mid)	GMB	7	10	13	dB	OUT (Pin 25, 26), Vo = 0.5 Vrms (Mid: 0 dB), Mid: 10 dB, f = 1 kHz
Cut amount (Mid)	GMC	-13	-10	-7	dB	OUT (Pin 25, 26), Vo = 0.5 Vrms (Mid: 0 dB), Mid: -10 dB, f = 1 kHz
Boost amount (Treble)	GTB	7	10	13	dB	OUT (Pin 25, 26), Vo = 0.5 Vrms (Tre: 0 dB), Tre: 10 dB, f = 10 kHz
Cut amount (Treble)	GTC	-13	-10	-7	dB	OUT (Pin 25, 26), Vo = 0.5 Vrms (Tre: 0 dB), Tre: -10 dB, f = 10 kHz

P. B. Amp Measurement Circuit Figure

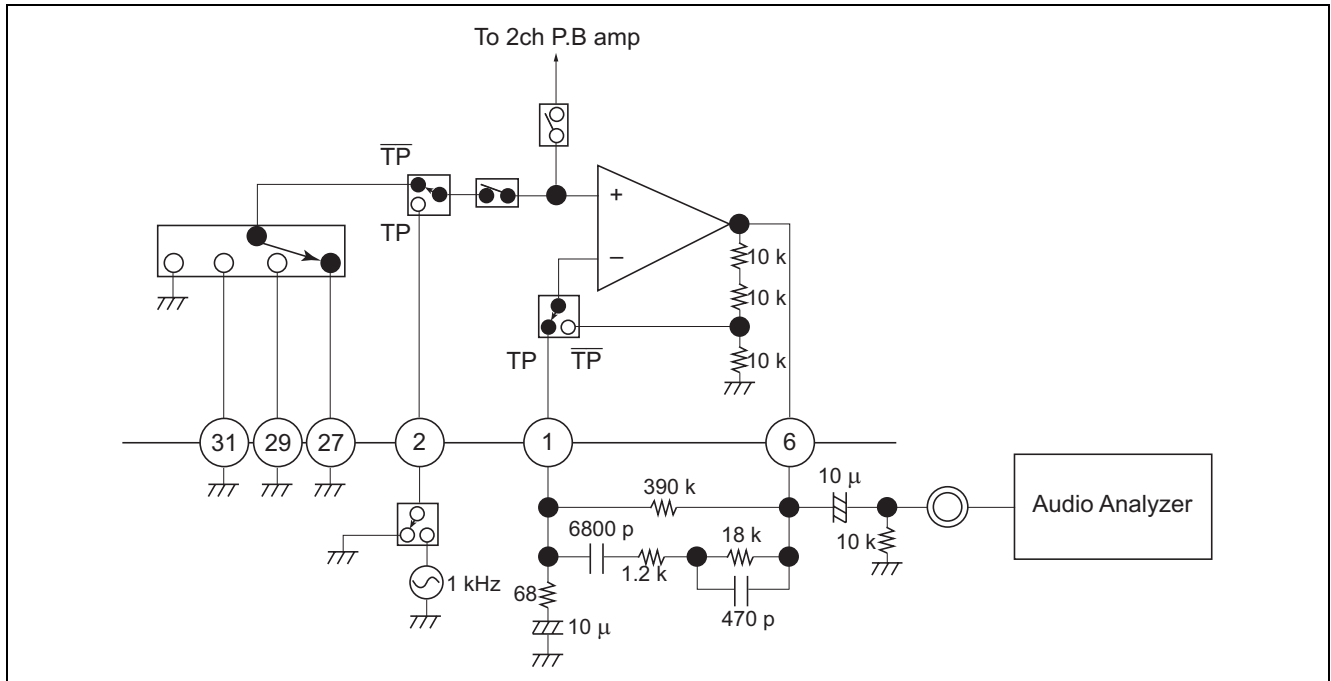


Input Conversion Noise Voltage

- Limits
Typ: 1.0 μVrms (JIS-A)
Max: 1.9 μVrms (JIS-A)
- Measurement method
(1) Input signal (1 kHz) to PB1P (pin2) and measure output gain of PB1O (pin6).
(2) Measure output noise voltage of PB1O (pin6) and convert Input conversion noise voltage from output noise voltage.

Maximum Output Voltage

- Limits
Min: 1.4 Vrms (THD = 1%)
Typ: 1.6 Vrms (THD = 1%)
- Measurement method
Input signal (1 kHz) to PB1P (pin2) and measure output gain of PB1O (pin6) when output THD is 1%.

Rec Amp Measurement Circuit Figure

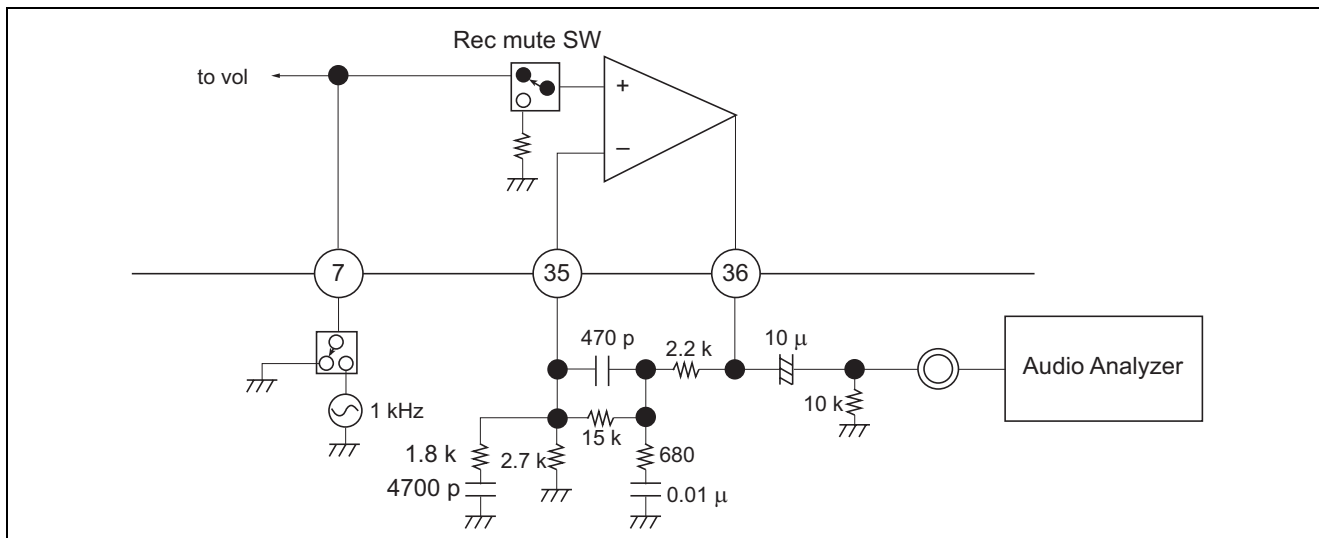

Output noise voltage

- Limits
Typ: 35 μ Vrms (JIS-A)
Max: 70 μ Vrms (JIS-A)
- Measurement method
Measure output noise voltage of REC1O (pin36) when VOLIN1 (pin7) is GND.


Maximum output voltage

- Limits
Min: 2.2 Vrms (THD = 1%)
Typ: 2.4 Vrms (THD = 1%)
- Measurement method
Input signal (1 kHz) to VOLIN1 (pin7) and measure output gain of REC1O (pin36) when output THD is 1%.

Tone Control Equivalent Circuit

Bass, Mid, Treble Circuit composition is common


(1) Boost equivalent circuit

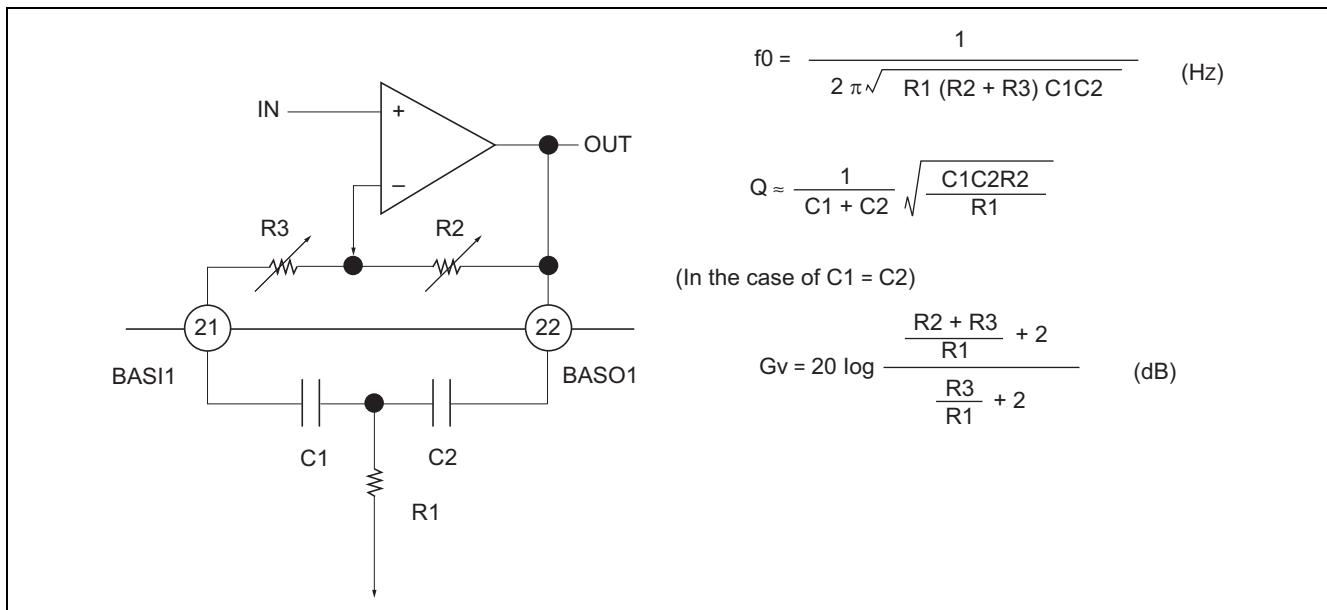

R2, R3 Standard value (Reference)

Gain		2 dB	4 dB	6 dB	8 dB	10 dB
Resistance (kΩ)	R2	10.46	18.77	25.36	30.61	34.77
	R3	26.79	18.48	11.89	6.64	2.48


(2) Cut equivalent circuit

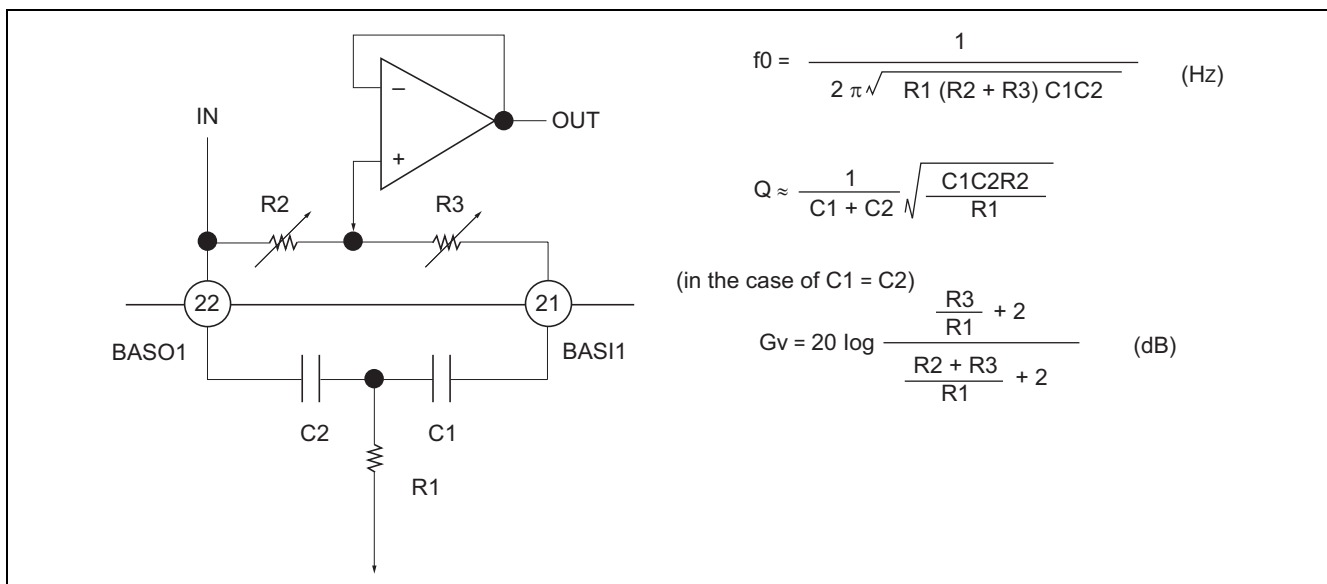


R2, R3 Standard value (Reference)

Gain		-2 dB	-4 dB	-6 dB	-8 dB	-10 dB
Resistance (kΩ)	R2	10.46	18.77	25.36	30.61	34.77
	R3	26.79	18.48	11.89	6.64	2.48

Application Example

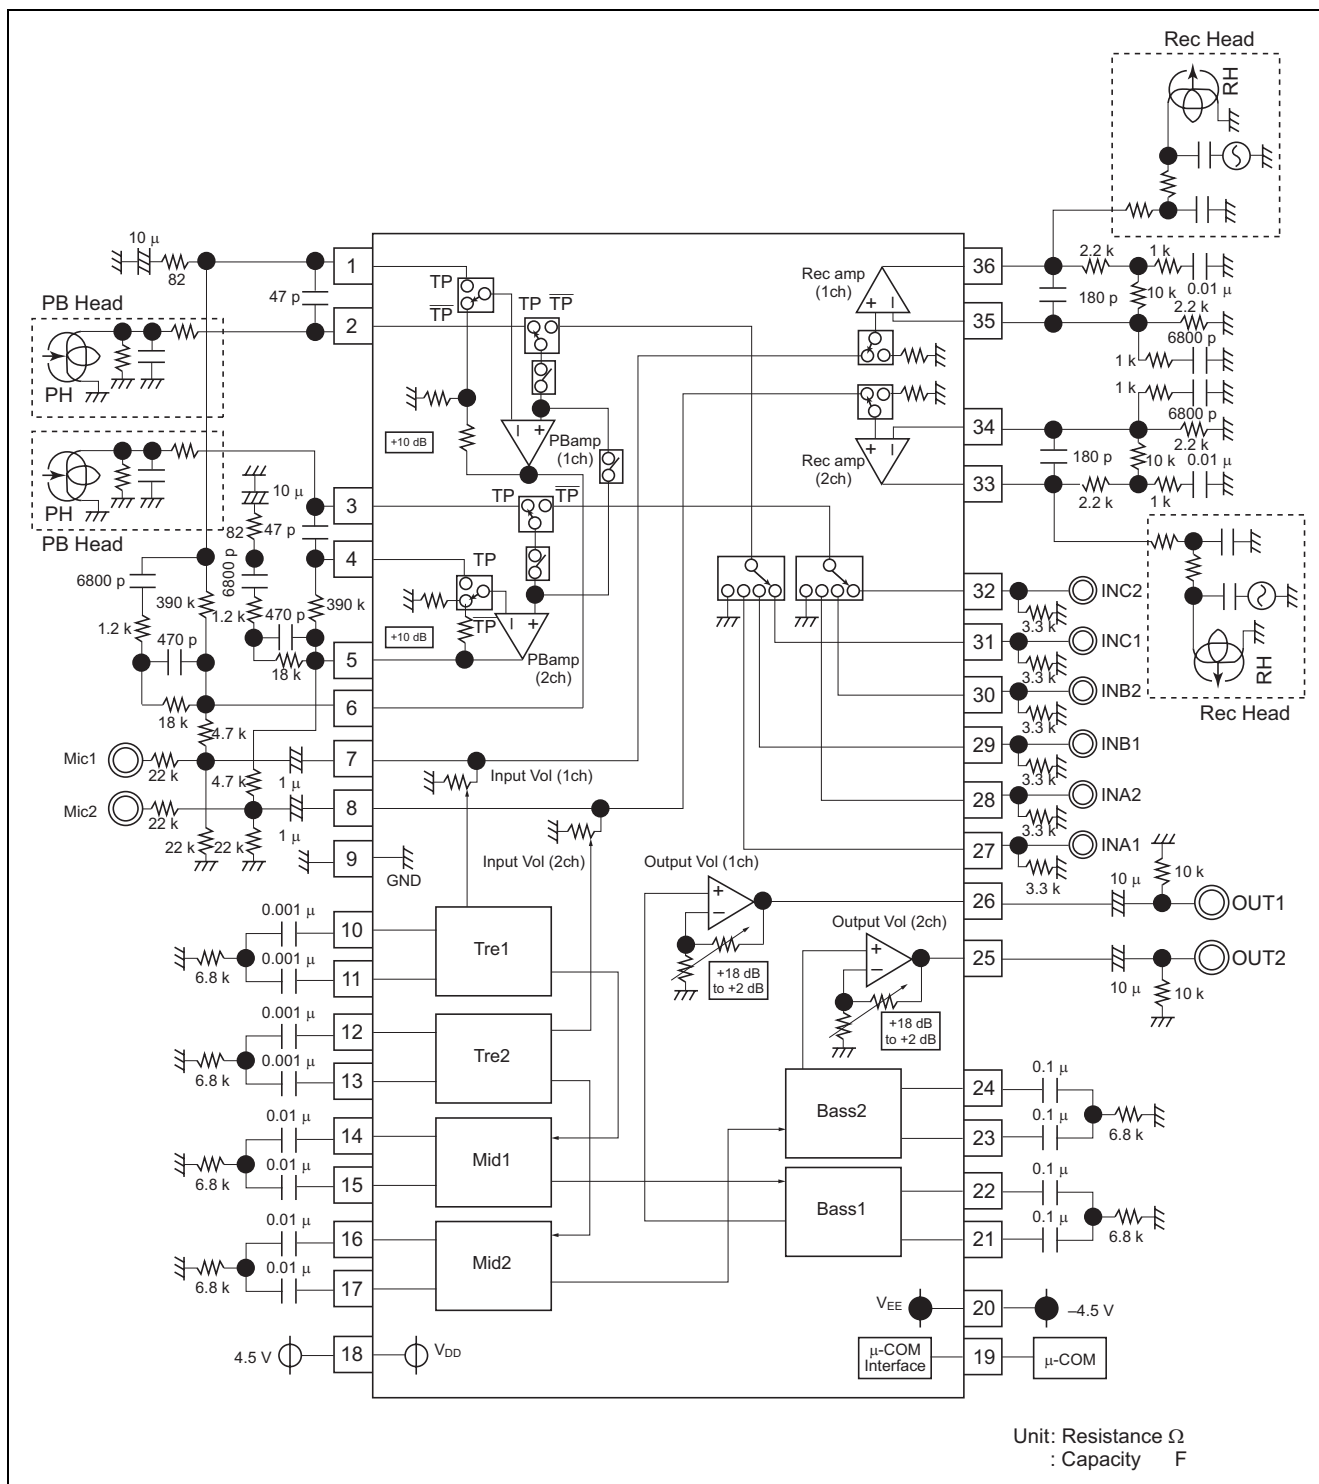

Package Dimensions

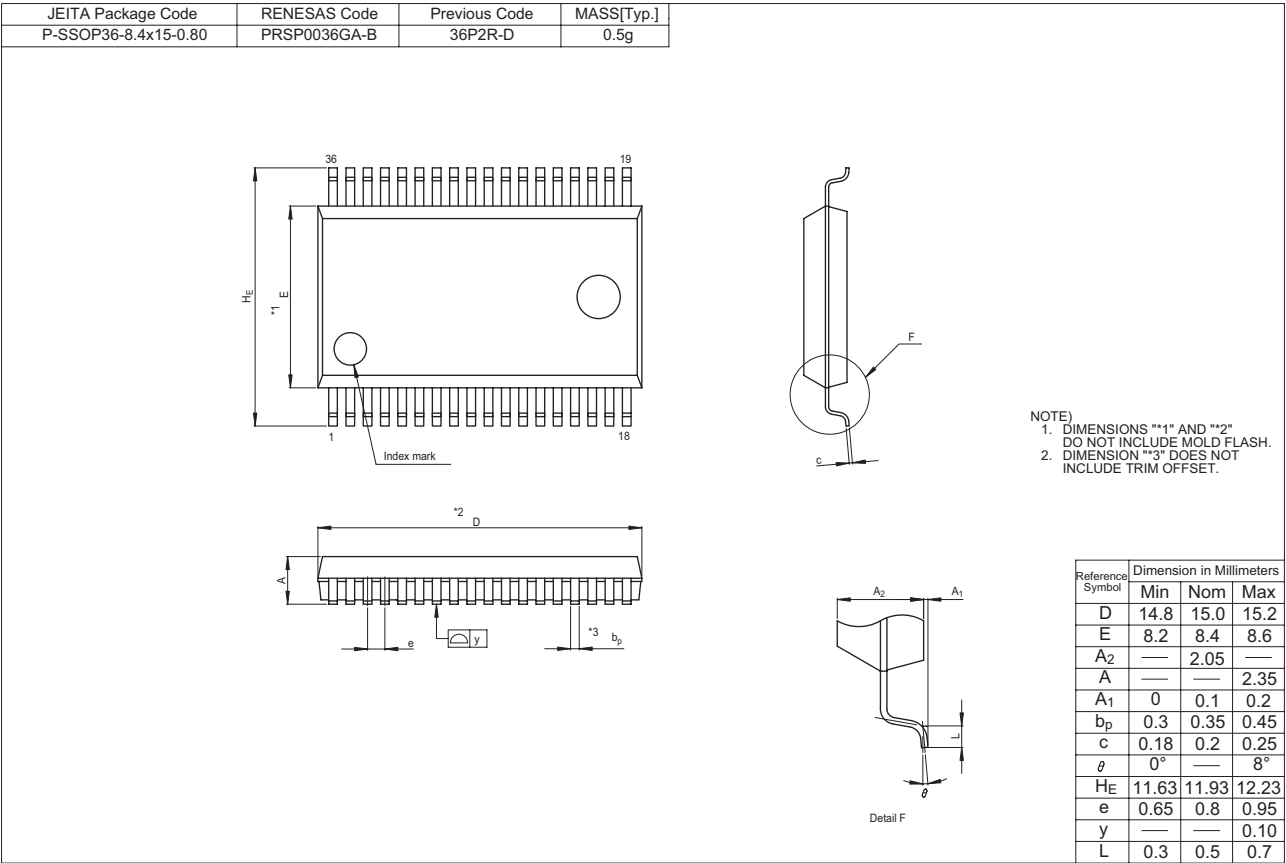

Notes:

1. This document is provided for reference purposes only so that Renesas customers may select the appropriate Renesas products for their use. Renesas neither makes warranties or representations with respect to the accuracy or completeness of the information contained in this document nor grants any license to any intellectual property rights or any other rights of Renesas or any third party with respect to the information in this document.
2. Renesas shall have no liability for damages or infringement of any intellectual property or other rights arising out of the use of any information in this document, including, but not limited to, product data, diagrams, charts, programs, algorithms, and application circuit examples.
3. You should not use the products or the technology described in this document for the purpose of military applications such as the development of weapons of mass destruction or for the purpose of any other military use. When exporting the products or technology described herein, you should follow the applicable export control laws and regulations, and procedures required by such laws and regulations.
4. All information included in this document such as product data, diagrams, charts, programs, algorithms, and application circuit examples, is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas products listed in this document, please confirm the latest product information with a Renesas sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas such as that disclosed through our website. (<http://www.renesas.com>)
5. Renesas has used reasonable care in compiling the information included in this document, but Renesas assumes no liability whatsoever for any damages incurred as a result of errors or omissions in the information included in this document.
6. When using or otherwise relying on the information in this document, you should evaluate the information in light of the total system before deciding about the applicability of such information to the intended application. Renesas makes no representations, warranties or guarantees regarding the suitability of its products for any particular application and specifically disclaims any liability arising out of the application and use of the information in this document or Renesas products.
7. With the exception of products specified by Renesas as suitable for automobile applications, Renesas products are not designed, manufactured or tested for applications or otherwise in systems the failure or malfunction of which may cause a direct threat to human life or create a risk of human injury or which require especially high quality and reliability such as safety systems, or equipment or systems for transportation and traffic, healthcare, combustion control, aerospace and aeronautics, nuclear power, or undersea communication transmission. If you are considering the use of our products for such purposes, please contact a Renesas sales office beforehand. Renesas shall have no liability for damages arising out of the uses set forth above.
8. Notwithstanding the preceding paragraph, you should not use Renesas products for the purposes listed below:
 - (1) artificial life support devices or systems
 - (2) surgical implantations
 - (3) healthcare intervention (e.g., excision, administration of medication, etc.)
 - (4) any other purposes that pose a direct threat to human lifeRenesas shall have no liability for damages arising out of the uses set forth in the above and purchasers who elect to use Renesas products in any of the foregoing applications shall indemnify and hold harmless Renesas Technology Corp., its affiliated companies and their officers, directors, and employees against any and all damages arising out of such applications.
9. You should use the products described herein within the range specified by Renesas, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas shall have no liability for malfunctions or damages arising out of the use of Renesas products beyond such specified ranges.
10. Although Renesas endeavors to improve the quality and reliability of its products, IC products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Please be sure to implement safety measures to guard against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other applicable measures. Among others, since the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
11. In case Renesas products listed in this document are detached from the products to which the Renesas products are attached or affixed, the risk of accident such as swallowing by infants and small children is very high. You should implement safety measures so that Renesas products may not be easily detached from your products. Renesas shall have no liability for damages arising out of such detachment.
12. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written approval from Renesas.
13. Please contact a Renesas sales office if you have any questions regarding the information contained in this document, Renesas semiconductor products, or if you have any other inquiries.



RENESAS SALES OFFICES

<http://www.renesas.com>

Refer to "<http://www.renesas.com/en/network>" for the latest and detailed information.

Renesas Technology America, Inc.
450 Holger Way, San Jose, CA 95134-1368, U.S.A
Tel: <1> (408) 382-7500, Fax: <1> (408) 382-7501

Renesas Technology Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.
Tel: <44> (1628) 585-100, Fax: <44> (1628) 585-900

Renesas Technology (Shanghai) Co., Ltd.
Unit 204, 205, AZIA Center, No.1233 Lujiazui Ring Rd, Pudong District, Shanghai, China 200120
Tel: <86> (21) 5877-1818, Fax: <86> (21) 6887-7858/7898

Renesas Technology Hong Kong Ltd.
7th Floor, North Tower, World Finance Centre, Harbour City, Canton Road, Tsimshatsui, Kowloon, Hong Kong
Tel: <852> 2265-6688, Fax: <852> 2377-3473

Renesas Technology Taiwan Co., Ltd.
10th Floor, No.99, Fushing North Road, Taipei, Taiwan
Tel: <886> (2) 2715-2888, Fax: <886> (2) 3518-3399

Renesas Technology Singapore Pte. Ltd.
1 Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632
Tel: <65> 6213-0200, Fax: <65> 6278-8001

Renesas Technology Korea Co., Ltd.
Kukje Center Bldg. 18th Fl., 191, 2-ka, Hangang-ro, Yongsan-ku, Seoul 140-702, Korea
Tel: <82> (2) 796-3115, Fax: <82> (2) 796-2145

Renesas Technology Malaysia Sdn. Bhd
Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No.18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: <603> 7955-9390, Fax: <603> 7955-9510