



IBM Packet Routing Switch PRS64G

Datasheet



© Copyright International Business Machines Corporation 2000.

All Rights Reserved
Printed in the United States of America August 2000

The following are trademarks of International Business Machines Corporation in the United States, or other countries, or both.

IBM IBM logo

Other company, product and service names may be trademarks or service marks of others.

All information contained in this document is subject to change without notice. The products described in this document are NOT intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change IBM's product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of IBM or third parties. All information contained in this document was obtained in specific environments, and is presented as an illustration. The results obtained in other operating environments may vary.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROVIDED ON AN "AS IS" BASIS.

In no event will IBM be liable for damages arising directly or indirectly from any use of the information contained in this document.

IBM Microelectronics Division
1580 Route 52, Bldg. 504
Hopewell Junction, NY 12533-6351

The IBM home page can be found at <http://www.ibm.com>
The IBM Microelectronics Division home page can be found at <http://www.chips.ibm.com>

prs64_title.fm.01
August 31, 2000

Contents

List of Figures	7
List of Tables	9
1. General Information	11
1.1 Features	11
1.2 Description	11
1.3 Conventions	12
1.3.1 Definition of Terms	12
2. Architecture	15
2.1 Basic Data Flow	15
2.2 Multicast Packets	15
2.3 Address Management	15
2.4 Shared Memory Architecture	15
2.5 Flow Control	16
2.5.1 Output Queuing and Priorities	16
2.5.2 Incoming Flow Process	16
2.5.3 Incoming Flow Control	16
2.5.4 Output Flow	17
2.5.5 Output Flow Control	17
2.5.6 Output Queue Manager	17
2.5.7 Shared Memory	18
2.6 Control Packets	18
2.7 Serial Host Interface	18
2.8 Serial Data Interface	18
2.9 Controllers	19
2.10 Signaling	19
2.10.1 Input Header (Bit Map)	19
2.10.2 Output Header (Output Queue Grant)	19
2.10.3 Service Packets	20
2.10.4 Packet Filtering	20
2.11 Link Integrity	20
2.12 Receive Grants	20
2.13 Look-Up Table	20
2.14 Side Communication Channel	21
2.15 Expansion Modes	21
2.15.1 External Speed Expansion	21
2.15.2 Internal Speed Expansion	22
2.15.3 Port Expansion	22
2.15.4 Physical Port Bundling	23
3. Functional Description	25
3.1 Logical Interface	25
3.2 Physical Interface	26



IBM Packet Routing Switch

3.3 Packet Type	27
3.3.1 Data Packets and Control Packets	27
3.3.2 Idle Packets	28
3.3.3 Sync Packets	28
3.4 Header Format	29
3.4.1 Header Byte H0 - Packet Qualifier	29
3.4.2 Header Byte H1, H2, H3, and H4	31
3.5 Idle Packet Trailer Format	32
3.6 Packet Reception	33
3.6.1 Master Input Port Operation	33
3.6.2 Slave Input Port Operation	34
3.6.3 Parity and CRC Errors	34
3.6.4 Address Insertion	34
3.7 Input Flow Control	34
3.7.1 Memory Threshold Exceeded Condition	35
3.7.2 Programming the Memory-Full Thresholds	35
3.7.3 Output Queue Threshold Exceeded Condition	35
3.7.4 Packet Reception Fairness	35
3.8 Output Queue Grant Signaling	36
3.8.1 Adapter Transmission Rules	36
3.8.2 Flow Control Error	37
3.9 Output Queues and Output Queue Priorities	37
3.10 Shared Memory	38
3.10.1 Organization	38
3.10.2 Shared Memory Access by Local Processor	38
3.11 Packet Transmission	38
3.11.1 Output Port Servicing	38
3.11.2 Idle Packet Transmission	40
3.12 Send Grant	40
3.12.1 Send Grant without Priority Indication	41
3.12.2 Send Grant per Priority	41
3.13 Receive Filter	41
3.14 Port Disabling	42
3.15 Address Manager and Address Corruption (Book Keep Mechanism)	42
3.16 Control Packets	42
3.16.1 Control Packet Reception	43
3.16.2 Control Packet Transmission	44
3.16.3 Packet Reception Window for Speed Expansion	45
3.17 Speed Expansion	45
3.17.1 External Speed Expansion	45
3.17.2 Internal Speed Expansion	45
3.17.3 Synchronization of Slave Device with Master Device	46
3.17.4 Master Slave Address Communication	46
3.18 Link Paralleling Bitmap Mapping	47
3.19 Best Effort Discard	48
3.19.1 Subflow Best Effort Discard Filter	50
4. Programming Interface	52
4.1 SHI Instruction Register	52

4.2 SHI Parity Error Checking	53
4.3 SHI Parity Generation	53
4.4 SHI Operational Protocol	53
5. Application Registers	54
5.1 Status Register	54
5.2 Register Definitions	55
5.3 SHI Internal Registers	58
5.3.1 PLL Programming Register	58
5.3.2 Reset Register	59
5.3.3 Interrupt Mask Register	61
5.3.4 BIST Counter Register	62
5.3.5 Bist Data Register	63
5.3.6 BIST Select Register	63
5.3.7 Debug Bus Select Register	64
5.4 DASL Programming Registers	68
5.4.1 DASL Output Drivers Enable Register	68
5.4.2 Output Port Enable Register	68
5.4.3 Synchronization Packet Transmit Register	68
5.4.4 Input Port Enable Register	69
5.4.5 DASL Signal Lost Register	69
5.4.6 SDC Rlos Enable Register	69
5.4.7 DASL Synchronization Hunt Register	70
5.4.8 DASL Synchronization Status Register	70
5.4.9 Picoprocessor Instruction Memory Access Register	71
5.4.10 DASL Configuration Register	72
5.4.11 DASL Port Error Register	72
5.4.12 DASL Port Quality Mask Register	73
5.4.13 DASL Port Quality Register	73
5.4.14 SDC Resources Address Register	73
5.4.15 SDC Resources Control Register	74
5.4.16 SDC Resources Data Registers	75
5.4.17 SDC Status Register	76
5.5 Flow Control Pins Status and Setting Registers	76
5.5.1 Send Grant Per Priority	76
5.5.2 Send Grant Status Register	77
5.5.3 Receive Grant Status Register	77
5.6 Functional Registers	78
5.6.1 Configuration 0 Register	78
5.6.2 Configuration 1 Register	80
5.6.3 Output Queue Enable Register	82
5.6.4 Input Controller Enable Register	82
5.6.5 Color Detection Disable Register	83
5.6.6 Send Grant Enable Register	83
5.6.7 Force Send Grant Register	83
5.6.8 Expected Color Received Register	84
5.6.9 CRC Error Port ID Register	84
5.6.10 Header Parity Error Port ID Register	84
5.6.11 Error Counters Register	85
5.6.12 Flow Control Violation Port ID Register	85



IBM Packet Routing Switch

5.6.13 Control Packet Counter Register	86
5.6.14 Output Queues Status Registers 1-4	87
5.6.15 Color Packet Received Register	88
5.6.16 Send Grant Violation Register	88
5.6.17 Occupancy Counters Register	89
5.6.18 Shared Memory Access Registers	89
5.6.19 Shared Memory Pointer Register	90
5.6.20 Shared Memory Data Register	91
5.6.21 Command Register	91
5.6.22 Control Packet Destination Register	92
5.6.23 Bitmap Filter Register	93
5.6.24 Thresholds Access Register	93
5.6.25 Credit Table Access Register	94
5.6.26 Lookup Tables Access Register	95
5.6.27 Bitmap Mapping Register	96
5.6.28 Best Effort Resources Access Register	97
5.6.29 Best Effort Discard Alarm Register	98
5.6.30 Side Communication Channel Input Reporting Register	99
6. Reset, Initialization, and Operation	100
6.1 Clock and PLL	100
6.2 Reset	100
6.3 DASL Initialization and Operation	100
7. I/O Definitions and Timing	103
7.1 I/O Timing	107
7.1.1 DASL Signals	107
7.1.2 SHI Interface Signals	107
7.1.3 Master-Slave Speed Expansion Signals	109
8. Pin Information	110
9. Electrical Characteristics	128
10. Line Termination	131
10.1 DASL and SYS_CLK	131
11. Mechanical Information	132
12. References	133
Revision Log	134

List of Figures

Figure 1: System View with IBM Packet Switch Serial Interface	13
Figure 2: System View with IBM Network Processor	13
Figure 3: Packet Routing Switch Block Diagram	14
Figure 4: External Speed Expansion Block Diagram	21
Figure 5: Internal Speed Expansion Block Diagram	22
Figure 6: Single Stage Port Expansion Block Diagram	23
Figure 7: Packet Format 2 Gb/s Port	25
Figure 8: Packet Format for 4 Gb/s Port	25
Figure 9: Packet Format for 16 Gb/s Port	26
Figure 10: Idle Packet Format	28
Figure 11: Input-side Grant Operation	36
Figure 12: Best Effort Burst Discard	50
Figure 13: Subflow Best Effort Discard Mechanism within the Input Controller	51
Figure 14: Switch Fabric DASL Port Synchronization Sequence	102
Figure 15: SHI Interface Signal Timing Diagram	107
Figure 16: SHI Signal Timing Diagram	108
Figure 17: SND_GRANT(n) Sampling Window	108
Figure 18: RCV_GRANT(n)	109
Figure 19: Pinout	110
Figure 20: DASL Termination	131
Figure 21: Physical Dimensions	132



IBM Packet Routing Switch

List of Tables

Table 1: Ordering Information	12
Table 2: Speed Expansion Shared Memory Buffering Capacities	22
Table 3: Link Paralleling Block Diagram	24
Table 4: Physical Bit Organization of a Port	27
Table 10: Header Byte 1 through 4 and Incoming Packet Bitmap	31
Table 11: Header Byte 1 through 4 and Output Queue Grant	32
Table 12: Example of Fly Wheel Counter Update	32
Table 15: Shared Memory Reserved Address for Control Packets	44
Table 16: Port Combination in Internal Speed Expansion	45
Table 17: Link Paralleling Configuration Example	47
Table 18: SHI OpCode Commands	52
Table 19: DASL Initialization and Operation Registers	100
Table 20: Signal Definitions	103
Table 21: Test Signals	106
Table 22: DASL Interface Skew	107
Table 23: SHI Signal Timing Values	108
Table 24: SND_GRANT Sampling Window Timing	109
Table 25: RCV_GRANT (i Sampling Window Timing)	109
Table 26: Ground and V _{DD} Pin Locations	111
Table 27: Optional Power Pins	111
Table 28: I/O Signal List, Sorted by Signal Name	112
Table 29: I/O Signal List, Sorted by Grid Position	120
Table 30: Absolute Maximum Ratings	128
Table 31: Recommended Operating Conditions	129
Table 32: Power Dissipation	129
Table 33: Electrical Characteristics for DASL I/Os	129
Table 34: Clocks	130
Table 35: Package Information	132



IBM Packet Routing Switch

1. General Information

1.1 Features

- Non-blocking, self-routing, single-stage switch
- 32 input ports and 32 output ports
- High Performance:
 - 1.6 Gb/s to 2 Gb/s throughput per port
 - Up to 64 Gb/s single device aggregate throughput
- Speed Expansion:
 - Internal: Support doubling port speed, (reducing the number of ports to 16)
 - External: Up to 128 Gb/s aggregate throughput (with two devices)
 - Combination of internal and external speed expansion provides 16 ports at 8 Gb/s (with two devices)
- Serial data communication from 400 to 500 Mb/s, compliant with the EIA/JEDEC JESD8-6 standard.
- Multicast support without packet duplication in shared memory
- Dynamically shared output buffer (1024 packets of 64 to 80 bytes)
- Configurable number of traffic priorities (one to four) with programmable output queue thresholds and shared memory thresholds
- Physical Port Bundling by four, with internal or external speed expansion to define logical port at 16 Gb/s
- Packet lossless scheduled switchover facility
- Serial processor interface (Serial Host Interface)
- Configurable packet lengths of:
 - 32 to 40 bytes (increment of two)
 - 64 to 80 bytes (increment of four)
 - 128 to 160 (increment of eight) with external speed expansion only
- Packet header of two to five bytes, containing destination bit map, packet priority, and switch redundancy support information, all protected by a parity bit
- Shared output buffer with total capacity of:
 - 1024 packets (64 bytes) for a single chip
 - 2048 packets (64 bytes) with external speed expansion (with two devices)
- Reception on any input port of Control Packets destined to the local processor
- Transmission of Control Packets from the local processor to any output port
- Detection of link liveness by reception of specific packets
- Programmable byte shuffling in outgoing packets
- CMOS6SF (SA-12E) technology (Ldrawn=0.25 μ m, L_{eff}=0.18 μ m): 2.5 V compliant LVCMOS compatible I/O for low speed signals
- IEEE 1149.1 standard boundary scan to facilitate circuit board testing

1.2 Description

The IBM Packet Routing Switch PRS64G, one of a family of second generation switching devices designed for high performance, non-blocking fixed length packet switching, enables development of scalable switch fabrics of aggregate bandwidth from 64 Gb/s to 512 Gb/s.

The switch receives packets on 32 input ports and routes them to one or more of 32 output ports based on bit map information carried in the packet header. Each port operates at two Gb/s, resulting in a single device throughput of 64 Gb/s. This data speed is

achieved by implementing, in one device, two 32 x 32 sub-switch elements, running at one Gb/s per port and organized internally in speed expansion mode. In addition, 500 Mb/s serial data communication provides, over two differential pairs, the necessary bit rate per island.

Quality of service support is provided through four levels of packet priority. The architecture supports flow control, based on a grant mechanism, and provides programmable thresholds, one per priority.



IBM Packet Routing Switch

Scalability of speed is achieved via external speed expansion. Two devices operate in parallel (one as master, the other as slave) to form a 32 x 32 switch core at 4 Gb/s per port. Scalability in port speed is achieved through link paralleling by combining four physical ports together into a logical port of 16 Gb/s. Scalability of ports can be provided by single stage port expansion, which allows the number of ports on the switch fabric to be increased.


No synchronization is required between input ports. However, packets on a given port are always received or transmitted at a fixed rate according to the packet length.

Table 1: Ordering Information

Part Number	Description	Bandwidth	Throughput
IBM32SW0640DSLCA250	IBM Packet Routing Switch	64-512 Gb/s	64 Gb/s

1.3 Conventions

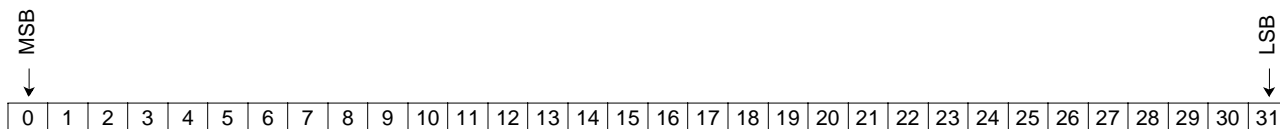Throughout this document, standard IBM notation is used: bits and bytes are numbered in ascending order from left to right. Thus the Most Significant Bit (MSB) has the lowest number and the Least Significant Bit (LSB) has the highest number:



Notation for bit encoding is as follows:

- Hexadecimal values are preceded by x and appear in single quotation marks. For example: 'x'0B00'.
- Binary values in text are either spelled out (zero and one) or appear in single quotation marks. For example: '1010'.
- Binary values in the Default and Description columns of the register sections have no special marking, but are separated from text as in this example:
 0 No action on read access
 1 Auto-reset interrupt request register upon read access

The use of overbars, for example $\overline{\text{DDEL_OUT}}$, designates signals that are active low.

Note: By default, the bits are positive active.

1.3.1 Definition of Terms


BIST: Built in self test

Local Processor: The microprocessor connected to PRS64G through the Serial Host Interface (SHI).

Logical Unit (LU): The part of the packet that is processed by one island. One packet is made of several LUs of equal length (2, 4, 8).

Packet: The user unit information element made of multiple LUs (header + payload).

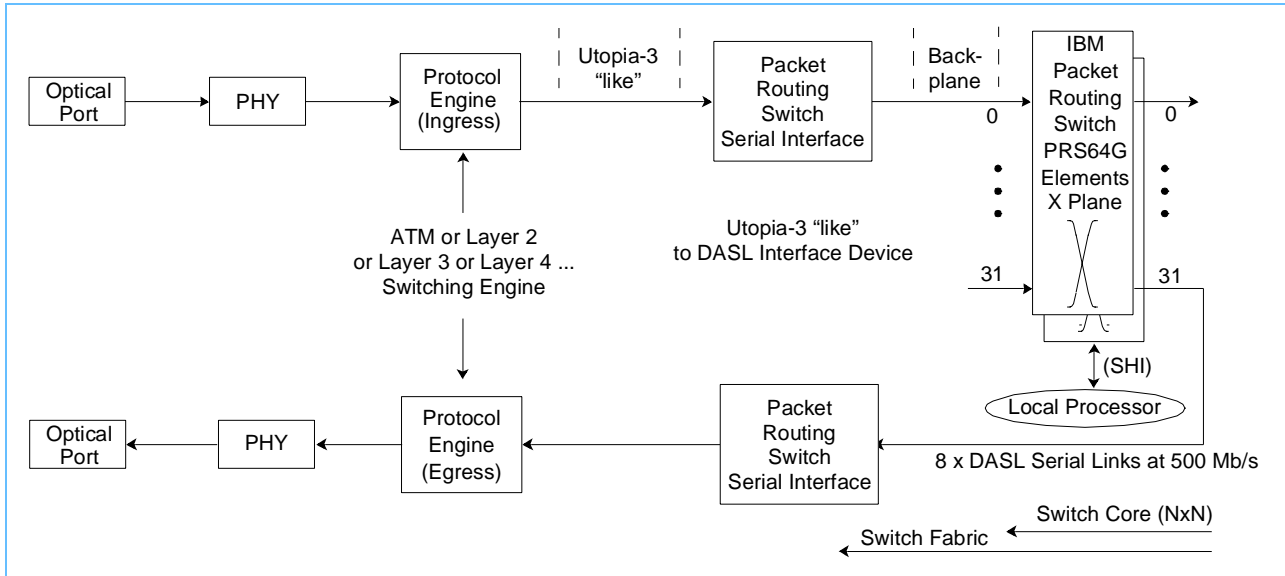Figure 1: System View with IBM Packet Switch Serial Interface



The PRS64G enables the construction of non-blocking scalable switch fabrics through repeated instances of the same switch element. It is designed for a wide variety of applications including: campus, WAN edge, access, and backbone switches. The PRS64G along with the IBM Packet Routing Switch Serial Interface provides a complete redundant switch fabric for the attachment of a 32-bit wide interface to any protocol engine. This supports protocols such as Packet Over Sonet (POS), Gigabit Ethernet Multilayer switching, and ATM.

Similarly, an IBM PowerNP NP4GS3 can attach directly through the DASL links to the PRS64G, allowing a very compact and powerful switching system. For more information regarding the NP4GS3, see the IBM PowerNP NP4GS3 Product Overview.

Figure 2: System View with IBM Network Processor


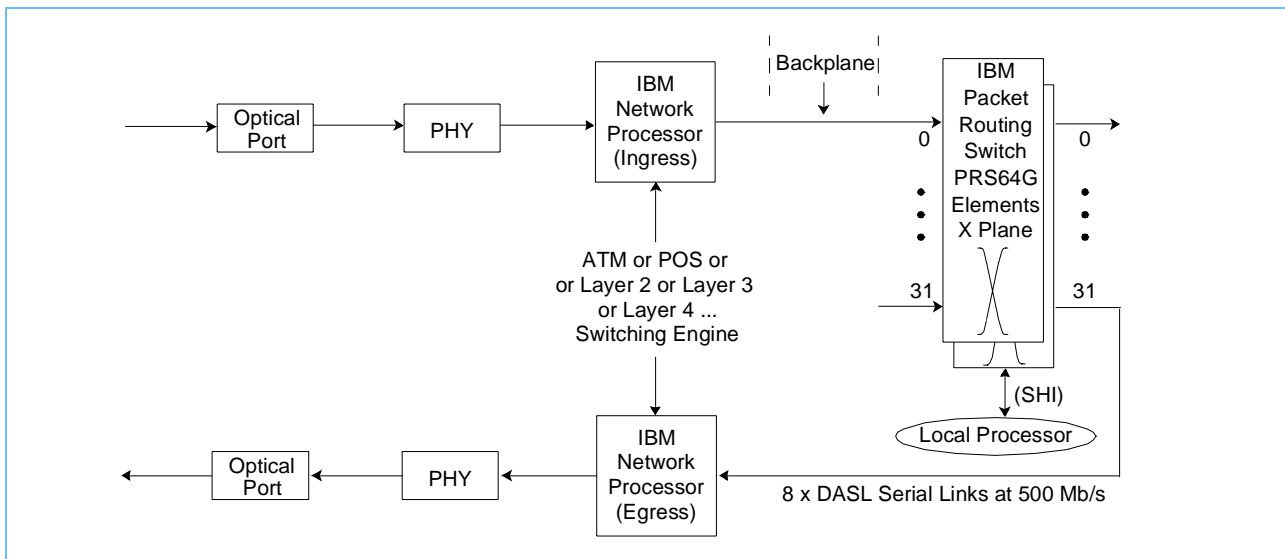


Figure 3: Packet Routing Switch Block Diagram

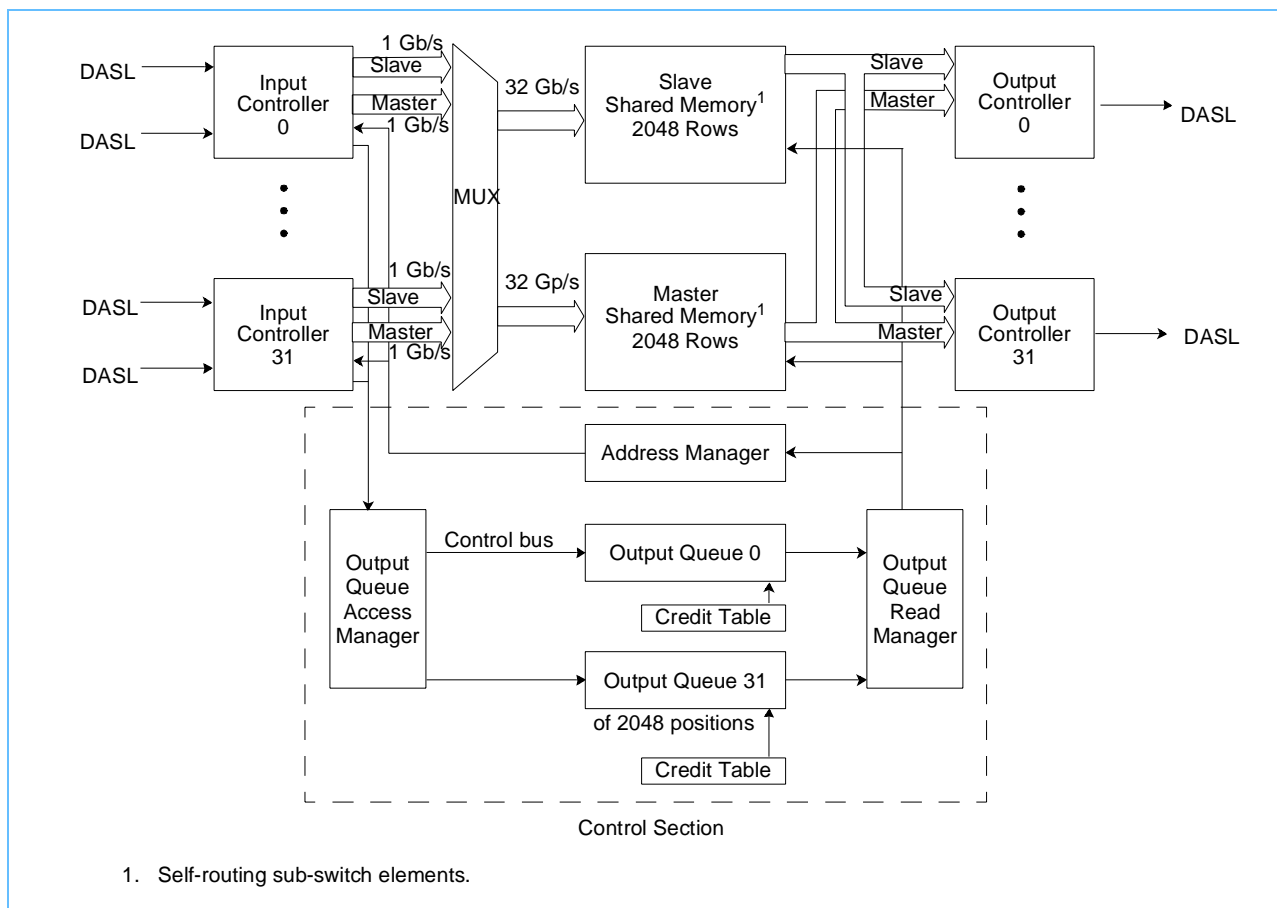

2. Architecture

2.1 Basic Data Flow

The PRS64G incorporates two self-routing sub-switch elements, and a control section that is the same. The device is made of two functional islands that operate identically when the switch is in regular (not speed expansion) mode. The switch has a fixed packet length shared memory, and a buffering capacity of 2048 rows of 16 to 20 bytes.

Each 2 Gb/s port carries two data streams, one master and one slave, each at one Gb/s. The master stream carries the Data packet header bytes, followed by packet payload bytes. The slave stream carries only payload bytes.

The input controllers examine the headers of incoming data packets and check the switch header integrity, using a parity bit on the header bytes. Valid data packets are then stored in the shared memory, and their storage addresses, along with the packet priority and bit map, are further processed by a centralized Output Queue Access Manager. These addresses are enqueued into output queues, one per output port and priority, according to the packet priority and bit map field. Data Packets are then transmitted, one at a time according to their place in the output queues, with the restriction that high priority packets always (except if specified differently by the Credit Table) overtake lower priority packets. However, the priority level to be received is selectable.

2.2 Multicast Packets

Multicast packets are processed the same way. A multicast packet is stored only once in Shared Memory, while its address is enqueued in all output queues indicated by its bit map field. A multicast packet is transmitted on the output ports according to the FIFO structure of each destination output queue (not necessarily at the same time on all ports). Multicast packets can only have one priority for all of their destinations.

2.3 Address Management

A central Address Manager maintains a pool of free Shared Memory addresses and provides new store addresses to the Input Controllers. Once a packet is transmitted, its address is returned to the Address Manager. The Address Manager also keeps track of the number of outputs still holding each address, since one address can be copied multiple times for multicast packets. Once this reaches zero, the address is returned to the free address pool.

2.4 Shared Memory Architecture

Shared Memory is organized as two banks, one master and one slave, each consisting of 2048 rows of 20 bytes, with one write port and one read port. Access to Shared Memory is performed one input and output port at a time. Sixteen to 20 bytes are transferred at each access, depending on the packet length. A central sequencer grants Shared Memory access to the input and output ports, cyclically. This sequencer cycle is equal, in byte cycles, to the number of data bytes stored at every access in one memory row. It is defined as an integer between 16 and 20, such that packet length is a multiple of this integer. All cycles have equal

IBM Packet Routing Switch

length. Without speed expansion or with speed expansion and packet length greater than 128 bytes, an LU is received in two cycles of equal length. In speed expansion and packet length smaller than 128 bytes, it takes only one cycle to receive an LU.

2.5 Flow Control

Flow control is provided for each output queue and for the entire shared memory using a grant mechanism. Grants are given to the ingress of the attached device to allow packets to enter the switch. Similarly, the egress of the attached device provides grants to each output port to enable packets to leave the switch. On the ingress, the attached device receives the output queue grants, which reflect the status of the output queues, and memory grants that reflect the status of the Shared Memory. One output queue grant is provided per output and per priority.

2.5.1 Output Queuing and Priorities

Queuing is provided for each output port. Packet addresses from each output are organized into four logical queues of different priority. For each logical queue, packet addresses are organized into a first in first out (FIFO) queuing structure.

Packets are sorted by priority when stored, according to a priority flag they carry. The highest priority is represented by zero and the lowest by three. Packets are transmitted on a given output with the highest available priority always overtaking the lower priorities unless the weighted cyclical function has been enabled.

2.5.2 Incoming Flow Process

Each incoming packet contains information about the logical port of its destinations and the logical address (priority) per output (except for Control Packets).

The island controller allows one packet, corresponding to one input, to be processed and stored at a time. Inputs are visited once per sequencer cycle. When the input on which a packet arrives is visited by the island controller, the packet data is stored once in the shared memory. The address of this location is placed in the logical queues (specified by its priority) of all of its destination outputs according to its priority. At the same time, the shared memory counter and the output queue counters of its destination are incremented.

If an incoming packet is marked as a Control Packet, it is also stored in shared memory. Its address is then placed in a Control Packet queue, and an interrupt is sent to the local processor. An incoming Control Packet can only be received if fewer than 32 Control Packets are present in the Control Packet queue. Otherwise, the packet is discarded and a flag is raised.

2.5.3 Incoming Flow Control

Flow control of incoming packets is provided by grants which are authorizations for the attached adapter to transmit a packet. Grants are provided separately for each output port and for each priority of a port. An output queue grant for a priority is provided whenever the total packet count for an output (regardless of priority) is below the output priority threshold. It is removed whenever this count exceeds the threshold value (there is no hysteresis). Grants are also provided for the shared memory for each priority. The shared memory grant (memory grant) for a given priority is provided whenever the total packet count in shared memory is below the shared memory priority threshold, and it is removed whenever this count exceeds the threshold value (there is no hysteresis).

An adapter is only allowed to transmit a packet when it has the memory grant for the packet priority as well as the output queue grants for the destination logical outputs. For multicast packets, the adapter is allowed to transmit a packet if it has the memory grant for the packet priority, regardless of output queue grants.

Incoming packets also carry a “best effort” flag. This flag allows packet discard at the input of the island whenever the best effort discard threshold is reached due to persistent traffic overspeed for that output port, leading to a congestion in the attached adapter. The watermark counter used by the input controllers to decide to discard a packet is incremented once per received packet for each output port and decremented according to the line period of the attached port adapter.

Finally, an anti-streaming function is provided at the input controllers to detect badly behaving adapters. When an adapter sends a packet to an output priority for which the output queue grant or memory grant have not been given in the past N packet cycles (programmable from 8 to 36 cycles), the packet is discarded and an interrupt is raised. For multicast packets, the same mechanism is applied, but it takes only the memory grants into consideration.

2.5.4 Output Flow

In each of the four logical output queues, Control Packets and Data Packets are transmitted in the following order:

1. Control Packets
2. Priority 0 packets
3. Priority 1 packets
4. Priority 2 packets
5. Priority 3 packets

In normal mode of operation, this order cannot be changed.

Through a weighted cyclical mechanism, it is possible to guarantee minimum bandwidth for any priority. The programmable Credit Table indicates which priority should be transmitted at each packet cycle. When a credit is generated for priority N, then a packet of priority N is sent on that output port, provided that the send grant is active for that priority and the corresponding logical queue is not empty. If a queue is empty, the normal algorithm applies.

2.5.5 Output Flow Control

Output flow control is provided by send grants (one per output), regardless of priority in normal mode of operation. A packet on a given output can only be transmitted if the send grant is provided for that output.

There is also a Send Grant Per Priority Mode which allows the attached device to decide which packet priority is allowed to exit the switch. An antistreaming option prevents a defective attached device from keeping the send grant deasserted indefinitely. The send grant antistreaming option is programmable from 16 to 1024 packet cycles. When this condition occurs a send grant violation interrupt is raised to the attached Local Processor.

2.5.6 Output Queue Manager

The Output Queue Manager maintains a unique counter for each output queue, which indicates the total number of packets enqueued for that output, regardless of priority. The total number of packets in all four logical queues of one output is compared to the threshold value of a given priority, in order to provide flow control for

IBM Packet Routing Switch

that output priority. All output counters are compared to those four thresholds once per sequencer cycle. If an output counter value is less than the threshold, the corresponding grant is set. Otherwise, it is cleared. Similarly, a counter keeps track of the total number of packets in Shared Memory.

2.5.7 Shared Memory

Four programmable Shared Memory thresholds are also provided, one for each priority. This counter is permanently compared to those four thresholds to generate the memory grants. An input ingress device is only allowed to transmit a packet when it has received both the output queue grants for the packet's destination and priority, and the memory grant for the packet priority. On the egress, a send grant is processed by each output port, either regardless of priority or per priority. The total number of packets in shared memory is compared to these threshold values for each priority, regardless of the output destination of the packets.

2.6 Control Packets

Control packets are those packets transmitted to and received from a local processor. Packets can be received on any input port, and are passed one at a time to the local processor. A 32-position FIFO queue is provided for incoming Control packets for which priority is not assigned. Control packets can be transmitted by the local processor on any set of output ports. Control packets do not carry a priority and are always transmitted on one output before any other packet present in the shared memory. Due to the slow nature of the local processor access compared to the packet data traffic rate, control packet transmission is infrequent and does not affect the performance of high priority traffic.

Data Packets for which the bit map field (Header Bytes 1:4) is 0 are detected as Control Packets and are passed to the local processor via a dedicated queue. The first bit map byte of an incoming Control Packet is overwritten by the input port number on which the packet is received.

2.7 Serial Host Interface

A Serial Host Interface (SHI) provides a serial interface to a local processor for programming application registers and accessing control packets. Refer to *7.1.2 SHI Interface Signals* on page 107 for an SHI diagram.

2.8 Serial Data Interface

A high speed serial interface is used to minimize the number of pins and to provide direct access over an extended distance. Two pairs of differential lines running at 500 Mb/s are provided for each master and slave LU stream. Therefore, each port is composed of four differential links. On the ingress side, the serial interface provides deserialization of one 2 ns bit stream into an 8 ns nibble stream. On the egress side, an 8 ns nibble stream is serialized into a 2 bit stream. For each stream, two nibbles are grouped to form a byte. Data is transmitted with a known clock such that only bit-phase alignment and packet alignment have to be performed. A picocode mechanism compensates for any skew between nibbles.

Link synchronization is provided by a training sequence of special Idle Packets, called Sync Packets. When sync packets are transmitted on a port, the receiving port can perform bit phase alignment of the incoming data, as well as packet alignment. The format of these Sync Packets is such that they are recognized by the receiving end as valid packets, and provide bit transitions on the physical line to allow for phase recovery. A sync packet LU is entirely composed of x'CC' bytes, except for the last byte which is x'33'.

One data byte is carried over two differential pairs. One pair carries all even numbered bits, and the other one all odd numbered bits. This converts the x'CC' sync packet bytes into alternating '0' and '1' transitions on the physical lines.

2.9 Controllers

The internal controller is managed by a Sequencer, with a cycle value of 16 to 20 byte clocks (boundaries included). The island controller allows the handling of logical units (LUs) of 16 to 20 bytes (in steps of one byte), or 32 to 40 bytes (in steps of two bytes). An LU is the part of a packet that one island processes. The shared memory organization allows storage of 2048 LUs of 16 to 20 bytes, or 1024 LUs of 32 to 40 bytes.

2.10 Signaling

LU data is passed in and out of the island, one byte per clock cycle, for each input and output port, at a rate of 1 Gb/s. The switch header contains a packet qualifier and bit map.

The Qualifier byte is the first byte of a packet. It contains information about:

- Packet priority
- Packet identification (data, idle)
- Packet filtering support (see *2.10.4 Packet Filtering* on page 20)
- Best effort discard flag
- Parity bit over the entire header (packet qualifier plus bit map field)

2.10.1 Input Header (Bit Map)

For incoming Data Packets, one to four bytes of the packet header provide the address of the packet destination, in the form of a bit map. Each bit of these bytes is associated with a logical output port, consisting of multiple (2, 4, or 8) physical ports, grouped together by either link paralleling or speed expansion into a unique logical port. In packet addressing, there is no difference between ports that are bundled together and individual ports. A bit set to '1' in the bit map indicates that the packet is to be routed to the corresponding logical port. This bit map field can point to multiple outputs.

2.10.2 Output Header (Output Queue Grant)

Depending on the header length, one to four bytes of outgoing packets carry the grant status of all output ports. This grant status is used by the receiver of the other adapter to make a decision on Data Packet transmission, according to the incoming flow control algorithm presented above. This grant status is referred to as an output logical queue grant (OQG).

On a given packet, the output queue grant field carries the status of all logical queues of the same priority. Ports bundled together represent a single logical queue. Consecutive packets carry the grant status for the different priorities, in a cyclic order. The synchronization of this cycle is provided by the packet numbering field (Flywheel priority field) contained in the outgoing Idle Packets.

IBM Packet Routing Switch

2.10.3 Service Packets

There are two sets of Service Packets - Time Fill Packets and Link Information Packets.

- *Time Fill Packets* are Idle Packets that contain LU CRC. They result from either a flow control situation or buffer emptiness. When no Data Packets are available on a port, Time Fill Packets are transmitted. During switchover process, Time Fill Packets can be “colored” (red or blue) to indicate that a buffer is empty of all priorities for a given switch plane. This is to maintain a continuous sequencing of the packet clock.
- *Link Information Packets*:
 - *Link Synchronization Packets* are used as a training sequence for the serial links, and they contain the LU CRC.
 - Yellow Idle Packets are used to test the continuity of a link (Link Liveness packets). The reception of a Yellow Idle Packet on a given input is logged into a register accessible by the local processor. Yellow Packets can only be transmitted by the local processor. There are three types of yellow packets: “Yellow1”, “Yellow2”, and “Yellow3”.

2.10.4 Packet Filtering

A packet filtering function is provided on the switch island inputs in order to decide whether to receive packets for certain destinations. According to the packet filtering field in the qualifier byte, the incoming packet bit map is either logically ANDed (Red packets) with a specified mask, its complement (Red compliment packets) value, or not masked at all (Blue packets). For Data Packets, the color (red, red compliment, or blue) is used to determine how the bit map filter is applied to the bit map destination address. There is one mask for all 32 inputs.

2.11 Link Integrity

Link integrity is provided by a CRC field, placed in the last byte of all Idle Packet LUs. The 8-bit CRC is the checksum of all bits carried over a port since the previous Idle Packet ended. Thus, when multiple Data Packets are transmitted, followed at some time by an Idle Packet, the CRC of this Idle Packet covers all previous Data Packets. This provides a measure of the link quality for fault isolation.

2.12 Receive Grants

A receive grant function is provided on device pins as a way to block packet reception for specific outputs. This function allows the implementation of packet lossless switchover for simple switch systems. It cannot be combined with the packet lossless switchover mechanism provided by filtering mechanisms. When a receive grant is asserted, reception of Data Packets in the corresponding output queue is enabled. When a receive grant is deasserted, no incoming packets are stored in the corresponding output queue, regardless of their bit map setting.

2.13 Look-Up Table

The Look-Up Table is a facility that allows shuffling of the bytes of outgoing packets. Only the first 16 bytes can be exchanged among each other or overwritten by one of the 16 bytes. One table is provided for all output ports. There is one table per island.

2.14 Side Communication Channel

The 4-bit side communications channel (SCC) allows two-way communication between the adapters and the switch. It is assumed that the switching factor of this information is very low. On the path from the adapters to the switch, the information is transferred inband in the sixth byte of the Idle cells master logical unit. SCC information is carried in bits 0:3 and 4:7. When the switch receives the idle cell, it extracts and compares bits 0:3 and 4:7. If the value is the same, an internal register that holds the information is refreshed. The information is then made available through the read-only register. On the path from the switch to the adapters, the information is taken from four input pins (SCCIn 0:3).

The SCC information is inserted into all the outgoing idle cells; all the output ports send the same information. In order to guarantee a minimum time to propagate the information in case of information change, the switch automatically generates an idle cell to all ports on SCC input pins edge detection.

2.15 Expansion Modes

When multiple islands (of the same device or of two devices) are running in speed expansion, one is master and the others are slaves. The master island generates the byte stream containing the qualifier byte, bit map, and output queue grant. The master island also performs packet routing and queuing. The slave islands only receive data bytes, and do not perform any packet routing and queuing. The address of packets in shared memory is provided by the master to the slave on a special input address bus. Furthermore, the slave island's internal sequencers are synchronized on the master sequencer in order to transmit the LUs at the same time on a given port.


2.15.1 External Speed Expansion

Speed expansion allows multiple devices to be connected in parallel to increase the port speed while keeping the number of ports constant, as shown in the Speed Expansion Block Diagram below.

When two devices are in external speed expansion, ports of the same number are grouped together.

Only two devices can be combined in external speed expansion.

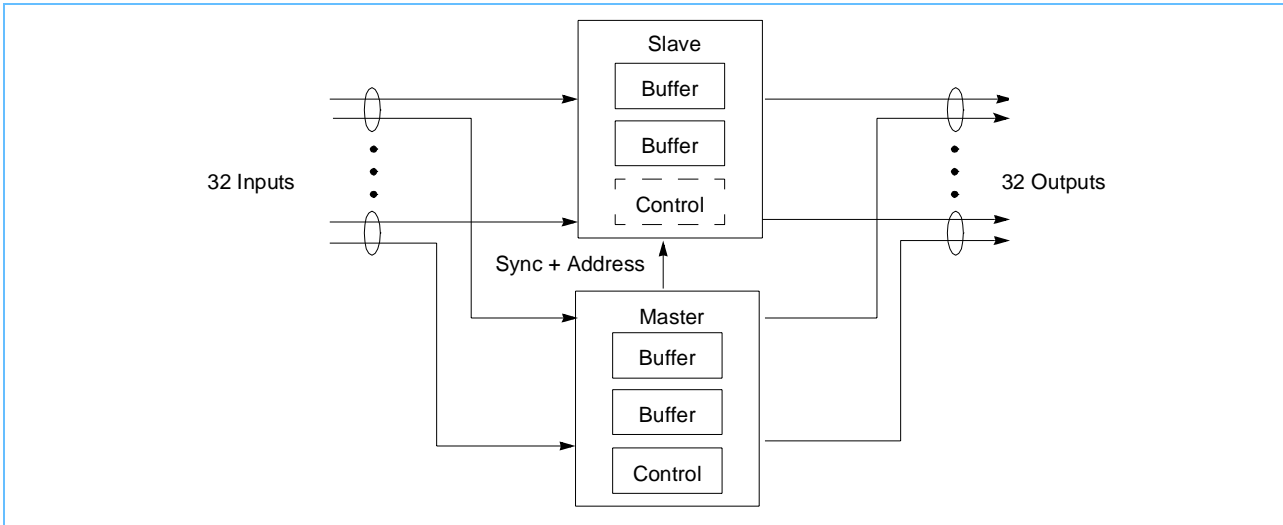Figure 4: External Speed Expansion Block Diagram



IBM Packet Routing Switch

2.15.2 Internal Speed Expansion

Ports of one island can also be paired to double the port speed while reducing the number of input and output ports to 16. Each pair of ports consists of one master port and one slave port, which have exactly the same functions as the ports of master or slave islands in external speed expansion.

Figure 5: Internal Speed Expansion Block Diagram

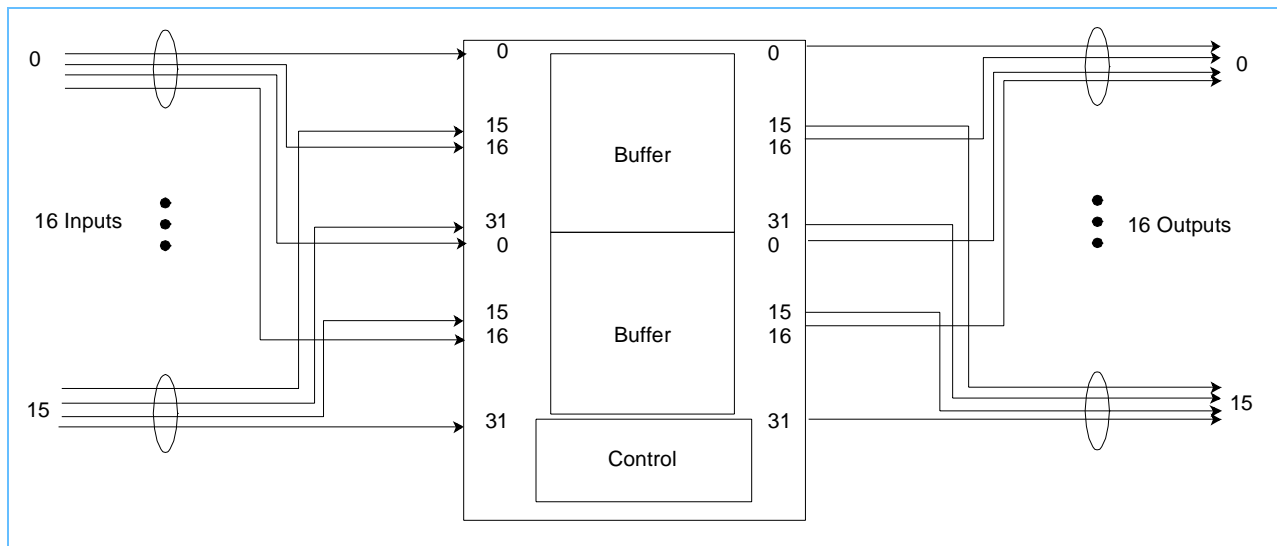


Table 2: Speed Expansion Shared Memory Buffering Capacities

Speed Expansion Mode	Switch Configuration	Gb/s port	Packet Length (bytes)	LU Size (bytes)	Buffering (packets)	Speed Expansion Factor
Single device, no internal speed expansion	32 x 32	2	64 - 80	32 - 40	1 K	2
			32 - 40	16 - 20	2 K	
Single device, with internal speed expansion	16 x 16	4	64 - 80	16 - 20	1 K	4
			128 - 160	32 - 40	512	
Two devices speed expanded, no internal speed expansion	32 x 32	4	64 - 80	16 - 20	2 K	4
			128 - 160	32 - 40	1 K	
Two devices speed expanded, no internal speed expansion	16 x 16	8	128 - 160	16 - 20	1 K	8
			256 - 320	32 - 40	512	

Note: In each case, the LU size seen by one island (either the master or the slave island of one device) is equal to the packet length divided by the speed expansion factor (port speed divided by the island port speed of one Gb/s).

2.15.3 Port Expansion

Port expansion allows multiple islands to be interconnected in parallel, in a single stage, in order to increase the number of physical ports, while keeping the port speed constant.


An external function must be provided to:

- Duplicate incoming packets and insert the correct bit map used by each island

- Merge traffic from different islands

Port expansion can be combined with speed expansion (internal and/or external) to increase port speed and the number of ports at the same time.

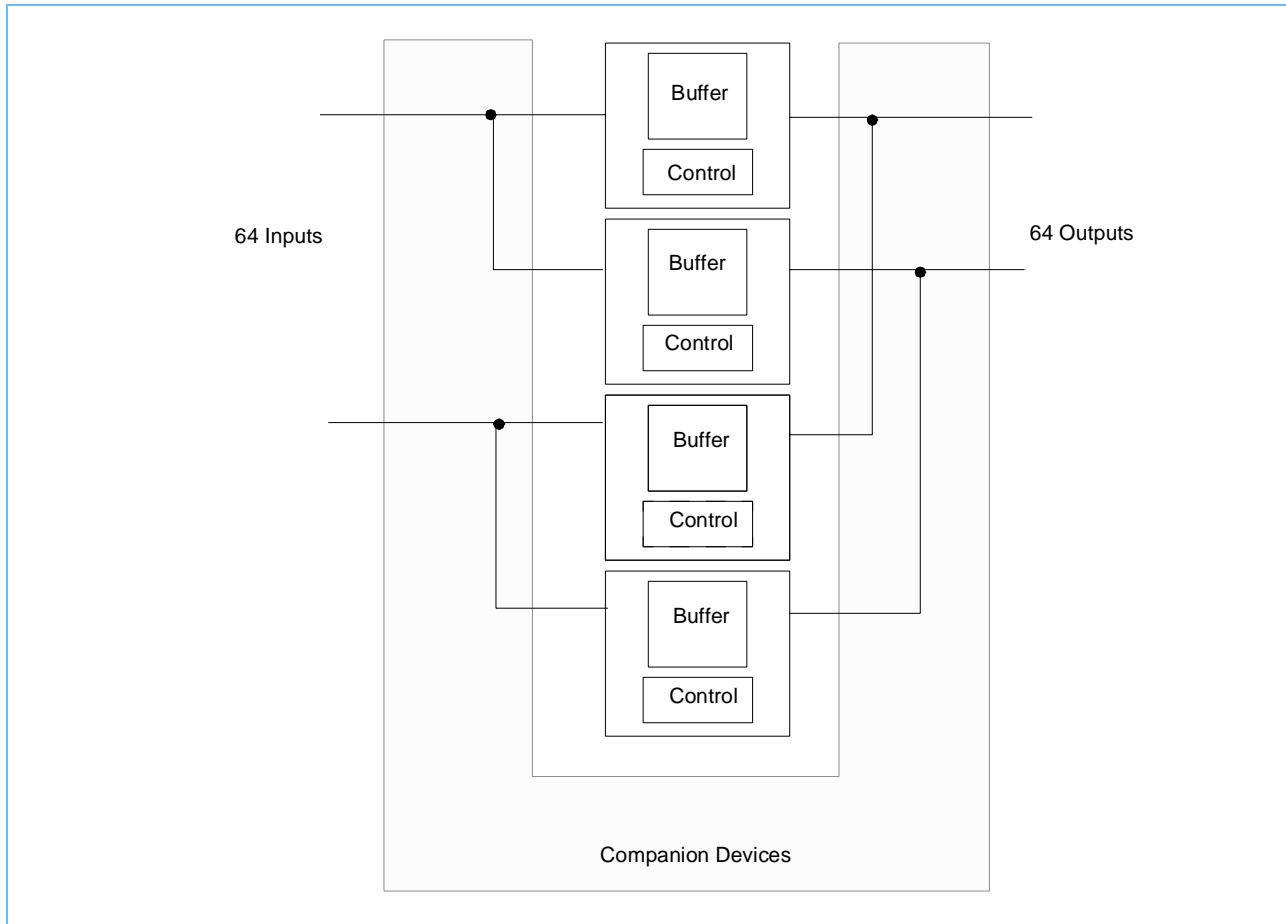Figure 6: Single Stage Port Expansion Block Diagram



2.15.4 Physical Port Bundling


Link paralleling is the grouping of physical ports to form a unique logical port. The only difference between the ports is in the packet ordering. For packets belonging to the same flow (i.e. input/output/priority combination), packet sequence must be maintained through the switch fabric, and packet ordering must be guaranteed when transmitting and receiving packets. Packet order is based on time of transmission. Packets of ports of a common link are sent one after another, with an offset of four clock cycles (32 ns). Therefore, a port 1 packet sent 32 ns after a packet on port 0 comes after the packet on port 0 in the sequence order.

Link paralleling of four ports is only possible in the following combinations: (0,1,2,3), (4,5,6,7), (8,9,10,11), (12,13,14,15), (16,17,18,19), (20,21,22,23), (24,25,26,27), and (28,29,30,31). Not all groups have to be used at the same time. This is configurable via the Input and Output Link Paralleling field in *5.6.1 Configuration 0 Register* on page 78.

IBM Packet Routing Switch

The figure below shows output link paralleling of ports (0,1,2,3), with a unique link list built in OQ 0. When sending a packet to output link 0, only the output 0 bit is set in the bit map. Addresses from OQ 0 are then distributed to the output ports 0,1,2, and 3: The OQ reads from OQ 0 when the internal sequencer indicates to process output 0, 1, 2, or 3.

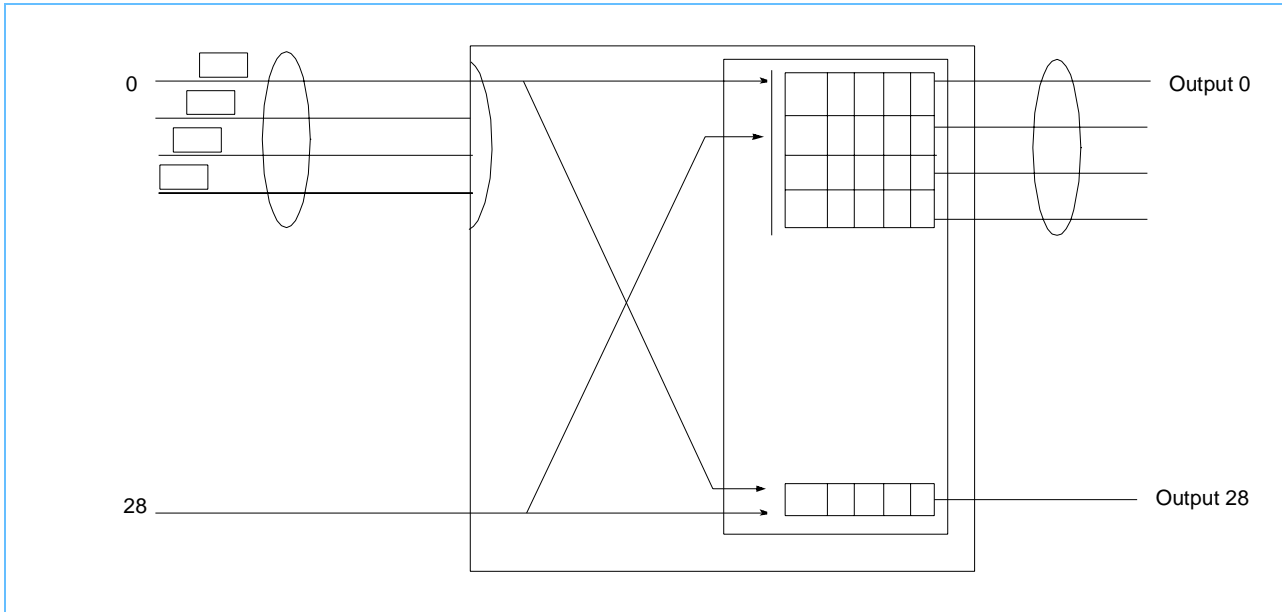Table 3: Link Paralleling Block Diagram



Link Paralleling is a logical grouping of ports. Each port or link transports independent packets. Packet ordering is such that a packet carried on a port of lower number is processed before a packet carried at the same time on a port of a higher number (for instance, if ports 0, 1, 2, and 3 are linked, a packet on port 0 comes, and thus is processed (enqueued), before packets on port 1, 2, or 3).

3. Functional Description

3.1 Logical Interface

As described in 2.15 *Expansion Modes* on page 21, the switch consists of two switch islands running in speed expansion. Data Packets are carried over an input or output port in two byte streams of one Gb/s each, one to or from the master island, and the other to or from the slave island. Each byte stream carries Logical Units (LU). Depending on the expansion mode and packet length, an LU has a length of 16 to 20 bytes or 32 to 40 (in increments of two) bytes.

As represented in the figure below, the master LU always carries the packet routing information, or header bytes, indicated by H0, H1 through H4 (depending on the header length). Depending on the speed expansion mode and the number of ports operating in link paralleling, the number of addressable output ports can be 8, 16, 24, or 32.


Figure 7: Packet Format 2 Gb/s Port



When running in either internal or external speed expansion, two ports are grouped to form a 4 Gb/s port. Depending on the port and chip configuration, a 2 Gb/s port can run either as a master port or a slave port:

- The master port is composed of two streams, one master, which carries the packet header information and data bytes, and one slave, which carries data bytes only.
- The slave port is composed of two slave streams, which carry data bytes only.

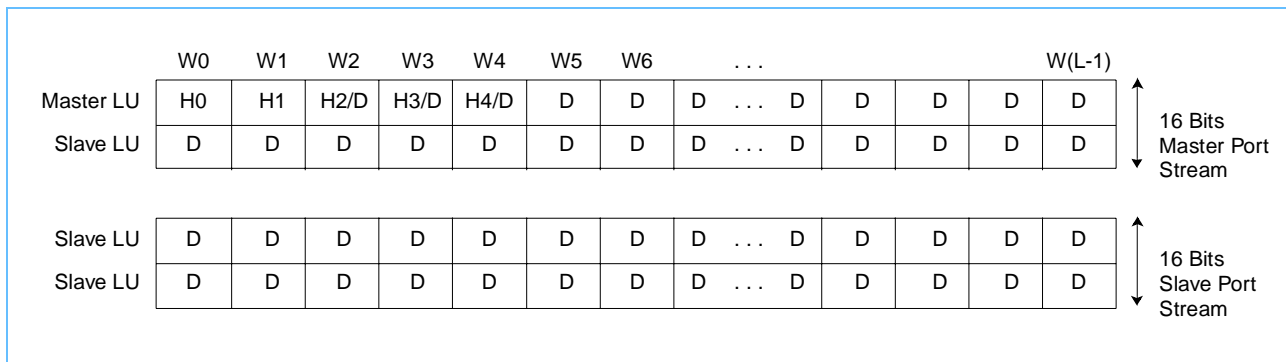
Figure 8: Packet Format for 4 Gb/s Port



The LUs of a packet are always transmitted or received at the same time on both streams of a port. The LUs of successive packets are transported one after the other, with no gap between packets.

IBM Packet Routing Switch

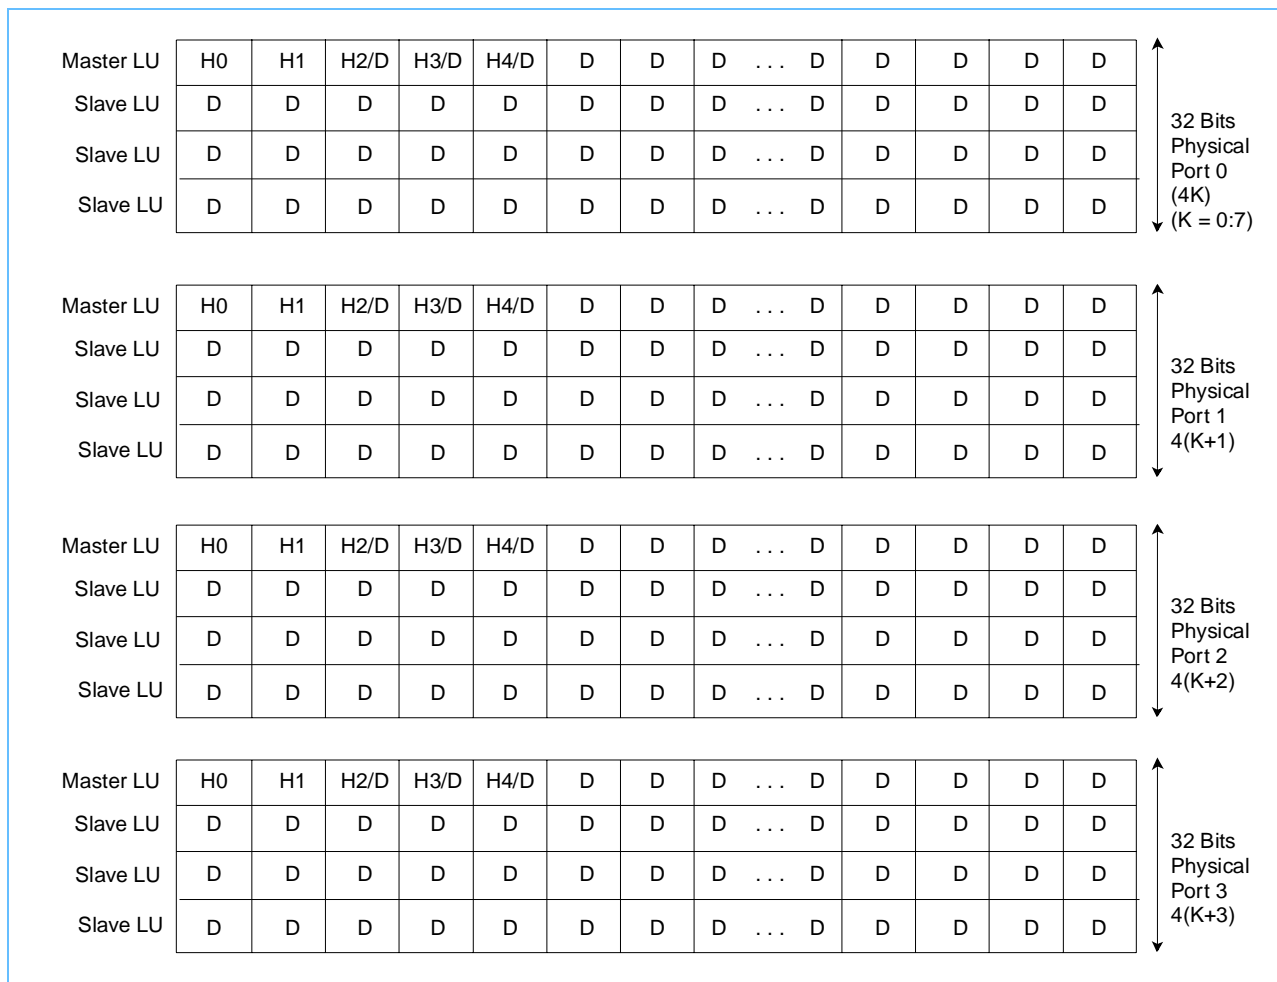Figure 9: Packet Format for 16 Gb/s Port



In the case of link paralleling the internal sequencer of device processes one physical port at a time, there is an interval of 32 (4 clock cycles x 8ns)ns between each physical port of a logical port. In order to guarantee that packets are received and processed according to their order of arrival, they must be transmitted to the input physical ports with the same pattern as the physical port processing (offset of 32 ns between ports). This is the responsibility of the attached device.

3.2 Physical Interface

Within the device, an LU is transported in a stream of bytes at 125 Mb/s. Externally, it is transported over two bit streams of 500 Mb/s each. At the device-pin level, each bit stream interface is differential and complies with the JEDEC JESD8-6 standard (HSTL).

Data bits are transferred across devices at a known frequency and no companion clock is required. However, bit-phase alignment is performed during the link synchronization phase.

The interface between the 8 ns and the 2 ns domains is handled by a data line interface, the Data Aligned Serial Link (DASL).

- On the input side, the DASL deserializes the two bit streams into one byte stream. It also performs the link synchronization through training sequence to allow bit phase alignment and packet alignment. Afterwards, it automatically compensates for any variation in temperature, voltage, etc.
- On the output side, the DASL serializes the byte stream into two bit streams.

Two internal picoprocessors (shared DASL controller: SDC) perform the synchronization of all lines on all ports. One is dedicated to ports 0 to 15 and the other to ports 16 to 31. A synchronization algorithm running on the picoprocessor performs the bit-phase alignment and packet alignment of all ports during the synchronization phase (see 6.3 *DASL Initialization and Operation* on page 100). The synchronization algorithm is downloaded into an internal instruction memory and is delivered along with the device.

During serialization and deserialization, a one byte stream is split into two bit streams, one carrying the even bits; the other the odd bits. A port consists of four differential pairs. The information and bit order that each pair carries is shown in the table below.

Table 4: Physical Bit Organization of a Port

Differential Pair	Information Carried	Bit Order
Data_0_Q and Data_0_QN	even number bits of the slave byte stream	b0 b2 b4 b6 of slave byte
Data_1_Q and Data_1_QN	odd number bits of the slave byte stream	b1 b3 b5 b7 of slave byte
Data_2_Q and Data_2_QN	even number bits of the master byte stream	b0 b2 b4 b6 of master byte
Data_3_Q and Data_3_QN	odd number bits of the master byte stream	b1 b3 b5 b7 of master byte

This bit grouping guarantees bit transitions to perform the phase alignment during synchronization on SYNC packets.

3.3 Packet Type

A packet can be one of the following types:

- A Data Packet that contains user data to be switched from input to output.
- A Control Packet that is used to communicate with the local processor.
- An Idle Packet that does not contain user data. Idle Packets are sent on a link when no Data Packets are available, or to perform link synchronization.
- Link Information Packet: Yellow Idle used to test the continuity of the link.

3.3.1 Data Packets and Control Packets

Data packets carry user data and Control packets carry information for local processor communication. *Figure 7: Packet Format 2 Gb/s Port* on page 25 shows the format of a Data and Control packet without speed expansion. A packet consists of 16-bit words, divided into a master stream and a slave stream.

Figure 8: Packet Format for 4 Gb/s Port on page 25 shows the format of a data or a control packet with speed expansion, either internal or external. In those configurations, the packet is transported over two different ports, either in the same device or in separate devices, in four LUs. The master port receives the master LU and a slave LU, and the slave port receives two slave LUs.

IBM Packet Routing Switch

Data packets have a priority that ranges from '0' (highest) to '3' (lowest). In addition, they also carry filtering (color) information used for switchover support, and a "best effort discard" flag.


Control Packets do not have priority.

3.3.2 Idle Packets

The figure below shows the format of an egress Idle Packet with and without speed expansion. In normal mode, the format is identical to the Data Packet format for 2 Gb/s ports, except that an Idle packet contains two trailer bytes in the last word of the packet. The ingress Idle packet has the same content as the egress Idle Packet except byte H1 through H4 contain 'CC'.

Speed expansion mode is similar to the Data packet format for 4 Gb/s ports, except for the trailer bytes at the end of the packet. The ingress Idle packet has the same content as the egress packet except bytes H1 through H4 contain 'CC'.

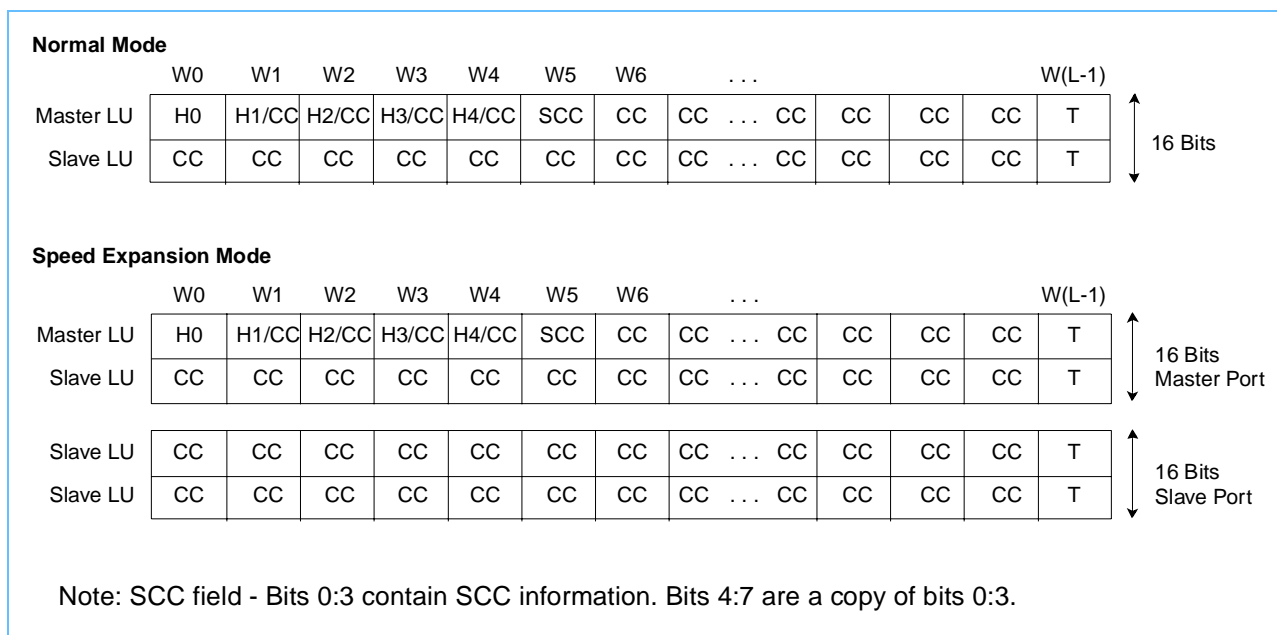Figure 10: Idle Packet Format



Like Data Packets, Idle Packets also carry color information. However, in this case the color (filtering) information is for signaling (such as liveness messages, or to identify link synchronization packets, called Sync packets), in addition to switchover support.

3.3.3 Sync Packets

Sync packets are special types of Idle Packets, which allow link synchronization by providing bit transition and packet delineation.

The bit organization by the physical interface provides on a given differential pair, a sequence of 'A', followed by a '5'. This bit sequence provides the necessary bit transition while the 'A to 5' transition allows for packet delineation.

3.4 Header Format

3.4.1 Header Byte H0 - Packet Qualifier

Table 5: H0 for “TimeFill” packets (Idle Packets)

Packet Type	Bit Position					
	0	1	2	3	4 and 5	6 and 7
	FlyWheel Extender	Parity	0	0	Color	Grant Priority bits
Blue Idle Packet	FWE	r	0	0	00	gg
Red Idle Packet	FWE	r	0	0	01	gg

r Even parity bit on entire header.
 gg Value of grant sync bits (ignored for received packets - value = '00'. Grant synchronization is a flywheel mechanism that allows the device to indicate to the attached chip the priority level of the output queue grant information contained in header bytes H1 through H4.

Table 6: H0 for “Synchronization” Packets

Packet Type	Bit Position							
	0	1	2	3	4	5	6	7
Synchronization Packet	1	1	0	0	1	1	0	0

Table 7: H0 for “Yellow” Packets

Packet Type	Bit Position							
	0	1	2	3	4	5	6	7
YellowPacket Type 1	0	r	0	0	1	0	x	x
YellowPacket Type 2	0	r	0	0	1	1	x	x
YellowPacket Type 3	1	r	0	0	1	0	x	x

r Even parity bit on entire header.
 x x value = 0 or 1.

Table 8: H0 for Data Packet and Control Packet (Bits 2 and/or 3 ≠ 0)

Packet Type	Bit Position						
	0	1	2	3	4	5	6 and 7
	EBM (1)	Parity (1)	Active Bit (1)	Backup Bit (1)	Best Effort Bit (1)	Reserved (1)	Priority (2)
Red compliment Data/Control Packet	x	r	0	1	be	x	pp

Key:
 EBM extended bit map
 x value = '0' or '1'
 r even parity bit on entire header
 be best effort
 pp packet priority



IBM Packet Routing Switch

Table 8: H0 for Data Packet and Control Packet (Bits 2 and/or 3 ≠ 0)

Packet Type	Bit Position						
	0	1	2	3	4	5	6 and 7
	EBM (1)	Parity (1)	Active Bit (1)	Backup Bit (1)	Best Effort Bit (1)	Reserved (1)	Priority (2)
Red direct Data/Control Packet	x	r	1	0	be	x	pp
Blue Data/Control Packet	x	r	1	1	be	x	pp

Key:
 EBM extended bit map
 x value = '0' or '1'
 r even parity bit on entire header
 be best effort
 pp packet priority

Table 9: H0 Fields

Field Name	Description	Settings
Parity Bit	The parity bit is even parity calculated on the entire packet header including the reserved fields. Even parity is such that the resulting number of '1' in the packet header is even. This ensures that the SYNC cell has a valid header.	
Reserved Bits	Reserved bits pass through the device unmodified.	
Data Packet Priority bits	The priority of a Data packet distinguishes between four levels of priority. When the packet is a Control packet, it is always transmitted before any other Data packets, and the priority field is ignored. Data Packets with higher priority will always be transmitted before those with lower priorities. There is a weighted cyclical mechanism based on a credit table which makes it possible to give precedence to a lower priority packet on a per port basis.	'00' Highest priority '01' Medium - High '10' Medium - Low '11' Lowest priority
Active and Backup Bits	The Active and Backup bits are used to determine how the Bit Map Filter Mask is applied to the Bit Map Destination Address (header bytes H1 through H4) and to determine the traffic type (Red or Blue) of Data Packets or Idle Packets. The Bit Map Filter is a programmable register. The resulting masked destination bit map is used by the device to route the packets to the appropriate destination(s), or to ignore the packet if the resulting bit map is all zeros. Control packet detection is performed before the Bit Map Filter is applied to the bit map contained in the packet header.	Active/ Backup <u>Bit Map FilterColor</u> '00' Idle Packetn/a '01' Packet bit map is bit wiseRed ANDed with bit wise complement of bit map filter '10' Packet bit map is bit wiseRed ANDed with bit map filter '11' Packet bit map is usedBlue unfiltered
Best Effort Discard Bit	Incoming packets with the "best effort discard" bit set will be dropped by the device when a threshold of four up/down counters (one per priority) representing the inverse of the switch speedup compared to the attached line is reached. By monitoring the packets destined to an output queue it is possible to determine up to which best effort priority is to be discarded to ease the congestion at the convergence of the output port.	'01' Packet bit map is bit wise ANDed with bit wise complement of bit map filter

Table 9: H0 Fields (Continued)

Field Name	Description	Settings
gg Bits	The grant priority bits (gg) are defined only for Idle Packets transmitted by the switch. They are used to synchronize the grant priority fly wheel of the attached device. For received packets, this field is not examined (its value is 'xx'). These bits encode the priority of the inband output queue grant information stored in header bytes H1 through H4. The coding of bits gg is identical to the Data packet priority.	'00' Highest priority '01' Medium - High '10' Medium - Low '11' Low priority
EBM: Extended BitMap	The purpose of this bit is to address in one cell header, half of the ports, in order to reduce the bitmap field length. When the "Extended bitmap function" is enabled, PRS64G will address 16 or 32 ports with a bitmap field of respectively 1 or 2 bytes.	'0' The bitmap field addresses the ports 0 to 7 for a 1 byte bitmap and the ports 0 to 15 for a 2 byte bitmap. '1' The bitmap field addresses the ports 8 to 15 for a 1 byte bitmap and the ports 16 to 31 for a 2 byte bitmap.
FWE: FlyWheel Extender	The purpose of this bit is to provide the inband OQ grant for half the ports in one cell header, in order to reduce the bitmap field length. When the "Extended bitmap function" is enabled, PRS64G will address 16 or 32 ports with a bitmap field of respectively 1 or 2 bytes.	FWE is always a toggle bit. When 0, it indicates that the grant field is related to ports 0 to 7 for a 1 byte bitmap and to ports 0 to 15 for a 2 byte bitmap. When 1, it indicates that the grant field is related to ports 8 to 15 for a 1 byte bitmap and to ports 16 to 31 for a 2 byte bitmap. Therefore, 2 consecutive cells with FWE equal to 0 then 1 carry the grant information for one priority.

Note: All the H0 bits are transported without modification except the Switch header parity which is refreshed. When the Best effort traffic is disabled, bit 4 has no effect. Bits 2, 3, 6 and 7 are always processed by the PRS64G. Therefore, they must be set by the user to the appropriate value.

3.4.2 Header Byte H1, H2, H3, and H4

The following chapter describes the contents of header bytes H1:H4 when the "Extended BitMap" function is disabled. When the function is enabled, the content of the header bytes H1:H4 depend on the value of the EBM and FWE bits. See descriptions for EBM and FWE in *Table 9: H0 Fields* on page 30 for more information.

3.4.2.1 Received Packet: Bitmap

Header Bytes H1 through H4 of a received packet carry the destination bit map of the packet. Header Byte H1 carries destination information for "logical" output ports 0 through 7. Header Byte H2 carries destination information for output ports 8 through 15. Header Byte H3 carries destination information for output ports 16 through 23. Header Byte H4 carries destination information for output ports 24 through 31.

For Control Packets, the entire bit map field is set to '0'.

Table 10: Header Byte 1 through 4 and Incoming Packet Bitmap

	Bit:	0	1	2	3	4	5	6	7
Header Byte H1	Port:	0	1	2	3	4	5	6	7
Header Byte H2	Port:	8	9	10	11	12	13	14	15
Header Byte H3	Port:	16	17	18	19	20	21	22	23
Header Byte H4	Port:	24	25	26	27	28	29	30	31



IBM Packet Routing Switch

3.4.2.2 Transmitted Packet: Inband Output Queue Grant Information

Depending on the setting of the Flow Control Enable bit in 5.6.1 Configuration 0 Register on page 78, Header Bytes H1 through H4 provide inband access to the output queue grant information.

When output queue grant insertion is enabled, Header Bytes H1 through H4 carry the output queue grant. The output queue grant is the grant information given to devices connected to the input ports. This information indicates the status of the output queues and controls whether or not to transmit packets to the switch. This information is carried for all 32 output ports at the same time for a given priority. Consecutive Idle and Data Packets carry a different priority, cycling from zero to the number of priority minus one. For instance, when two priorities are enabled, it takes two packets to transmit the output queue grant information.

Table 11: Header Byte 1 through 4 and Output Queue Grant

	Bit	0	1	2	3	4	5	6	7
Header Byte H1	Output Queue:	0	1	2	3	4	5	6	7
Header Byte H2	Output Queue:	8	9	10	11	12	13	14	15
Header Byte H3	Output Queue:	16	17	18	19	20	21	22	23
Header Byte H4	Output Queue:	24	25	26	27	28	29	30	31

When all four priorities are enabled, the output queue grant information is transmitted in a cycle of four packets. However, if the Three Threshold Enable bit is set in 5.6.2 Configuration 1 Register on page 80, the cycle is reduced to 3, and grants for priorities 0, 1 and 2 only are sent. It is assumed that thresholds 2 and 3 are programmed with the same value.

To synchronize the input interface device with the inband output queue grant, the priority value for which the output queue grant is transmitted is carried in the Grant Priority bits of the Qualifier Byte of Idle Packets. Since inband grant priority is transmitted in cycles of consecutive packets, priority synchronization (through a fly wheel counter) is performed on Idle Packets only, and this information is not provided for Data Packets but the fly wheel counter continues to update itself synchronously per packet. However, grant information is always transmitted for both idle and data packets.

Table 12: Example of Fly Wheel Counter Update

Counter Value	3	0	1	2	3	0	1
Packet type	Data	Idle H0 bit gg=00	Data	Data	Idle H0 bit gg= 11	Data	Data

When the “output queue grant insertion enable” bit of 5.6.2 Configuration 1 Register on page 80 is not set, bytes H1 through H4 are identical to bytes H1 through H4 of the received header.

3.5 Idle Packet Trailer Format

The trailer byte of ingress and egress 'timefill' Idle packets contains an eight-bit CRC checksum value which is calculated over all the bytes sent over that stream since the last Idle packet CRC byte. The trailer byte of ingress and egress Data and Control packets contains user data. Note that, depending on the module programming, the CRC is also checked on the ingress yellow packets. This is done in order to insure the compatibility with the IBM 25G Packet Routing switch.

The CRC encoding is defined by the generating polynomial $X^8+X^4+X^3+X^2+1$. The initial value for CRC calculation is programmable via an 8-bit CRC Init field in *5.6.2 Configuration 1 Register* on page 80. The initial CRC value is chosen so that the resulting trailer CRC of a Sync packet equals x'33' for all LU lengths. The CRC Init values are given in the chapter describing *5.6.2 Configuration 1 Register* on page 80.

When an Idle packet is received, the CRC is verified. CRC errors, if not masked, are reported via an interrupt.

3.6 Packet Reception

3.6.1 Master Input Port Operation

Packets are received on a particular input asynchronously with the packets on the other inputs, except for the ports in link paralleling. When a start of packet is received, a master input port performs the following actions:

- The packet header is analyzed and the various fields are extracted from the header. The entire packet is ignored if the header parity is incorrect. The error is reported via a Header Error interrupt and, if not masked, the main interrupt is asserted. Also, the global Header Error counter is incremented.
- If the header parity is correct and the received packet is not a sync packet, the packet color is extracted. When the packet type is yellow, bit *n* in the *5.6.15 Color Packet Received Register* on page 88 is set (where *n* is the number of the input port).

Further actions depend on the packet type and are described in the following sections.

3.6.1.1 Idle Packet

In external speed expansion, the slave is informed that an Idle packet has arrived. The Trailer Byte is verified. If there is a CRC error, it is reported via the CRC Error interrupt and, if not masked, the main interrupt is asserted. The global CRC Error counter is also incremented. No further action is taken for Idle Packets (not stored in shared memory).

3.6.1.2 Data Packet

- The packet is ignored if:
 - The packet destination output ports are all disabled, or
 - The packet cannot be stored in the packet memory. This is a flow control error and will be reported via the Flow Control Violation interrupt. This error can only occur if the adapter does not follow the memory grant information. If the interrupt is not masked, the main interrupt is asserted.

3.6.1.3 Control Packet

- The packet is only received if the number of currently enqueued Control Packets does not exceed the fixed threshold of 32; otherwise the Control packet is ignored. When 32 Control packets are already enqueued, the next Control packet is discarded, and an interrupt is raised if not masked.

IBM Packet Routing Switch

3.6.2 Slave Input Port Operation

When a start of packet is received, a slave input port receives control information from the master port. For each received packet this can be one of the following:

- An Idle packet is received. The Trailer Byte is verified. If a CRC error is detected, it is reported via the CRC Error interrupt. The CRC Error Counter is also incremented. If the error is not masked, the main interrupt is asserted.
- The incoming Data packet is received. The packet is then stored in the packet memory at the address received from the master port.

If both the slave and master port receive an Idle packet, and the master port informs the slave port to ignore the Idle Packet as a result of a header parity error, the slave will ignore the Trailer Byte in the Idle packet.


3.6.3 Parity and CRC Errors

The detection of header parity errors is reported via the *5.6.10 Header Parity Error Port ID Register* on page 84. Trailer CRC errors are reported via the CRC Error interrupt, and if not masked, generate a main interrupt. Each type of error has an individual error counter.

These interrupts are generated by the device that detects the error. In external speed expansion, the master device reports header parity errors and trailer CRC errors for data on its input port; the slave device reports trailer CRC errors for data on its input ports.

3.6.4 Address Insertion

The input port number is inserted in header byte H1 of incoming Control packets as follows:



The input port number is encoded on five bits x'8000' in the physical bit map, which corresponds to a value of X'00' in the input port number.

3.7 Input Flow Control

The switch continuously maintains shared memory and output queue status information. This status information is periodically transmitted via the memory grants and output queue grants for flow control to adapters which are connected to the switch inputs.

Flow control is used to signal the adapter that it should stop transmitting packets when the packet memory threshold is exceeded for the packet priority, or when an output queue threshold is exceeded for the packet priority.

3.7.1 Memory Threshold Exceeded Condition

There are four programmable memory-full thresholds, one for each packet priority. These thresholds can be used to prevent packets of a particular priority from using the entire packet memory. When the total number of allocated memory locations exceeds the threshold value, the corresponding memory grant signal is cleared. It is reset when the total number of allocated locations is less than the threshold value.

The four memory-full thresholds must be programmed in a decreasing manner. The memory-full threshold for priority 0 must be greater than or equal to the memory-full threshold for priority 1, which in turn must be greater than or equal to the memory-full threshold for priority 2, and so on. Consequently, when memory-full threshold 0 is exceeded, the other memory-full thresholds are also exceeded.

The memory-full information is available on chip pins (MEM_GRANT).

3.7.2 Programming the Memory-Full Thresholds

The memory-full threshold 0 should be programmed to:

NumberOfPackets - 64 - (32 * MasterGrantDelay) - ControlPacketReception - ControlPacket Transmission.

NumberOfPackets is the total packet storage available in shared memory, given in *Table 2: Speed Expansion Shared Memory Buffering Capacities* on page 22.

64 addresses are reserved by the Input Controller and should be subtracted from the total number of packets (either 1024 or 2048 depending whether speed expansion is off or on).

MasterGrantDelay, calculated in LUs, is equal to the transmission and processing time of the Memory Grant by the adapter + 1.

ControlPacketReception represents the 32 locations that are reserved for Control Packet reception, if necessary.

ControlPacketTransmission represents the location that is reserved for the Control Processor to send a packet.

3.7.3 Output Queue Threshold Exceeded Condition

There are four programmable output queue-full thresholds, one for each packet priority. All output queues use the same threshold per priority. These thresholds can be used to:

- Prevent packets of a certain priority and destined to a specific output from using the entire packet memory.
- Prevent packets of a certain priority from consuming too much output queue memory space (in relation to packets of a higher priority).

When the total number of addresses in an output queue exceeds a priority threshold, regardless of the priorities, the corresponding output queue grant is cleared. It is set whenever the total number of addresses in the output queue is below the threshold value.

3.7.4 Packet Reception Fairness

Two fairness mechanisms are implemented to guarantee that, on average, each input has an equal chance of receiving a packet:

IBM Packet Routing Switch

- **Output queue-full fairness.** When multiple inputs receive packets destined for the same set of outputs, then on average, each input has the same chance to receive its packet.
- **Memory-full fairness.** When multiple inputs receive packets with the same priority and the output queue(s) are not full, then on average, each input has the same chance to receive its packet.

This is accomplished by updating the memory grant and output queue grant values once per sequencer cycle.

3.8 Output Queue Grant Signaling


This section describes how the output queue grant flow-control status information described in the previous section is transmitted to the adapters that are connected to the switch inputs, and how these adapters should use the flow control information.

The memory grants are directly available on device pins. However, the output queue-full information is available only inband in the header of packets transmitted to the adapters if the Output Queue Grant Insertion Enable bit is set in *5.6.2 Configuration 1 Register* on page 80.

It is the responsibility of the adapter transmitting packets to the switch to determine if the packet can be accepted by the switch. The figure below shows the use of the inband output queue grant information. Inside the switch, only one input port and one output port are shown.

The adapter maintains an output queue grant status, which is a copy of the switch output queue grant status. Due to the multiplexing of the inband output queue grant of all priorities, this copy can be outdated by $P * LU + 2 * LU$ time from the switch full status, plus the latency of the attached device in processing the information, plus the DASL link latency, where P is the number of enabled priorities. See *3.4.2 Header Byte H1, H2, H3, and H4* on page 31 for a description of the inband output queue grant transmission.

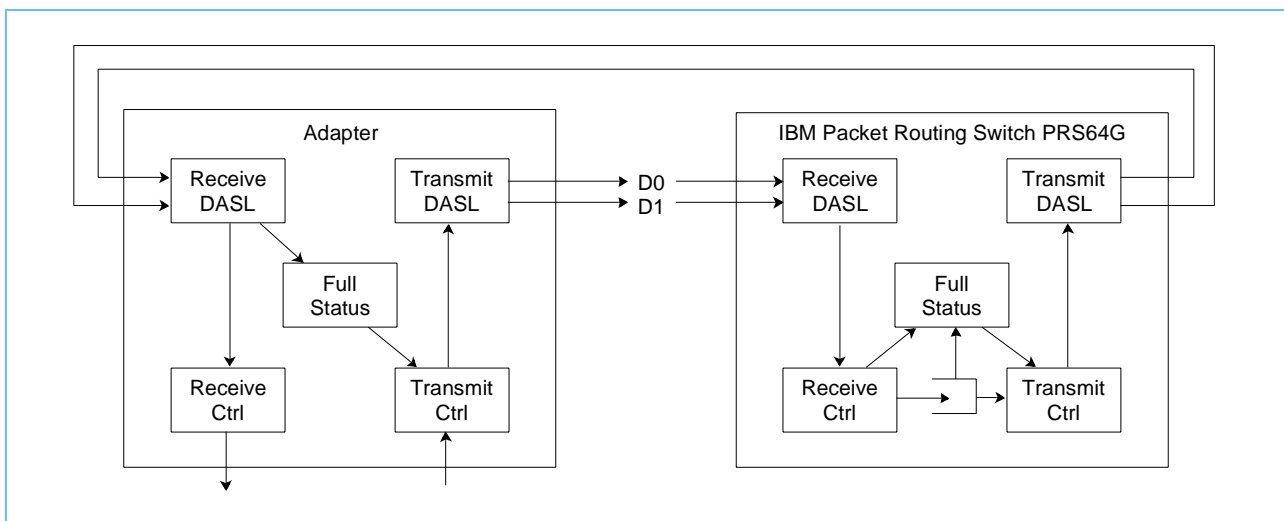Figure 11: Input-side Grant Operation



3.8.1 Adapter Transmission Rules

The adapter maintains output queue grant status, which contains the following information:

- An output queue grant bit for each packet routing switch output *i* and for each priority *p*, that is set when the adapter is allowed to transmit packets of priority *p* to output *i*. When the adapter receives a packet from the packet routing switch, it copies the 32 bits of header bytes one through four into its internal status table.
- Four memory grant bits, which override all output queue grant bits.

A rule to determine when an adapter may transmit a packet destined for a set of outputs with priority *p* is:

- The memory grant bit of the appropriate priority in the adapter must be set, and
- If the packet is unicast, the output queue grant bits in the adapter must be set for the destination output.

For multicast packets, it is recommended that only the memory grant bits be examined.

3.8.2 Flow Control Error

3.8.2.1 Shared Memory Overrun

As mentioned above, a packet routing switch input can always receive a packet, regardless of the full status of the output queues and shared memory, as long as it has a packet storage address. However, if a packet is received when the input does not have an address, the packet is discarded and a Flow Control Violation interrupt is set. If not masked, the main interrupt is asserted. This error can only occur if the Shared Memory Threshold bits have not been programmed correctly, or if the adapter does not respond to the memory grant pin information.

3.8.2.2 Flow Control Violation

An error can also occur if an adapter transmits packets regardless of the output queue grant and/or memory grant being deasserted. When an input receives a packet destined to an output for which the output queue grant or memory grant have not been given in the past *N* LU cycles (flow control latency *N* is programmable from 8 to 36 by increment of 2), a Flow Control Violation interrupt is set and, if not masked, the main interrupt is asserted and the packet is discarded.

When the incoming packet is multicast, this anti streaming mechanism is only based on the memory grant, and does not take the output queue grants into consideration.

3.9 Output Queues and Output Queue Priorities

The addresses of packets in the packet memory are stored in one output queue (or in multiple output queues when the packet is a multicast packet). There are 32 output queues, one queue for each output. Each output queue can store the maximum number of addresses.

In addition, each output queue is logically divided into four independent queues, one queue for each packet priority. When reading the output queue, addresses in a higher priority queue have precedence over addresses in a lower priority queue. Consequently, higher priority packets will overtake lower priority packets. However, the Credit Table allows alteration of priority scheduling, and it is possible to give the lower priorities a minimum amount of bandwidth to avoid starvation.

When the output `SND_GRANT` is active, the corresponding output queue is emptied at the rate at which packets are transmitted. This operation is also performed when the output queue is disabled (slow flush), regardless of the `SND_GRANT` value.

IBM Packet Routing Switch

In addition, if an adapter keeps the send grant for a period longer than N LU cycles (N programmable from 16 to 1024), a send grant violation interrupt is raised and the slow flush mechanism is enabled.

3.10 Shared Memory

3.10.1 Organization

The shared memory is organized as two dual port large RAMs, each containing 2048 rows of 20 bytes. The two RAMs operate in parallel. The first RAM stores all the bytes in the master LU; the second RAM stores all the bytes in the slave LU.

Each island receives, byte after byte, the content of an LU and stores the entire row at a time in the shared memory. Similarly, each output reads an entire row at a time from the packet memory and transmits it to the output byte after byte.

3.10.2 Shared Memory Access by Local Processor

The local processor has full read and write access to the entire packet memory through the application registers via the *5.6.19 Shared Memory Pointer Register* on page 90 and *5.6.20 Shared Memory Data Register* on page 91. For example, this function is used when creating or reading Control Packets.

For an LU of length 17 to 20 and 34 to 40, the access time to the shared memory is guaranteed to be no more than one LU cycle. For an LU of length 16 and 32, the access time can only be guaranteed if the Control Packet Access Priority bit is set in the *5.6.2 Configuration 1 Register* on page 80.

3.11 Packet Transmission

The data stream format at the switch output side is identical to the format at the input side. However, packet transmit start times are synchronized with an internal switch packet sync clock, via the SEQ_CLK. The internal switch packet sync clock is either generated internally or can be synchronized with an external packet sync clock. This is required for a slave device in external speed expansion mode, where the sync clock of the slaves must be synchronized with the sync clock of the master. The programming of the SEQ_CLK usage is performed via the Sequencer Sync Pin Mode bit in the *5.6.2 Configuration 1 Register* on page 80.

3.11.1 Output Port Servicing

The transmission of a packet on a certain output starts at a fixed point in time, as defined in the table below.

Table 13: Packet Transmission Time

Output Port Number	Time Relationship with SEQ_CLK [byte cycle] ¹	Transmission Time without Internal Speed Expansion [byte cycle]	Transmission Time with Internal Speed Expansion [byte cycle]
0 (reference), 16	21	0	0
1, 17	25	4	4
2, 18	29	8	8
3, 19	33	12	12
4, 20	22	1	1
5, 21	26	5	5
6, 22	30	9	9
7, 23	34	13	13
8, 24	23	2	-
9, 25	27	6	-
10, 26	31	10	-
11, 27	35	14	-
12, 28	24	3	-
13, 29	28	7	-
14, 30	32	11	-
15, 31	36	15	-

1. The time relationship with SEQ_CLK is the number of clock cycles between a low to high transition on the SEQ_CLK pin and the start of transmission of the first byte of a packet.

An switch output will always transmit a packet. If no Control packet or Data packet is available to transmit, or no packet has a transmission grant, the output will transmit an Idle Packet. Otherwise the switch will transmit the packet.

In external speed expansion, slave outputs start to transmit packets at the same time as master outputs.

3.11.1.1 Look-Up Table

Byte ordering of the outgoing packets can be modified via the Look-Up Tables. It is also possible to repeat the same byte several times. These tables, one for the master stream and one for the slave stream, identify which data byte of the packet to send at a specific byte time. Only the first 16 data bytes of each stream can be rearranged, and master and slave bytes cannot be mixed. These tables are common for all output ports.

Table 14: Example of Byte Reordering via the Look-Up Table

Table Entry Value	Byte Row before Ordering	Byte Row after Ordering
3	Byte 0	Byte 3
4	Byte 1	Byte 4
5	Byte 2	Byte 5
3	Byte 3	Byte 3



IBM Packet Routing Switch

Table 14: Example of Byte Reordering via the Look-Up Table

Table Entry Value	Byte Row before Ordering	Byte Row after Ordering
4	Byte 4	Byte 4
5	Byte 5	Byte 5
15	Byte 6	Byte 15
14	Byte 7	Byte 14
13	Byte 8	Byte 13
12	Byte 9	Byte 12
11	Byte 10	Byte 11
10	Byte 11	Byte 10
9	Byte 12	Byte 9
8	Byte 13	Byte 8
7	Byte 14	Byte 7
6	Byte 15	Byte 6
-	Byte 16	Byte 16

3.11.2 Idle Packet Transmission

3.11.2.1 Normal Idle Packet

Time fill Idle Packets are transmitted when no Data Packets are available or when the SND_GRANT is low, according to the following rules:

- If the Color Force bit is '1' in the 5.6.1 Configuration 0 Register on page 78, an Idle packet of the color equal to the Color bit of the Mode Register is sent.
- If the Color Force bit is '0', an Idle packet of color equal to the Expected Color bit of the 5.6.1 Configuration 0 Register on page 78 is sent, if
 - A packet of color equal to the Expected Color has been received on all active inputs since the Color Clear command was last sent via the 5.6.21 Command Register on page 91, and
 - The corresponding output queue is empty.
- Otherwise, an Idle packet of color opposite to the Expected Color is sent.

3.11.2.2 Yellow Idle Packet

Yellow Idle Packets can only be generated by the Local Processor. The local processor must build the yellow Idle packet in shared memory and transmit it to the desired outputs as for any other Control Packet. Therefore on the egress port the yellow Idle packet does not carry the LU CRC or the grant priority flywheel bits.

3.12 Send Grant

There are two modes of Send Grant operation - a single indication independent from the priority, and a mode where the attached device has the capability to determine which priority it want to receive.

3.12.1 Send Grant without Priority Indication

Flow control is provided to the output ports via 32 send grant SND_GRANT pins. Data or Control Packets are only transmitted on a given output if its SND_GRANT is active high. Otherwise, Idle Packets are transmitted as long as the SND_GRANT is low.

These signals are treated asynchronously to the internal device logic. Therefore, if the transitions on the SND_GRANT pins are not synchronized with the output packet flow, an exact control of the number of Data or Control Packets transmitted cannot be bounded to two packets. For example, when SND_GRANT is high for $N * LU$ cycles, $N-1$ to $N+1$ Data or Control Packets will be transmitted (if available). Similarly, when SND_GRANT is low for $N * LU$, $N-1$ to $N+1$ Idle Packets will be transmitted.

However, if the SND_GRANT transitions are synchronized with the output packet flow, N Data or Control Packets (if available) will be transmitted if SND_GRANT is high for $N * LU$, and N Idle Packets will be transmitted when SND_GRANT is low for $N * LU$. In order to achieve this, the synchronization requirement is that the SND_GRANT signal should be stable at the device pin during its sampling window, defined in relationship with the beginning of the transmission of the corresponding packet on device pins (See I/O Timing section).

This SND_GRANT sampling window also defines the latency of the packet transmission reaction to changes of the SND_GRANT signal both when it is asserted or deasserted.

3.12.2 Send Grant per Priority

SND_GRANT can also be operated per priority. In this mode, the SND_GRANT interface line is multiplexed per priority over one line (one per port).

In this mode of operation the attached device provides serial information timed by a clock at half the LU byte clock and based on a unique header followed by the priority bits.

The pattern for edge detection and multiplexing of the SND_GRANTs (P0, P1, P2 and P3) is shown below. It is composed of $9 * 16ns$ intervals.

Note: This pattern therefore, can be padded by '0's, if its length needs to be adjusted (to LU size for instance).

0	0	0	0	1	P0	P1	P2	P3
---	---	---	---	---	----	----	----	----

The '00001' pattern cannot be reproduced by any combination of the SND_GRANTs.

Phase alignment and pattern delineation is performed by edge detection (through oversampling) on the first '1' following four '0's by oversampling the SND_GRANT interface line. The alignment is performed for every new set of SND_GRANT values, which provides an insensitivity to long term clock phase jitter.

The attached device provides a priority bit map which will allow the switch device to send any packet with the granted priority(ies) and to hold the other(s).

3.13 Receive Filter

The receive grant permits the filtering of incoming packets based on their destination. It prevents the reception of Data Packets by selected outputs. The 32 RCV_GRANT bits act as a filter of the incoming packet bit map:

- When RCV_GRANT(i) is high, reception of Data Packets in the output queue i is enabled,

IBM Packet Routing Switch

- When RCV_GRANT(i) is low, no incoming packets are stored in output queue i, regardless of their bit map setting.

The RCV_GRANT signals are treated asynchronously to the internal logic. However, it is possible to synchronize all 32 RCV_GRANT signals with the input packet flows in order to guarantee reception, or rejection, of specific packets. To this end, the RCV_GRANT signals must be stable on the device pins during the sampling window, defined in relationship with the beginning of the reception of the corresponding packet on the device pins (See *7.1 I/O Timing* on page 107).

The RCV_GRANT function is actually implemented as an extension of the Bit Map Filter on device pins (RCV_GRANTs are ANDed with the Bit Map Filter) and therefore has the exact same effect. When using the RCV_GRANT function:

- The Color mechanism and the Bit Map Filter function should not be used
- Only Data Packets with header Active bit set to '1'b and Backup bit set to '0' can be transmitted, and
- The Bit Map Filter has to be set to x'FFFF'

3.14 Port Disabling

An input port and the corresponding output port can only be disabled by programming the *5.4.4 Input Port Enable Register* on page 69 (x'0B') and *5.4.2 Output Port Enable Register* on page 68 (x'09').

3.15 Address Manager and Address Corruption (Book Keep Mechanism)

The address manager controls packet addresses by maintaining a pool of free addresses and occupancy counters for each address. It provides the input controllers with addresses from the free address pool. When an address is used, the occupancy counters are initialized to the number of destinations of the corresponding packet. Each time a packet is transmitted, the occupancy counter of its address is decremented by one. When the counter reaches zero, the address is returned to the free address pool.

Since addresses are continuously used as packets are being received and transmitted, it is important to detect address corruption scenarios. Address corruption can lead not only to corruption of packets, but also to a loss of available addresses, which can decrease performance.

Therefore, two error detection mechanisms are in place to detect corruption:

- Each output queue is protected by parity. When an address is written to an output queue, parity is generated and stored with the address and it is checked upon reading this location.
- The address manager detects the following error scenarios:
 - A counter is initialized to a value while it is not zero,
 - An address is freed by an output controller when its counter is zero.

Each of these errors sets the Address Corruption interrupt and, if not masked, the main interrupt is asserted.

3.16 Control Packets

It is possible to address a local processor attached to a packet routing switch by means of Control packets. A Control packet is similar to a normal Data packet, except that its memory addresses are stored in a special Control packet queue.

For external speed expansion, Control packet received and transmitted interrupts are only generated by the master. Also, the Load Next Control Packet Address command, and Free Control Packet Address command, are only issued to the master. No action is taken if those commands are issued to the slaves.

Whenever performing a shared memory access to receive or transmit a Control packet, the access time to the memory is guaranteed by the sequencer to be at most one LU unit length, except for LUs of length 16 and 32 bytes. This also is true for both the master and slave in speed expansion.

For LUs of 16 and 32 bytes, the Control Packet Access Priority Enable bit (*5.6.1 Configuration 0 Register* on page 78) must be set in order to guarantee a memory access time of at most three LU unit lengths (this depends on the latency in reacting to the Memory Grant mechanism by the attached LU device). This rule applies only to single device configurations or to the master in speed expansion. In speed expansion, a master operation follows a slave operation as described in the sections below. In this case, it is guaranteed that the slave memory access is completed when the master memory access is completed.

3.16.1 Control Packet Reception

Control Packets can be received on all input ports and are stored as any other packet in the shared memory. The shared memory locations of the Control Packets are written into a Control packet queue, which allows for multiple Control Packets to be received. The Control packet queue has 32 locations. This provides fairness among all inputs. Each input can receive a Control Packet at the same time and all packets can be processed. If the queue is full when a Control packet arrives, it is discarded. When a Control packet is accepted, a Control Packet Received interrupt is generated and, if not masked, the main interrupt is asserted. The local processor can then access the Control packets via the *5.6.18 Shared Memory Access Registers* on page 89.

The number of Control packets currently enqueued is provided via the Control Packet Counter. Upon reception of a Control Packet Received Interrupt, the following tasks are performed:

1. A Load Next Control Packet Address command is issued via the *5.6.21 Command Register* on page 91. This loads the first address of the Control Packet queue into the *5.6.19 Shared Memory Pointer Register* on page 90.
2. The *5.6.19 Shared Memory Pointer Register* on page 90 is read. This is address A:

External Speed Expansion	Internal Speed Expansion	Packet Size (No. of Bytes)	Addresses to read in master and slave memory banks
0	0	32 to 40	A
0	1	32 to 40	A
1	0	32 to 40	A
0	0	64 to 80	A and A+1
0	1	64 to 80	A and A+1024
1	0	64 to 80	A
1	0	128 to 160	A and A+1
0	1	128 to 160	A and A+1 A+1024 and A+1025
1	1	128 to 160	A and A+1024
1	1	256 to 320	A and A+1 A+1024 and A+1025



IBM Packet Routing Switch

3. All the rows of the Control packet are read via the 5.6.19 Shared Memory Pointer Register on page 90 (Master LU and slaves LU) and 5.6.20 Shared Memory Data Register on page 91. A Free Current Control Packet Address command is issued via the 5.6.21 Command Register on page 91 to free up the first address in the Control Packet Queue.
4. If the Control Packet Counter is not zero and/or if another Control Packet Received Interrupt is issued, steps one through four are performed again.

In external speed expansion, the shared memory start address of the Control packet for the slaves is the same as for the master. Therefore, after issuing the Load Next Control Packet Address command to the master, the local processor must read the master 5.6.19 Shared Memory Pointer Register on page 90 and write its content to the slave 5.6.19 Shared Memory Pointer Register on page 90. According to how the control packet access priority enable bit (configuration register 1 @x'21') has been set (mainly in the case that the LU size is 16 or 32 and the switch is loaded at 100%), the local processor must then issue a Read Command to the slave, followed by a Read Command to the master. Only then can the data from the slave and the master be read if the Control Packet Access Priority Enable bit in 5.6.2 Configuration 1 Register on page 80 has been set. Once the first row is completely read in both master and slave, the same sequence of a Read Command to the slave and the master has to be issued in order to read the second data row in both devices. This is necessary to guarantee the access time to the slave shared memory. All rows in both the master and the slave must be read before issuing the Free Current Control Packet Address command to the master.

Note: The reference of the input port which received the Control packet is inserted in the header position H1.

3.16.2 Control Packet Transmission

The Local Processor has write access to the entire packet memory. There is an address reserved as indicated in the following table. The contents of these rows can be transmitted upon command from the Local Processor.

Table 15: Shared Memory Reserved Address for Control Packets

External Speed Expansion	Internal Speed Expansion	Packet Size (No. of Bytes)	Shared Memory Reserved Address
0	0	32 to 40	0
0	0	64 to 80	0 and 1
0	1	64 to 80	0 and 1024
1	0	64 to 80	0
1	0	128 to 160	0 and 1

Control Packets are sent one at a time. Note that Control Packets can only start at shared memory location zero. In order to transmit a Control Packet, the following tasks are performed:

1. The first row of the Control packet in the Memory Row Register is built via the 5.6.20 Shared Memory Data Register on page 91.
2. A Memory Row Write at address 0 command is issued via the 5.6.19 Shared Memory Pointer Register on page 90.
3. Items one and two are repeated for all rows of the Control Packet.
4. The output ports from which the Control packet must be transmitted are specified by loading the 5.6.22 Control Packet Destination Register on page 92.

5. A Wait for a Control Packet Transmitted Interrupt (an interrupt will be raised when all rows are transmitted).

In external speed expansion, the local processor must write the rows to the slave and the master devices before issuing the Control Packet Transmit command. The local processor must first write a row to the slave, followed by a row to the master. This sequence is necessary to guarantee access time to the slave memory.

Note: The 5.6.22 *Control Packet Destination Register* on page 92 must be specified only for the master chip.

3.16.3 Packet Reception Window for Speed Expansion

Packets belonging to a group of related speed-expanded inputs must arrive within a specific window. The reference point (the input that defines packet arrival time T_a) is the master in a speed expanded configuration. All other related inputs must receive packets between $T_a - 1$ byte clock and $T_a + 1$ byte clock.

3.17 Speed Expansion

The purpose of speed expansion is to increase the physical port speed of a switch. Two methods are supported: external speed expansion and internal speed expansion.

3.17.1 External Speed Expansion

One master device and one slave device can be used in so called external speed expansion mode. The master device performs all the address handling. That is, it maintains the output queues and the address manager. These components are idle in the slave device. Packet addresses, used by the inputs, are sent from the master device to the slave device on a special input address bus. The timing in a master device is such that master inputs receive new addresses at the same time as all the slave inputs.

Packet addresses used by the outputs are sent in a similar fashion from the master device to the slave device. Again, the timing in the master device is such that a master output receives a new retrieve address at the same time as the slave output. A master output and the corresponding slave output always start the transmission of a packet simultaneously.

When two devices are in external speed expansion, ports of the same number are grouped together.

Only two devices can be combined in external speed expansion.

3.17.2 Internal Speed Expansion

It is also possible to connect two ports on the same device together in speed expansion. This allows for a four Gb/s 16 x 16 switch. The table below shows which inputs and outputs are combined.

Internal and external speed expansion may not be combined together.

Table 16: Port Combination in Internal Speed Expansion

Internal Speed Expansion Mode (configuration 1 register)	External Speed Expansion Mode (configuration 1 register)	Configuration	Port Speed	Port Combination
0	0	32 x 32	2 Gb/s	none

IBM Packet Routing Switch

Table 16: Port Combination in Internal Speed Expansion

Internal Speed Expansion Mode (configuration 1 register)	External Speed Expansion Mode (configuration 1 register)	Configuration	Port Speed	Port Combination
1	0	16 x 16	4 Gb/s	0 and 16, 1 and 17, ... 15 and 31
1	1	16 x 16	8 Gb/s	0 and 16, 1 and 17, ... 15 and 31

3.17.3 Synchronization of Slave Device with Master Device

The master device and the slave device in an external speed expansion configuration must be synchronized. This is done with SEQ_CLK sync pin, which can operate in one of the following modes:

- When the PRS64G is configured as a master device in external speed expansion, or in single device operation, the SEQ_CLK pin is programmed as an output. The device generates an internal sync signal that is used for its internal timing. This internal sync signal appears on the SEQ_CLK output.

Note: It is possible to configure the SEQ_CLK of the master as an input and to externally generate this signal. However, this signal must be distributed to the master and the slave synchronously to the device internal byte clocks.

- When the PRS64G is configured as a slave device in external speed expansion, the SEQ_CLK must be programmed as input. The sync signal that is used for the internal timing is taken from the master.

Each PRS64G contains a sequencer. The SEQ_CLK sync signal is used to synchronize the sequencer in the slave device with the sequencer in the master device. Both the master and slave sequencer are fully synchronized. Therefore the SEQ_CLK is fully synchronous to the device internal logic.

3.17.4 Master Slave Address Communication

Two busses, one for the input section and one for the output section, are used to transfer addresses from the master to the slave:

- Each bus is synchronous with the internal byte clock.
- When external speed expansion is disabled, the busses are tri-state.
- When external speed expansion is enabled, and the device is programmed as a master, the busses are configured as output.
- When external speed expansion is enabled, and the device is programmed as a slave, the busses are configured as input.
- Each bus has a parity signal:
 - When the slave detects a parity error on the input bus, the address is ignored, the packet is not stored, and a speed expansion error interrupt is generated.
 - When the slave detects a parity error on the output bus, the address is ignored, the slave transmits Idle Packet LUs, and a speed expansion error interrupt is generated.

Therefore, the slave does not report parity errors directly to the master, but does interrupt the local processor.

- The maximum external speed expansion factor is two (which logically represents four-way speed expansion). That is, there can be one master and one slave.

3.18 Link Paralleling Bitmap Mapping

With four ports operating in link paralleling, only one bit is consumed in the incoming bitmap. With many ports operating in link paralleling, the full 32-bit bitmap may be useless and a shorter bitmap header can be used to optimize the header/payload ratio. This increases the total payload bandwidth available for each port. An example is the packet routing switch operating in 8x8 mode, which only requires an 8-bit bitmap.

Any physical port in multiple of four (0, 4, 8, 12,16, 20, 24, 28) can operate in one or four-way link paralleling. Therefore LP physical ports are in fixed groups of four and the lowest physical port is the one used to identify the physical link paralleling.

The following table is an example of the mapping between a logical |bit of the bitmap (with lowest port numbers operating in link paralleling) and its associated physical queue within the chip. Queues that can operate in link paralleling mode appear in bold. Numbers appearing with a smaller font indicate the physical queues which are used (no more available) by this queue which operates in link paralleling mode. The port in link paralleling is always referenced to the lowest physical port. The table shows the LP ports in ascending order but the LP ports can be setup in any order. The table also shows the associated possible bit map length (8, 16, 24, 32) recommended for each configuration.

Table 17: Link Paralleling Configuration Example with Link Paralleling in Ascending Order

Logical Bitmap	No LP 32 ports	1 LP 29 ports	2 LP 26 ports	3 LP 23 ports	4 LP 20 ports	5 LP 17 ports	6 LP 14 ports	7 LP 11 ports	8 LP 8 ports
0	00	00 (01,02,03)	00 (01,02,03)	00 (01,02,03)	00 (01,02,03)	00 (01,02,03)	00 (01,02,03)	00 (01,02,03)	00 (01,02,03)
1	01	04	04 (05,06,07)	04 (05,06,07)	04 (05,06,07)	04 (05,06,07)	04 (05,06,07)	04 (05,06,07)	04 (05,06,07)
2	02	05	08	08 (09,10,11)	08 (09,10,11)	08 (09,10,11)	08 (09,10,11)	08 (09,10,11)	08 (09,10,11)
3	03	06	09	12	12 (13,14,15)	12 (13,14,15)	12 (13,14,15)	12 (13,14,15)	12 (13,14,15)
4	04	07	10	13	16	16 (17,18,19)	16 (17,18,19)	16 (17,18,19)	16 (17,18,19)
5	05	08	11	14	17	20	20 (21,22,23)	20 (21,22,23)	20 (21,22,23)
6	06	09	12	15	18	21	24	24 (25,26,27)	24 (25,26,27)
7	07	10	13	16	19	22	25	28	28 (29,30,31)
8	08	11	14	17	20	23	26	29	
9	09	12	15	18	21	24	27	30	

Note: Queues operating in link paralleling mode appear in bold. Numbers appearing with a smaller font indicate the physical queues which are “consumed” (no more available) by this queue which operates in link paralleling mode.



IBM Packet Routing Switch

Table 17: Link Paralleling Configuration Example with Link Paralleling in Ascending Order (Continued)

Logical Bitmap	No LP 32 ports	1 LP 29 ports	2 LP 26 ports	3 LP 23 ports	4 LP 20 ports	5 LP 17 ports	6 LP 14 ports	7 LP 11 ports	8 LP 8 ports
10	10	13	16	19	22	25	28	31	
11	11	14	17	20	23	26	29		
12	12	15	18	21	24	27	30		
13	13	16	19	22	25	28			
14	14	17	20	23	26	29			
15	15	18	21	24	27	30			
16	16	19	22	25	28				
17	17	20	23	26	29				
18	18	21	24	27	30				
19	19	22	25	28	31				
20	20	23	26	29					
21	21	24	27	30					
22	22	25	28	31					
23	23	26	29						
24	24	27	30						
25	25	28	31						
26	26	29							
27	27	30							
28	28	31							
29	29								
30	30								
31	31								

Note: Queues operating in link paralleling mode appear in bold. Numbers appearing with a smaller font indicate the physical queues which are “consumed” (no more available) by this queue which operates in link paralleling mode.

There is also a multiplexer of 32 by 32 ports, and each logical port can be mapped to any physical port. For example, physical port 1 can be addressed by logical bit map 0 (instead of logical port 1 corresponding to physical port 1 as shown in the table above).

3.19 Best Effort Discard

The PRS64G implements a subflow discard mechanism for applications in which the lowest priorities are prevented from accessing an output port. This is done because in the higher priorities some subflows are less important than some of the lowest priority subflows. The packet routing switch implements virtual queue monitoring and an optional packet discard to prevent those best effort subflows from jeopardizing the quality of service of the guaranteed priority subflows. This allows the packet routing switch to perform a best effort burst discard when all flow control capability has been exhausted. The discard is done in burst to minimize the number of frames that are affected. As with lossless operation, when the packet routing switch is operating as

a lossy switch, flow control is activated when the amount of traffic for an output port exceeds the port's capacity. The packet routing switch discards traffic flagged as best effort when the aggregate load for that output port exceeds the port's capacity for a significant amount of time.

The PRS64G assumes that the guaranteed bandwidth traffic is never discarded and therefore congestion for this traffic is managed only through the normal flow control mechanism.


The operation of the lossy switch is based on a set of five counters per port that are decremented at a packet speed equivalent to the throughput of the port to which it is attached (the line rate is provided by a register defined at the initialization of the port). The five counters are updated as follows:

- The main counter represents the total traffic for a given output port. It is incremented for each packet destined to the output port it is monitoring.
- The second counter counts all incoming packets for a given output port except the packets which are of lowest priority (Priority 3) and which are best effort bandwidth. The guaranteed traffic of priority 3 is also counted.
- The third counter counts all incoming packets except best effort packets of priority 3 and 2.
- The fourth counter counts all incoming packets except best effort packets of priority 3, 2, and 1.
- The fifth counter counts only those packets corresponding to the guaranteed bandwidth traffic.

Associated with the main counter is an enable discard threshold (EDT) which, when reached, will trigger the discard mechanism. There is also a halt discard threshold (HDT) based on the value of the main counter used to end the discard process. The other four counters have a single common threshold, the Best Effort Priority Discard Threshold (BEPDT), which determines which subflow(s) have to be discarded. The assumption is that if the value of any of the counters exceeds the threshold, the discard of that traffic will not be sufficient to ease the flow of the guaranteed traffic bandwidth. The PRS64G immediately knows which priority of best effort subflow traffic has to be discarded based on past history. It discards only the best effort bandwidth traffic corresponding to the priority creating the problem as well as the best effort traffic corresponding to the lower priorities. The BEPDT threshold is analyzed only once when the discard process is started. Afterwards, only the HDT threshold is used to determine when to stop the discard process.

The global assumption is that the guaranteed bandwidth should be engineered so that it never exceeds the discard threshold. The objective is that, on average, the guaranteed bandwidth is engineered to dequeue without having the need for flow control. However, there might be situations where the nature of the traffic changes before the HDT is reached. In this case, the discard mechanism does not help to ease the congestion. So, as an option when the EDT threshold is reached, the algorithm analyzes the BEPDT every packet cycle to determine if there is not a new best effort priority which is impairing the guaranteed bandwidth.

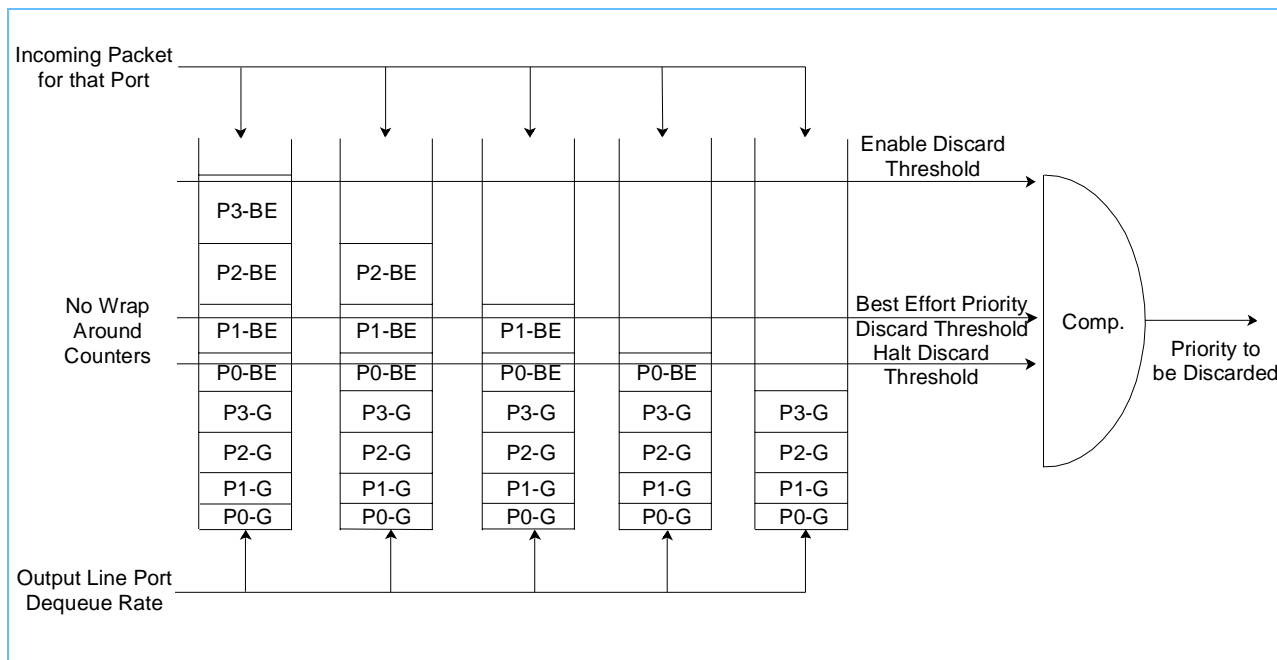
Figure 12: Best Effort Burst Discard



3.19.1 Subflow Best Effort Discard Filter

When an incoming packet arrives at the switch input, its priority bits, the subflow best effort discard bit, and the destination Bit Map are provided to the best effort filter logic. The priority selects the appropriate BEPx Drop Filter. The Filter is used as a destination Bit Map Mask (Drop = 0). So, if the combination of the incoming packet bit mask and the filter bit mask is '0', the packet is not queued and the corresponding destination(s) discard counters are updated. There is a 16-bit discard counter for each combination of port and priority. When a packet is discarded, the appropriate counter is updated. This will provide visibility on the discard intensity and level of discard.

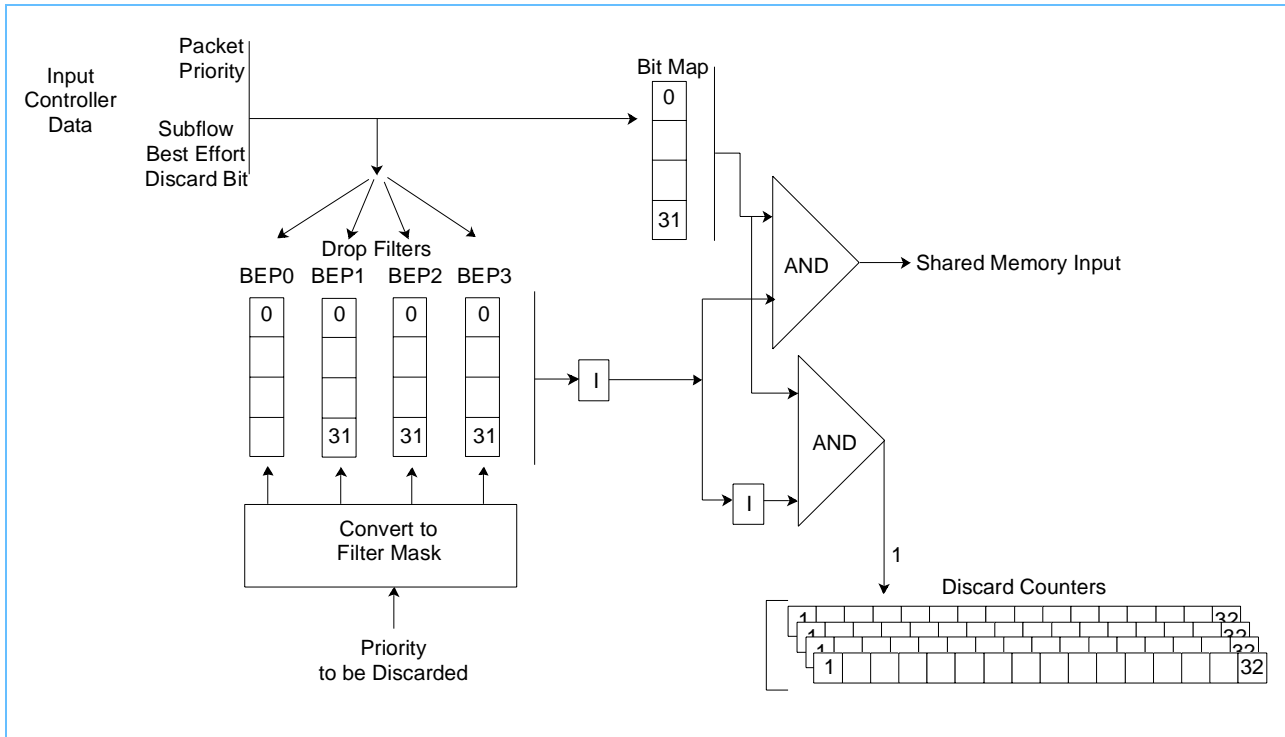Figure 13: Subflow Best Effort Discard Mechanism within the Input Controller




4. Programming Interface

The programming interface is provided by the Serial Host Interface (SHI). The SHI provides an access to all Switch Element internal resources through four signals:

- SHI_Clock: Switch Element input
- $\overline{\text{SHI_Select}}$: Switch Element input
- SHI_Data_In: Switch Element input
- SHI_Data_Out: Switch Element output

The SHI interface and the internal SHI logic are synchronized to the SHIClock. This clock operates at a lower frequency than the system clock.

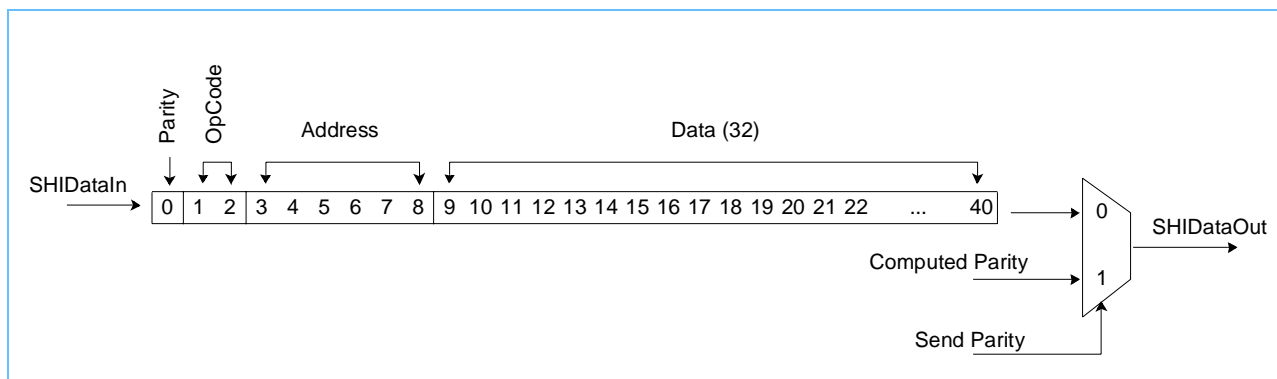4.1 SHI Instruction Register



The instruction scanned into the SHI is decoded into four fields as shown in above: a Data field (32-bit), an Address field (6-bit), an OpCode field (2-bit) and a Parity bit. The *4.1 SHI Instruction Register* on page 52 checks for odd parity of incoming instructions. The Parity bit is contained in the MSB (bit 0) of the *4.1 SHI Instruction Register* on page 52, and is the last bit scanned.

Table 18: SHI OpCode Commands

OpCode	Command	Command Description
00	NOOP	Execute no operation. Used to push the data out of the SHI Instruction Register after a Read or ReadStatus command has been issued.
01	READ STATUS	Allows the reading of the <i>5.1 Status Register</i> on page 54. The Status Register content is loaded into the Data field of the SHI Instruction Register. At the same time the Status Register is cleared. NOOP operation is then required to get back the SHI instruction Data field.
10	WRITE REGISTER	Data contained in the Data field of the SHI Instruction Register is written into the register specified by the Address field of the Instruction Register.
11	READ REGISTER	The register content specified by the Address field of the SHI Instruction Register is loaded into the Data field of the SHI Instruction Register. NOOP operation is then required to get back the SHI instruction Data field.

4.2 SHI Parity Error Checking

SHI error checking consists of one bit of parity protection for each instruction scanned into the *4.1 SHI Instruction Register* on page 52. If a parity error is detected on a received instruction, the execution of that instruction is inhibited and the SHI Parity Error bit is set in the *5.1 Status Register* on page 54. All bits of the SHI command are protected by the parity bit (*i.e.* if $\overline{\text{SHI_Select}}$ is active during N number of SHI_Clock cycles, the parity is checked on N bits).

4.3 SHI Parity Generation

Both incoming and outgoing data carry odd parity. This parity is computed at each SHI_Clock cycle as long as the $\overline{\text{SHI_Select}}$ signal is active. The computed parity is sent on SHI_Data_Out when the $\overline{\text{SHI_Select}}$ line is deactivated.

4.4 SHI Operational Protocol

An SHI instruction operation is invoked when the $\overline{\text{SHI_Select}}$ input is b'0'. Data transferred over SHI_Data_In is shifted into the *4.1 SHI Instruction Register* on page 52. Serial data shifted in must begin with the Least Significant Bit (LSB) of the instruction and end with the Most Significant Bit (MSB) of the instruction to be executed. This scan operation is synchronized with the SHI_Clock line. Instructions always execute one cycle after the $\overline{\text{SHI_Select}}$ changes from an active to an inactive state.

SHI Command	OpCode	Operation(s) ¹	Description
Write	10	One single SHI operation of 41 bits.	The Address field specifies which internal register has to be loaded with the content of the Data field.
Read	11	9-bit READ	Address field specifies the register number to read.
	00	33-bit NOOP	Read result + parity is sent over SHIDataOut signal
Read Status	01	3-bit READ STATUS	
	00	33-bit NOOP	<i>5.1 Status Register</i> on page 54 content + parity is sent over SHIDataOut signal.

1. The Read and Read Status operations each consists of two SHI operations.



5. Application Registers

5.1 Status Register

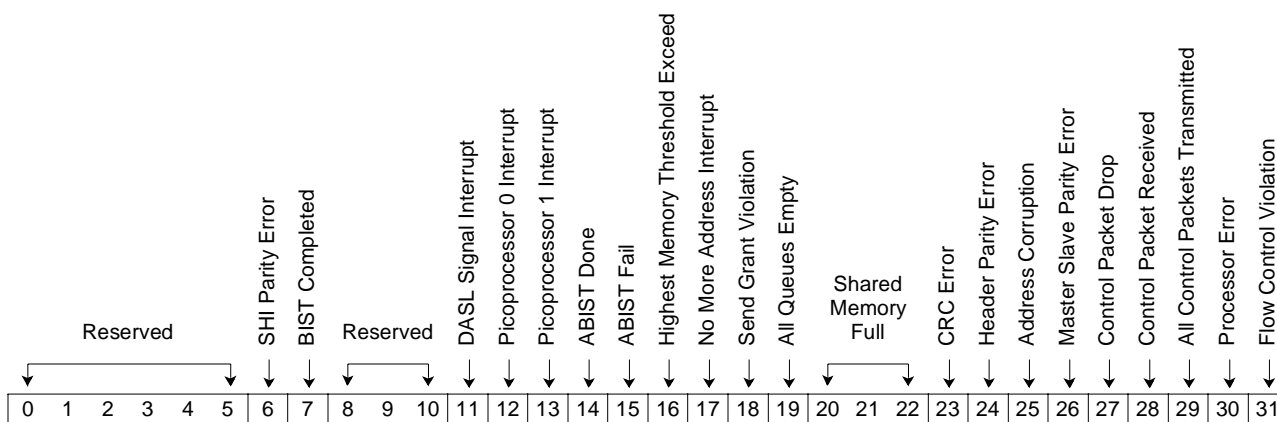
The *5.1 Status Register* on page 54 is accessed when an SHI READ STATUS command is performed.

Almost all bits can generate an interrupt. All the interrupts are maskable by setting the appropriate bit in the *5.3.3 Interrupt Mask Register* on page 61. When a mask bit is set to '1' the corresponding event sets the appropriate bit in the *5.1 Status Register* on page 54. This does not result in the activation of the Interrupt output signal, which is used as an interrupt to the microprocessor.

Note that the Interrupt signal can only be activated if the Global Interrupt Mask bit is not set in the *5.3.2 Reset Register* on page 59 and the OCD Enable bit is set in the same register.

Reset Value '0000 0000'

Access Type Read Only and Read/Clear



Bit(s)	Description
0:5	Reserved.
6	SHI Parity Error. Set to '1' when the SHI detects a parity error in the SHI instruction.
7	BIST Completed. Set to '1' when the BIST controller has ended the internal process after a BistRequest command. <i>5.1 Status Register</i> on page 54 bits 8 to 31 are forced to '0' while the BIST is running. This bit does not generate an interrupt.
8:10	Reserved.
11	DASL Signal Interrupt. Generated whenever a bit in the <i>5.4.5 DASL Signal Lost Register</i> on page 69 changes.
12	Picoprocessor 0 Interrupt. When set to '1'b, indicates that the internal processor which handles ports 0 to 15 has generated an interrupt.
13	Picoprocessor 1 Interrupt. When set to '1'b, indicates that the internal processor which handles ports 16 to 31 has generated an interrupt.
14	ABIST Done. Set to '1'b when the ABIST controller has ended an internal process after an ABIST Start command. This bit does not generate an interrupt.
15	ABIST Fail. Indicates that, after completion of the ABIST process, at least one ABIST check failed on one RAM. This bit is only valid if the ABIST Done bit is asserted. This bit does not generate an interrupt.

IBM Packet Routing Switch

Bit(s)	Description
16	Highest Memory Threshold Exceeded. Indicates that shared memory occupancy has crossed the Priority 0 threshold. This is an event (not a status) which occurs when the threshold is exceeded. It does not indicate when the shared memory becomes below the threshold.
17	No More Address Interrupt. This interrupt is generated whenever a packet is received on an input port while no store address is available.
18	Send Grant Violation. Set every time an adapter removes the SND_GRANT for the time defined in the Send Grant Antistreaming field of <i>5.6.1 Configuration 0 Register</i> on page 78, see <i>5.6.16 Send Grant Violation Register</i> on page 88. This function is enabled only if the link is synchronized and if the Output Queue is enabled.
19	All Queues Empty. Set by an edge detection of all output queues being empty.
20:22	Shared Memory Full. Indicates maximum level of Shared Memory reached between two consecutive read operations. 000: None. 001: Priority 3 full. 010: Priorities 2 and 3 full. 011: Priorities 1, 2, and 3 full. 100: Priorities 0, 1, 2, and 3 full. others Reserved.
23	CRC Error. Set when a data trailer CRC error is detected on an input port. The port is identified via the <i>5.6.9 CRC Error Port ID Register</i> on page 84. The number of CRC errors for all ports is reported in the field Trailer CRC Error Count of the .
24	Header Parity Error. Set when a parity error is detected in an incoming packet. The port is identified via the <i>5.6.10 Header Parity Error Port ID Register</i> on page 84. The number of parity errors for all ports is reported in the Header Parity Error Count field of the .
25	Address Corruption. Set every time an address corruption is detected. When an address is corrupted, one or more addresses are actually lost from the address space available to store packets.
26	Master/Slave Parity Error. Set when a parity error has been detected on the speed expansion bus which connects a master to a slave device.
27	Control Packet Drop. Set when a Control packet is dropped on an input as a result of a Control packet queue full condition.
28	Control Packet Received. Set when a new Control packet is received. The number of Control packets currently in the Control Receive Queue is indicated by the "Control Packet Counter" register.
29	All Control Packets Transmitted. Set when a Control packet has been successfully transmitted to all the selected destinations.
30	Processor Error. This interrupt is generated when the local processor initiates a new command or operation while the chip internal logic is not ready. This interrupt can be generated in two situations: <ul style="list-style-type: none"> Write <i>5.6.19 Shared Memory Pointer Register</i> on page 90 while either a Read or Write operation is pending. Write/Read the <i>5.6.20 Shared Memory Data Register</i> on page 91 while either a Read or Write operation is pending.
31	Flow Control Violation. For unicast packets, this interrupt is generated either when a packet is destined to outputs for which no output queue grant has been given in the past N packet cycles (see description of the Flow Control Latency field in the <i>5.6.1 Configuration 0 Register</i> on page 78) or when no MemoryGrant has been given in the past N packet cycles. For a multicast packet, only the MemoryGrant information is taken into account for the violation detection. The violating ports are identified by the corresponding bits in the <i>5.6.12 Flow Control Violation Port ID Register</i> on page 85.

5.2 Register Definitions

The Internal Application Registers (described below) allow the chip configuration to be specified and status information to be reported. All bits in the Application Registers are set to zero during a Flush operation, unless otherwise specified.



IBM Packet Routing Switch

All **Reserved** bits/addresses correspond to non-implemented bits/addresses. This means they are always read as '0' and the write value is “don't care”.

All **Spare** bits are implemented but not used. This means that these bits can be Write/Read but they have no effect on the chip configuration.

Note: Registers 0 to 6 are directly implemented in the SHI internal logic. There is no need to start the PLL and release the flush to access those registers.

Register Address (hex)	Access	Functional Description
SHI Internal Registers: 00 to 07		
00	Read / Write	PLL Programming Register
01	Read / Write	Reset Register
02	Read / Write	Interrupt Mask Register
03	Read / Write	BIST Counter Register
04	Read / Write	BIST Data Register
05	Read / Write	BIST Select Register
06	Read / Write	Debug Bus Select Register
07		Reserved
DASL Programming Register: 08 to 1D		
08	Read / Write	DASL Output Driver Enable Register
09	Read / Write	Output Port Enable Register
0A	Read / Write	Synchronization Packet Transmit Register
0B	Read / Write	Input Port Enable Register
0C	Read Only	DASL Signal Lost Register
0D	Read / Write	SDC RLOS Enable Register
0E	Read / Write	DASL Synchronization Hunt Register
0F	Read Only	DASL Synchronization Status Register
10	Read / Write	Picoprocessors Instruction Memory Access Register
11	Read / Write	DASL Configuration Register
12	Read Only	DASL Port Error Register
13	Read / Write	DASL Port Quality Mask Register
14	Read Only	DASL Port Quality Register
15	Read / Write	SDC_0 Resources Address Register
16	Read / Write	SDC_0 Resources Control Register
17	Read / Write	SDC_0 Resources Data Register
18	Read Only	SDC_0 Status Register



IBM Packet Routing Switch

Register Address (hex)	Access	Functional Description
19	Read / Write	SDC_1 Resources Address Register
1A	Read / Write	SDC_1 Resources Control Register
1B	Read / Write	SDC_1 Resources Data Register
1C	Read Only	SDC_1 Status Register
Flow Control Pins Status Registers: 1D to 1F		
1D	Read / Write	Send Grant Per Priority
1E	Read Only	Send Grant Status Register
1F	Read Only	Receive Grant Status Register
Functional Registers: 20 to 3F		
20	Read / Write	Configuration 0 Register
21	Read / Write	Configuration 1 Register
22	Read / Write	Output Queue Enable Register
23	Read / Write	Input Controller Enable Register
24	Read / Write	Color Detection Disable Register
25	Read / Write	Send Grant Enable Register
26	Read / Write	Force Send Grant Register
27	Read Only	Expected Color Received Register
28	Read Only	CRC Error Port ID Register
29	Read Only	Header Parity Error Port ID Register
2A	Read Only	Error Counters Register
2B	Read Only	Flow Control Violation Port ID Register
2C	Read Only	Control Packet Counter Register
2D	Read Only	Output Queues 00 to 07 Status Register
2E	Read Only	Output Queues 08 to 15 Status Register
2F	Read Only	Output Queues 16 to 23 Status Register
30	Read Only	Output Queues 24 to 31 Status Register
31	Read Only	Color Packet Received Register
32	Read Only	Send Grant Violation Register
33	Read Only	Occupancy Counters Register
34	Read / Write	Shared Memory Pointer Register
35	Read / Write	Shared Memory Data Register
36	Read / Write	Command Register
37	Read / Write	Control Packet Destination Register




IBM Packet Routing Switch

Register Address (hex)	Access	Functional Description
38	Read / Write	Bit Map Filter Register
39	Read / Write	Threshold Access Register
3A	Read / Write	Credit Table Access Register
3B	Read / Write	Look Up Tables Access Register
3C	Read / Write	Bitmap Mapping Register
3D	Read / Write	Best Effort Resources Access Register
3E	Read Only	Best Effort Discard Alarm
3F	Read Only	Side Communication Channel Input Reporting

5.3 SHI Internal Registers

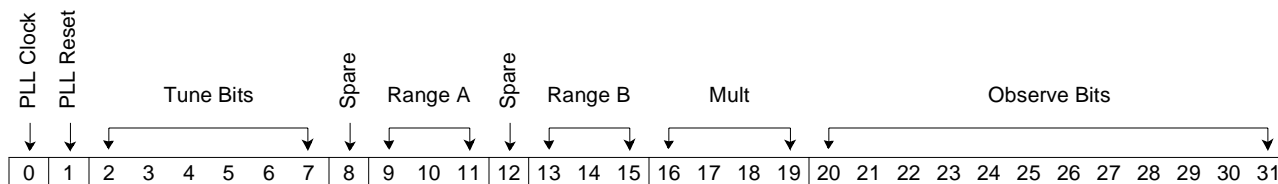5.3.1 PLL Programming Register



Reset Value 'u100 0000 0000 0000 0000 uuuu uuuu uuuu' where 'u' = undefined

Address x'00'

Access Type Read / Write


Bit(s)	Description
0	PLL Clock. Read-Only field which indicates that the feedback clock is in phase with the reference clock.
1	PLL Reset. Holds the PLL under reset. Can not be released until the reference clock is stable and the PLL is correctly programmed.
2:7	Tune Bits. Used to optimize the PLL stability and jitter. Must be set to '010101'.
8	Spare.
9:11	Range A. Used to choose the PLL output frequency. Must be set to '111'.
12	Spare.
13:15	Range B. Not used. Must be set to '111'.
16:19	Mult. Defines the PLL feedback divider. Must be set to '0010'.
20:31	Observe Bits. 12 Read-Only bits for testing purposes.

5.3.2 Reset Register

Reset Value '0000 0010 0001 1111 0000 0000 0000 0100'

Address x'01'

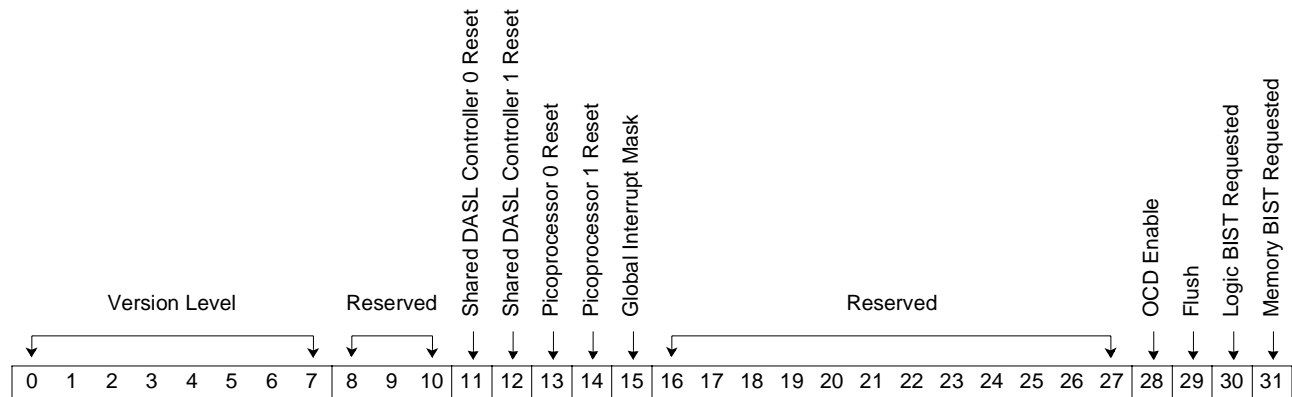Access Type Read / Write



Bit(s)	Description
0:7	Version Level. (Read-Only)
8:10	Reserved.
11	Shared DASL Controller 0 Reset. When this bit is set, the DASL logic attached to ports 0 to 15 is forced to reset state. This bit has to be kept asserted until the 5.4.10 DASL Configuration Register on page 72 is fully programmed.
12	Shared DASL Controller 1 Reset. When this bit is set, the DASL logic attached to ports 16 to 31 is forced to reset state. This bit has to be kept asserted until the 5.4.10 DASL Configuration Register on page 72 is fully programmed.
13	Picoprocessor 0 Reset. When this bit is set, the internal picoprocessor attached to ports 0 to 15 is forced into a reset state. This bit has to be kept asserted until the corresponding instruction memory is fully programmed.
14	Picoprocessor 1 Reset. When this bit is set, the internal picoprocessor attached to ports 16 to 31 is forced into a reset state. This bit has to be kept asserted until the corresponding instruction memory is fully programmed.
15	Global Interrupt Mask. When asserted, no interrupt is generated to the local processor. The device interrupt pin (active low) is tri-stated and tied up with an external pull-up resistor. However, the 5.1 Status Register on page 54 bits are still asserted whenever the corresponding event or error occurs.
16:27	Reserved.
28	OCD Enable. When set, all device drivers are enabled if no other configuration disables them. When not set, all drivers are disabled (tri-stated), except for the SHI_Data_Out driver.
29	Flush. When active, all the device logic, except the SHI internal logic, is kept under reset.
30	Logic BIST Requested. When active, the BIST controller starts to run the internal logic BIST as soon as the Flush bit is deactivated. This bit can only be asserted while the Flush bit is active. The BIST completion is reported through the 5.1 Status Register on page 54.
31	Memory BIST Requested. When active, the memory BIST controller starts to execute memory test as soon as the Flush bit is deactivated. This bit can only be asserted while the Flush bit is active. The memory BIST completion and result is reported in the 5.1 Status Register on page 54.

IBM Packet Routing Switch

5.3.2.1 BIST Execution Sequence

This sequence must be executed after card power up.

1. Activate the $\overline{\text{NotPowerOnReset}}$ input pin and start the SHI clock.
2. Deactivate the $\overline{\text{NotPowerOnReset}}$ input pin after at least three SHI clock cycles.
3. Write the PLL programming register with the correct value, release PLL reset.
4. Wait 500 μs .
5. Set the Logic BIST Requested bit in the 5.3.2 *Reset Register* on page 59.
6. Set the PRPG/MISR Data field of the 5.3.5 *Bist Data Register* on page 63 with a defined value.
7. Load the Bist Counter register.
8. Set the Shift Speed field in the BIST Select 5.3.6 *BIST Select Register* on page 63, as well as the scan chain length.
9. Remove the Flush bit in the 5.3.2 *Reset Register* on page 59.
10. Pool the 5.1 *Status Register* on page 54 until BIST Completed bit is set.
11. Read the MISRs result in the PRPG/MISR Data field of the 5.3.5 *Bist Data Register* on page 63.
12. Set the Flush bit and reset the LogicBIST Requested bit in the 5.3.2 *Reset Register* on page 59.

5.3.2.2 Memory BIST Execution Sequence

1. Activate the $\overline{\text{PowerOnReset}}$ input pin and start the SHI clock.
2. Deactivate the $\overline{\text{PowerOnReset}}$ input pin after at least three SHI clock cycles.
3. Write the PLL programming *PLL Programming Register* with the correct value, release PLL reset.
4. Wait 500 μs .
5. Set the "Memory BIST Requested" bit in the *Reset Register*.
6. Remove the Flush bit in the *Reset Register*.
7. Pool the *Status Register* until "ABIST Done" bit is set.
8. Check that "ABIST Fail" is off.
9. Set the Flush bit and reset the "Memory BIST Requested" bit in the *Reset Register*.

5.3.2.3 Reset Sequence

This sequence must be executed after a switch card power up.

1. Activate the $\overline{\text{PowerOnReset}}$ input pin and start the SHI clock.
2. Deactivate the $\overline{\text{PowerOnReset}}$ input pin after at least three SHI clock cycles.
3. Write the PPL Programming 5.3.1 *PLL Programming Register* on page 58 with the correct value and release the PLL reset.
4. Wait 500 μs .
5. Set the "MemoryBIST Requested" bit in the 5.3.2 *Reset Register* on page 59.
6. Remove the Flush bit in the 5.3.2 *Reset Register* on page 59 .
7. Pool the 5.1 *Status Register* on page 54 until "ABIST Done" bit is set.
8. Check that the "ABIST Fail" is off.
9. Set the Flush bit and reset the "Memory BIST Requested" bit in the 5.3.2 *Reset Register* on page 59.
10. Deactivates the Picoprocessor 0 and 1 Reset bits in the 5.3.2 *Reset Register* on page 59.
11. Read Status Register to clear all interrupts.
12. If needed, release the Global Interrupt Mask in the 5.3.2 *Reset Register* on page 59.
13. Set the OCD Enable bit in the 5.3.2 *Reset Register* on page 59.

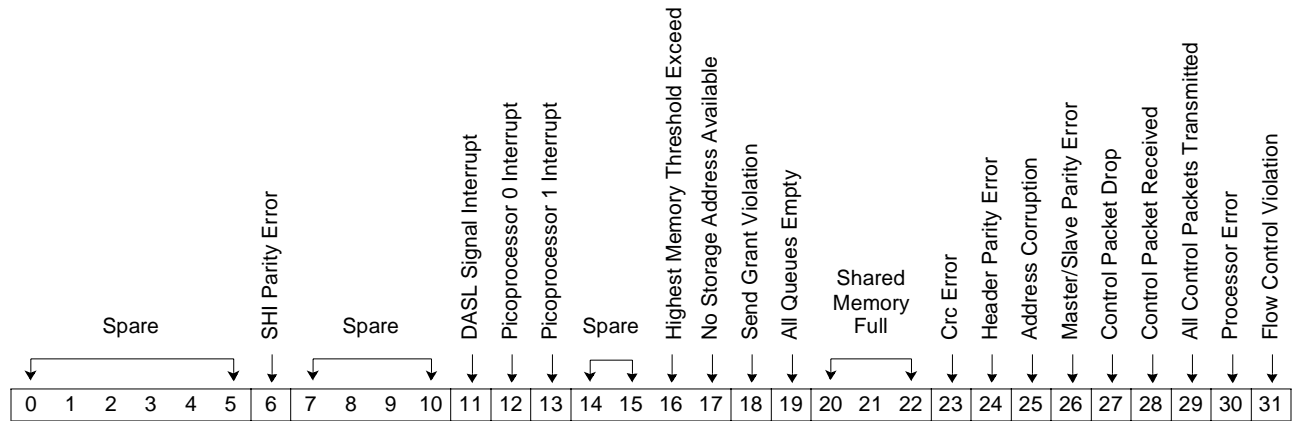
5.3.3 Interrupt Mask Register

Sets masks for the application bits of the 5.1 Status Register on page 54. When a mask bit is set, the corresponding status bit is still asserted whenever an event is detected. No interrupt is generated.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'

Address x'02'

Access Type Read / Write



Bit(s)	Description
0:5	Spare.
6	SHI Parity Error. Set to '1' when the SHI detects a parity error in the SHI instruction.
7:10	Spare
11	DASL Signal Interrupt. Generated whenever a bit in the 5.4.5 DASL Signal Lost Register on page 69 changes.
12	Picoprocessor 0 Interrupt. When set to '1'b, indicates that the internal processor which handles ports 0 to 15 has generated an interrupt.
13	Picoprocessor 1 Interrupt. When set to '1'b, indicates that the internal processor which handles ports 16 to 31 has generated an interrupt.
14:15	Spare.
16	Highest Memory Threshold Exceeded. Indicates that shared memory occupancy has crossed the Priority 0 threshold. This is an event (not a status) which occurs when the threshold is exceeded. It does not indicate when the shared memory becomes below the threshold.
17	No Address
18	Send Grant Violation. Set every time an adapter removes the SND_GRANT for the time defined in the Send Grant Antistreaming field of 5.6.1 Configuration 0 Register on page 78, see 5.6.16 Send Grant Violation Register on page 88. This function is enabled only if the link is synchronized and if the Output Queue is enabled.
19	All Queues Empty. Set by an edge detection of all output queues being empty.




IBM Packet Routing Switch

Bit(s)	Description
20:22	Shared Memory Full. Indicates for which priority the total number of packets in shared memory has crossed the threshold value. 000: None. 001: Priority 3 full. 010: Priorities 2 and 3 full. 011: Priorities 1, 2, and 3 full. 100: Priorities 0, 1, 2, and 3 full. others Reserved. Note: This is an event (not a status) which occurs when the threshold is exceeded. It does not indicate when the shared memory becomes below the threshold.
23	CRC Error. Set when a data trailer CRC error is detected on an input port. The port is identified via the 5.6.9 CRC Error Port ID Register on page 84. The number of CRC errors for all ports is reported in the field Trailer CRC Error Count of the .
24	Header Parity Error. Set when a parity error is detected in an incoming packet. The port is identified via the 5.6.10 Header Parity Error Port ID Register on page 84. The number of parity errors for all ports is reported in the Header Parity Error Count field of the .
25	Address Corruption. Set every time an address corruption is detected. When an address is corrupted, one or more addresses are actually lost from the address space available to store packets.
26	Master/Slave Parity Error. Set when a parity error has been detected on the speed expansion bus which connects a master to a slave device.
27	Control Packet Drop. Set when a Control packet is dropped on an input as a result of a Control packet queue full condition.
28	Control Packet Received. Set when a new Control packet is received. The number of Control Packets currently in the Control Receive Queue is indicated by the "Control Packet Counter" register.
29	All Control Packets Transmitted. Set when a Control packet has been successfully transmitted to all the selected destinations.
30	Processor Error. This interrupt is generated when the local processor initiates a new command or operation while the chip internal logic is not ready. This interrupt can be generated in two situations: <ul style="list-style-type: none"> • Write 5.6.19 Shared Memory Pointer Register on page 90 while either a Read or Write operation is pending. • Write/Read the 5.6.20 Shared Memory Data Register on page 91 while either a Read or Write operation is pending.
31	Flow Control Violation. This interrupt is also generated when a packet is destined to outputs for which no output queue grant has been given in the past N packet cycles (see description of the Flow Control Latency field in the 5.6.1 Configuration 0 Register on page 78. The violating ports are identified by the on page 85.

5.3.4 BIST Counter Register

This register specifies the number of BIST cycles to be performed.


Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'
Address x'03'
Access Type Read / Write



5.3.5 Bist Data Register

This register allows to Write/Read the BIST PRG/MISR registers.

Reset Value undefined
 Address x'04'
 Access Type Read / Write



5.3.6 BIST Select Register

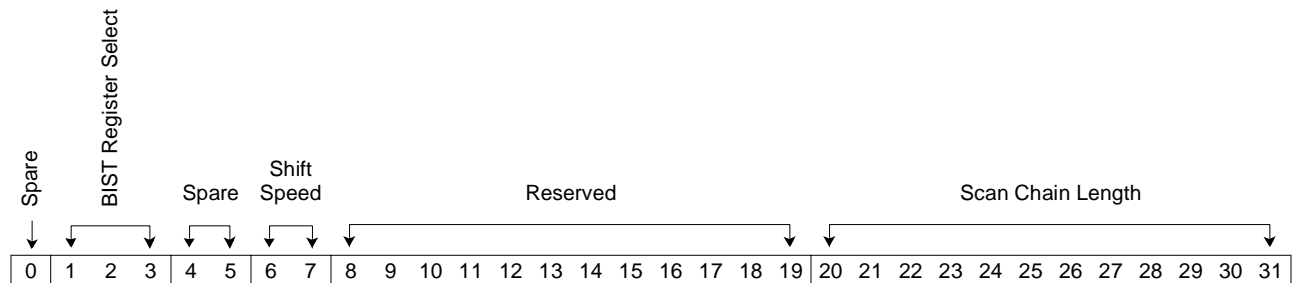
This register, in addition to the 5.3.5 Bist Data Register on page 63, allows indirect write/read access to the Internal PRPG/MISR Registers. Write access is performed in two steps:

1. Write the 5.3.6 BIST Select Register on page 63 with the BIST Register Select field specifying which BIST register has to be read.
2. Write the 5.3.5 Bist Data Register on page 63 with the desired value (Selected Internal PRG/MISR Register is loaded).

Read access is also performed in two steps:

1. Write the 5.3.6 BIST Select Register on page 63 with the BIST Register Select field specifying which BIST register has to be written.
2. Read the 5.3.5 Bist Data Register on page 63. The selected Internal PRPG/MISR Register value is returned.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'
 Address x'05'
 Access Type Read / Write



Bit(s)	Description
0	Spare.



IBM Packet Routing Switch


Bit(s)	Description
1:3	Bist Register Select. 000 PRPG0 001 PRPG1 010 PRPG2 011 PRPG3 100 MISR0 101 MISR1 110 MISR2 111 MISR3
4:5	Spare.
6:7	Shift Speed. Defines the delay between a B clock pulse and an A clock pulse while BIST shifting: 00 8 ns 01 16 ns 10 24 ns 11 32 ns
8:19	Reserved.
20:31	Scan Chain Length.

5.3.7 Debug Bus Select Register

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'

Address x'06'

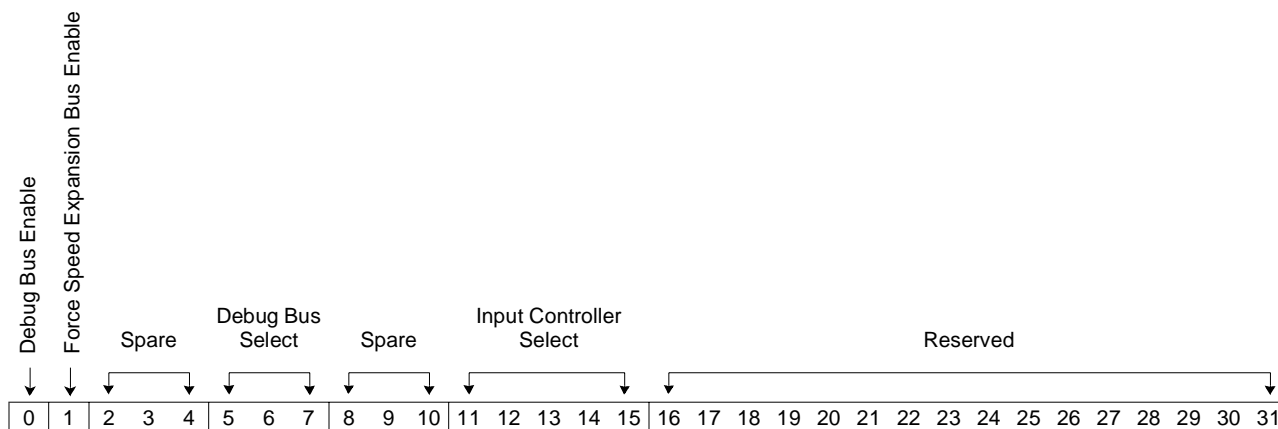Access Type Read / Write



Bit(s)	Description
0	Debug Bus Enable. When on, debug bus drivers are enabled.
1	Force Speed Expansion Bus Enable. When on, the Master/slave bus drivers are enabled whatever the module configuration is. Warning: This bit must be used carefully in order to avoid the destruction of the module drivers when operating in external speed expansion mode.
2:4	Spare.

IBM Packet Routing Switch

Bit(s)	Description
5:7	Debug Bus Selects: 000 Sequencer 001 Address manager 010 Packet Routing Switch general information 011 Input controller selected by Input Controller Select field 100 Picoprocessor 0 instruction address + companion clock 101 Picoprocessor 1 instruction address + companion clock 110 Picoprocessor 0 internal information 111 Picoprocessor 1 internal information
8:10	Spare.
11:15	Input Controller Select
16:31	Reserved.

Depending on the Debug Bus Select value, the following information is provided on the DebugDataOut(0:15) pins.

5.3.7.1 Sequencer Information

DebugDataOut(0:3)	SEQ_T_TXARAToSlaves
DebugDataOut(4:7)	SEQ_T_TXASAToSlaves
DebugDataOut(8)	SEQ_MSSync
DebugDataBusOut(9)	SPINP_SeqClk
DebugDataOut(10)	SEQ_SeqClk
DebugDataOut(11)	ARG_NotPGSelectToSEQ
DebugDataOut(12:15)	SEQ_T_OQASStart

5.3.7.2 Address Manager Information

DebugDataOut(0)	OQA_ASACountVal
DebugDataOut(1)	ADM_MemFreeAck
DebugDataOut(2)	ADM_Regenerating
DebugDataOut(3)	ARG_NotPGSelectToADM
DebugDataOut(4)	ADM_FreeARACtrIPktAck
DebugDataOut(5:15)	OQA_ASAToADM

5.3.7.3 Packet Routing Switch General Information

DebugDataOut(0)	B_CLK_8ns
-----------------	-----------

IBM Packet Routing Switch

DebugDataOut(1)	C_CLK_8ns
DebugDataOut(2)	CT_RAM_NC_CLK
DebugDataOut(3)	OCM_B_CLK
DebugDataOut(4)	DASL_TB1
DebugDataOut(5)	DASL_TC1
DebugDataOut(6)	DASL_TC2
DebugDataOut(7)	MABIST_BCLK
DebugDataOut(8)	MABIST_CCLK
DebugDataOut(9)	MABIST_STCLK
DebugDataOut(10)	MABIST_LBIST
DebugDataOut(11)	PLL_Lock
DebugDataOut(12)	PLL_Reset
DebugDataOut(13)	SynchronousFlush
DebugDataOut(14)	MabistRequest
DebugDataOut(15)	BistRequest

5.3.7.4 Input Controller Information (One among 32 Selected by Input Controller Select Field)

DebugDataOut(0:4)	ByteCounter
DebugDataOut(5)	RowCounter
DebugDataOut(6)	HdrPtyError
DebugDataOut(7)	CRCErrror
DebugDataOut(8)	Receiving
DebugDataOut(9)	IdleCell
DebugDataOut(10)	ControlCell
DebugDataOut(11)	DataCell
DebugDataOut(12)	ASAValid
DebugDataOut(13)	NSAValid
DebugDataOut(14)	AddrInTime
DebugDataOut(15)	MasterByteCounterVal

5.3.7.5 Picoprocessor 0 Instruction Address + Companion Clock; Picoprocessor 1 Instruction Address + Companion Clock

DebugDataOut(0:10)	Picoprocessor address
DebugDataOut(11:14)	Not used
DebugDataOut(15)	Picoprocessor clock

5.3.7.6 Picoprocessor 0 Internal Information; Picoprocessor 1 Internal Information

DebugDataOut(0:1)	from IDCD_CC unit
DebugDataOut(2)	MUXR_CNTL
DebugDataOut(3)	MUXQ_CNTL
DebugDataOut(4)	MUXA_CNTL
DebugDataOut(5)	ImmediateDataFromInstruction
DebugDataOut(6:7)	DataWidth
DebugDataOut(8:9)	ALU_B_Select
DebugDataOut(10:11)	ALU_A_Select
DebugDataOut(12)	AccessPY
DebugDataOut(13)	PY_AutoIncrement
DebugDataOut(14)	AccessPX
DebugDataOut(15)	PX_AutoIncrement



IBM Packet Routing Switch


5.4 DASL Programming Registers

The DASL logic contains 32 DASL receivers, 32 DASL transmitters, and two Shared DASL controllers (SDC). Each SDC contains a picoprocessor with an instruction memory as well as local store, and a set of IO registers and hardware which assist in order to control the DASL receivers. SDC_0 handles ports 0 to 15, while SDC_1 handles ports 16 to 31. The following set of registers is used to access/control the whole DASL logic.

5.4.1 DASL Output Drivers Enable Register

A DASL output driver corresponding to a selected port is enabled when on, and if the OCD Enable bit is set in the 5.3.2 Reset Register on page 59 and Fully Inserted input pin is active (low level). The DASL output driver is tri-stated when off.


Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'
Address x'08'
Access Type Read / Write



5.4.2 Output Port Enable Register

When on, normal data transmission is allowed on the corresponding port. When off, the data sent by the port is forced to '0'.


Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'
Address x'09'
Access Type Read / Write



5.4.3 Synchronization Packet Transmit Register

Specifies which output ports have to transmit Sync Packets.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'
Address x'0A'
Access Type Read / Write




5.4.4 Input Port Enable Register

When on, the corresponding input port is enabled and DASL alignment is allowed on that port. When off, alignment is not possible and thus no packet can be received on the corresponding port.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'

Address x'0B'

Access Type Read / Write




5.4.5 DASL Signal Lost Register

Reset Value Undefined

Address x'0C'

Access Type Read / Only



Bit(s)	Description
1:31	Bit n corresponds to port n. 1 No signal is detected on at least one DASL line of the corresponding port. 0 A correct signal is detected on all lines of the corresponding port. Any change in any of those bits generates a DASL Signal Interrupt if not masked


5.4.6 SDC Rlos Enable Register

When on, the Shared DASL Controller automatically reacts to a receiver lost signal assertion on a port receiver, by resetting the port phase alignment state machine. In this case, the port receivers have to be re-synchronized. When off, the SDC does not react to a RLOS condition on a port receiver. An RLOS condition is always reported by the DASL signal lost register.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'

Address x'0D'

Access Type Read / Write





IBM Packet Routing Switch


5.4.7 DASL Synchronization Hunt Register

A raising edge requests the picoprocessor to perform bit phase alignment and packet delineation. When the picoprocessor detects a raising edge, the corresponding bit in the 5.4.8 DASL Synchronization Status Register on page 70 is cleared.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'

Address x'0E'

Access Type Read / Write



5.4.8 DASL Synchronization Status Register


When on ('1'): the bit phase alignment and packet delineation are completed and normal packet reception is possible on the corresponding port.

When off ('0'): the synchronization sequence initiated by a synchronization hunt command (through the 5.4.7 DASL Synchronization Hunt Register on page 70) is not yet completed, or that the port is disabled.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'


Address x'0F'

Access Type Read Only



5.4.9 Picoprocessor Instruction Memory Access Register

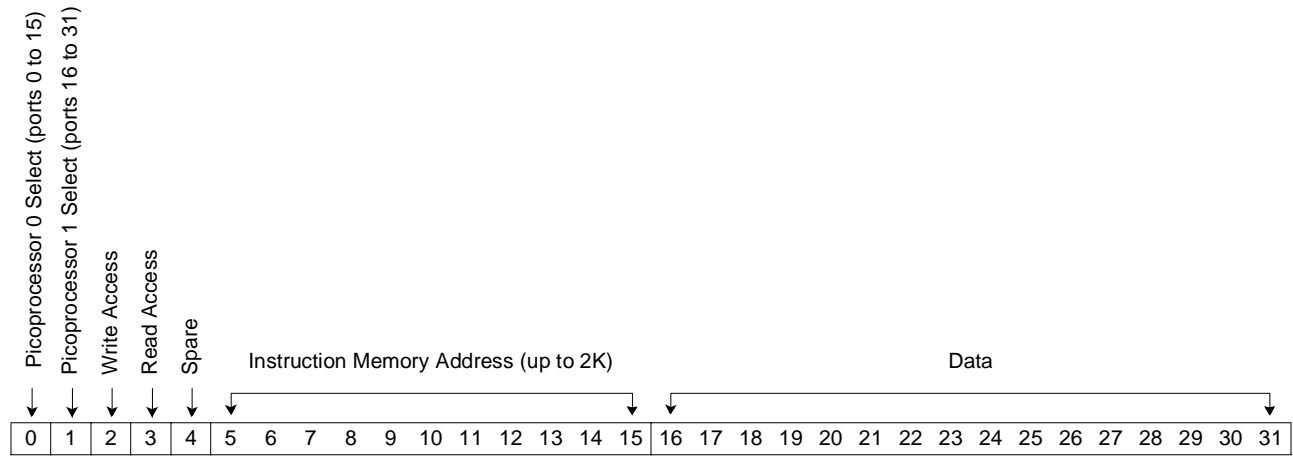Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'
Address x'10'
Access Type Read / Write




Bit(s)	Description
0	Picoprocessor 0 Select.. Access request to/from picoprocessor 0 instruction memory.
1	Picoprocessor 1 Select.. Access request to/from picoprocessor 1 instruction memory.
2	Write Access. Write access to both picoprocessor at the same time is allowed.
3	Read Access. Read access is performed in two steps: a. Write the 5.4.9 Picoprocessor Instruction Memory Access Register on page 71 with either bit 0 or 1 set (both are not allowed at the same. Address field specifies the instruction memory address, Data field is don't care b. Read the 5.4.9 Picoprocessor Instruction Memory Access Register on page 71. The read result is returned in the Data field.
4	Spare.
5:15	Instruction Memory Address (up to 2k).
16:31	Data.

IBM Packet Routing Switch

5.4.10 DASL Configuration Register

This register must be loaded before the Picoprocessor Reset is released in the 5.3.2 *Reset Register* on page 59.

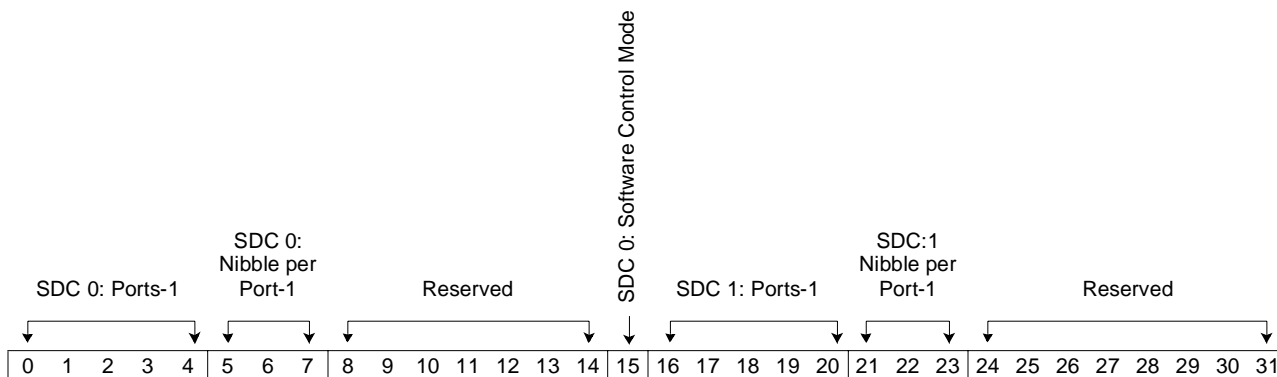Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'
Address x'11'
Access Type Read / Write




Bit(s)	Description
1:4	SDC 0/1 Number of Port-1. The number of physical ports handled by the picoprocessor. Must be set to 'x0F'
5:7	SDC 0/1 Number of Nibble per Port-1. The number of physical DASL links per port. Must be set to 3.
8:15	Reserved. Must be set to x'01'
16:20	SDC 1: Ports-1.
21:23	SDC 1: Nibble per Port-1.
24:31	Reserved. Must be set to x'01

5.4.11 DASL Port Error Register

When on: the bit indicates that an error has been detected by the DASLRX state machine on the corresponding port.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'
Address x'12'
Access Type Read Only



5.4.12 DASL Port Quality Mask Register


When on: the corresponding bit in the DASL Port Quality Register is reset.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'

Address x'13'

Access Type Read / Write

Bit n corresponds to port n.



5.4.13 DASL Port Quality Register


When on: the picoprocessor has detected a minimum eye violation on a port. A minimum eye violation indicates that one or more of the DASL links which make up the port, is not operating within the specification.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'

Address x'14'

Access Type Read Only

Bit n corresponds to port n



5.4.14 SDC Resources Address Register

Register x'15' is dedicated to SDC 0 (ports 0 to 15) while Register 'x'19' is dedicated to SDC 1 (ports 16 to 31). These two registers are not used in normal operational mode.


Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'

Address x'15', x'19'

Access Type Read / Write

Reserved

Resource Address



Bit(s)	Description
0:15	Reserved.
16:31	Resource Address: Specifies the resource address for a read or a write operation. This allows indirect access to the local store and picoprocessor IO registers.



IBM Packet Routing Switch

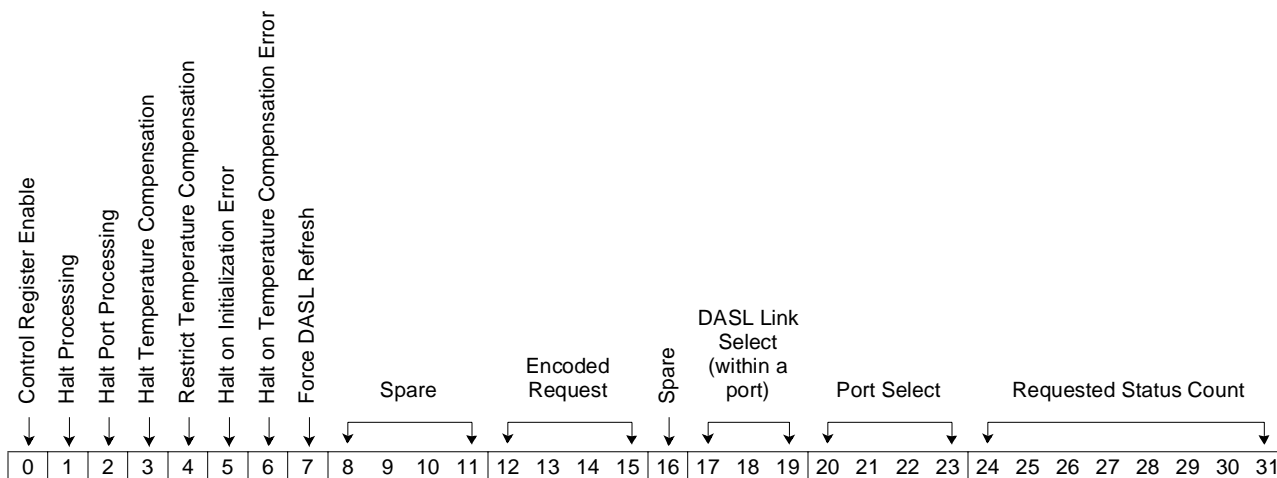
5.4.15 SDC Resources Control Register

Register x'16' is dedicated to SDC 0 (ports 0 to 15) while Register x'1A' is dedicated to SDC 1 (ports 16 to 31). Those registers are not used in operational mode.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'

Address x'16', x'1A'

Access Type Read / Write



Bit(s)	Description
0	Control Register Enable. A high on this signal will enable the register content. When this bit is low, the rest of the bits will be ignored except the Requested Status Count field.
1	Halt Processing.
2	Halt Port Processing.
3	Halt Temperature Compensation.
4	Restrict Temperature Compensation.
5	Halt On Initialization Error.
6	Halt On Temperature Compensation Error.
7	Force DASL Refresh.
8:11	Spare.
12:15	Encoded Request. Values indicate which services the picocode should perform. Valid values: 0000 No operation 0001 Request a read to the address given by the 5.4.14 SDC Resources Address Register on page 73 0010 Request a write to the address given by the 5.4.14 SDC Resources Address Register on page 73 0101 Load Sample Memory 1000 Request a delay line sample from the DASL specified by the Port Select and DASL Link Select fields 1001 Update the DASL Data Structure with the 5.4.16 SDC Resources Data Registers on page 75 input for the DASL receiver specified by the Port Select and DASL Link Select fields. others Reserved

IBM Packet Routing Switch

Bit(s)	Description
16	Spare.
17:19	DASL Link Select (within a port). An encoded value which selects the DASL link within the selected port for a given action.
20:23	Port Select. An encoded value which selects the port for a given action. A request which utilizes the Port Select field will get processed at the next service time for the selected port. If the supplied port value is out of range, the request will be processed for Port 0.
24:31	Requested Status Count. This field will be read by the picoprocessor, incremented, and written back out of the Updated Status Count field of the 5.4.17 SDC Status Register on page 76. This behaves as a "keep alive" mechanism in order for the application to monitor the state of the picoprocessor.

5.4.16 SDC Resources Data Registers


Register x'17' is dedicated to SDC 0 (ports 0 to 15) while Register x'1B' is dedicated to SDC 1 (ports 16 to 31). Those registers are not used in operational mode.

This register contains the SDC resource data for read and write operations.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'

Address x'17', x'1B'

Access Type Read / Write



IBM Packet Routing Switch

5.4.17 SDC Status Register

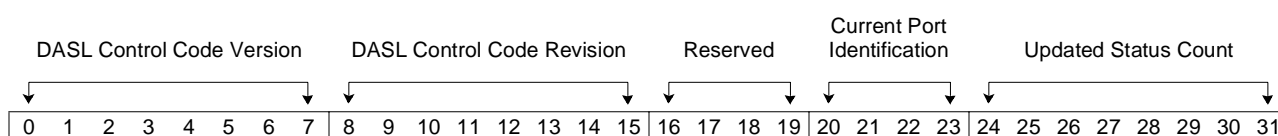
Register x'18' is dedicated to SDC 0 (ports 0 to 15) while Register x'1C' is dedicated to SDC 1 (ports 16 to 31).

This register is loaded by the functional picocode when the corresponding Picoprocessor 0/1 Reset bit is released in the 5.3.2 *Reset Register* on page 59.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'

Address x'18', x'1C'

Access Type Read Only



Bit(s)	Description
0:7	DASL Control Code Version. Which version of code is running.
8:15	DASL Control Code Revision. Which version of code is running.
16:19	Reserved
20:23	Current Port Identification. This field displays the port number which is currently processed by the Shared DASL Controller.
24:31	Updated Status Count. Written by the picoprocessor to be one greater than the value present in the Requested Status Count field of the 5.4.15 <i>SDC Resources Control Register</i> on page 74. This serves as a "keep alive" mechanism to allow the application to monitor the state of the picoprocessor.

5.5 Flow Control Pins Status and Setting Registers

5.5.1 Send Grant Per Priority


When SendGrantPerPriority bit is not active in the 5.6.2 *Configuration 1 Register* on page 80, this indicates the current level of the switch send grant input signals coming from the attached devices.

When SendGrantPerPriority bit is active, a one in this register indicates that the incoming signal contains the Send Grant Per Priority framing '00001' and at least the Send Grant for one priority.

Reset Value Undefined

Address x'1E'


Access Type Read Only



5.5.2 Send Grant Status Register

This indicates the current level of the switch's receive grant input signals.


Reset Value Undefined
Address x'1F'
Access Type Read Only



5.5.3 Receive Grant Status Register

When active, it indicates that the incoming send grant signals carry the send grant information for several priorities. When this bit is set to '0', the send grant signals are used as level and does not carry information per priority.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'
Address x'1D'
Access Type Read / Write



IBM Packet Routing Switch

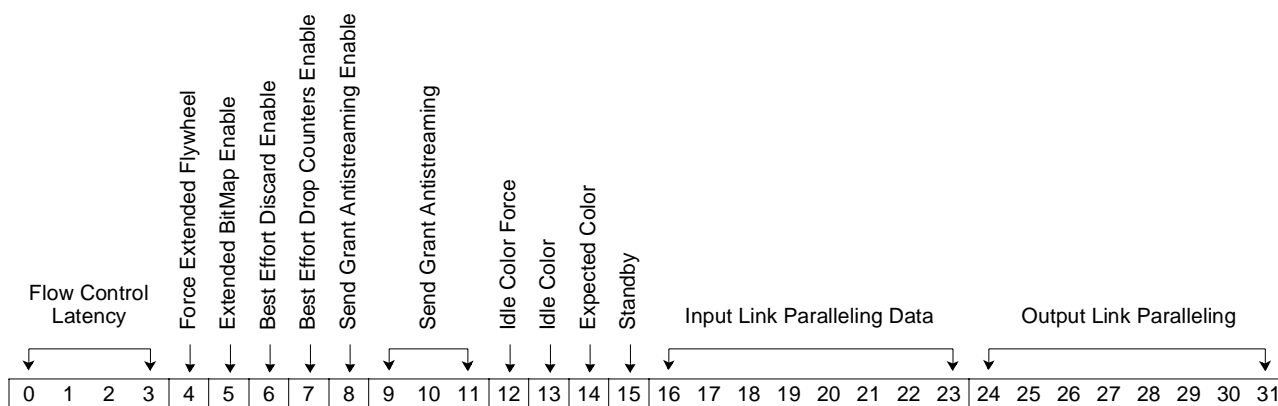
5.6 Functional Registers

5.6.1 Configuration 0 Register

Reset Value '0000 0000 0000 0001 0000 0000 0000 0000'

Address x'20'

Access Type Read / Write



Bit(s)	Description
0:3	Flow Control Latency. When active, flow control is checked by the input controllers. If a received packet is destined to an output for which no grant has been given in the past number of packet cycles defined by N, a Flow Control Violation interrupt is asserted. The packet is discarded. 0 Function is disabled. 1 N = 8 2 N =10 3 N=12 ... 14 N=34 15 N=36
4	Force Extended Flywheel. When on, the Packet qualifier bit 0 is forced to 1 on outgoing idle cells (used for test purpose)
5	Extended BitMap Enable. When on, indicates that the packet qualifier bit 0 of incoming data packet holds the "Extended Bitmap" information. This bit also enables the "Extended OQ grant flywheel".
6	Best Effort Discard Enable. When active, the best effort traffic can be discarded depending on the best effort discard thresholds and the level of best effort counters.
7	Best Effort Drop Counters Enable. When active, all the best effort packets discarded by the input controllers are count in best effort drop counters.
8	Send Grant Antistreaming Enable. When active, the Send Grant antistreaming function is enabled.

IBM Packet Routing Switch

Bit(s)	Description
9:11	<p>Send Grant Antistreaming. This function provides a protection when the adapter removes the “send grant” for a long time. If the “send grant” is not raised for N contiguous packet cycles, it is internally forced active until the adapter raises it again. The Send Grant Antistreaming field is encoded as follow:</p> <p>‘000’ N=16 ‘001’ N=32 ‘010’ N=64 ‘011’ N=128 ‘100’ N=256 ‘101’ N=512 ‘110’ N=1024 ‘111’ N=2048</p>
12	<p>Idle Color Force. When active, all Idle Packets will be transmitted with the color specified by the Idle Color bit, regardless of the Expected Color bit setting. When the color mechanism is not used, this bit must be set to 1.</p>
13	<p>Idle Color. Specifies the color to give to all Idle Packets, when the Idle Color Force is set:</p> <p>0 Blue Idle Packets 1 Red Idle Packets</p>
14	<p>Expected Color. Specifies the expected color of incoming packets after a Color Clear Command is initiated through the 5.6.21 <i>Command Register</i> on page 91.</p> <p>0 Blue packets 1 Red packets</p>
15	<p>Standby.</p>
16:23	<p>Input Physical Port Bundling. This field defines which input ports are merged to build an OC-192 links.</p> <p>Bit 0 Ports 00 to 03 are processed as an OC-192 logical link. Bit 1 Ports 04 to 07 are processed as an OC-192 logical link. Bit 2 Ports 08 to 11 are processed as an OC-192 logical link. Bit 3 Ports 12 to 15 are processed as an OC-192 logical link. Bit 4 Ports 16 to 19 are processed as an OC-192 logical link. Bit 5 Ports 20 to 23 are processed as an OC-192 logical link. Bit 6 Ports 24 to 27 are processed as an OC-192 logical link. Bit 7 Ports 28 to 31 are processed as an OC-192 logical link.</p>
24:31	<p>Output Physical Port Bundling. This field defines which output ports are merged to build an OC-192 links. The encoding is the same as Input Link Paralleling field.</p>



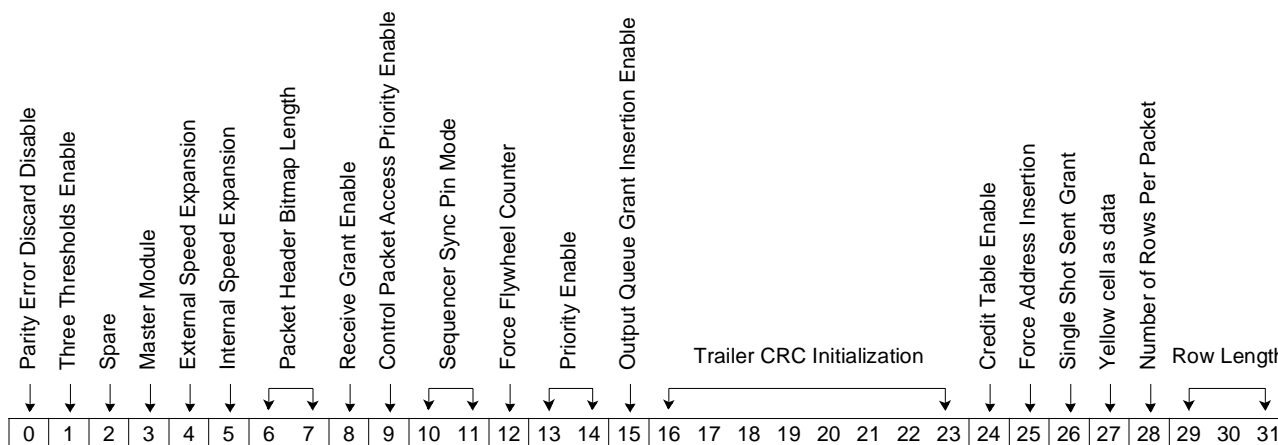
IBM Packet Routing Switch

5.6.2 Configuration 1 Register

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'

Address x'21'

Access Type Read / Write



Bit(s)	Description
0	Parity Error Discard Disable. When active, incoming packets with invalid header parity are not discarded by the input controllers, and are received as normal packets but a Header Parity Error interrupt is raised, and the Packet Header Parity Error Count field is incremented in the on page 85.
1	Three Thresholds Enable. When active, the output queue grant information transmitted in the outgoing packets is only passed for priorities 0, 1 and 2. This means that after grants of priority 2 have been transmitted, the grants for priority 0 are transmitted in the next packet. This allows a reduction of the update time of the output queue grant information with four priorities. Also, when this bit is set, the output queue thresholds for priority 2 and 3 have to be set equal, as well for the shared memory thresholds for priority 2 and 3. When this bit is set to '0', grants for all 4 priorities are transmitted if the Priority Enable field (of this register) is set to '11'.
2	Spare
3	Master Module. Defines which is the master module when using the device in external speed expansion.
4	External Speed Expansion. Enables 2-way external speed expansion. This configuration bit has to be specified for both master and slave modules.
5	Internal Speed Expansion. Enables 2-way internal speed expansion.
6:7	Packet Header Bitmap Length. This field defines the length of the packet header bit map as follow : '00' 1 byte '01' 2 bytes '10' 3 bytes '11' 4 bytes
8	Receive Grant Enable.
9	Control Packet Access Priority Enable. This bit guarantees access time to the shared memory by the local processor for read and write accesses. When set, a shared memory access by the local processor is performed within a maximum of three LU time units after the command has been issued. It only has to be set for row length of 16 or 32 bytes. For other row lengths, the sequencer operation guarantees local processor access time to the shared memory independently of the setting of this bit.

IBM Packet Routing Switch


Bit(s)	Description
10:11	<p>Sequencer Sync Pin Mode. Specifies the operation of the SEQ_SYNC pin.</p> <p>00 SEQ_SYNC is tri-stated, and the chip sequencer runs on its own.</p> <p>01 SEQ_SYNC is an output signal generated by the internal sequencer, which is running on its own.</p> <p>10 SEQ_SYNC is an input signal on which the internal sequencer synchronizes.</p> <p>11 Reserved.</p>
12	<p>Force Fly Wheel. When on the flywheel counter is forced to the value defined in priority enable filed (Used for test purpose)</p>
13:14	<p>Priority Enable. This controls the cycling process of Output Queue Grant information to the attached adapter.</p> <p>00 priority 0 only enabled.</p> <p>01 priority 0 and 1 enabled.</p> <p>10 priority 0, 1 and 2 enabled.</p> <p>11 priority 0, 1, 2 and 3 enabled.</p>
15	<p>Output Queue Grant Insertion Enable. When asserted, the insertion of the output queue grant in the outgoing packet header byte is performed. When deasserted, output queue grant is not inserted, and the received header is transmitted unchanged.</p>
16:23	<p>Trailer CRC Initialization. Specifies the initialization value to be used for the 8-bit Idle Packet trailer CRC check.</p> <p>LU LengthCRC Init Register in Hex</p> <p>16 D0</p> <p>17 DD</p> <p>18 04</p> <p>19 FA</p> <p>20 07</p> <p>32 9B</p> <p>34 67</p> <p>36 2E</p> <p>38 61</p> <p>40 5A</p>
24	<p>Credit Table Enable. This bit enables the scanning of the credit table by the switch output control logic. It allows the application to not initialize the credit table if the function is not used.</p>
25	<p>Force Address Insertion. When active the input controller inserts its address into the H2 field (Used for test purpose).</p>
26	<p>Single Shot Sent Grant. When this bit is set to '0', grants for all 4 priorities are transmitted if the Priority Enable field of Configuration 1 Register is set to 3 (Used for test purpose).</p>
27	<p>Yellow cell as data. When active, an incoming Yellow cell is processed as data cell. This means the LU doesn't contain the CRC. When inactive, the incoming Yellow cell is processed as Idle cell. This means the LU contains the CRC. Therefore, the CRC is checked.</p>
28	<p>Number Of Rows Per Packet. Defines the number of rows contained in a logical unit.</p> <p>0 1 row</p> <p>1 2 rows</p>
29:31	<p>Row Length. Provides the length of a row in the shared memory.</p> <p>'000' 16 bytes</p> <p>'001' 17 bytes</p> <p>'010' 18 bytes</p> <p>'011' 19 bytes</p> <p>'100' 20 bytes</p> <p>others reserved</p>

IBM Packet Routing Switch

5.6.3 Output Queue Enable Register

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'
Address x'22'
Access Type Read / Write

Bit n corresponds to port n.




Bit(s)	Description
0:31	<p>Bit n corresponds to port n. When active, the corresponding output queue is enabled and packets destined for that output are enqueued. When set to 0, the output queue is disabled and the following actions are taken:</p> <ol style="list-style-type: none"> 1. Unicast packets destined to a disabled output queue are discarded and multicast packets are enqueued only in enabled output queues. 2. A disabled output queue is "slow flushed". Addresses are dequeued and recycled as during normal operation. The slow flush takes place regardless of SND_GRANT signal, as long as the queue is disabled. 3. The output queue grant corresponding to a disabled queue are forced to '1'. 4. Idle packets are transmitted if the corresponding bit is set in the <i>Output Drivers Enable Register</i> and in the <i>5.4.2 Output Port Enable Register</i> on page 68.

5.6.4 Input Controller Enable Register

When active, normal data and Control Packet reception is allowed on that port. When set to 0, neither data nor Control Packets are received.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'
Address x'23'
Access Type Read / Write

Bit n corresponds to port n.



5.6.5 Color Detection Disable Register


When active, the color detection mechanism is disabled for that input and the corresponding bit in the 5.6.8 *Expected Color Received Register* on page 84 is set. See section on Color Mechanism.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'

Address x'24'

Access Type Read / Write

Bit n corresponds to port n.



5.6.6 Send Grant Enable Register


When active, normal send grant signal decoding is performed, and packet transmission is possible only if the retrieved send grant information is active. When set to 0, packets are not transmitted, regardless of the value of the send grant signal except if the corresponding bit is set in the 5.6.7 *Force Send Grant Register* on page 83.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'

Address x'25'

Access Type Read / Write

Bit n corresponds to port n.



5.6.7 Force Send Grant Register


When active, the device control logic considers that the send grant signals are always active whatever the 5.6.6 *Send Grant Enable Register* on page 83 specifies and whatever the send grant pin values indicate.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'

Address x'26'

Access Type Read / Write

Bit n corresponds to port n.




IBM Packet Routing Switch

5.6.8 Expected Color Received Register

When active, it either indicates that the expected color has been received on that input, since the last Color Clear command, or that the corresponding bit in the 5.6.5 *Color Detection Disable Register* on page 83 is set. When a bit is set to 0, it indicates that the color opposite to the expected color is still being received on that input.


Reset Value Undefined
Address x'27'
Access Type Read Only



5.6.9 CRC Error Port ID Register

Indicates which input port has detected a trailer CRC error within an idle cell. This register is cleared on read.


Reset Value '0000 0000 0000 0000 0000 0000 0000 000'
Address x'28'
Access Type Read Only



5.6.10 Header Parity Error Port ID Register

Indicates which input port has detected a packet header parity error. This register is cleared on read.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'
Address x'29'
Access Type Read / Only




IBM Packet Routing Switch

5.6.13 Control Packet Counter Register

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'

Address x'2C'

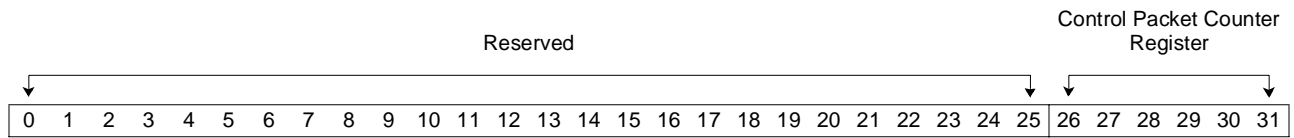Access Type Read Only




Bit(s)	Description
0:25	Reserved.
26:31	Control Packet Counter. Indicates the number of Control Packets currently in the Control packet receive queue. Value range is 0 to 32.

5.6.14 Output Queues Status Registers 1-4

These four registers provide the status of the 32 output queues. Register 1 shows the status of the 32 output queues. Each register is composed of eight 4-bit ranges that describe a particular output queue status: Register 1 shows the status of output queues 0-7; register 2 of queues 8-15; register 3 of queues 16-23; and register 4 of queues 24-31. Within each queue's 4-bit range, the first bit is the Output Queue Empty field, which indicates whether the queue has been emptied since the last read operation, and the other three bits are the status field, which indicates the maximum level reached by the output queue since the last read operation. Because the maximum level occurs when the threshold is exceeded, the status field does not indicate when the queue occupancy is below the threshold.

The offsets referred to in the bit-by-bit descriptions of these four registers are shown with the addresses below:

Reset Value	'1000 1000 1000 1000 1000 1000 1000 1000'		
Address	Output Queues 0-7	x'2D'	Offset = 0
	Output Queues 8-15	x'2E'	Offset = 8
	Output Queues 16-23	x'2F'	Offset = 16
	Output Queues 24-31	x'30'	Offset = 24
Access Type	Read Clear		

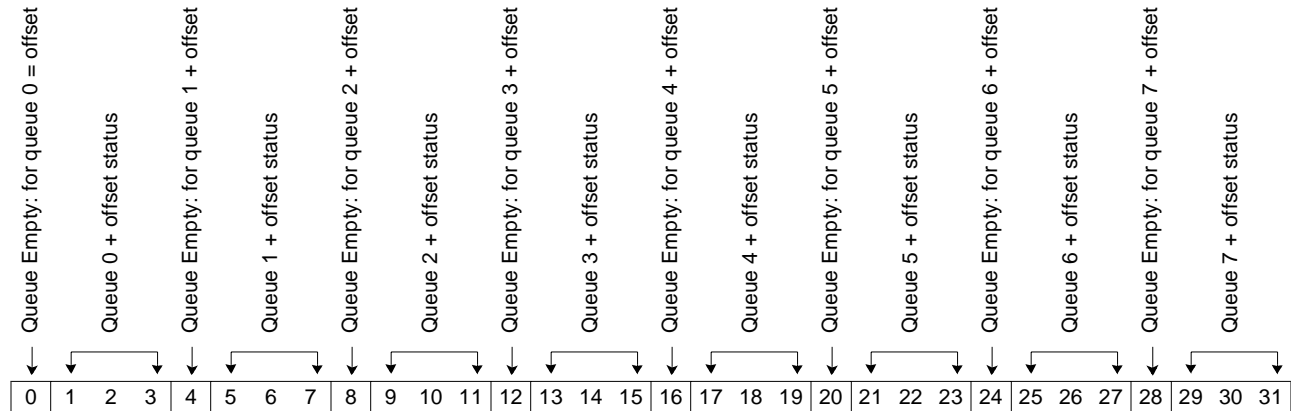

Bit(s)	Description
0	Queue Empty for Queue 0 + offset. When set to '1', the corresponding output queue is empty.
1:3	Status for Queue 0 + offset. This field indicates for which priority the total number of packets in the output queue has crossed the corresponding threshold value. Each time a priority threshold is crossed for an output queue, the Status field for that particular output queue is updated. This only occurs when the threshold is exceeded. Coding is as follows: 000 queue not full for any priorities 001 Priority 3 full 010 Priorities 2 and 3 full 011 Priorities 1 to 3 full 100 Priorities 0 to 3 full others Reserved
4	Queue Empty for Queue 1 + offset. When set to '1', the corresponding output queue is empty.
5:7	Status for Queue 1 + offset. See description of bits 1:3.


IBM Packet Routing Switch

Bit(s)	Description
8	Queue Empty for Queue 2 + offset. When set to '1', the corresponding output queue is empty.
9:11	Status for Queue 2 + offset. See description of bits 1:3.
12	Queue Empty for Queue 3 + offset. When set to '1', the corresponding output queue is empty.
13:15	Status for Queue 3 + offset. See description of bits 1:3.
16	Queue Empty for Queue 4 + offset. When set to '1', the corresponding output queue is empty.
17:19	Status for Queue 4 + offset. See description of bits 1:3.
20	Queue Empty for Queue 5 + offset. When set to '1', the corresponding output queue is empty.
21:23	Status for Queue 5 + offset. See description of bits 1:3.
24	Queue Empty for Queue 6 + offset. When set to '1', the corresponding output queue is empty.
25:27	Status for Queue 6 + offset. See description of bits 1:3.
28	Queue Empty for Queue 7 + offset. When set to '1', the corresponding output queue is empty.
29:31	Status for Queue 7 + offset. See description of bits 1:3.

5.6.15 Color Packet Received Register

Specifies if at least one cell has been received with the color selected by the 'ColorSelect' field of the Command register. The register is cleared on read, and bits are set dominant.


Reset Value undefined
Address x'31'
Access Type Read Only



5.6.16 Send Grant Violation Register


Indicates which ports have removed the send grant for too long (see send grant antistreaming function in 5.6.1 Configuration 0 Register on page 78). The register is cleared on read, and bits are set dominant. This function is only activated if the Send Grant is enabled.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'
Address x'32'
Access Type Read / Only



5.6.17 Occupancy Counters Register

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'
 Address x'33'
 Access Type Read Only



Bit(s)	Description
0:4	Reserved.
5:15	Total Packet Count in Shared Memory. Indicates the number of packets that are currently in the shared memory. This field is continuously refreshed (each Network Processor internal clock cycle).
16:20	Reserved.
21:31	Total Address Count in Free Queue. Indicates the current number of available addresses. This field is continuously refreshed each internal clock cycle.

5.6.18 Shared Memory Access Registers

The internal shared memory can be accessed via an internal five words (a word is 32 bits) register called the Internal Memory Row Register (This is an internal register accessible via shared memory data register). This register, together with the *5.6.19 Shared Memory Pointer Register* on page 90 and the *5.6.20 Shared Memory Data Register* on page 91, allows to Write / Read any location in the shared memory.

Writing a row to the shared memory:

1. Build the row to be loaded into the shared memory by written five times into the *5.6.20 Shared Memory Data Register* on page 91
 - a. First write: loads bytes 0 to 3 of the Internal Memory Row Register (can't find this register).
 - b. Second write: loads bytes 4 to 7 of the Internal Memory Row Register.
 - c. Third write: loads bytes 8 to 11 of the Internal Memory Row Register.
 - d. Fourth write: loads 12 to 15 of the Internal Memory Row Register.
 - e. Fifth write: loads bytes 16 to 19 of the Internal Memory Row Register.
2. Write the *5.6.19 Shared Memory Pointer Register* on page 90 with Write bit = 1, and bits 20 to 31 defining the row address. The Internal Memory Row Register content is loaded into the shared memory.



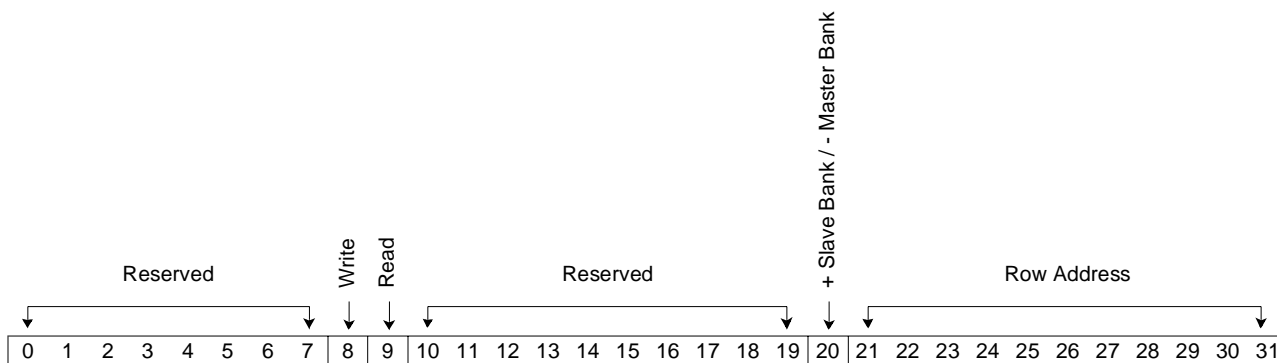
IBM Packet Routing Switch

Reading a row from the shared memory:

- a. Write the 5.6.19 Shared Memory Pointer Register on page 90 with Read bit = 1, and bits 20 to 31 defining the row address.
- b. Read five times the 5.6.20 Shared Memory Data Register on page 91.
- c. First read: returns bytes 0 to 3 of the Internal Memory Row Register.
- d. Second read: returns bytes 4 to 7 of the Internal Memory Row Register.
- e. Third read: returns bytes 8 to 11 of the Internal Memory Row Register.
- f. Fourth read: returns bytes 12 to 15 of the Internal Memory Row Register.
- g. Fifth read: returns bytes 16 to 19 of the Internal Memory Row Register

5.6.19 Shared Memory Pointer Register


Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'
 Address x'34'
 Access Type Read / Write



Bit(s)	Description
0:7	Reserved
8	Write. Allow to write data into the shared memory row register
9	Read. Allow to read data from the shared memory row register
10:19	Reserved.
20	+ Slave Bank /- Master Bank. Select the shared memory bank
21:31	Row Address. Select one of the 2048 row address

5.6.20 Shared Memory Data Register


Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'
Address x'35'
Access Type Read / Write



5.6.21 Command Register

This register allows the software to initiate specific actions. Bits 29 to 31 are interpreted as pulses, that is a command is only executed when the register is written to. These registers do not have to be cleared after the command has been executed.

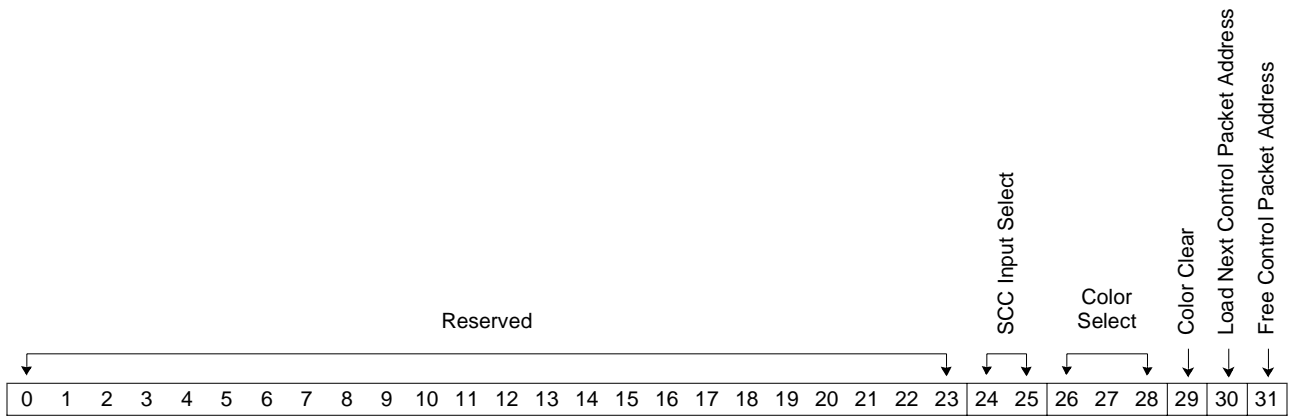Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'
Address x'36'
Access Type Read / Write



Bit(s)	Description
0:23	Reserved
24:25	SCC Input Select. These 2 bits are used to select the incoming Side Communication Channel bit, 1 among 4, that must be reported in the 'Side Communication Channel Input Reporting' register. 00 SCC input bit 0 is reported 01 SCC input bit 1 is reported 10 SCC input bit 2 is reported 11 SCC input bit 3 is reported



IBM Packet Routing Switch

Bit(s)	Description
26:28	Color Select. These 3 bits select the color that must be reported in the “Color Packet Received” Register. 000 Blue 001 Red 010 Yellow 1 011 Yellow 2 100 Yellow 3 101 Synchro cell 110 Reserved 111 Reserved
29	Color Clear. This command clears the Idle Packet Color State machine. After this command is initiated, Idle Packets are transmitted with the color specified in the Expected Color field of the 5.6.1 Configuration 0 Register on page 78. Transmission on a given output port, only takes place when both following conditions are satisfied: at least one packet of the expected color is received on all inputs, and the corresponding output queue is empty. As long as these two conditions are not met, Idle Packets are transmitted with the opposite color to the expected color.
30	Load Next Control Packet Address. Loads the address at the top of the Control packet queue into the Internal Memory Row Register. Note that the read address stays at the top of the Control packet queue.
31	Free Control Packet Address. Frees the address at the top of the Control packet queue. The next address (if available) moves to the top.

5.6.22 Control Packet Destination Register

Provides the bit map of the output ports to which the current Control packet is destined. A ‘1’ at position n indicates that the Control packet has to be sent to output n.


When the Control packet is sent over the line, the corresponding bit is cleared in the Control Packet Destination Register. When the Control packet is sent to the last port (register value returns to x’0000 0000’), an All Control Packets Transmitted interrupt is generated. If, for any reason, the Control Packet is not sent to a particular port, the application can reset the corresponding bit into the register.

Reset Value ‘0000 0000 0000 0000 0000 0000 0000 0000’

Address x’37’

Access Type Read / Write

Bit n corresponds to port n.



Bit(s)	Description
0:28	Reserved.
29	Color Clear. This command clears the Idle Packet Color State machine. After this command is initiated, Idle Packets are transmitted with the color specified in the Expected Color field of the 5.6.1 Configuration 0 Register on page 78. Transmission on a given output port, only takes place when both following conditions are satisfied: at least one packet of the expected color is received on all inputs, and the corresponding output queue is empty. As long as these two conditions are not met, Idle Packets are transmitted with the opposite color to the expected color.
30	Load Next Control Packet Address. Loads the address at the top of the Control packet queue into the Internal Memory Row Register. Note that the read address stays at the top of the Control packet queue.

IBM Packet Routing Switch

Bit(s)	Description
31	Free Control Packet Address. Frees the address at the top of the Control Packet queue. The next address (if available) moves to the top.

5.6.23 Bitmap Filter Register


Specifies the mask to apply to the received packet bit map for switchover support. See the description of the received packet header for details on the operation of this mask. Note that this register can't be written while the module is in standby mode.

Reset Value '1111 1111 1111 1111 1111 1111 1111 1111'

Address x'38'

Access Type Read / Write

Bit n corresponds to port n.


5.6.24 Thresholds Access Register

This register gives indirect access to all the Internal Threshold Registers.

Write access is performed in one SHI command: Set the Write bit to '1', select the Internal Threshold Register with the Threshold Select field, and indicate the value to be loaded with the Threshold Value field.

Read access requires two SHI commands:

- Write the Threshold Access Register with the Write bit cleared to '0' and select the Internal Threshold Register to be read with the Threshold Select field.
- Read the Threshold Value from the Threshold Access Register.

Shared Memory Thresholds: The shared memory thresholds are composed of four 11-bit fields. These values have a range of 0 to 2047. When the number of packets in shared memory becomes equal or greater than the threshold value of a given priority, the corresponding memory grant is low ('0'b). Otherwise, the memory grant bit is high ('1'b).

Threshold Select = 0: Internal Shared Memory Threshold Register for priority 0.

Threshold Select = 1: Internal Shared Memory Threshold Register for priority 1.

Threshold Select = 2: Internal Shared Memory Threshold Register for priority 2.

Threshold Select = 3: Internal Shared Memory Threshold Register for priority 3.

Output Queues Thresholds: The output queues thresholds are composed of four 11-bit fields. These values have a range of 0 to 2047. When the number of packets in a queue becomes equal or greater than the threshold value of a given priority, the corresponding output queue grant is low ('0'b).

Threshold Select = 4: Output Queue Threshold Register for priority 0.

Threshold Select = 5: Output Queue Threshold Register for priority 1.

Threshold Select = 6: Output Queue Threshold Register for priority 2.

Threshold Select = 7: Output Queue Threshold Register for priority 3.

Output Queues Thresholds for Link Paralleling: Same as above but used when a port is defined as a link paralleling one.



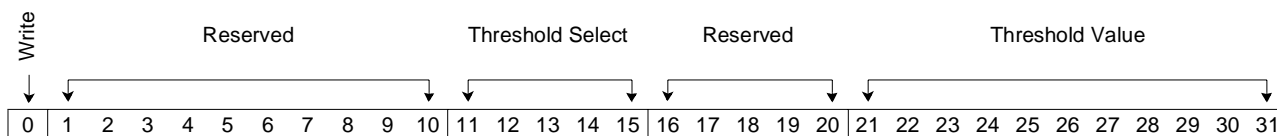
IBM Packet Routing Switch

- Threshold Select = 8: Output Queue Threshold Register for priority 0.
- Threshold Select = 9: Output Queue Threshold Register for priority 1.
- Threshold Select = 10: Output Queue Threshold Register for priority 2.
- Threshold Select = 11: Output Queue Threshold Register for priority 3.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'

Address x'39'

Access Type Read / Write



Bit(s)	Description
0	Write
1:10	Reserved
11:15	Threshold Select
16:20	Reserved
21:31	Threshold Value

5.6.25 Credit Table Access Register

This register allows indirect access to the credit table. There are 256 credits per port. Therefore, each port has 32 addresses of 16 bits. The One Credit field contains the priority for which a credit must be generated.

Write access is performed in one SHI command: set the Write/Read bit to '1', specify the output port number with the Port Number field, specify the address to be written with the Credit Table Address field, and set the eight credits with the eight One Credit fields.

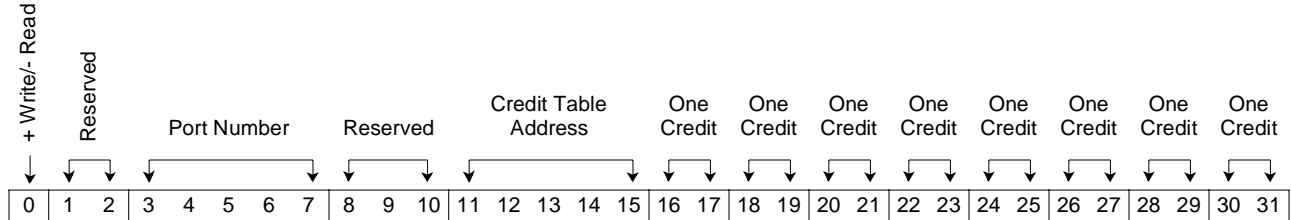
Read access requires two SHI commands:

1. Write this register with the Write / Read bit cleared to '0', specify the port number with the Port Number field, and specify the address to be read with Credit Table Address field.
2. Read the eight credit fields from the *5.6.25 Credit Table Access Register* on page 94.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'

Address x'3A'

Access Type Read / Write



5.6.26 Lookup Tables Access Register

A Lookup Table is a 16-entry table that allows to rearrange the first 16 bytes of each data row of a byte stream before transmission. Thus, there are two such tables, one for the master stream, and one for the slave stream.

For each table, entry at location N of the lookup table points to the data byte to be sent as the Nth byte in the same data stream.

The Lookup Table reset values are the normal byte order, from 0 to 15 (no rearranging). Note that the Lookup Table can't be written while the module is in standby mode. This register allows indirect access to the two Lookup Tables. There are 16 entries per table.

Write access is performed in one SHI command: SHI write to the *5.6.26 Lookup Tables Access Register* on page 95, bit 0 = '1'.

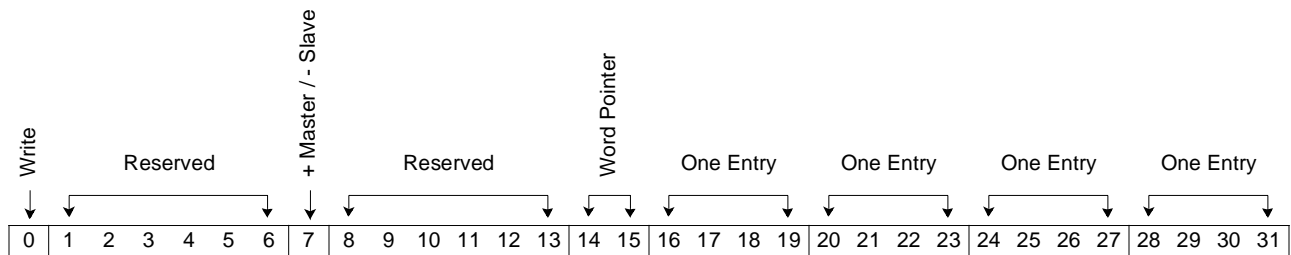
Read Access requires two SHI commands: (should this be here in a footer?)

1. SHI write to the *5.6.26 Lookup Tables Access Register* on page 95, bit 0 = '0', Master/Slave and Word Pointer fields specify the lookup table address.
2. SHI read to the *5.6.26 Lookup Tables Access Register* on page 95. Four entries are returned.

Reset Value '0000 0000 0000 0000 0000 0001 0010 0011'

Address x'3B'

Access Type Read / Write





IBM Packet Routing Switch

Bit(s)	Description
0	Write. Write access is performed in one SHI command: SHI write to the <i>5.6.26 Lookup Tables Access Register</i> on page 95, bit 0 0 0 = '1'.
1:6	Reserved.
7	+Master / - Slave. Selects either the master or the slave lookup table
8:13	Reserved.
14:15	Entries Pointer. Selects four entries among 16: 00 0 to 3 01 4 to 7 10 8 to 11 11 12 to 15 The values of the four selected entries are defined from bits 16 to 31.
16:19	One Entry.
20:23	One Entry.
24:27	One Entry.
28:31	One Entry.

5.6.27 Bitmap Mapping Register

This register defines the mapping between a bit position in the Packet header bytes H1 to H4 and a physical queue. All the packets received with a bitmap bit N set to '1' are routed to the physical queue defined by the Physical queue Field (Logical Bitmap Bit Position field).

Example: Assume the *5.6.27 Bitmap Mapping Register* on page 96 is written with the Logical Bitmap Bit Position field = 3, Physical Queue Field = 7. This means that all the packets received with the bitmap bit 3 set to '1' will be routed to Physical output queue 7.

Write access is performed in one SHI command:

1. Set the Write bit to '1', specify both Logical Bitmap Bit Position and Physical Queue fields.

Read access requires two SHI commands:

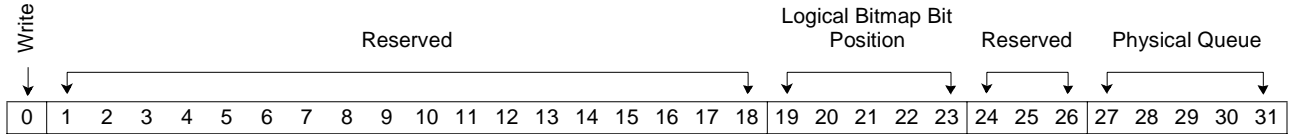
1. Write the *5.6.27 Bitmap Mapping Register* on page 96 with the Write bit cleared to '0' and specify the Logical Bitmap Bit Position field.
2. Read operation will return the corresponding Physical Queue field.

The Bitmap Mapping default value is such as there is no rearranging (Bitmap bit N points to Physical queue N). Note that the *5.6.27 Bitmap Mapping Register* on page 96 can't be written while the module is in Standby mode.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'

Address x'3C'

Access Type Read / Write



Bit(s)	Description
0	Write.
1:18	Reserved.
19:23	Logical Bitmap Bit Position.
24:26	Reserved.
27:31	Physical Queue.

5.6.28 Best Effort Resources Access Register

This register gives indirect access to all the Best Effort logic resources.

Write access is performed in one SHI command:

1. Set the Write bit to '1', set both Port Number and Resource Select fields. The Resource Value will be loaded into the selected resource.

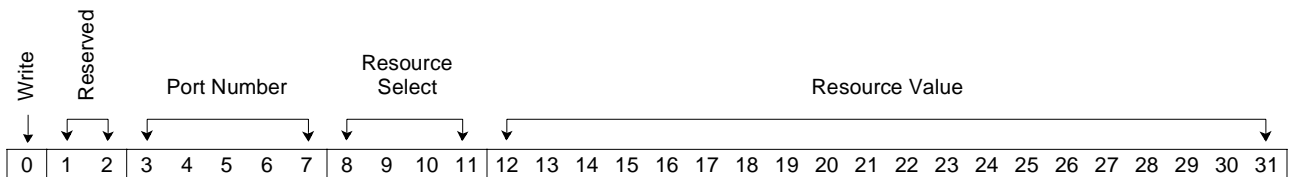
Read access requires two SHI commands:

1. Write the *5.6.28 Best Effort Resources Access Register* on page 97 with the Write bit cleared to '0' and select set Port Number and Resource Select fields.
2. Read the Resource Value from the *5.6.28 Best Effort Resources Access Register* on page 97.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'

Address x'3D'

Access Type Read / Write



Bit(s)	Description
0	Write.



IBM Packet Routing Switch

Bit(s)	Description
1:2	Reserved.
3:7	Port Number.
8:11	Resource Select. Resource Select encoding: 0000 Best Effort counter 1 0001 Best Effort counter 2 0010 Best Effort counter 3 0011 Best Effort counter 4 0100 Best Effort counter 5 0101 Best Effort Threshold 1 0110 Best Effort Threshold 2 0111 Best Effort Threshold 3 1000 Priority 0 Best Effort Drop counter 1001 Priority 1 Best Effort Drop counter 1010 Priority 2 Best Effort Drop counter 1011 Priority 3 Best Effort Drop counter 1100 Protocol engine virtual packet clock (only bits 22 to 31 are valid in that case). 1101 Reserved 1110 Reserved 1111 Reserved
12:31	Resource value. When the Resource Select field is a counter, it indicates the counter value. When the Resource Select field is a protocol engine virtual clock, the encoded value is: x'00000' No protocol engine packet clock. (protocol engine packet clock frequency = 0) x'00001' 'Single Shot Protocol Engine Packet Clock'. This generates a pulse on the internal protocol engine packet clock (used for test purpose) x'nnnnn' The protocol engine packet clock has a "nnnnn" x 4 ns period.


5.6.29 Best Effort Discard Alarm Register

Indicates that the best effort discard logic is currently in the phase where best effort packet could be discarded.

Reset Value '0000 0000 0000 0000 0000 0000 0000 0000'

Address x'3E'

Access Type Read Only



5.6.30 Side Communication Channel Input Reporting Register


Indicates the level of the incoming SCC information extracted from the Idle cells bit n (n can be 0 to 3 depending on the SCC Input Select field of the Command register)

Reset Value Undefined

Address x'3F'

Access Type Read Only

Bit n corresponds to port n.



6. Reset, Initialization, and Operation

6.1 Clock and PLL

A reference clock must be provided on the SYS_CLK input. The frequency of the reference clock is 50% of the byte clock, based on the setting of the 5.3.1 PLL Programming Register on page 58.

6.2 Reset

The NotPowerOnResetIn input must be asserted after a system power-up sequence occurs. For the full reset sequence see 5.3.2.3 Reset Sequence on page 60 and for the reset register see 5.3.2 Reset Register on page 59

6.3 DASL Initialization and Operation

Once the switch has been fully configured and before actual data traffic can take place between the switch and the adapter(s), the DASL interfaces between the switch and the remote device connected to specific switch ports must be initialized to provide bit phase alignment and packet alignment at the data receivers in both directions.

The port synchronization is under the overall control of the system Control Processor which coordinates the operation between the switch core and the adapters. For switch elements, this synchronization is handled by the local processor (running the switch control microcode), connected to the SHI interface, after initialization or after error detection. It can also be performed directly through interface lines between the switch control and the port adapter.

The registers of interest are:

Table 19: DASL Initialization and Operation Registers

Address	Register	Description
x'0B'	5.4.4 Input Port Enable Register on page 69	
x'09'	5.4.2 Output Port Enable Register on page 68	
x'08'	5.4.1 DASL Output Drivers Enable Register on page 68	
x'0C'	5.4.5 DASL Signal Lost Register on page 69	
x'0F'	5.4.8 DASL Synchronization Status Register on page 70	<p>Reports the status of the input receiver.</p> <p>When the packet routing switch is in external speed expansion mode, the local processor must set the Figure DASL Synchronization Hunt Register and check the Figure DASL Synchronization Status Register on both devices separately. Similarly, it has to inform both the master and slave device to transmit Sync Packets via the Figure Synchronization Packet Transmit Register.</p>

Table 19: DASL Initialization and Operation Registers (Continued)

Address	Register	Description
x'0E'	5.4.7 DASL Synchronization Hunt Register on page 70	<p>Forces the input ports to start the synchronization sequence.</p> <p>When the packet routing switch is in external speed expansion mode, the local processor must set the Figure DASL Synchronization Hunt Register and check the Figure DASL Synchronization Status Register on both devices separately. Similarly, it has to inform both the master and slave device to transmit Sync Packets via the Figure Synchronization Packet Transmit Register.</p>
x'0A'	5.4.3 Synchronization Packet Transmit Register on page 68	<p>Specifies on which port the sync packets are to be transmitted in order for the remote device input port to synchronize. While Sync Packets are transmitted on an output port, Data Packets destined to that output port will be discarded at the same rate as if they were actually sent on the line. When not transmitting Sync Packets, the output ports transmit normal traffic packets, Data Packets, or Idle Packets.</p>

In summary, the following steps must be taken in order to synchronize input ports, either after reset and initialization of the device, or when the control processor decides to resynchronize a link due to data errors on the incoming packets. The same steps must be taken on both the switch port and the remote device. They do not have to be synchronous, but the global sequence of operation must be followed:


1. Disable the switch port, by writing '0' in register x'09' and x'0B' (between 10 to 60 ms to be effective), and remote chip ports
2. Enable the switch port, by writing '1' in register x'09' and x'0B' (between 10 to 60 ms to be effective), and remote chip ports
3. Disable DASL transmission, by writing a '0' in register x'08'.
4. Check for valid connectivity of the receiver to a differential transmitter through the 5.4.5 DASL Signal Lost Register on page 69 to ensure the integrity of the serial links.
5. Enable Transmit Sync Packets in the 5.4.3 Synchronization Packet Transmit Register on page 68 x'0A'.
6. Enable DASL transmission, by writing a '1' (it is a bit map field) into registers x'08' and x'09'.
7. Enable 5.4.4 Input Port Enable Register on page 69 x'0B', by writing a '1' in the bit position corresponding to the port.
8. Write to the 5.4.7 DASL Synchronization Hunt Register on page 70 x'0E' for the enabled ports to start synchronization.
9. Poll the 5.4.8 DASL Synchronization Status Register on page 70 x'0F' to verify completion of synchronization after a Sync Time-Out period. If some ports failed to synchronize, their Sync Status bits will be '0'.
10. When synchronization has been achieved the local processor and the remote device report to the control processor that it is ready for data transfer.
11. Remove synch hunt from 5.4.7 DASL Synchronization Hunt Register on page 70 x'0E'.
12. Read 5.6.9 CRC Error Port ID Register on page 84 x'28' and x'2A' to clear any CRC error indication that might have been set up during synchronization period.
13. Upon reception of both reports, the control processor commands both ends of the full duplex link (switch port and remote device) to stop transmitting Sync Packets. Normal packet transfer (idle or data) on the input ports can then be initiated.
14. Activate 5.6.3 Output Queue Enable Register on page 82 x'22'.

IBM Packet Routing Switch

15. Activate 5.6.3 Output Queue Enable Register on page 82 x'23'.
16. As the link is now in data mode the switch control must poll the CRC Error Registers and the 5.4.5 DASL Signal Lost Register on page 69 to check for error free operation.

This sequence of operation is shown in the following flow chart. Note that this sequence can be performed on multiple ports at the same time, or on one port at a time.

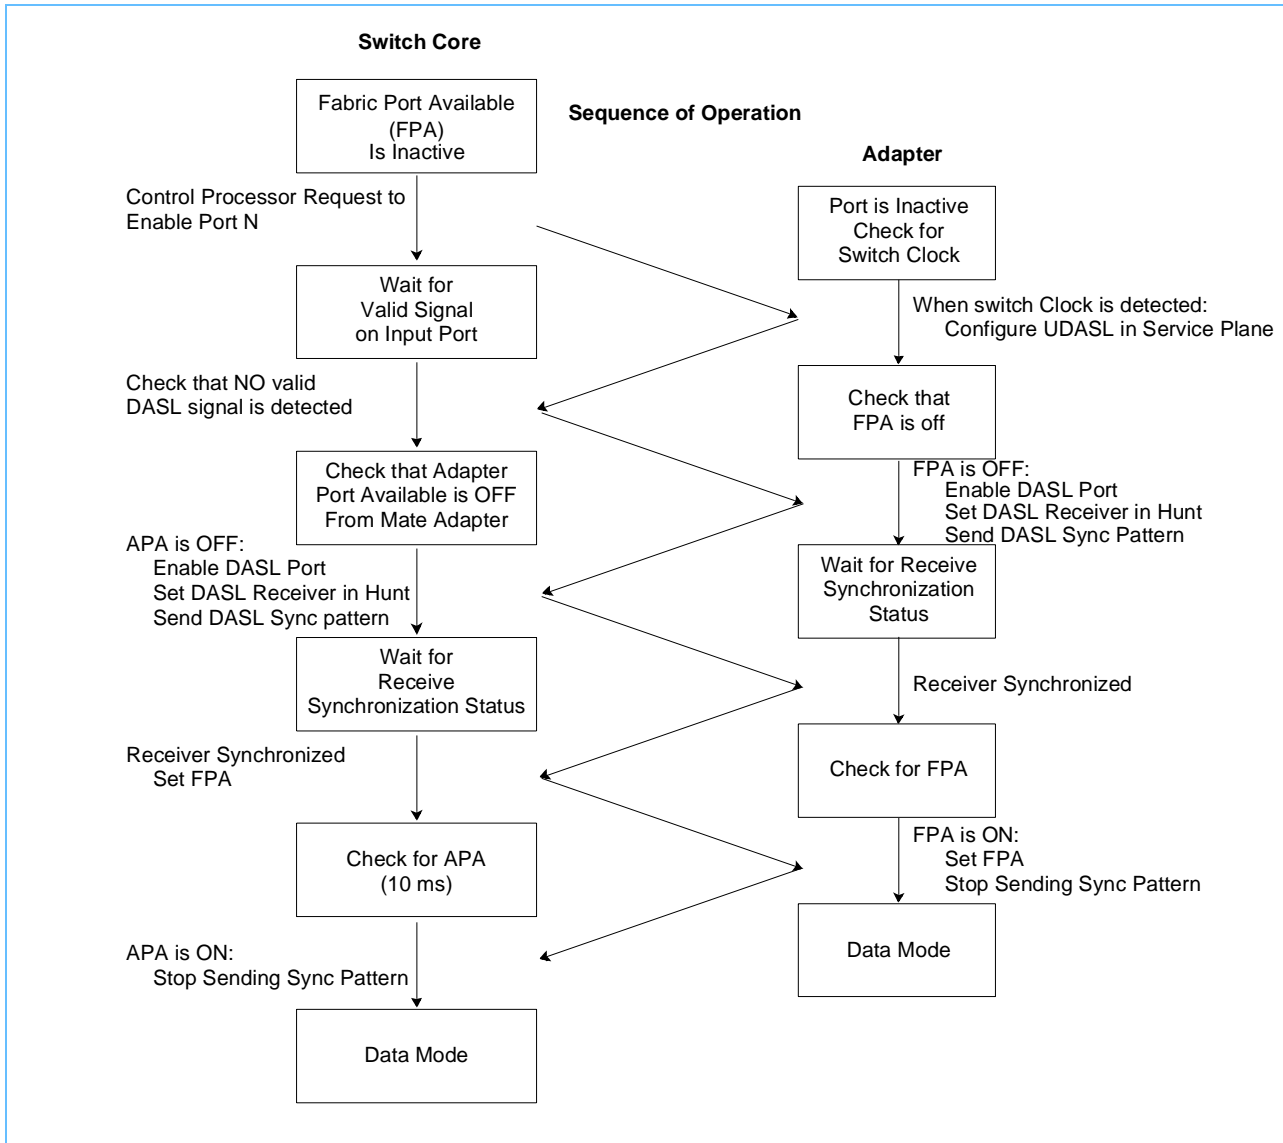Figure 14: Switch Fabric DASL Port Synchronization Sequence



7. I/O Definitions and Timing

Note: All signals are active high unless shown with an $\overline{\hspace{1cm}}$, which denotes active low.

Table 20: Signal Definitions (Page 1 of 4)

Signal Name	Type I/O Level	I/O Cell Name	Description
Clock and Reset Signals			
OscillatorIn	Input	AIT330S_A	System clock used for the internal clock generation network. OscillatorIn is equal to half the internal byte clock. Its frequency is between 50 to 62.5 MHz with 50% duty cycle.
Osc125MhzOut $\overline{\text{Osc125MhzOut}}$	Output Differential	ODASL	Free running B clock phase of the byte clock at the output of the internal clock tree. This clock output will be at the correct frequency of twice OscillatorIn
Osc250MhzOut $\overline{\text{Osc250MhzOut}}$	Output Differential	ODASL	Free running 250 MHz clock.
Osc500MhzOut $\overline{\text{Osc500MhzOut}}$	Output Differential	ODASL	DASL PLL bit clock.
NotPowerONresetIn	Input	BP2550_A	This signal must be active for at least four SHI clock cycles. Asserting this pin causes a reset of all internal logic, except the IEEE 1149.1 (JTAG logic block). See 6. <i>Reset, Initialization, and Operation</i> on page 100 for details on the reset sequence.
MSBusPacketClockBidi	Bidirectional	BC2550_C	Low frequency clock used to synchronize the internal sequencers of different modules. For external speed expansion, it is a synchronous signal generated by the master device and fed to the slave device. The period of this clock is equal to LU time with 50% duty cycle. The mode of operation of this pin is programmable via the Sequencer Sync Mode bit in Configuration 1 Register. It can be either tri-stated for single device operation, generated by the device, or received by the device.
NotFullyInsertedIn	Input	BP2550_A	Used to set the DASL drivers in High Z until the board housing the device is fully inserted. This pin ensures that both ends of the switch board on which the device is soldered are fully inserted. An external pull-up resistor forces the inactive state.
Data Signals			
DasIData[00:31]In(0:3) $\overline{\text{DasIData[00:31]In(0:3)}}$	Input	IDASL	DasIData[p]In(n) $\overline{\text{DasIData[p]In(n)}}$ form one of the four 500 Mb/s differential signals for input port p. For each port, bits 0 and 1 carry the slave byte stream and bits 2 and 3 carry the master byte stream.
DasIData[00:31]Out(0:3) $\overline{\text{DasIData[00:31]Out(0:3)}}$	Output	ODASL	DasIData[p]Out(n) $\overline{\text{DasIData[p]Out(n)}}$ Output form one of the four 500 Mb/s differential signals for output port p. For each port, bits 0 and 1 carry the slave byte stream and bits 2 and 3 carry the master byte stream.

IBM Packet Routing Switch

Table 20: Signal Definitions (Page 2 of 4)

Signal Name	Type I/O Level	I/O Cell Name	Description
MemoryGrantOut[0:3]	Output	BP2550_A	MemoryGrantOut[n] provides the grant status of the shared memory for priority n. The MemoryGrantOut[n] pins are updated every four clock cycles (of 8 to 10 ns). The device pin encoding and corresponding grant definition is as follows: 0 1 2 3: priority level 0 0 0 0: No Grant 1 0 0 0: Priority 0, or Control Packets 1 1 0 0: Priority 0 or 1, or Control Packets 1 1 1 0: Priority 0 .. 2, or Control Packets 1 1 1 1: Priority 0 .. 3, or Control Packets others: Reserved. See 3. <i>Functional Description</i> on page 25 for further details. When two devices are in external speed expansion, only the MemoryGrantOut[0:3] bus from the master device is used.
SendGrantIn[0:31]	Input	BP2550_B	Grants the output ports the opportunity to transmit packets. When bit n is active, a packet can be transmitted on portn. When inactive, Data Packets are not allowed to be transmitted; only Idle Packets. When a Data packet is to be transmitted, the packet of highest available priority will be transmitted unless otherwise specified by the credit table. When two devices are in external speed expansion, the SendGrantIn[0:31] bus of the slave device is not used and thus not connected.
ReceiveGrantIn[0:31]	Input	BP2550_B	Provides a grant to receive packets for each output. Incoming packets will only be received for output n if the ReceiveGrantIn[0:31] is active high. Packets destined for outputs for which the ReceiveGrantIn[0:31] is deasserted will not be enqueued in those outputs. When two devices are in external speed expansion, the ReceiveGrantIn[0:31] bus of the slave device is not used and thus not connected.
Master-Slave Speed Expansion Signals The following I/Os are only connected when two devices are in external speed expansion. Note that these signals are synchronous to the internal master/slave clocks and point-to-point between the two devices.			
MSBusSynchOut	Output	BC2550_C	Connects directly to the MSBusSynchIn pin of the other device. This signal is a synchronous one clock cycle (of 8 to 10 ns) pulse to frame the information that is multiplexed on the MSBusInputAddrBidi[0:25] and MSBusOutputAddrBidi[0:25] busses. When the device is used alone (without external speed expansion) this signal is tri stated.
MSBusSynchIn	Input	BC2550_C	Connects directly to the MSBusSynchOut of the other device.

Table 20: Signal Definitions (Page 3 of 4)

Signal Name	Type I/O Level	I/O Cell Name	Description												
MSBusInputAddrBidi[0:25]	Bidirectional	BC2550_C	<p>Connects the master to the slave. In single device mode, this bus is tri-stated. It provides the address used by the input controllers to store the next packet. MSBusInputAddrBidi(0:10) are the 11-bit wide address value fields, MSBusInputAddrBidi(11) is the valid bit of the address, and MSBusInputAddrBidi(12) is the odd parity bit over MSBusInputAddrBidi(0:11). MSBusInputAddrBidi(0:12) is a multiplexed bus on which the store addresses of the 16 input controllers with the lowest port number are transmitted.</p> <p>Similarly MSBusInputAddrBidi(13:25) is a multiplexed bus on which the store addresses of the 16 input controllers with the highest port number are transmitted. MSBusInputAddrBidi(24) is the valid bit of the address, and MSBusInputAddrBidi(25) is the odd parity bit over MSBusInputAddrBidi(13:24). They are synchronized with MSBusSynchOut. When MSBusSynchOut is high, the address for port 0 and 16 are carried. The address for port N is carried for N clock cycles after MSBusSynch high. The values of the address and the valid bit are used by the master to indicate to the slave ports, according to the table below, whether to ignore the incoming Data Packet, to receive the incoming Data Packet, or to treat the incoming packet as idle.</p> <p>The slave action is as follows:</p> <table border="0"> <tr> <td>Bits 0:10 (Address)</td> <td>Bit 1 (Valid Bit)</td> <td>Slave Action</td> </tr> <tr> <td>Zero value</td> <td>1</td> <td>Ignore the Data Packet</td> </tr> <tr> <td>Non Zero value</td> <td>1</td> <td>Receive the Data Packet</td> </tr> <tr> <td>-</td> <td>0</td> <td>Treat incoming packet as an Idle Packet</td> </tr> </table>	Bits 0:10 (Address)	Bit 1 (Valid Bit)	Slave Action	Zero value	1	Ignore the Data Packet	Non Zero value	1	Receive the Data Packet	-	0	Treat incoming packet as an Idle Packet
Bits 0:10 (Address)	Bit 1 (Valid Bit)	Slave Action													
Zero value	1	Ignore the Data Packet													
Non Zero value	1	Receive the Data Packet													
-	0	Treat incoming packet as an Idle Packet													
MSBusOutputAddrBidi[0:25]	Bidirectional	BC2550_C	<p>Connects the master to the slave. In single device mode, this bus is tri-stated. It provides the address used by the output controllers to read the next packet. MSBusOutputAddrBidi(0:10 and 13:23) are the two times 11-bit wide address value fields, MSBusOutputAddrBidi(11 and 24) is the valid bit of the address, and MSBusOutputAddrBidi(12 and 25) is the odd parity bit over MSBusOutputAddrBidi(0:11 and 13:24). MSBusOutputAddrBidi(0:12 and 13:25) is a multiplexed bus on which the read addresses of all 32 output controllers are transmitted. It is synchronized with MSBusSynchOut. When MSBusSynchOut is high, the address for port 0 and 16 is carried. The address for port N is carried N clock cycles after MSBusSynchOut high.</p>												
SHI Interface Signals															
SHIClockIn	Input	BP2550_A	Free running clock line that generates the SHI clock.												
NotInterruptOut	Output	BP2550_A	Used to generate an interrupt to the microprocessor. The signal remains asserted until an SHI_READ_STATUS command occurs. To support a wired-OR configuration, NotInterruptOut uses an open-drain driver and is in the high-impedance state when inactive.												
SHISerialDataIn	Input	BP2550_A	Serial data line that shifts into the SHI Instruction Register.												
SHISerialDataOut	Output	BP2550_A	Serial data line that shifts out of the SHI Instruction Register. The SHISerialDataOut is placed in high-impedance state when the SHI is not in shift state. The SHI is in shift state one SHI clock cycle after SHINotSelectIn = '0'.												
SHINotSelectIn	Input	BP2550_A	Enables the SHI operation. One SHI clock cycle after the SHINotSelectIn signal becomes active, the instruction is serially shifted into the SHI Instruction Register.												



IBM Packet Routing Switch

Table 20: Signal Definitions (Page 4 of 4)

Signal Name	Type I/O Level	I/O Cell Name	Description
Debug Bus Signals			
DebugDataOut[0:15]	Output	BC2550_C	This 16-bit bus provides direct I/O access (logic analyzer) to the Debug Bus specified by the 5.3.7 <i>Debug Bus Select Register</i> on page 64
Digital Inputs			
SCCIn[0:3]	Input	BP2550_B	Allow access to some information from the switch board

Table 21: Test Signals

Signal Name	I/O Cell Name	Comment
LSSD_SCAN_IN(0:20)	IC25PDT_A	Scan chains inputs
LSSD_SCAN_IN(21:23)	IC25PUT_A	Scan chains inputs JTAG Test Data Input (TDI) = LSSD_SCAN_IN(21) JTAG Test Mode Select (TMS) = LSSD_SCAN_IN(22) JTAG Test Clock (TCK) = LSSD_SCAN_IN(23)
LSSD_SCAN_OUT(0:23)	BP2550T_A	Scan chains outputs Memory BIST DIAG_OUT = LSSD_SCAN_OUT(20) PLL_LOCK = LSSD_SCAN_OUT(21) PLL_TESTOUT = LSSD_SCAN_OUT(22) JTAG Test Data Output (TDO) = LSSD_SCAN_OUT(23)
LSSD_SCAN_MODE	IC25PDT_A	Allows all clocks to be controlled from the primary inputs and connects all scan chains.
LSSD_A_CLK	IC25PUT_A	Used as an external source for the internal SRL A clock.
LSSD_B1_CLK	IC25PUT_A	Used as an external source for the internal SRL B clock.
LSSD_C1_CLK	IC25PUT_A	Used as an external source for the internal SRL C clock.
LSSD_C2_CLK	IC25PDT_A	Used as an external source for the internal SRAM C clock.
LSSD_C3_CLK	IC25PUT_A	Used as an external source for the internal GRA C clock.
LSSD_C4_CLK	IC25PUT_A	Used as an external source for the internal GRA C clock. (4 ports GRA only)
OscillatorIn	AIT330S_A	System clock used for the internal clock generation network.
DI1	IC25D1PUT_A	Serves as the driver inhibit for all non-test outputs. Active low
DI2	IC25D2PUT_A	Serves as the driver inhibit for all test outputs. Active low
RI	IC25RIT_A	Serves as the receiver inhibit for all inputs. Active low External PullUp required
TRST	IC25PDT_A	JTAG Test Reset
IOTEST	IC25PDT_A	Used for Reduced Pin Count Testing. It allows all LSSD boundary inputs to drive signals out LSSD_SCAN_GATE = IOTEST BISTTESTM1 = IOTEST BISTGATE = IOTEST
LSSD_TAP_C1	IC25PUT_A	JTAG Controller C1 clock
LSSD_TAP_C2	IC25PUT_A	JTAG Controller C2 clock

Table 21: Test Signals (Continued)

Signal Name	I/O Cell Name	Comment
BISTTESTM3	IC25PDT_A	Used to handle the internal memory BIST controllers PLL_TESTIN = IOTEST and (not BISTTESTM3)
LeakageTest	IC25LTPUT_A	Used during the leakage test
PLL_VDDA	AID330S_A	PLL Analog voltage
DELAYIn	BP2550PD_A	Input of the internal delay element used for process measurement. The internal delay element is built with a chain of 300 INVERT_O gate
DELAYOut	BP2550_A	Output of the internal delay element used for process measurement. Min=11ns (Process=-3 Sigma, Temperature=0 C, Voltage=2.7v) Max=28ns (Process=+3 Sigma, Temperature=125 C, Voltage=2.3v)

7.1 I/O Timing

7.1.1 DASL Signals

The following table provides the skew requirements related to the DASL links.


Table 22: DASL Interface Skew

Parameter	Rating	Units	Notes
Maximum skew between the two lines of a differential pair	± 130	ps	
Maximum skew between two 500 Mb/s links of the same port (This applies also for any two ports in speed expansion)	± 2	clock cycles (8 to 10 ns)	1

1. Clock cycle = 8 ns (125 MHz operation) to 10ns (100MHz operation).

7.1.2 SHI Interface Signals

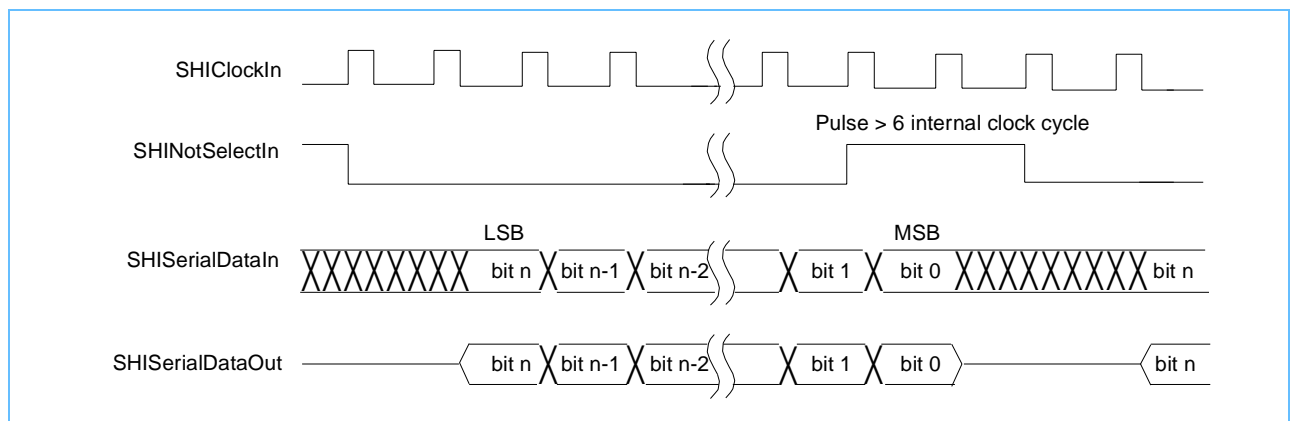Figure 15: SHI Interface Signal Timing Diagram



IBM Packet Routing Switch

Figure 16: SHI Signal Timing Diagram

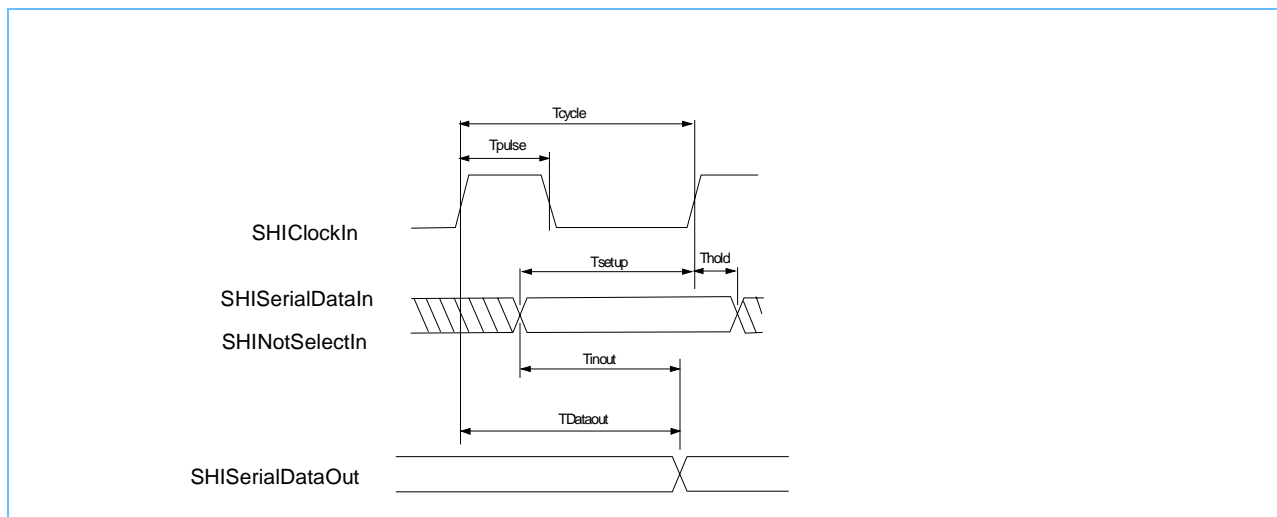


Table 23: SHI Signal Timing Values

Symbol	Parameter	Rating		Units
		Min.	Max.	
T_{CYCLE}	Cycle time	16		ns
T_{PULSE}	Pulse width	4		
T_{SETUP}	Setup time	4		
T_{HOLD}	Hold time	5		
T_{inout}	SHINotSelectIn to SHISerialDataOut	2	6	
$T_{dataout}$	SHIClockIn to SHISerialDataOut	3	8	

7.1.2.1 Timing Window

The sampling window of $SND_GRANT(n)$ is the time window during which the $SND_GRANT(n)$ signal on the device pin is sampled in order to decide on the transmission of a data or Control Packet. This window is defined in relationship with the beginning of transmission of that packet on the device output pins.

Figure 17: $SND_GRANT(n)$ Sampling Window in relationship with the packet flow on output n pins.

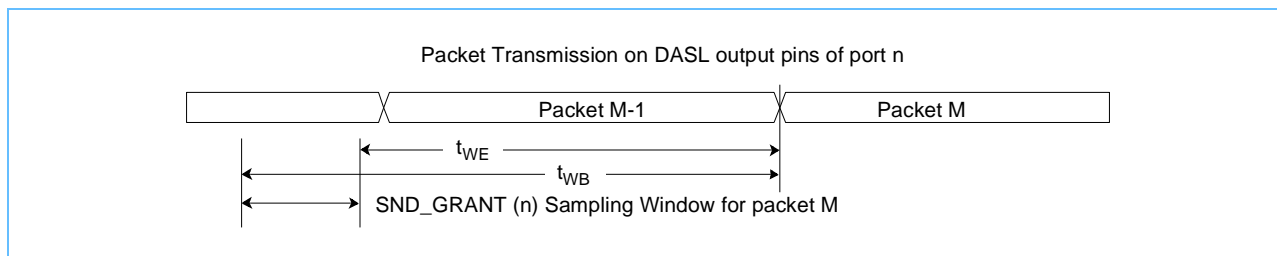



Table 24: SND_GRANT Sampling Window Timing

Symbol	Parameter	Rating	Note
t_{WB}	Sampling Window Beginning (including setup time)	21 ns +18 byte cycles	1
t_{WE}	Sampling Window End (including hold time)	17 ns +18 byte cycles	1

1. Clock cycle = 8 to 10 ns.

7.1.2.2 RCV_GRANT Sampling Window

The sampling window of RCV_GRANT(*n*) is the time window during which the RCV_GRANT signals on the device pins are sampled in order to decide on the reception of a packet for output *n*. This window is defined in relationship with the beginning of the packet reception on the device input pins.

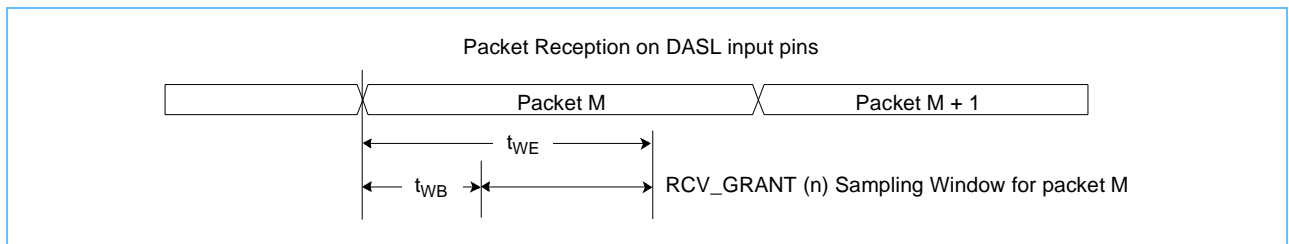Figure 18: RCV_GRANT(*n*) Sampling Window in relationship with the packet flow on any input.

Table 25: RCV_GRANT (*i* Sampling Window Timing)

Symbol	Parameter	Rating	Note
t_{WB}	Sampling Window Beginning - (including setup time)	-3 ns + 2 clock cycles	1
t_{WE}	Sampling Window End - (including hold time)	14 ns + 5.25 clock cycles	1

1. Clock cycle = 8 to 10 ns.

7.1.3 Master-Slave Speed Expansion Signals

The Master-Slave speed expansion bus (SYS_CLK, MS_SYNC_IN, MS_SYNC_OUT, MS_IN_ADDR, and MS_OUT_ADDR) is synchronous to the internal byte clock of the devices. They are connected point-to-point between the master and the slave devices. In order to guarantee the timing on those signals, the wiring is limited in length.

The Master-Slave speed expansion bus (SEQ_CLK, MS_SYNC_IN, MS_SYNC_OUT, MS_IN_ADDR, and MS_OUT_ADDR) is synchronous to the internal byte clock of the devices.

8. Pin Information

Figure 19: Pinout (42.5 mm CCGA Package Top View Through Ceramic)
 For a listing of pin assignments, see *Table 29: I/O Signal List, Sorted by Grid Position* on page 120.

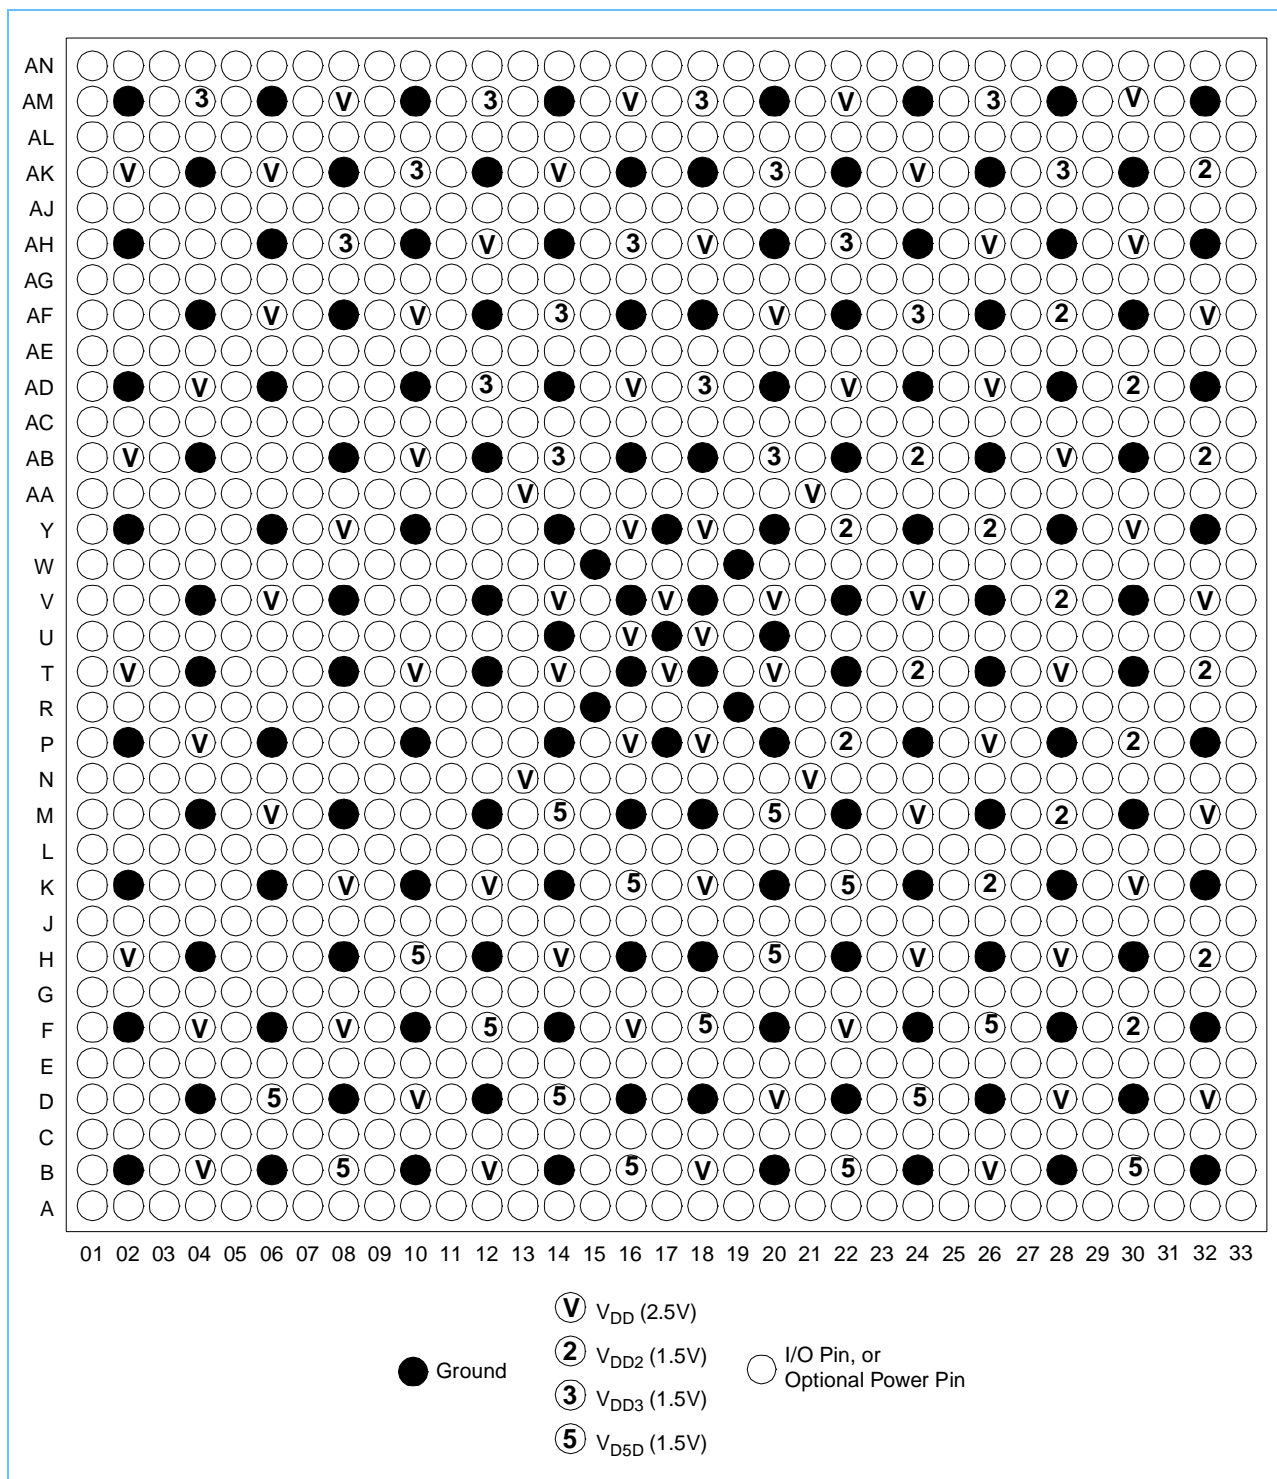


Table 26: Ground and V_{DD} Pin Locations

Pin Function	Pin Grid Locations
GND	AB04, AB08, AB12, AB16, AB18, AB22, AB26, AB30, AD02, AD06, AD10, AD14, AD20, AD24, AD28, AD32, AF04, AF08, AF12, AF16, AF18, AF22, AF26, AF30, AH02, AH06, AH10, AH14, AH20, AH24, AH28, AH32, AK04, AK08, AK12, AK16, AK18, AK22, AK26, AK30, AM02, AM06, AM10, AM14, AM20, AM24, AM28, AM32, B02, B06, B10, B14, B20, B24, B28, B32, D04, D08, D12, D16, D18, D22, D26, D30, F02, F06, F10, F14, F20, F24, F28, F32, H04, H08, H12, H16, H18, H22, H26, H30, K02, K06, K10, K14, K20, K24, K28, K32, M04, M08, M12, M16, M18, M22, M26, M30, P02, P06, P10, P14, P17, P20, P24, P28, P32, R15, R19, T04, T08, T12, T16, T18, T22, T26, T30, U14, U17, U20, V04, V08, V12, V16, V18, V22, V26, V30, W15, W19, Y02, Y06, Y10, Y14, Y17, Y20, Y24, Y28, Y32
V_{DD}	AA13, AA21, AB02, AB10, AB28, AD04, AD16, AD22, AD26, AF06, AF10, AF20, AF32, AH12, AH18, AH26, AH30, AK02, AK06, AK14, AK24, AM08, AM16, AM22, AM30, B04, B12, B18, B26, D10, D20, D28, D32, F04, F08, F16, F22, H02, H14, H24, H28, K08, K12, K18, K30, M06, M24, M32, N13, N21, P04, P16, P18, P26, T02, T10, T14, T17, T20, T28, U16, U18, V06, V14, V17, V20, V24, V32, Y08, Y16, Y18, Y30,
V_{DD2}	AB24, AB32, AD30, AF28, AK32, F30, H32, K26, M28, P22, P30, T24, T32, V28, Y22, Y26
V_{DD3}	AB14, AB20, AD12, AD18, AF14, AF24, AH08, AH16, AH22, AK10, AK20, AK28, AM04, AM12, AM18, AM26
V_{DD5}	B08, B16, B22, B30, D06, D14, D24, F12, F18, F26, H10, H20, K16, K22, M14, M20

Table 27: Optional Power Pins (Recommended)

Pin Function	Pin Grid Location
GND_A	AA15, AA16, AA19, AA29, AB21, AB31, AC19, AE13, AE21, AE25, AE27, AN33, G07, K13, K17, L20, M11, M13, M21, M23, N15, N17, N19, N23, P21, P29, R11, R14, R16, R23, T21, U11, U21, V13, W17, W31, Y11, Y13, Y23
VDD150_A	AC13, AC20, AE07, AG27, AL13, C13, G25, L14, L19, P11, P23, R13, R18, U12, W12, W18, Y21
VDD_A	AA22, AB29, AC22, AD17, AN01, G09, J25, J27, L11, L21, N09, N16, R17, R21, R22, R27, U15, U24, U28, W25, W29, Y19, Y27



IBM Packet Routing Switch

Table 28: I/O Signal List, Sorted by Signal Name (Page 1 of 8)

Signal Name	Grid Position	Signal Name	Grid Position	Signal Name	Grid Position
BISTTESTM3	AJ01	DasIData01OutNot(2)	AE26	DasIData03OutNot(1)	AG26
DasIData00In(0)	AE33	DasIData01OutNot(3)	AE28	DasIData03OutNot(2)	AG24
DasIData00In(1)	AE31	DasIData02In(0)	AL30	DasIData03OutNot(3)	AJ25
DasIData00In(2)	AF33	DasIData02In(1)	AL32	DasIData04In(0)	AN24
DasIData00In(3)	AE30	DasIData02In(2)	AN30	DasIData04In(1)	AL24
DasIData00InNot(0)	AD33	DasIData02In(3)	AN32	DasIData04In(2)	AN23
DasIData00InNot(1)	AD31	DasIData02InNot(0)	AK29	DasIData04In(3)	AK23
DasIData00InNot(2)	AE32	DasIData02InNot(1)	AM33	DasIData04InNot(0)	AN25
DasIData00InNot(3)	AF31	DasIData02InNot(2)	AM29	DasIData04InNot(1)	AL25
DasIData00Out(0)	AB27	DasIData02InNot(3)	AM31	DasIData04InNot(2)	AM23
DasIData00Out(1)	AC27	DasIData02Out(0)	AG28	DasIData04InNot(3)	AL23
DasIData00Out(2)	AC25	DasIData02Out(1)	AF29	DasIData04Out(0)	AE22
DasIData00Out(3)	AC28	DasIData02Out(2)	AJ27	DasIData04Out(1)	AF23
DasIData00OutNot(0)	AA26	DasIData02Out(3)	AJ28	DasIData04Out(2)	AF21
DasIData00OutNot(1)	AB25	DasIData02OutNot(0)	AH29	DasIData04Out(3)	AJ23
DasIData00OutNot(2)	AC26	DasIData02OutNot(1)	AG29	DasIData04OutNot(0)	AG23
DasIData00OutNot(3)	AC29	DasIData02OutNot(2)	AJ26	DasIData04OutNot(1)	AE23
DasIData01In(0)	AH31	DasIData02OutNot(3)	AH27	DasIData04OutNot(2)	AG22
DasIData01In(1)	AG32	DasIData03In(0)	AN28	DasIData04OutNot(3)	AH23
DasIData01In(2)	AJ30	DasIData03In(1)	AK27	DasIData05In(0)	AM21
DasIData01In(3)	AJ32	DasIData03In(2)	AM25	DasIData05In(1)	AL22
DasIData01InNot(0)	AG30	DasIData03In(3)	AL26	DasIData05In(2)	AN20
DasIData01InNot(1)	AH33	DasIData03InNot(0)	AM27	DasIData05In(3)	AL20
DasIData01InNot(2)	AK31	DasIData03InNot(1)	AL28	DasIData05InNot(0)	AN22
DasIData01InNot(3)	AK33	DasIData03InNot(2)	AN26	DasIData05InNot(1)	AK21
DasIData01Out(0)	AC24	DasIData03InNot(3)	AK25	DasIData05InNot(2)	AN21
DasIData01Out(1)	AD27	DasIData03Out(0)	AE24	DasIData05InNot(3)	AL21
DasIData01Out(2)	AF27	DasIData03Out(1)	AF25	DasIData05Out(0)	AJ22
DasIData01Out(3)	AE29	DasIData03Out(2)	AJ24	DasIData05Out(1)	AJ21
DasIData01OutNot(0)	AD25	DasIData03Out(3)	AH25	DasIData05Out(2)	AE20
DasIData01OutNot(1)	AD29	DasIData03OutNot(0)	AD23	DasIData05Out(3)	AH19



IBM Packet Routing Switch

Table 28: I/O Signal List, Sorted by Signal Name (Page 2 of 8)

Signal Name	Grid Position	Signal Name	Grid Position	Signal Name	Grid Position
DasIData05OutNot(0)	AG21	DasIData07Out(3)	AJ15	DasIData09Out(2)	AG11
DasIData05OutNot(1)	AH21	DasIData07OutNot(0)	AE15	DasIData09Out(3)	AE11
DasIData05OutNot(2)	AG20	DasIData07OutNot(1)	AH17	DasIData09OutNot(0)	AF13
DasIData05OutNot(3)	AJ20	DasIData07OutNot(2)	AF15	DasIData09OutNot(1)	AJ11
DasIData06In(0)	AN19	DasIData07OutNot(3)	AJ16	DasIData09OutNot(2)	AE12
DasIData06In(1)	AL19	DasIData08In(0)	AN12	DasIData09OutNot(3)	AF11
DasIData06In(2)	AN18	DasIData08In(1)	AK13	DasIData10In(0)	AM07
DasIData06In(3)	AN17	DasIData08In(2)	AM11	DasIData10In(1)	AL06
DasIData06InNot(0)	AM19	DasIData08In(3)	AL11	DasIData10In(2)	AM05
DasIData06InNot(1)	AK19	DasIData08InNot(0)	AM13	DasIData10In(3)	AK05
DasIData06InNot(2)	AL18	DasIData08InNot(1)	AL12	DasIData10InNot(0)	AN06
DasIData06InNot(3)	AL17	DasIData08InNot(2)	AN11	DasIData10InNot(1)	AK07
DasIData06Out(0)	AF19	DasIData08InNot(3)	AK11	DasIData10InNot(2)	AN04
DasIData06Out(1)	AJ18	DasIData08Out(0)	AG14	DasIData10InNot(3)	AL04
DasIData06Out(2)	AE19	DasIData08Out(1)	AJ14	DasIData10Out(0)	AG10
DasIData06Out(3)	AJ17	DasIData08Out(2)	AG13	DasIData10Out(1)	AJ09
DasIData06OutNot(0)	AG19	DasIData08Out(3)	AH13	DasIData10Out(2)	AD11
DasIData06OutNot(1)	AJ19	DasIData08OutNot(0)	AE14	DasIData10Out(3)	AG08
DasIData06OutNot(2)	AD19	DasIData08OutNot(1)	AH15	DasIData10OutNot(0)	AJ10
DasIData06OutNot(3)	AF17	DasIData08OutNot(2)	AJ12	DasIData10OutNot(1)	AH09
DasIData07In(0)	AK17	DasIData08OutNot(3)	AJ13	DasIData10OutNot(2)	AE10
DasIData07In(1)	AL16	DasIData09In(0)	AN09	DasIData10OutNot(3)	AF09
DasIData07In(2)	AM15	DasIData09In(1)	AL09	DasIData11In(0)	AK03
DasIData07In(3)	AK15	DasIData09In(2)	AN08	DasIData11In(1)	AM03
DasIData07InNot(0)	AM17	DasIData09In(3)	AK09	DasIData11In(2)	AK01
DasIData07InNot(1)	AN16	DasIData09InNot(0)	AN10	DasIData11In(3)	AM01
DasIData07InNot(2)	AN15	DasIData09InNot(1)	AL10	DasIData11InNot(0)	AJ04
DasIData07InNot(3)	AL15	DasIData09InNot(2)	AM09	DasIData11InNot(1)	AN02
DasIData07Out(0)	AD15	DasIData09InNot(3)	AL08	DasIData11InNot(2)	AJ02
DasIData07Out(1)	AG17	DasIData09Out(0)	AG12	DasIData11InNot(3)	AL02
DasIData07Out(2)	AG15	DasIData09Out(1)	AH11	DasIData11Out(0)	AJ08



IBM Packet Routing Switch

Table 28: I/O Signal List, Sorted by Signal Name (Page 3 of 8)

Signal Name	Grid Position	Signal Name	Grid Position	Signal Name	Grid Position
DasIData11Out(1)	AH07	DasIData13Out(1)	AC08	DasIData15Out(1)	V05
DasIData11Out(2)	AH05	DasIData13Out(2)	AA08	DasIData15Out(2)	W09
DasIData11Out(3)	AG05	DasIData13Out(3)	AC05	DasIData15Out(3)	U08
DasIData11OutNot(0)	AJ07	DasIData13OutNot(0)	AC07	DasIData15OutNot(0)	W07
DasIData11OutNot(1)	AJ06	DasIData13OutNot(1)	AC09	DasIData15OutNot(1)	W05
DasIData11OutNot(2)	AG06	DasIData13OutNot(2)	AB07	DasIData15OutNot(2)	W10
DasIData11OutNot(3)	AF05	DasIData13OutNot(3)	AC06	DasIData15OutNot(3)	U06
DasIData12In(0)	AH01	DasIData14In(0)	AA02	DasIData16In(0)	U04
DasIData12In(1)	AG04	DasIData14In(1)	AB03	DasIData16In(1)	T03
DasIData12In(2)	AE02	DasIData14In(2)	Y01	DasIData16In(2)	R02
DasIData12In(3)	AF03	DasIData14In(3)	Y03	DasIData16In(3)	R04
DasIData12InNot(0)	AG02	DasIData14InNot(0)	AB01	DasIData16InNot(0)	U02
DasIData12InNot(1)	AH03	DasIData14InNot(1)	AA04	DasIData16InNot(1)	T01
DasIData12InNot(2)	AF01	DasIData14InNot(2)	AA01	DasIData16InNot(2)	R01
DasIData12InNot(3)	AE04	DasIData14InNot(3)	AA03	DasIData16InNot(3)	R03
DasIData12Out(0)	AE08	DasIData14Out(0)	AB05	DasIData16Out(0)	R10
DasIData12Out(1)	AE06	DasIData14Out(1)	AA05	DasIData16Out(1)	U05
DasIData12Out(2)	AD09	DasIData14Out(2)	Y09	DasIData16Out(2)	R07
DasIData12Out(3)	AD05	DasIData14Out(3)	W06	DasIData16Out(3)	R05
DasIData12OutNot(0)	AF07	DasIData14OutNot(0)	AA07	DasIData16OutNot(0)	R09
DasIData12OutNot(1)	AE05	DasIData14OutNot(1)	AA06	DasIData16OutNot(1)	U07
DasIData12OutNot(2)	AC10	DasIData14OutNot(2)	Y07	DasIData16OutNot(2)	R08
DasIData12OutNot(3)	AD07	DasIData14OutNot(3)	Y05	DasIData16OutNot(3)	T05
DasIData13In(0)	AD01	DasIData15In(0)	W01	DasIData17In(0)	N01
DasIData13In(1)	AD03	DasIData15In(1)	W03	DasIData17In(1)	N03
DasIData13In(2)	AC01	DasIData15In(2)	V01	DasIData17In(2)	M01
DasIData13In(3)	AC04	DasIData15In(3)	U01	DasIData17In(3)	N04
DasIData13InNot(0)	AE01	DasIData15InNot(0)	W02	DasIData17InNot(0)	P01
DasIData13InNot(1)	AE03	DasIData15InNot(1)	W04	DasIData17InNot(1)	P03
DasIData13InNot(2)	AC02	DasIData15InNot(2)	V03	DasIData17InNot(2)	N02
DasIData13InNot(3)	AC03	DasIData15InNot(3)	U03	DasIData17InNot(3)	M03
DasIData13Out(0)	AB09	DasIData15Out(0)	W08	DasIData17Out(0)	P07



IBM Packet Routing Switch

Table 28: I/O Signal List, Sorted by Signal Name (Page 4 of 8)

Signal Name	Grid Position	Signal Name	Grid Position	Signal Name	Grid Position
DasIData17Out(1)	P05	DasIData19Out(1)	K07	DasIData21Out(1)	H09
DasIData17Out(2)	N07	DasIData19Out(2)	H07	DasIData21Out(2)	E10
DasIData17Out(3)	N06	DasIData19Out(3)	J05	DasIData21Out(3)	F09
DasIData17OutNot(0)	P09	DasIData19OutNot(0)	K09	DasIData21OutNot(0)	K11
DasIData17OutNot(1)	R06	DasIData19OutNot(1)	K05	DasIData21OutNot(1)	G08
DasIData17OutNot(2)	M05	DasIData19OutNot(2)	J08	DasIData21OutNot(2)	G10
DasIData17OutNot(3)	N05	DasIData19OutNot(3)	J06	DasIData21OutNot(3)	E09
DasIData18In(0)	L02	DasIData20In(0)	E02	DasIData22In(0)	B09
DasIData18In(1)	L03	DasIData20In(1)	C02	DasIData22In(1)	C08
DasIData18In(2)	J01	DasIData20In(2)	E04	DasIData22In(2)	A10
DasIData18In(3)	J03	DasIData20In(3)	A02	DasIData22In(3)	C10
DasIData18InNot(0)	L01	DasIData20InNot(0)	D01	DasIData22InNot(0)	A08
DasIData18InNot(1)	L04	DasIData20InNot(1)	B01	DasIData22InNot(1)	D09
DasIData18InNot(2)	K01	DasIData20InNot(2)	D03	DasIData22InNot(2)	A09
DasIData18InNot(3)	K03	DasIData20InNot(3)	B03	DasIData22InNot(3)	C09
DasIData18Out(0)	M07	DasIData20Out(0)	G06	DasIData22Out(0)	J12
DasIData18Out(1)	L06	DasIData20Out(1)	H05	DasIData22Out(1)	H11
DasIData18Out(2)	L07	DasIData20Out(2)	E07	DasIData22Out(2)	H13
DasIData18Out(3)	L09	DasIData20Out(3)	E06	DasIData22Out(3)	E11
DasIData18OutNot(0)	N08	DasIData20OutNot(0)	F05	DasIData22OutNot(0)	G11
DasIData18OutNot(1)	L05	DasIData20OutNot(1)	G05	DasIData22OutNot(1)	J11
DasIData18OutNot(2)	M09	DasIData20OutNot(2)	E08	DasIData22OutNot(2)	G12
DasIData18OutNot(3)	L08	DasIData20OutNot(3)	F07	DasIData22OutNot(3)	F11
DasIData19In(0)	H01	DasIData21In(0)	A04	DasIData23In(0)	A11
DasIData19In(1)	J04	DasIData21In(1)	C04	DasIData23In(1)	D11
DasIData19In(2)	G02	DasIData21In(2)	A06	DasIData23In(2)	B13
DasIData19In(3)	F03	DasIData21In(3)	D07	DasIData23In(3)	C12
DasIData19InNot(0)	J02	DasIData21InNot(0)	B05	DasIData23InNot(0)	B11
DasIData19InNot(1)	H03	DasIData21InNot(1)	D05	DasIData23InNot(1)	C11
DasIData19InNot(2)	F01	DasIData21InNot(2)	B07	DasIData23InNot(2)	A12
DasIData19InNot(3)	G04	DasIData21InNot(3)	C06	DasIData23InNot(3)	D13
DasIData19Out(0)	L10	DasIData21Out(0)	J10	DasIData23Out(0)	E12



IBM Packet Routing Switch

Table 28: I/O Signal List, Sorted by Signal Name (Page 5 of 8)

Signal Name	Grid Position	Signal Name	Grid Position	Signal Name	Grid Position
DasIData23Out(1)	E 13	DasIData25Out(1)	F 17	DasIData27Out(1)	F 23
DasIData23Out(2)	J 14	DasIData25Out(2)	G 19	DasIData27Out(2)	G 23
DasIData23Out(3)	F 15	DasIData25Out(3)	E 19	DasIData27Out(3)	J 23
DasIData23OutNot(0)	G 13	DasIData25OutNot(0)	J 19	DasIData27OutNot(0)	H 21
DasIData23OutNot(1)	F 13	DasIData25OutNot(1)	H 17	DasIData27OutNot(1)	E 23
DasIData23OutNot(2)	G 14	DasIData25OutNot(2)	H 19	DasIData27OutNot(2)	J 22
DasIData23OutNot(3)	E 14	DasIData25OutNot(3)	E 18	DasIData27OutNot(3)	H 23
DasIData24In(0)	A 15	DasIData26In(0)	A 21	DasIData28In(0)	A 26
DasIData24In(1)	C 15	DasIData26In(1)	C 21	DasIData28In(1)	D 25
DasIData24In(2)	A 16	DasIData26In(2)	A 22	DasIData28In(2)	B 27
DasIData24In(3)	C 17	DasIData26In(3)	D 21	DasIData28In(3)	C 28
DasIData24InNot(0)	B 15	DasIData26InNot(0)	A 20	DasIData28InNot(0)	B 25
DasIData24InNot(1)	D 15	DasIData26InNot(1)	C 20	DasIData28InNot(1)	C 26
DasIData24InNot(2)	C 16	DasIData26InNot(2)	B 21	DasIData28InNot(2)	A 28
DasIData24InNot(3)	A 17	DasIData26InNot(3)	C 22	DasIData28InNot(3)	D 27
DasIData24Out(0)	H 15	DasIData26Out(0)	G 20	DasIData28Out(0)	G 24
DasIData24Out(1)	E 16	DasIData26Out(1)	E 20	DasIData28Out(1)	E 25
DasIData24Out(2)	J 15	DasIData26Out(2)	G 21	DasIData28Out(2)	K 23
DasIData24Out(3)	G 17	DasIData26Out(3)	F 21	DasIData28Out(3)	G 26
DasIData24OutNot(0)	G 15	DasIData26OutNot(0)	J 20	DasIData28OutNot(0)	E 24
DasIData24OutNot(1)	E 15	DasIData26OutNot(1)	F 19	DasIData28OutNot(1)	F 25
DasIData24OutNot(2)	K 15	DasIData26OutNot(2)	E 22	DasIData28OutNot(2)	J 24
DasIData24OutNot(3)	E 17	DasIData26OutNot(3)	E 21	DasIData28OutNot(3)	H 25
DasIData25In(0)	B 17	DasIData27In(0)	B 23	DasIData29In(0)	B 29
DasIData25In(1)	C 18	DasIData27In(1)	C 23	DasIData29In(1)	B 31
DasIData25In(2)	B 19	DasIData27In(2)	A 25	DasIData29In(2)	D 29
DasIData25In(3)	D 19	DasIData27In(3)	C 25	DasIData29In(3)	B 33
DasIData25InNot(0)	D 17	DasIData27InNot(0)	A 23	DasIData29InNot(0)	A 30
DasIData25InNot(1)	A 18	DasIData27InNot(1)	D 23	DasIData29InNot(1)	A 32
DasIData25InNot(2)	A 19	DasIData27InNot(2)	A 24	DasIData29InNot(2)	C 30
DasIData25InNot(3)	C 19	DasIData27InNot(3)	C 24	DasIData29InNot(3)	C 32
DasIData25Out(0)	K 19	DasIData27Out(0)	G 22	DasIData29Out(0)	E 26



IBM Packet Routing Switch

Table 28: I/O Signal List, Sorted by Signal Name (Page 6 of 8)

Signal Name	Grid Position	Signal Name	Grid Position	Signal Name	Grid Position
DasIData29Out(1)	F27	DasIData31Out(1)	L29	LSSD_C2_CLK	G31
DasIData29Out(2)	F29	DasIData31Out(2)	N26	LSSD_C3_CLK	AJ31
DasIData29Out(3)	G29	DasIData31Out(3)	M25	LSSD_C4_CLK	C29
DasIData29OutNot(0)	E27	DasIData31OutNot(0)	L25	LSSD_SCAN_IN(0)	T09
DasIData29OutNot(1)	E28	DasIData31OutNot(1)	L28	LSSD_SCAN_IN(1)	AE16
DasIData29OutNot(2)	G28	DasIData31OutNot(2)	M27	LSSD_SCAN_IN(10)	AN07
DasIData29OutNot(3)	H29	DasIData31OutNot(3)	L27	LSSD_SCAN_IN(11)	E05
DasIData30In(0)	D31	DebugDataOut(0)	L23	LSSD_SCAN_IN(12)	AL33
DasIData30In(1)	D33	DebugDataOut(1)	N22	LSSD_SCAN_IN(13)	C01
DasIData30In(2)	G30	DebugDataOut(10)	L30	LSSD_SCAN_IN(14)	G33
DasIData30In(3)	F33	DebugDataOut(11)	L31	LSSD_SCAN_IN(15)	C05
DasIData30InNot(0)	E30	DebugDataOut(12)	N29	LSSD_SCAN_IN(16)	AE18
DasIData30InNot(1)	E32	DebugDataOut(13)	N28	LSSD_SCAN_IN(17)	AJ29
DasIData30InNot(2)	F31	DebugDataOut(14)	P25	LSSD_SCAN_IN(18)	AL27
DasIData30InNot(3)	G32	DebugDataOut(15)	P27	LSSD_SCAN_IN(19)	AN03
DasIData30Out(0)	J26	DebugDataOut(2)	G27	LSSD_SCAN_IN(2)	AJ33
DasIData30Out(1)	J28	DebugDataOut(3)	N20	LSSD_SCAN_IN(20)	AL03
DasIData30Out(2)	K25	DebugDataOut(4)	N24	LSSD_SCAN_IN(21)	AL01
DasIData30Out(3)	K29	DebugDataOut(5)	N25	LSSD_SCAN_IN(22)	G03
DasIData30OutNot(0)	H27	DebugDataOut(6)	L33	LSSD_SCAN_IN(23)	C07
DasIData30OutNot(1)	J29	DebugDataOut(7)	L32	LSSD_SCAN_IN(3)	AN29
DasIData30OutNot(2)	L24	DebugDataOut(8)	M29	LSSD_SCAN_IN(4)	AN27
DasIData30OutNot(3)	K27	DebugDataOut(9)	N27	LSSD_SCAN_IN(5)	AL05
DasIData31In(0)	J32	DELAYIn	AA09	LSSD_SCAN_IN(6)	V27
DasIData31In(1)	H31	DELAYOut	M17	LSSD_SCAN_IN(7)	AL31
DasIData31In(2)	K33	DI1	AJ05	LSSD_SCAN_IN(8)	V25
DasIData31In(3)	K31	DI2	A03	LSSD_SCAN_IN(9)	AG33
DasIData31InNot(0)	H33	IOTEST	V07	LSSD_SCAN_MODE	A27
DasIData31InNot(1)	J30	LeakageTest	U31	LSSD_SCAN_OUT(0)	G01
DasIData31InNot(2)	J33	LSSD_A_CLK	E31	LSSD_SCAN_OUT(1)	C33
DasIData31InNot(3)	J31	LSSD_B1_CLK	A29	LSSD_SCAN_OUT(10)	G16
DasIData31Out(0)	L26	LSSD_C1_CLK	T27	LSSD_SCAN_OUT(11)	AG31



IBM Packet Routing Switch

Table 28: I/O Signal List, Sorted by Signal Name (Page 7 of 8)

Signal Name	Grid Position	Signal Name	Grid Position	Signal Name	Grid Position
LSSD_SCAN_OUT(12)	E03	MSBusInputAddrBidi(14)	W28	MSBusOutputAddrBidi(2)	M31
LSSD_SCAN_OUT(13)	J16	MSBusInputAddrBidi(15)	AA30	MSBusOutputAddrBidi(20)	U33
LSSD_SCAN_OUT(14)	AG01	MSBusInputAddrBidi(16)	W21	MSBusOutputAddrBidi(21)	U27
LSSD_SCAN_OUT(15)	AG03	MSBusInputAddrBidi(17)	AA31	MSBusOutputAddrBidi(22)	U29
LSSD_SCAN_OUT(16)	C27	MSBusInputAddrBidi(18)	Y31	MSBusOutputAddrBidi(23)	U26
LSSD_SCAN_OUT(17)	A07	MSBusInputAddrBidi(19)	Y25	MSBusOutputAddrBidi(24)	U32
LSSD_SCAN_OUT(18)	AL29	MSBusInputAddrBidi(2)	V33	MSBusOutputAddrBidi(25)	U30
LSSD_SCAN_OUT(19)	AL07	MSBusInputAddrBidi(20)	AA28	MSBusOutputAddrBidi(3)	N30
LSSD_SCAN_OUT(2)	C31	MSBusInputAddrBidi(21)	AC31	MSBusOutputAddrBidi(4)	R28
LSSD_SCAN_OUT(20)	AN05	MSBusInputAddrBidi(22)	AC30	MSBusOutputAddrBidi(5)	R25
LSSD_SCAN_OUT(21)	E33	MSBusInputAddrBidi(23)	W22	MSBusOutputAddrBidi(6)	R24
LSSD_SCAN_OUT(22)	V09	MSBusInputAddrBidi(24)	AA23	MSBusOutputAddrBidi(7)	R20
LSSD_SCAN_OUT(23)	J18	MSBusInputAddrBidi(25)	AA27	MSBusOutputAddrBidi(8)	R26
LSSD_SCAN_OUT(3)	A05	MSBusInputAddrBidi(3)	U25	MSBusOutputAddrBidi(9)	R33
LSSD_SCAN_OUT(4)	C03	MSBusInputAddrBidi(4)	V19	MSBusPacketClockBidi	AB33
LSSD_SCAN_OUT(5)	AN31	MSBusInputAddrBidi(5)	V29	MSBusSyncln	AC32
LSSD_SCAN_OUT(6)	E01	MSBusInputAddrBidi(6)	V23	MSBusSyncOut	AA25
LSSD_SCAN_OUT(7)	E29	MSBusInputAddrBidi(7)	V21	NotFullyInsertedIn	M19
LSSD_SCAN_OUT(8)	G18	MSBusInputAddrBidi(8)	W30	NotInterruptOut	L18
LSSD_SCAN_OUT(9)	A31	MSBusInputAddrBidi(9)	W26	NotPowerOnResetIn	N18
LSSD_TAP_C1	T07	MSBusOutputAddrBidi(0)	P31	Osc125MhzOut	W32
LSSD_TAP_C2	AG16	MSBusOutputAddrBidi(1)	N31	Osc125MhzOutNot	W33
MemoryGrantOut(0)	A33	MSBusOutputAddrBidi(10)	R32	Osc250MhzOut	P33
MemoryGrantOut(1)	P19	MSBusOutputAddrBidi(11)	R31	Osc250MhzOutNot	N33
MemoryGrantOut(2)	K21	MSBusOutputAddrBidi(12)	R30	Osc500MhzOut	N32
MemoryGrantOut(3)	J21	MSBusOutputAddrBidi(13)	T23	Osc500MhzOutNot	M33
MSBusInputAddrBidi(0)	U23	MSBusOutputAddrBidi(14)	T29	OscillatorIn	T25
MSBusInputAddrBidi(1)	V31	MSBusOutputAddrBidi(15)	R29	PLL_VDDA	T31
MSBusInputAddrBidi(10)	W27	MSBusOutputAddrBidi(16)	T19	ReceiveGrantIn(0)	AA24
MSBusInputAddrBidi(11)	W20	MSBusOutputAddrBidi(17)	T33	ReceiveGrantIn(1)	AA20
MSBusInputAddrBidi(12)	W24	MSBusOutputAddrBidi(18)	U19	ReceiveGrantIn(10)	AB17
MSBusInputAddrBidi(13)	Y29	MSBusOutputAddrBidi(19)	U22	ReceiveGrantIn(11)	AA17



IBM Packet Routing Switch

Table 28: I/O Signal List, Sorted by Signal Name (Page 8 of 8)

Signal Name	Grid Position	Signal Name	Grid Position	Signal Name	Grid Position
ReceiveGrantIn(12)	AC17	ReceiveGrantIn(6)	AD21	SendGrantIn(22)	T15
ReceiveGrantIn(13)	AE17	ReceiveGrantIn(7)	AB19	SendGrantIn(23)	U09
ReceiveGrantIn(14)	AC16	ReceiveGrantIn(8)	AA18	SendGrantIn(24)	U13
ReceiveGrantIn(15)	W16	ReceiveGrantIn(9)	AC18	SendGrantIn(25)	U10
ReceiveGrantIn(16)	AL14	RI	AJ03	SendGrantIn(26)	V15
ReceiveGrantIn(17)	AN13	SCCIn(0)	W23	SendGrantIn(27)	V11
ReceiveGrantIn(18)	AB15	SCCIn(1)	L22	SendGrantIn(28)	W14
ReceiveGrantIn(19)	AC15	SCCIn(2)	AN14	SendGrantIn(29)	W13
ReceiveGrantIn(2)	AB23	SCCIn(3)	Y15	SendGrantIn(3)	C14
ReceiveGrantIn(20)	AD13	SendGrantIn(0)	L17	SendGrantIn(30)	W11
ReceiveGrantIn(21)	AC14	SendGrantIn(1)	J17	SendGrantIn(31)	AA10
ReceiveGrantIn(22)	AG09	SendGrantIn(10)	P15	SendGrantIn(4)	A13
ReceiveGrantIn(23)	AB13	SendGrantIn(11)	L12	SendGrantIn(5)	A14
ReceiveGrantIn(24)	AC12	SendGrantIn(12)	J09	SendGrantIn(6)	M15
ReceiveGrantIn(25)	AE09	SendGrantIn(13)	N12	SendGrantIn(7)	L15
ReceiveGrantIn(26)	AC11	SendGrantIn(14)	J07	SendGrantIn(8)	J13
ReceiveGrantIn(27)	AB11	SendGrantIn(15)	N14	SendGrantIn(9)	L13
ReceiveGrantIn(28)	AA12	SendGrantIn(16)	N11	SHIClockIn	AC33
ReceiveGrantIn(29)	AG07	SendGrantIn(17)	N10	SHINotSelectIn	AA32
ReceiveGrantIn(3)	AC23	SendGrantIn(18)	R12	SHISerialDataIn	AA33
ReceiveGrantIn(30)	AA14	SendGrantIn(19)	P13	SHISerialDataOut	Y33
ReceiveGrantIn(31)	AA11	SendGrantIn(2)	L16	TRST	AG18
ReceiveGrantIn(4)	AG25	SendGrantIn(20)	T13		
ReceiveGrantIn(5)	AC21	SendGrantIn(21)	T11		



IBM Packet Routing Switch

Table 29: I/O Signal List, Sorted by Grid Position (Page 1 of 8)

Grid Position	Signal Name	Grid Position	Signal Name	Grid Position	Signal Location
A02	DaslData20In(3)	A33	MemoryGrantOut(0)	AB09	DaslData13Out(0)
A03	DI2	AA01	DaslData14InNot(2)	AB11	ReceiveGrantIn(27)
A04	DaslData21In(0)	AA02	DaslData14In(0)	AB13	ReceiveGrantIn(23)
A05	LSSD_SCAN_OUT(3)	AA03	DaslData14InNot(3)	AB15	ReceiveGrantIn(18)
A06	DaslData21In(2)	AA04	DaslData14InNot(1)	AB17	ReceiveGrantIn(10)
A07	LSSD_SCAN_OUT(17)	AA05	DaslData14Out(1)	AB19	ReceiveGrantIn(7)
A08	DaslData22InNot(0)	AA06	DaslData14OutNot(1)	AB23	ReceiveGrantIn(2)
A09	DaslData22InNot(2)	AA07	DaslData14OutNot(0)	AB25	DaslData00OutNot(1)
A10	DaslData22In(2)	AA08	DaslData13Out(2)	AB27	DaslData00Out(0)
A11	DaslData23In(0)	AA09	DELAYIn	AB33	MSBusPacketClockBidi
A12	DaslData23InNot(2)	AA10	SendGrantIn(31)	AC01	DaslData13In(2)
A13	SendGrantIn(4)	AA11	ReceiveGrantIn(31)	AC02	DaslData13InNot(2)
A14	SendGrantIn(5)	AA12	ReceiveGrantIn(28)	AC03	DaslData13InNot(3)
A15	DaslData24In(0)	AA14	ReceiveGrantIn(30)	AC04	DaslData13In(3)
A16	DaslData24In(2)	AA17	ReceiveGrantIn(11)	AC05	DaslData13Out(3)
A17	DaslData24InNot(3)	AA18	ReceiveGrantIn(8)	AC06	DaslData13OutNot(3)
A18	DaslData25InNot(1)	AA20	ReceiveGrantIn(1)	AC07	DaslData13OutNot(0)
A19	DaslData25InNot(2)	AA23	MSBusInputAddrBidi(24)	AC09	DaslData13OutNot(1)
A20	DaslData26InNot(0)	AA24	ReceiveGrantIn(0)	AC10	DaslData12OutNot(2)
A21	DaslData26In(0)	AA25	MSBusSyncOut	AC11	ReceiveGrantIn(26)
A22	DaslData26In(2)	AA26	DaslData00OutNot(0)	AC12	ReceiveGrantIn(24)
A23	DaslData27InNot(0)	AA27	MSBusInputAddrBidi(25)	AC14	ReceiveGrantIn(21)
A24	DaslData27InNot(2)	AA28	MSBusInputAddrBidi(20)	AC15	ReceiveGrantIn(19)
A25	DaslData27In(2)	AA30	MSBusInputAddrBidi(15)	AC16	ReceiveGrantIn(14)
A26	DaslData28In(0)	AA31	MSBusInputAddrBidi(17)	AC17	ReceiveGrantIn(12)
A27	LSSD_SCAN_MODE	AA32	SHINotSelectIn	AC18	ReceiveGrantIn(9)
A28	DaslData28InNot(2)	AA33	SHISerialDataIn	AC21	ReceiveGrantIn(5)
A29	LSSD_B1_CLK	AB01	DaslData14InNot(0)	AC23	ReceiveGrantIn(3)
A30	DaslData29InNot(0)	AB03	DaslData14In(1)	AC24	DaslData01Out(0)
A31	LSSD_SCAN_OUT(9)	AB05	DaslData14Out(0)	AC25	DaslData00Out(2)
A32	DaslData29InNot(1)	AB07	DaslData13OutNot(2)	AC26	DaslData00OutNot(2)

Table 29: I/O Signal List, Sorted by Grid Position (Page 2 of 8)

Grid Position	Signal Name	Grid Position	Signal Name	Grid Position	Signal Location
AC27	DasIData00Out(1)	AE10	DasIData10OutNot(2)	AF23	DasIData04Out(1)
AC28	DasIData00Out(3)	AE11	DasIData09Out(3)	AF25	DasIData03Out(1)
AC29	DasIData00OutNot(3)	AE12	DasIData09OutNot(2)	AF27	DasIData01Out(2)
AC30	MSBusInputAddrBidi(22)	AE14	DasIData08OutNot(0)	AF29	DasIData02Out(1)
AC31	MSBusInputAddrBidi(21)	AE15	DasIData07OutNot(0)	AF31	DasIData00InNot(3)
AC32	MSBusSyncln	AE16	LSSD_SCAN_IN(1)	AF33	DasIData00In(2)
AC33	SHIClockIn	AE17	ReceiveGrantIn(13)	AG01	LSSD_SCAN_OUT(14)
AD01	DasIData13In(0)	AE18	LSSD_SCAN_IN(16)	AG02	DasIData12InNot(0)
AD03	DasIData13In(1)	AE19	DasIData06Out(2)	AG03	LSSD_SCAN_OUT(15)
AD05	DasIData12Out(3)	AE20	DasIData05Out(2)	AG04	DasIData12In(1)
AD07	DasIData12OutNot(3)	AE22	DasIData04Out(0)	AG05	DasIData11Out(3)
AD09	DasIData12Out(2)	AE23	DasIData04OutNot(1)	AG06	DasIData11OutNot(2)
AD11	DasIData10Out(2)	AE24	DasIData03Out(0)	AG07	ReceiveGrantIn(29)
AD13	ReceiveGrantIn(20)	AE26	DasIData01OutNot(2)	AG08	DasIData10Out(3)
AD15	DasIData07Out(0)	AE28	DasIData01OutNot(3)	AG09	ReceiveGrantIn(22)
AD19	DasIData06OutNot(2)	AE29	DasIData01Out(3)	AG10	DasIData10Out(0)
AD21	ReceiveGrantIn(6)	AE30	DasIData00In(3)	AG11	DasIData09Out(2)
AD23	DasIData03OutNot(0)	AE31	DasIData00In(1)	AG12	DasIData09Out(0)
AD25	DasIData01OutNot(0)	AE32	DasIData00InNot(2)	AG13	DasIData08Out(2)
AD27	DasIData01Out(1)	AE33	DasIData00In(0)	AG14	DasIData08Out(0)
AD29	DasIData01OutNot(1)	AF01	DasIData12InNot(2)	AG15	DasIData07Out(2)
AD31	DasIData00InNot(1)	AF03	DasIData12In(3)	AG16	LSSD_TAP_C2
AD33	DasIData00InNot(0)	AF05	DasIData11OutNot(3)	AG17	DasIData07Out(1)
AE01	DasIData13InNot(0)	AF07	DasIData12OutNot(0)	AG18	TRST
AE02	DasIData12In(2)	AF09	DasIData10OutNot(3)	AG19	DasIData06OutNot(0)
AE03	DasIData13InNot(1)	AF11	DasIData09OutNot(3)	AG20	DasIData05OutNot(2)
AE04	DasIData12InNot(3)	AF13	DasIData09OutNot(0)	AG21	DasIData05OutNot(0)
AE05	DasIData12OutNot(1)	AF15	DasIData07OutNot(2)	AG22	DasIData04OutNot(2)
AE06	DasIData12Out(1)	AF17	DasIData06OutNot(3)	AG23	DasIData04OutNot(0)
AE08	DasIData12Out(0)	AF19	DasIData06Out(0)	AG24	DasIData03OutNot(2)
AE09	ReceiveGrantIn(25)	AF21	DasIData04Out(2)	AG25	ReceiveGrantIn(4)



IBM Packet Routing Switch

Table 29: I/O Signal List, Sorted by Grid Position (Page 3 of 8)

Grid Position	Signal Name	Grid Position	Signal Name	Grid Position	Signal Location
AG26	DasIData03OutNot(1)	AJ09	DasIData10Out(1)	AK15	DasIData07In(3)
AG28	DasIData02Out(0)	AJ10	DasIData10OutNot(0)	AK17	DasIData07In(0)
AG29	DasIData02OutNot(1)	AJ11	DasIData09OutNot(1)	AK19	DasIData06InNot(1)
AG30	DasIData01InNot(0)	AJ12	DasIData08OutNot(2)	AK21	DasIData05InNot(1)
AG31	LSSD_SCAN_OUT(11)	AJ13	DasIData08OutNot(3)	AK23	DasIData04In(3)
AG32	DasIData01In(1)	AJ14	DasIData08Out(1)	AK25	DasIData03InNot(3)
AG33	LSSD_SCAN_IN(9)	AJ15	DasIData07Out(3)	AK27	DasIData03In(1)
AH01	DasIData12In(0)	AJ16	DasIData07OutNot(3)	AK29	DasIData02InNot(0)
AH03	DasIData12InNot(1)	AJ17	DasIData06Out(3)	AK31	DasIData01InNot(2)
AH05	DasIData11Out(2)	AJ18	DasIData06Out(1)	AK33	DasIData01InNot(3)
AH07	DasIData11Out(1)	AJ19	DasIData06OutNot(1)	AL01	LSSD_SCAN_IN(21)
AH09	DasIData10OutNot(1)	AJ20	DasIData05OutNot(3)	AL02	DasIData11InNot(3)
AH11	DasIData09Out(1)	AJ21	DasIData05Out(1)	AL03	LSSD_SCAN_IN(20)
AH13	DasIData08Out(3)	AJ22	DasIData05Out(0)	AL04	DasIData10InNot(3)
AH15	DasIData08OutNot(1)	AJ23	DasIData04Out(3)	AL05	LSSD_SCAN_IN(5)
AH17	DasIData07OutNot(1)	AJ24	DasIData03Out(2)	AL06	DasIData10In(1)
AH19	DasIData05Out(3)	AJ25	DasIData03OutNot(3)	AL07	LSSD_SCAN_OUT(19)
AH21	DasIData05OutNot(1)	AJ26	DasIData02OutNot(2)	AL08	DasIData09InNot(3)
AH23	DasIData04OutNot(3)	AJ27	DasIData02Out(2)	AL09	DasIData09In(1)
AH25	DasIData03Out(3)	AJ28	DasIData02Out(3)	AL10	DasIData09InNot(1)
AH27	DasIData02OutNot(3)	AJ29	LSSD_SCAN_IN(17)	AL11	DasIData08In(3)
AH29	DasIData02OutNot(0)	AJ30	DasIData01In(2)	AL12	DasIData08InNot(1)
AH31	DasIData01In(0)	AJ31	LSSD_C3_CLK	AL14	ReceiveGrantIn(16)
AH33	DasIData01InNot(1)	AJ32	DasIData01In(3)	AL15	DasIData07InNot(3)
AJ01	BISTTESTM3	AJ33	LSSD_SCAN_IN(2)	AL16	DasIData07In(1)
AJ02	DasIData11InNot(2)	AK01	DasIData11In(2)	AL17	DasIData06InNot(3)
AJ03	RI	AK03	DasIData11In(0)	AL18	DasIData06InNot(2)
AJ04	DasIData11InNot(0)	AK05	DasIData10In(3)	AL19	DasIData06In(1)
AJ05	DI1	AK07	DasIData10InNot(1)	AL20	DasIData05In(3)
AJ06	DasIData11OutNot(1)	AK09	DasIData09In(3)	AL21	DasIData05InNot(3)
AJ07	DasIData11OutNot(0)	AK11	DasIData08InNot(3)	AL22	DasIData05In(1)
AJ08	DasIData11Out(0)	AK13	DasIData08In(1)	AL23	DasIData04InNot(3)

Table 29: I/O Signal List, Sorted by Grid Position (Page 4 of 8)

Grid Position	Signal Name	Grid Position	Signal Name	Grid Position	Signal Location
AL24	DasIData04In(1)	AN07	LSSD_SCAN_IN(10)	B13	DasIData23In(2)
AL25	DasIData04InNot(1)	AN08	DasIData09In(2)	B15	DasIData24InNot(0)
AL26	DasIData03In(3)	AN09	DasIData09In(0)	B17	DasIData25In(0)
AL27	LSSD_SCAN_IN(18)	AN10	DasIData09InNot(0)	B19	DasIData25In(2)
AL28	DasIData03InNot(1)	AN11	DasIData08InNot(2)	B21	DasIData26InNot(2)
AL29	LSSD_SCAN_OUT(18)	AN12	DasIData08In(0)	B23	DasIData27In(0)
AL30	DasIData02In(0)	AN13	ReceiveGrantIn(17)	B25	DasIData28InNot(0)
AL31	LSSD_SCAN_IN(7)	AN14	SCCIn(2)	B27	DasIData28In(2)
AL32	DasIData02In(1)	AN15	DasIData07InNot(2)	B29	DasIData29In(0)
AL33	LSSD_SCAN_IN(12)	AN16	DasIData07InNot(1)	B31	DasIData29In(1)
AM01	DasIData11In(3)	AN17	DasIData06In(3)	B33	DasIData29In(3)
AM03	DasIData11In(1)	AN18	DasIData06In(2)	C01	LSSD_SCAN_IN(13)
AM05	DasIData10In(2)	AN19	DasIData06In(0)	C02	DasIData20In(1)
AM07	DasIData10In(0)	AN20	DasIData05In(2)	C03	LSSD_SCAN_OUT(4)
AM09	DasIData09InNot(2)	AN21	DasIData05InNot(2)	C04	DasIData21In(1)
AM11	DasIData08In(2)	AN22	DasIData05InNot(0)	C05	LSSD_SCAN_IN(15)
AM13	DasIData08InNot(0)	AN23	DasIData04In(2)	C06	DasIData21InNot(3)
AM15	DasIData07In(2)	AN24	DasIData04In(0)	C07	LSSD_SCAN_IN(23)
AM17	DasIData07InNot(0)	AN25	DasIData04InNot(0)	C08	DasIData22In(1)
AM19	DasIData06InNot(0)	AN26	DasIData03InNot(2)	C09	DasIData22InNot(3)
AM21	DasIData05In(0)	AN27	LSSD_SCAN_IN(4)	C10	DasIData22In(3)
AM23	DasIData04InNot(2)	AN28	DasIData03In(0)	C11	DasIData23InNot(1)
AM25	DasIData03In(2)	AN29	LSSD_SCAN_IN(3)	C12	DasIData23In(3)
AM27	DasIData03InNot(0)	AN30	DasIData02In(2)	C14	SendGrantIn(3)
AM29	DasIData02InNot(2)	AN31	LSSD_SCAN_OUT(5)	C15	DasIData24In(1)
AM31	DasIData02InNot(3)	AN32	DasIData02In(3)	C16	DasIData24InNot(2)
AM33	DasIData02InNot(1)	B01	DasIData20InNot(1)	C17	DasIData24In(3)
AN02	DasIData11InNot(1)	B03	DasIData20InNot(3)	C18	DasIData25In(1)
AN03	LSSD_SCAN_IN(19)	B05	DasIData21InNot(0)	C19	DasIData25InNot(3)
AN04	DasIData10InNot(2)	B07	DasIData21InNot(2)	C20	DasIData26InNot(1)
AN05	LSSD_SCAN_OUT(20)	B09	DasIData22In(0)	C21	DasIData26In(1)
AN06	DasIData10InNot(0)	B11	DasIData23InNot(0)	C22	DasIData26InNot(3)



IBM Packet Routing Switch

Table 29: I/O Signal List, Sorted by Grid Position (Page 5 of 8)

Grid Position	Signal Name	Grid Position	Signal Name	Grid Position	Signal Location
C23	DasIData27In(1)	E05	LSSD_SCAN_IN(11)	F07	DasIData20OutNot(3)
C24	DasIData27InNot(3)	E06	DasIData20Out(3)	F09	DasIData21Out(3)
C25	DasIData27In(3)	E07	DasIData20Out(2)	F11	DasIData22OutNot(3)
C26	DasIData28InNot(1)	E08	DasIData20OutNot(2)	F13	DasIData23OutNot(1)
C27	LSSD_SCAN_OUT(16)	E09	DasIData21OutNot(3)	F15	DasIData23Out(3)
C28	DasIData28In(3)	E10	DasIData21Out(2)	F17	DasIData25Out(1)
C29	LSSD_C4_CLK	E11	DasIData22Out(3)	F19	DasIData26OutNot(1)
C30	DasIData29InNot(2)	E12	DasIData23Out(0)	F21	DasIData26Out(3)
C31	LSSD_SCAN_OUT(2)	E13	DasIData23Out(1)	F23	DasIData27Out(1)
C32	DasIData29InNot(3)	E14	DasIData23OutNot(3)	F25	DasIData28OutNot(1)
C33	LSSD_SCAN_OUT(1)	E15	DasIData24OutNot(1)	F27	DasIData29Out(1)
D01	DasIData20InNot(0)	E16	DasIData24Out(1)	F29	DasIData29Out(2)
D03	DasIData20InNot(2)	E17	DasIData24OutNot(3)	F31	DasIData30InNot(2)
D05	DasIData21InNot(1)	E18	DasIData25OutNot(3)	F33	DasIData30In(3)
D07	DasIData21In(3)	E19	DasIData25Out(3)	G01	LSSD_SCAN_OUT(0)
D09	DasIData22InNot(1)	E20	DasIData26Out(1)	G02	DasIData19In(2)
D11	DasIData23In(1)	E21	DasIData26OutNot(3)	G03	LSSD_SCAN_IN(22)
D13	DasIData23InNot(3)	E22	DasIData26OutNot(2)	G04	DasIData19InNot(3)
D15	DasIData24InNot(1)	E23	DasIData27OutNot(1)	G05	DasIData20OutNot(1)
D17	DasIData25InNot(0)	E24	DasIData28OutNot(0)	G06	DasIData20Out(0)
D19	DasIData25In(3)	E25	DasIData28Out(1)	G08	DasIData21OutNot(1)
D21	DasIData26In(3)	E26	DasIData29Out(0)	G10	DasIData21OutNot(2)
D23	DasIData27InNot(1)	E27	DasIData29OutNot(0)	G11	DasIData22OutNot(0)
D25	DasIData28In(1)	E28	DasIData29OutNot(1)	G12	DasIData22OutNot(2)
D27	DasIData28InNot(3)	E29	LSSD_SCAN_OUT(7)	G13	DasIData23OutNot(0)
D29	DasIData29In(2)	E30	DasIData30InNot(0)	G14	DasIData23OutNot(2)
D31	DasIData30In(0)	E31	LSSD_A_CLK	G15	DasIData24OutNot(0)
D33	DasIData30In(1)	E32	DasIData30InNot(1)	G16	LSSD_SCAN_OUT(10)
E01	LSSD_SCAN_OUT(6)	E33	LSSD_SCAN_OUT(21)	G17	DasIData24Out(3)
E02	DasIData20In(0)	F01	DasIData19InNot(2)	G18	LSSD_SCAN_OUT(8)
E03	LSSD_SCAN_OUT(12)	F03	DasIData19In(3)	G19	DasIData25Out(2)
E04	DasIData20In(2)	F05	DasIData20OutNot(0)	G20	DasIData26Out(0)



IBM Packet Routing Switch

Table 29: I/O Signal List, Sorted by Grid Position (Page 6 of 8)

Grid Position	Signal Name	Grid Position	Signal Name	Grid Position	Signal Location
G21	DasIData26Out(2)	J04	DasIData19In(1)	K09	DasIData19OutNot(0)
G22	DasIData27Out(0)	J05	DasIData19Out(3)	K11	DasIData21OutNot(0)
G23	DasIData27Out(2)	J06	DasIData19OutNot(3)	K15	DasIData24OutNot(2)
G24	DasIData28Out(0)	J07	SendGrantIn(14)	K19	DasIData25Out(0)
G26	DasIData28Out(3)	J08	DasIData19OutNot(2)	K21	MemoryGrantOut(2)
G27	DebugDataOut(2)	J09	SendGrantIn(12)	K23	DasIData28Out(2)
G28	DasIData29OutNot(2)	J10	DasIData21Out(0)	K25	DasIData30Out(2)
G29	DasIData29Out(3)	J11	DasIData22OutNot(1)	K27	DasIData30OutNot(3)
G30	DasIData30In(2)	J12	DasIData22Out(0)	K29	DasIData30Out(3)
G31	LSSD_C2_CLK	J13	SendGrantIn(8)	K31	DasIData31In(3)
G32	DasIData30InNot(3)	J14	DasIData23Out(2)	K33	DasIData31In(2)
G33	LSSD_SCAN_IN(14)	J15	DasIData24Out(2)	L01	DasIData18InNot(0)
H01	DasIData19In(0)	J16	LSSD_SCAN_OUT(13)	L02	DasIData18In(0)
H03	DasIData19InNot(1)	J17	SendGrantIn(1)	L03	DasIData18In(1)
H05	DasIData20Out(1)	J18	LSSD_SCAN_OUT(23)	L04	DasIData18InNot(1)
H07	DasIData19Out(2)	J19	DasIData25OutNot(0)	L05	DasIData18OutNot(1)
H09	DasIData21Out(1)	J20	DasIData26OutNot(0)	L06	DasIData18Out(1)
H11	DasIData22Out(1)	J21	MemoryGrantOut(3)	L07	DasIData18Out(2)
H13	DasIData22Out(2)	J22	DasIData27OutNot(2)	L08	DasIData18OutNot(3)
H15	DasIData24Out(0)	J23	DasIData27Out(3)	L09	DasIData18Out(3)
H17	DasIData25OutNot(1)	J24	DasIData28OutNot(2)	L10	DasIData19Out(0)
H19	DasIData25OutNot(2)	J26	DasIData30Out(0)	L12	SendGrantIn(11)
H21	DasIData27OutNot(0)	J28	DasIData30Out(1)	L13	SendGrantIn(9)
H23	DasIData27OutNot(3)	J29	DasIData30OutNot(1)	L15	SendGrantIn(7)
H25	DasIData28OutNot(3)	J30	DasIData31InNot(1)	L16	SendGrantIn(2)
H27	DasIData30OutNot(0)	J31	DasIData31InNot(3)	L17	SendGrantIn(0)
H29	DasIData29OutNot(3)	J32	DasIData31In(0)	L18	NotInterruptOut
H31	DasIData31In(1)	J33	DasIData31InNot(2)	L22	SCCIn(1)
H33	DasIData31InNot(0)	K01	DasIData18InNot(2)	L23	DebugDataOut (0)
J01	DasIData18In(2)	K03	DasIData18InNot(3)	L24	DasIData30OutNot(2)
J02	DasIData19InNot(0)	K05	DasIData19OutNot(1)	L25	DasIData31OutNot(0)
J03	DasIData18In(3)	K07	DasIData19Out(1)	L26	DasIData31Out(0)



IBM Packet Routing Switch

Table 29: I/O Signal List, Sorted by Grid Position (Page 7 of 8)

Grid Position	Signal Name	Grid Position	Signal Name	Grid Position	Signal Location
L27	DasIData31OutNot(3)	N18	NotPowerOnResetIn	R08	DasIData16OutNot(2)
L28	DasIData31OutNot(1)	N20	DebugDataOut(3)	R09	DasIData16OutNot(0)
L29	DasIData31Out(1)	N22	DebugDataOut(1)	R10	DasIData16Out(0)
L30	DebugDataOut(10)	N24	DebugDataOut(4)	R12	SendGrantIn(18)
L31	DebugDataOut(11)	N25	DebugDataOut(5)	R20	MSBusOutputAddrBidi(7)
L32	DebugDataOut(7)	N26	DasIData31Out(2)	R24	MSBusOutputAddrBidi(6)
L33	DebugDataOut(6)	N27	DebugDataOut(9)	R25	MSBusOutputAddrBidi(5)
M01	DasIData17In(2)	N28	DebugDataOut(13)	R26	MSBusOutputAddrBidi(8)
M03	DasIData17InNot(3)	N29	DebugDataOut(12)	R28	MSBusOutputAddrBidi(4)
M05	DasIData17OutNot(2)	N30	MSBusOutputAddrBidi(3)	R29	MSBusOutputAddrBidi(15)
M07	DasIData18Out(0)	N31	MSBusOutputAddrBidi(1)	R30	MSBusOutputAddrBidi(12)
M09	DasIData18OutNot(2)	N32	Osc500MhzOut	R31	MSBusOutputAddrBidi(11)
M15	SendGrantIn(6)	N33	Osc250MhzOutNot	R32	MSBusOutputAddrBidi(10)
M17	DELAYOut	P01	DasIData17InNot(0)	R33	MSBusOutputAddrBidi(9)
M19	NotFullyInsertedIn	P03	DasIData17InNot(1)	T01	DasIData16InNot(1)
M25	DasIData31Out(3)	P05	DasIData17Out(1)	T03	DasIData16In(1)
M27	DasIData31OutNot(2)	P07	DasIData17Out(0)	T05	DasIData16OutNot(3)
M29	DebugDataOut(8)	P09	DasIData17OutNot(0)	T07	LSSD_TAP_C1
M31	MSBusOutputAddrBidi(2)	P13	SendGrantIn(19)	T09	LSSD_SCAN_IN(0)
M33	Osc500MhzOutNot	P15	SendGrantIn(10)	T11	SendGrantIn(21)
N01	DasIData17In(0)	P19	MemoryGrantOut(1)	T13	SendGrantIn(20)
N02	DasIData17InNot(2)	P25	DebugDataOut(14)	T15	SendGrantIn(22)
N03	DasIData17In(1)	P27	DebugDataOut(15)	T19	MSBusOutputAddrBidi(16)
N04	DasIData17In(3)	P31	MSBusOutputAddrBidi(0)	T23	MSBusOutputAddrBidi(13)
N05	DasIData17OutNot(3)	P33	Osc250MhzOut	T25	OscillatorIn
N06	DasIData17Out(3)	R01	DasIData16InNot(2)	T27	LSSD_C1_CLK
N07	DasIData17Out(2)	R02	DasIData16In(2)	T29	MSBusOutputAddrBidi(14)
N08	DasIData18OutNot(0)	R03	DasIData16InNot(3)	T31	PLL_VDDA
N10	SendGrantIn(17)	R04	DasIData16In(3)	T33	MSBusOutputAddrBidi(17)
N11	SendGrantIn(16)	R05	DasIData16Out(3)	U01	DasIData15In(3)
N12	SendGrantIn(13)	R06	DasIData17OutNot(1)	U02	DasIData16InNot(0)
N14	SendGrantIn(15)	R07	DasIData16Out(2)	U03	DasIData15InNot(3)

Table 29: I/O Signal List, Sorted by Grid Position (Page 8 of 8)

Grid Position	Signal Name	Grid Position	Signal Name	Grid Position	Signal Location
U04	DasIData16In(0)	V11	SendGrantIn(27)	W20	MSBusInputAddrBidi(11)
U05	DasIData16Out(1)	V15	SendGrantIn(26)	W21	MSBusInputAddrBidi(16)
U06	DasIData15OutNot(3)	V19	MSBusInputAddrBidi(4)	W22	MSBusInputAddrBidi(23)
U07	DasIData16OutNot(1)	V21	MSBusInputAddrBidi(7)	W23	SCCIn(0)
U08	DasIData15Out(3)	V23	MSBusInputAddrBidi(6)	W24	MSBusInputAddrBidi(12)
U09	SendGrantIn(23)	V25	LSSD_SCAN_IN(8)	W26	MSBusInputAddrBidi(9)
U10	SendGrantIn(25)	V27	LSSD_SCAN_IN(6)	W27	MSBusInputAddrBidi(10)
U13	SendGrantIn(24)	V29	MSBusInputAddrBidi(5)	W28	MSBusInputAddrBidi(14)
U19	MSBusOutputAddrBidi(18)	V31	MSBusInputAddrBidi(1)	W30	MSBusInputAddrBidi(8)
U22	MSBusOutputAddrBidi(19)	V33	MSBusInputAddrBidi(2)	W32	Osc125MhzOut
U23	MSBusInputAddrBidi(0)	W01	DasIData15In(0)	W33	Osc125MhzOutNot
U25	MSBusInputAddrBidi(3)	W02	DasIData15InNot(0)	Y01	DasIData14In(2)
U26	MSBusOutputAddrBidi(23)	W03	DasIData15In(1)	Y03	DasIData14In(3)
U27	MSBusOutputAddrBidi(21)	W04	DasIData15InNot(1)	Y05	DasIData14OutNot(3)
U29	MSBusOutputAddrBidi(22)	W05	DasIData15OutNot(1)	Y07	DasIData14OutNot(2)
U30	MSBusOutputAddrBidi(25)	W06	DasIData14Out(3)	Y09	DasIData14Out(2)
U31	LeakageTest	W07	DasIData15OutNot(0)	Y15	SCCIn(3)
U32	MSBusOutputAddrBidi(24)	W08	DasIData15Out(0)	Y25	MSBusInputAddrBidi(19)
U33	MSBusOutputAddrBidi(20)	W09	DasIData15Out(2)	Y29	MSBusInputAddrBidi(13)
V01	DasIData15In(2)	W10	DasIData15OutNot(2)	Y31	MSBusInputAddrBidi(18)
V03	DasIData15InNot(2)	W11	SendGrantIn(30)	Y33	SHISerialDataOut
V05	DasIData15Out(1)	W13	SendGrantIn(29)		
V07	IOTEST	W14	SendGrantIn(28)		
V09	LSSD_SCAN_OUT(22)	W16	ReceiveGrantIn(15)		

9. Electrical Characteristics

Table 30: Absolute Maximum Ratings

Symbol	Parameter	Min	Typ	Max	Units	Notes
V _{DD}	Supply Voltage	-0.5	2.5	4.3	V	1
V _{IN}	Input Voltage	-0.5		V _{DD} +0.6	V	1, 4
V _{OUT}	Output Voltage	-0.5		V _{DD}	V	1
θ _{JA}	Thermal impedance junction to ambient package Airflow = 0		10.8		°C/W	2
θ _{JA}	Thermal impedance junction to ambient package Airflow = 100 FPM		9.8		°C/W	2
θ _{JA}	Thermal impedance junction to ambient package Airflow = 100 FPM w/heat sink				°C/W	2
θ _{JC}	Thermal impedance junction to case package		0.20		°C/W	3
T _S	Storage Temperature	-25		150	°C	1
T _A	Operating Junction Temperature Range	0		125	°C	1
	Electrostatic Discharge	-3000	6000	3000	V	1

1. Permanent device damage might occur if the above absolute maximum ratings are exceeded. Functional operation should be restricted to the conditions listed in *Table 31: Recommended Operating Conditions* on page 129. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.
2. Modules mounted to a 2S2P card, 1 oz. copper, size 63.5 mm x 76.2 mm. Flow on both sides of card, vertical orientation.
3. θ_{JC} represents the difference between junction temperature and the temperature at the top center of the outside surface of the component package divided by the power applied to the component mounted to the test card.
4. V_{DD} max at 2.75 V

Table 31: Recommended Operating Conditions

Symbol	Parameter (for TTL compatible I/Os)	Min	Typ	Max	Units	Notes
V_{DD}	Supply Voltage	2.1	2.5	2.7	V	1, 2, 3
V_{DR}	Supply Voltage	2.1	2.5	2.7	V	1, 2, 3
V_{DD2}	Supply Voltage	1.46	1.5	1.54	V	1, 2, 3
V_{IH}	Input Up Level		1.4	1.7	V	
V_{IL}	Input Down Level	0.7	1.4		V	
V_{OH}	High Level Output Voltage ($V_{DD}=\text{min}$, $I_{OH}=-4\text{mA}$)	2.0	2.3	VDD	V	
V_{OL}	Low Level Output Voltage ($V_{DD}=\text{min}$, $I_{OL}=6\text{mA}$ $I_{OL}=8\text{mA}$)	GND	0.2	0.4	V	
I_{IL}	Receiver maximum input leakage Low Level Input Current at LPDL	No pull-up/down		0	μA	4
		With pull-up		0	μA	
		With pull-down		-250	μA	
I_{IH}	Receiver maximum input leakage High Level Input Current at MPUL	No pull-up/down		0	μA	4
		With pull-up		400	μA	
		With pull-down		0	μA	
C_i	Input Capacitance ($V_{DD}=\text{nom}$)			5	pF	

- For power up, the +2.5 V supply must be activated either prior to or concurrently with the +1.5 V supply. The device might be damaged if the 1.5 V supply is activated for an extended period of time while the 2.5 V supply remains at 0 V level.
- For power down, the +2.5 V supply must be deactivated either after or concurrently with the +1.5 V supply. The device might be damaged if the 1.5 V supply is activated for an extended period of time while the 2.5 V supply remains at 0 V level.
- Up to 400 mV of negative voltage can be tolerated during the sequence of any two supplies. There is no time delay requirement, only the negative voltage restriction.
- Applies to receivers/bidis without pullup or pulldown resistors.

Table 32: Power Dissipation

Supply	Power		Current	
	Nom	Max	Nom	Max
2.5 V	19.8 W	23.2 W	7.9 A	8.6 A
1.5 V	1.7 W	1.8 W	1.1 A	1.2 A

Table 33: Electrical Characteristics for DASL I/Os

Parameter	Ref Signal	Min	Typ	Max	Units	Notes
Rising Transition Rate of the Output	DASL Driver	0.14	0.21	0.38	ns	1
Falling Transition Rate of the Output	DASL Driver	0.19	0.28	0.33	ns	1
Max Input Pin Cap	DASL Receiver		2.5		pF	1

- The DASL I/Os are compatible with high speed transceiver logic (HSTL) differential interface standard defined in JEDEC document JESD8-6.

IBM Packet Routing Switch

Table 34: Clocks


Parameter		Min	Max	Units	Notes
Internal Clock Frequency		100	125	MHz	1, 2
OscillatorIn	Internal PLL	50	62.5		
<p>1. The OscillatorIn input must have a tolerance of ± 100 ppm (0.01%), a duty cycle of 40 - 60%, and a phase jitter: ± 150 ps (cycle to cycle) maximum.</p> <p>2. The skew between Master and Slave OscillatorIn input pin is ± 250 ps maximum.</p>					

10. Line Termination

10.1 DASL and SYS_CLK

The DASL data inputs ($DATA_IN_nn_Q(i)$ and $DATA_IN_nn_QN(i)$) and the clock reference (SYS_CLK_Q and SYS_CLK_QN) used differential HSTL EIA/JEDEC (EIA/JESD8-6) standard compliant IO books. The following figure gives the recommended termination for those receiver lines.

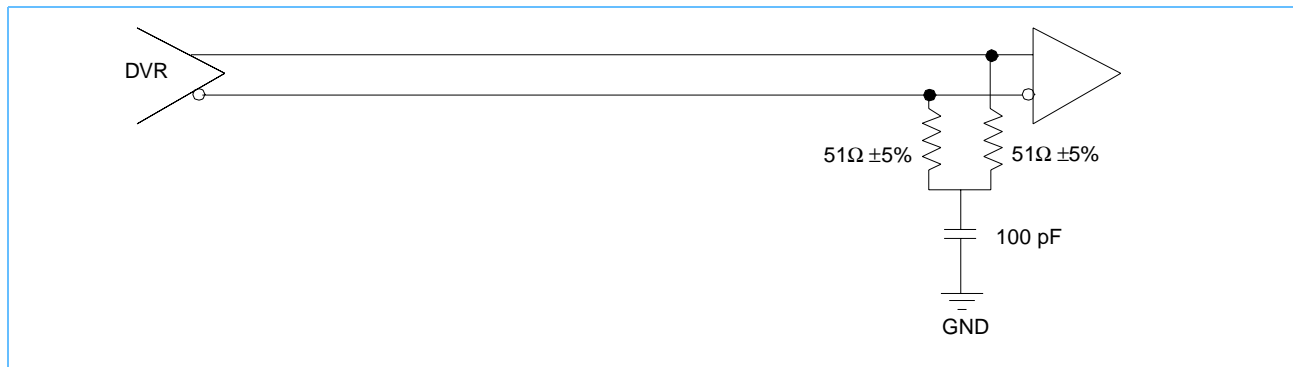Figure 20: DASL Termination



The termination network has to be placed within 2.5 cm of the receiver device.

Note: For the SYS_CLK_Q/QN differential pair, both termination resistors can be directly connected to GND, without the use of a capacitor.

11. Mechanical Information

Figure 21: Physical Dimensions

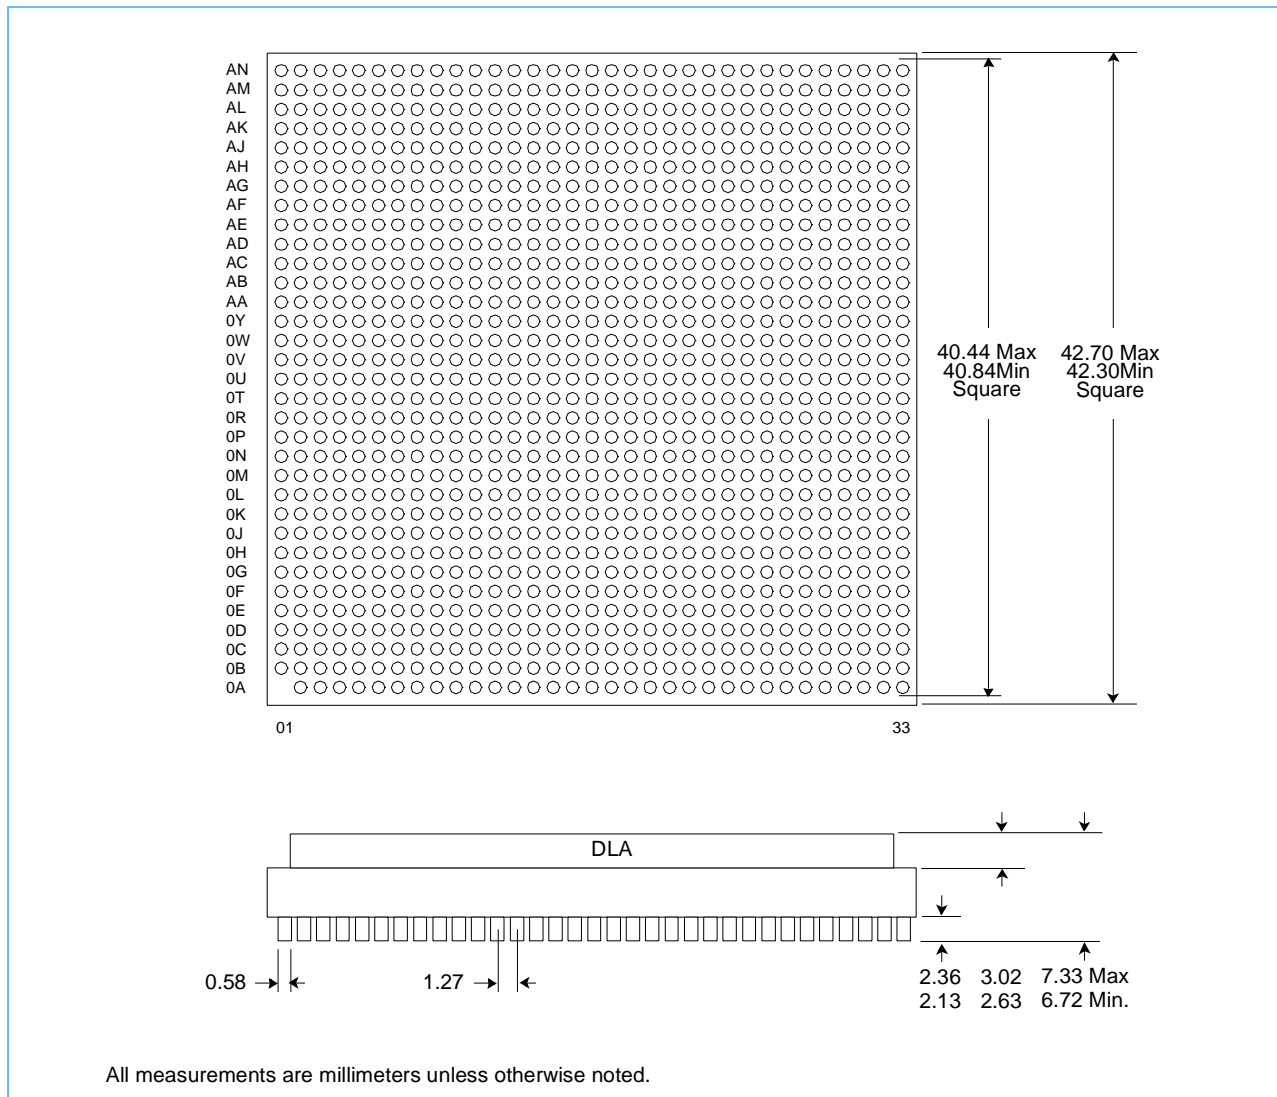


Table 35: Package Information

Package Type	Ceramic Column Grid Array (CCGA) with Direct Lid Attach (DLA)
Leads	1088
Power Supply	Dual: V _{DD} 2.5 V V _{DR} 2.5 V for DASL receiver (treated as VDD at card level; no special requirements) V _{DD2} 1.5 V

12. References

1. IEEE 1491.1 Specification, IEEE Standard Test Access Port and Boundary Scan Architecture
2. CMOS5S6 Semi-Custom User's Guide. IBM Document Number PL-SC-C56, October 30, 1998
3. EIA/JEDEC Standard High Speed Transceiver Logic (HSTL) A 1.5 V output Buffer Supply Voltage Based Interface Standard for Digital Integrated Circuits EIA/JESD8-6 August 1995
4. IBM Packet Routing Switch PRS28.4G, Databook, 8/26/99



IBM Packet Routing Switch

Revision Log

Revision Date	Contents of Modification
06/01/00	Initial release (revision 00).
08/31/00	First release (01). Changed reference to document type from Databook to Datasheet. Changed page header labels from IBM Packet Routing Switch PRS64G to IBM Packet Routing Switch and from IBM32SW0640DSLCA250 to PRS64G. Changed references to IBM 64G Packet Routing Switch to IBM Packet Routing Switch PRS64G or PRS64G as appropriate.