

2012 Size

806-928MHz Band
Chip Multilayer RF Transformer

Impedance Ratio 50:200


FSLT-S087G

All the technical data and information contained
herein are subject to change without notice.



LT-FSLT-S087G-0410A

Shape & Size

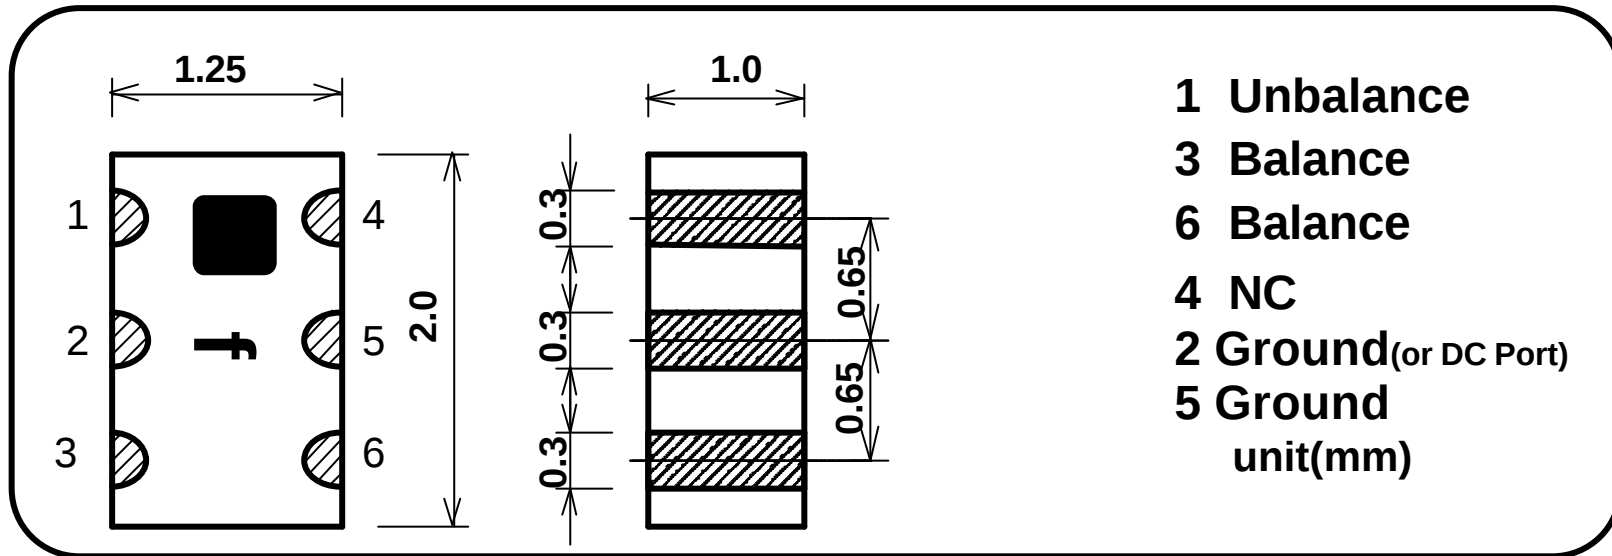


Specifications

P/N	Frequency Range(MHz)	Impedance ratio	Insertion Loss *1	Amplitude Balance	V.S.W.R	Phase Balance	Handling Power	Temperature Range
FSLT-S087G	806-928	50:200	1.0dB Max.	1.0dB Max.	2.0 Max.	180 +/- 10deg.	100mW Max.	-35 to +85 deg.C

*1 Measured by "Back to Back" per piece

FSLT-S087G Sample DATA


Insertion loss

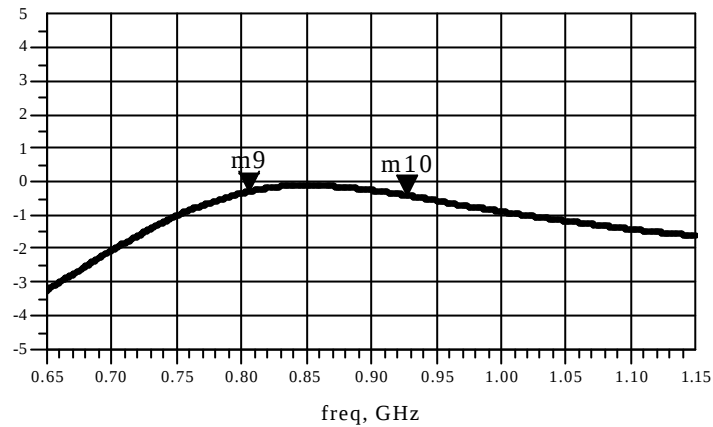

m9
freq=806.0MHz
dB(S(5,4))/2=-0.291

m10
freq=928.0MHz
dB(S(5,4))/2=-0.407

Amplitude balance

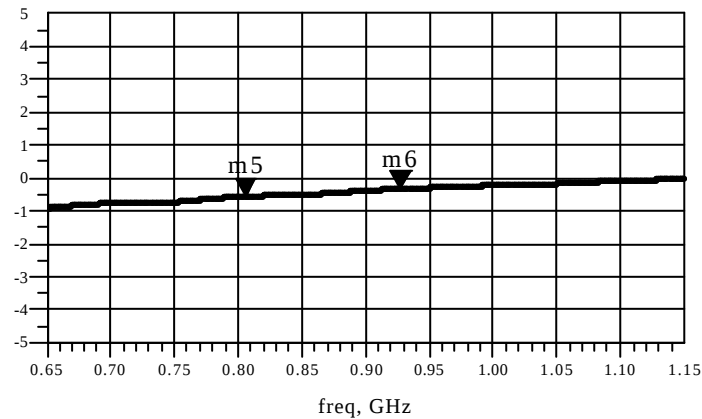


m5
freq=806.0MHz
dB(S(2,1))-dB(S(3,1))=-0.540

m6
freq=928.0MHz
dB(S(2,1))-dB(S(3,1))=-0.326

All the technical data and information contained herein are subject to change without notice.


V.S.W.R

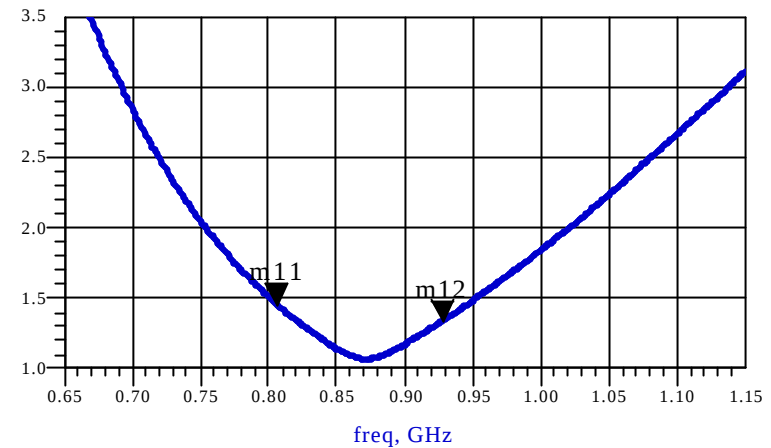

m11
freq=806.0MHz
VSWR1=1.456

m12
freq=928.0MHz
VSWR1=1.339

Phase balance

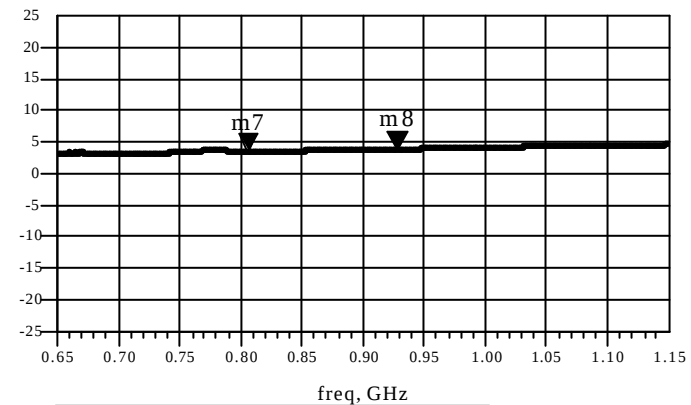


m7
freq=806.0MHz
180-abs(phase((S(2,1))/S(3,1)))=3.402


m8
freq=928.0MHz
180-abs(phase((S(2,1))/S(3,1)))=3.860

LT-FSLT-S087G-0410A

If you apply DC voltage to Balance Port,
please add capacitor as below circuit.

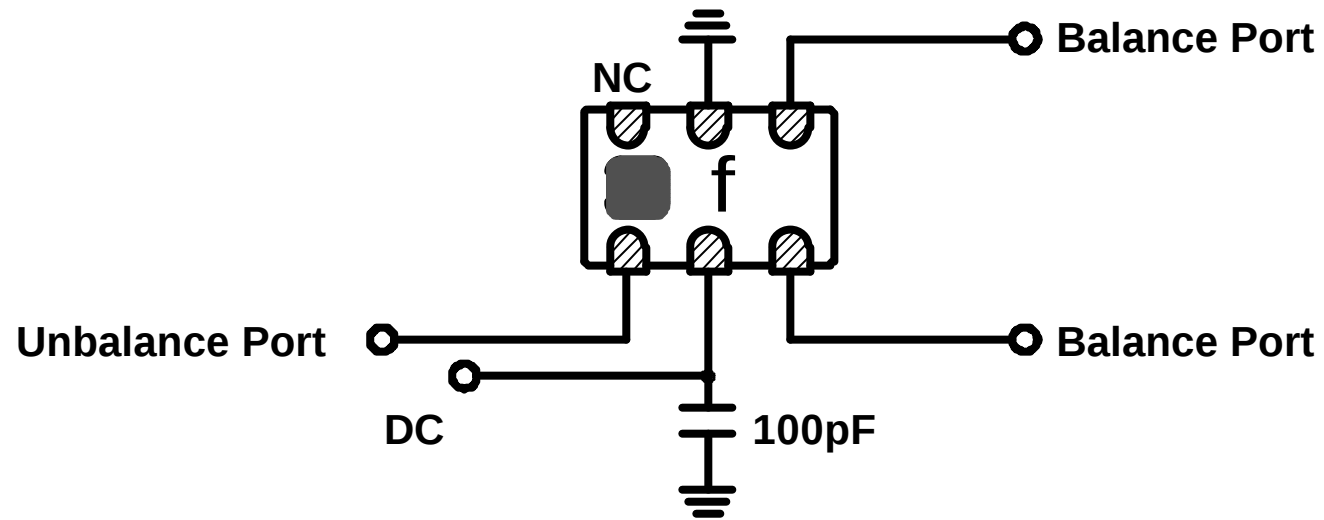

Foot Pattern

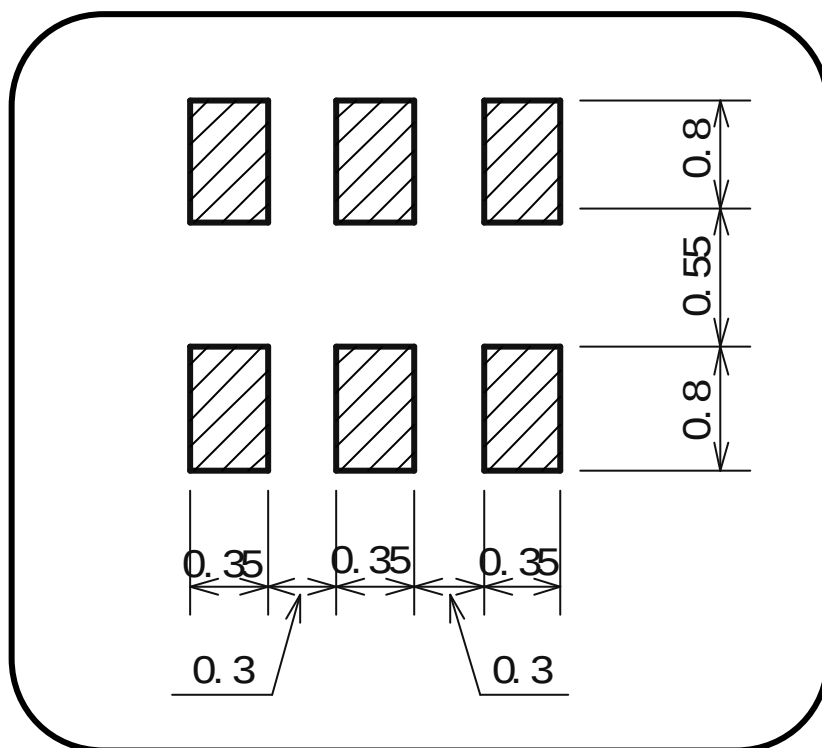

Foot Pattern Example

