




# SMJ 500-3A

Quad-Diode Mixer

## Product Features

- Input IP3 +11 dBm
- RF Freq 2 - 500 MHz
- LO Freq 2 - 500 MHz
- IF Freq DC - 500 MHz
- LO Drive Level +3 dBm

## Functional Diagram



Pin No.	Function
1	RF
2	IF
3	LO
4-5	Ground
6	Ground

## Specifications

Parameters	Units	Minimum	Typical	Maximum	Comments
RF Frequency	MHz	2		500	
LO Frequency	MHz			500	
IF Frequency	MHz	DC		500	
SSB Conversion Loss	dB				
L-R Isolation	dB		32		
L-I Isolation	dB		30		
IIP3	dBm		+11		
LO Drive	dBm		+3		
RF - Return Loss	dB		11		
LO - Return Loss	dB		14		
IF - Return Loss	dB		11		

Test conditions unless otherwise noted  
 1. Tested in a 50 Ohm system, low Side LO.

## Recommended Maximum Rating

Parameters	Rating
Operating Case Temperature	-40 to +70 °C
Storage Temperature	-65 to +100 °C
RF Input Power at 25°C (continuous)	+11 dBm

## Ordering Information

Part No.	Description
SMJ 500-3A	Diode Mixer (Available in Tape & Reel)
SMJ 500-3A-PCB	Fully Assembled Application Circuit






# SMJ 500-3A

Quad-Diode Mixer


The Communications Edge™

## OUTLINE DRAWING

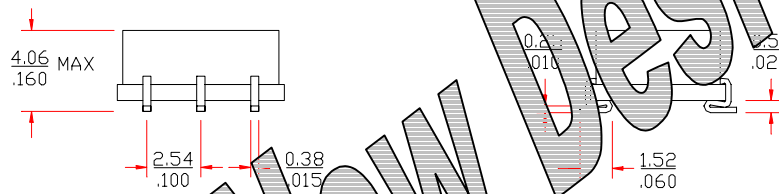


mm  
inch

## LAND PATTERN

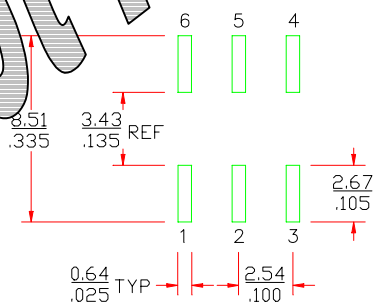

## MOUNTING CONFIGURATION

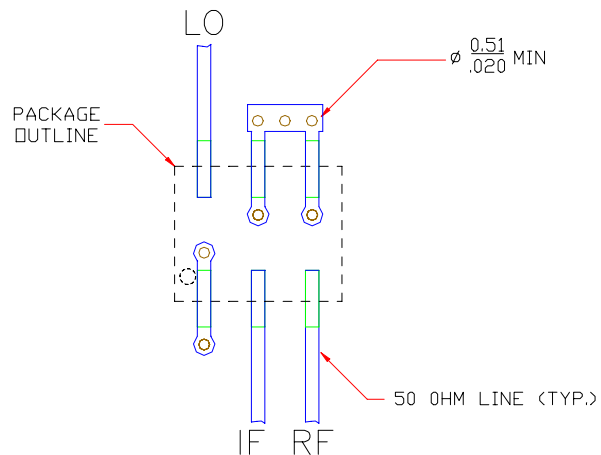

FUNCTION	PIN NO.
GROUND	1
IF	2
RF	3
GROUND	4-5
LO	6

- Notes:
1. Ground vias are critical for RF grounding considerations.
  2. If your PCB design rules allow, ground vias should be placed under the land pattern for better RF performance. Otherwise ground vias should be placed as close land pattern as possible.
  3. Trace width depends on PC board.