



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

MPS2907
MPS2907-L/H
MPS2907A
MPS2907A-L/H

PNP Silicon
Plastic-Encapsulate
Transistor

Features

- Capable of 0.625Watts of Power Dissipation.
- Collector-current -0.6A
- Collector-base Voltage -60V
- Operating and storage junction temperature range: -55°C to +150°C
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Marking: MPS2907/MPS2907A

Electrical Characteristics @ 25°C Unless Otherwise Specified


Symbol	Parameter	Min	Max	Units
OFF CHARACTERISTICS				
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=-10\text{mAdc}$, $I_B=0$)	MPS2907 -40	---	Vdc
		MPS2907A -60	---	
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=-10\text{uAdc}$, $I_E=0$)	-60	---	Vdc
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ($I_E=-10\text{uAdc}$, $I_C=0$)	-5.0	---	Adc
I_{CBO}	Collector Cutoff Current ($V_{CB}=-50\text{Vdc}$, $I_E=0$)	---	-0.1	uAdc
		MPS2907 ---	-0.01	
I_{CEO}	Collector Cutoff Current ($V_{CE}=-35\text{Vdc}$, $I_E=0$)	---	-0.1	Vdc
		MPS2907 ---	-0.05	
I_{EBO}	Emitter Cutoff Current ($V_{EB}=-3.0\text{Vdc}$, $I_C=0$)	---	-0.1	uAdc
		MPS2907 ---	-0.01	

ON CHARACTERISTICS

h_{FE-1}	DC Current Gain ($I_C=-150\text{mAdc}$, $V_{CE}=-10\text{Vdc}$)	100	300	---
h_{FE-2}	DC Current Gain ($I_C=-1.0\text{mAdc}$, $V_{CE}=-10\text{Vdc}$)	MPS2907 60	---	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=-500\text{mAdc}$, $I_B=-50\text{mAdc}$)	---	-0.6	Vdc
$V_{(BE)sat}$	Base-Emitter Saturation Voltage ($I_C=-500\text{mAdc}$, $I_B=-50\text{mAdc}$)	---	-1.2	Vdc
f_T	Transition Frequency ($V_{CE}=-20\text{Vdc}$, $I_C=-50\text{mAdc}$, $f=100\text{MHz}$)	200	---	MHz

CLASSIFICATION OF h_{FE}

Rank	L	H
Range	100-200	200-300

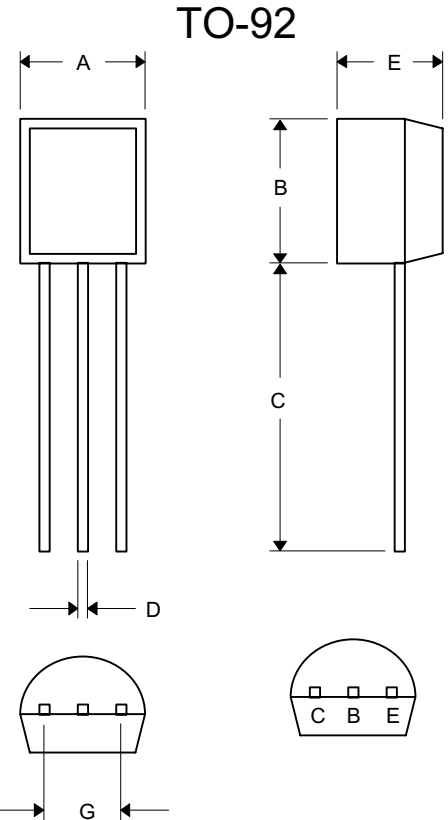

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.175	.185	4.45	4.70	
B	.175	.185	4.45	4.70	
C	.500	---	12.70	---	
D	.016	.020	0.41	0.63	
E	.135	.145	3.43	3.68	
G	.095	.105	2.42	2.67	



TM

Micro Commercial Components

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.