FLTWC0311-18-0 - ACTIVE

FlexLite

TE Internal #: 733809-000 Hook Up Wire, FlexLite TW, 600V Voltage Rating, Black Wire Color, 18AWG Wire Size, .82mm² Wire Size, Operating Temperature Range -65 – 135 °C

View on TE.com >

Wire & Cable > Hook Up Wire



Cable Type: FlexLite TW Voltage Rating: 600 V Wire Color: Black Insulation Material: Flame-Retardant, Modified Polyester Conductor Material: Tin-Coated Copper

Features

Product Type Features

Product Type

Product Classification

Wire

Wire - Commercial



Cable Style	Primary, Stranded	
Cable Type	FlexLite TW	
Configuration Features		
Number of Conductors	1	
Number of Strands	19	
Electrical Characteristics		
Resistance (Max)	6.22 Ω/1000 ft @ 68°F	
Voltage Rating	600 V	
Body Features		
Weight	9.52 kg/km	
Wire Color	Black	
Insulation Material	Flame-Retardant, Modified Polyester	
Conductor Material	Tin-Coated Copper	
Dimensions		
	18 AWG	

FLTWC0311-18-0

Hook Up Wire, FlexLite TW, 600V Voltage Rating, Black Wire Color, 18AWG Wire Size, .82mm² Wire Size, Operating Temperature Range -65 – 135 °C



Wire Diameter	1.65 mm[.065 in]
Overall Outside Diameter Range	1.6 – 1.7 mm[.063 – .067 in]
Conductor Diameter	1.18 mm[.047 in]
Strand Size	30 AWG
Wire Size	.82 mm ²
Usage Conditions	
Operating Temperature Range	-65 – 135 °C
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUN 2020 (209) Candidate List Declared Against: JAN 2020 (205) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900

ppm.

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


FLTWC0311-18-0

Hook Up Wire, FlexLite TW, 600V Voltage Rating, Black Wire Color, 18AWG Wire Size, .82mm² Wire Size, Operating Temperature Range -65 – 135 °C



	()	Ha I		
6	-			
TE Mod D-436-3	el / Part # 7	650075-(000	

Customers Also Bought

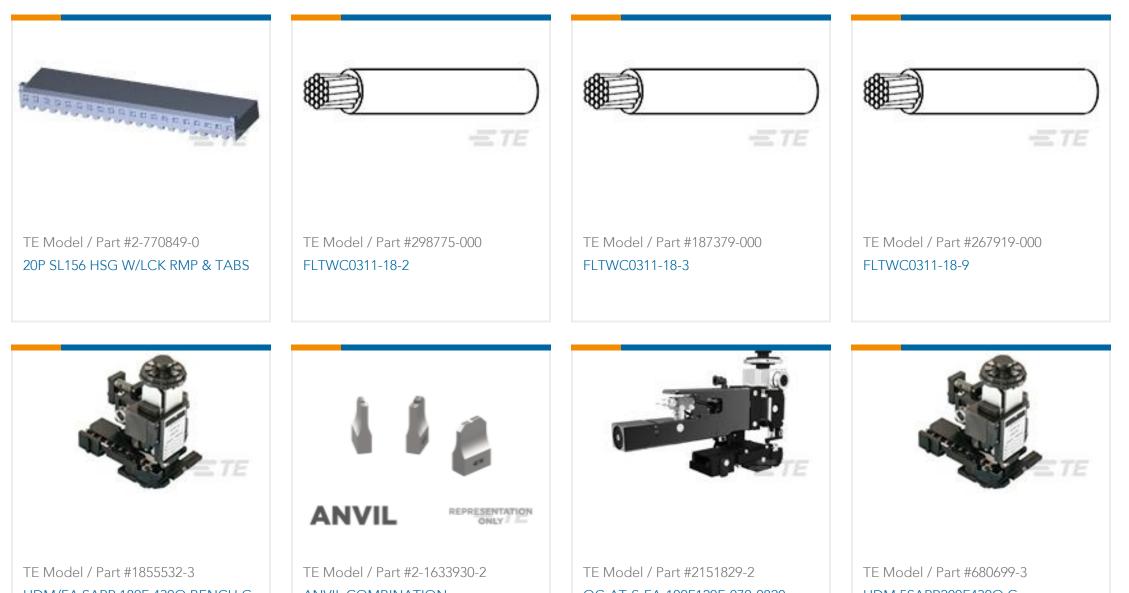

HDM/FA SAPR.180F.4300 BENCH G CUT ANVIL, COMBINATION



Documents

Product Drawings FLTWC0311-18-0

English

Datasheets & Catalog Pages 1654025_Sec9_FlexLite

English

Wire and Cable Overview

English

C For support call+1 800 522 6752

FLTWC0311-18-0

Hook Up Wire, FlexLite TW, 600V Voltage Rating, Black Wire Color, 18AWG Wire Size, .82mm² Wire Size, Operating Temperature Range -65 – 135 °C



Product Specifications Product Specification

English