REV.	DESCRIPTION	DATE
A	RELEASED	07/25-'02
B	更改料號	01/16-'03
C	正反腳位相反，更正腳位	02/25-'03

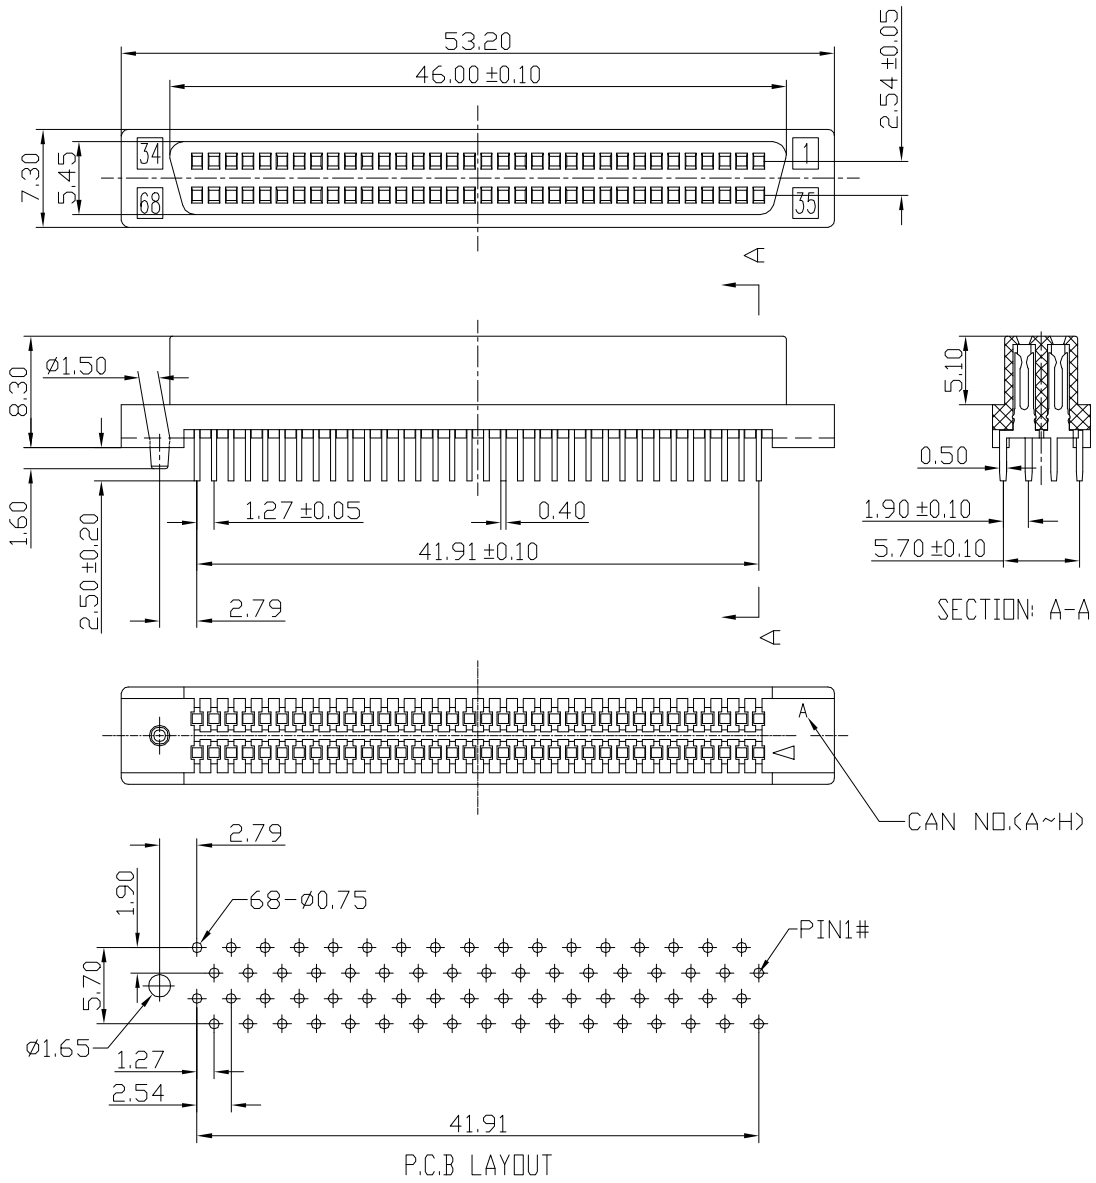

Notes:

*Material:

Housing: PBT with glass-fiber reinforced (UL 94V-0);
Contacts: Brass;
Contact Plating: Gold plating over Nickel on contact area;
Tin/Lead plating on terminal.

*Electrical Specification:

Contact Current Rating: 1 Amperes;
Dielectric Withstanding Voltage: AC 250V Min (For 1 minute);
Insulation Resistance: 500 Megohms Min(At 500V DC);
Contact Resistance: 35 Milliohms Max.

*Envirnmental:

Operating Temperature: -55°C to +105°C.

*Part Number:

WSS2-068-B B B 1 1

- 空白: No Mark
- W: Winning Mark
- 1: With Post
- 1: Standard Positon
- B: PBT
- B: Brass
- Gold A: Flash B: 3u"
- NO. of Contacts
- Series NO.

檔名 F/Name	C:\DWG\SCSI\AP\W068-S.DWG	T E L.	2299-4155	未註入公差 Tolerance Unless Otherwise Specified	設計 Designed	製圖 Drawing	檢圖 Reviewed	承認 Approved	單位 Unit	mm	比例尺 Scale		Third Angle Projection
品名 P/Name	SCSI 068 Pins Connectors (Standard)	F A X.	2299-4157	.X ~ ±0.38					日期 Date	02/25/03	Sheet	1	Of 1
公司 CO/Name	承豐精密工業股份有限公司 WIN WIN PRECISION INDUSTRIAL CO., LTD.			.XX ~ ±0.25 .XXX ~ ±0.20 ANGLE ~ ±3°					圖名 Name	SCSI 068-S Pin (標準腳位) 承認圖			REV
									圖號 Drawing No.	SCSI-068PN-AN-N001			C