



SANYO Semiconductors

DATA SHEET

LA75695VA

Monolithic Linear IC
 For Use in TV/VTR Applications
IF Signal Processing
(VIF+SIF+SIF converter)

Overview

The LA75695VA is a NTSC Support VIF/SIF signal-processing IC that makes the minimum number of adjustments possible. The system is designed so that VCO adjustment makes AFT adjustment unnecessary, thus simplifying the adjustment steps in endproduct manufacturing. PLL detection is adopted in the FM detector, allowing the LA75695VA to support multichannel detection for the audio signal. In addition, it also incorporates a buzz canceller that suppresses Nyquist buzz for improved audio quality.

Functions

- VIF Block: VIF Amplifier, Buzz Canceller, PLL Detector, IF AGC, RF AGC, AFT, Equalizer Amplifier
- 1st SIF Block: 1st SIF Amplifier, 1st SIF Detector
- SIF Block: Limiter Amplifier, PLL-FM Detector

Specifications

Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	$V_{CC1 \text{ max}}$		6	V
	$V_{CC2 \text{ max}}$		12	V
Circuit voltage	V_{13}, V_{17}		V_{CC}	V
Circuit current	I_6		-3	mA
	I_{10}		-10	mA
	I_{24}		-2	mA
Allowable power dissipation	$P_d \text{ max}$	$T_a \leq 70^\circ\text{C}$, Mounted on a board. *	600	mW
Operating temperature	T_{opr}		-20 to +75	$^\circ\text{C}$
Storage temperature	T_{stg}		-55 to +150	$^\circ\text{C}$

* When mounted on a $114.3 \times 76.1 \times 1.6 \text{ mm}^3$, glass epoxy circuit board.

- Any and all SANYO Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO Semiconductor representative nearest you before using any SANYO Semiconductor products described or contained herein in such applications.
- SANYO Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor products described or contained herein.

SANYO Semiconductor Co., Ltd.

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

LA75695VA

Recommended Operating Conditions at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	V _{CC1}		5	V
	V _{CC2}		9	V
Operating voltage	V _{CC1 op}		4.5 to 5.5	V
	V _{CC2 op}		4.5 to 9.5	V

Electrical Characteristics at Ta = 25°C, V_{CC1} = 5V, V_{CC2} = 9V, fp = 45.75MHz

VIF Block

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Circuit current 1	I ₅		35.7	42	48.3	mA
Circuit current 2	I ₄		6.7	7.9	9.1	mA
Maximum RF AGC voltage	V _{14H}		V _{CC2} -0.5	V _{CC2}		V
Minimum RF AGC voltage	V _{14L}			0	0.5	V
Input sensitivity	V _i	S1 = OFF	30	36	42	dBμV
AGC range	GR		50	56		dB
Maximum allowable input	V _{i max}		95	100		dBμV
No-signal video output voltage	V ₆		3.1	3.4	3.7	V
Sync. signal tip voltage	V _{6 tip}		0.8	1.1	1.3	V
Video output level	V _O		1.7	2.0	2.3	Vp-p
Black noise threshold voltage	V _{BTH}		0.5	0.8	1.1	V
Black noise clamp voltage	V _{BCL}		1.7	2.1	2.4	V
Video S/N	S/N		48	52		dB
C-S best	IC-S		38	43		dB
Frequency characteristics	f _C	6MHz	-3	-1.5		dB
Differential gain	DG			3	6.5	%
Differential phase	DP			3	5	°C
No-signal AFT voltage	V ₁₃		2.0	2.5	3.0	V
Maximum AFT voltage	V _{13H}		V _{CC2} -1.0	V _{CC2} -0.5	V _{CC2}	V
Minimum AFT voltage	V _{13L}		0	0.18	1.0	V
AFT detection sensitivity	Sf		17	25	34	mV/kHz
VIF input resistance	R _i	45.75MHz		1.5		kΩ
VIF input capacitance	C _i	45.75MHz		3		pF
APC pull-in range (U)	fpu		0.7	1.5		MHz
APC pull-in range (L)	fpl			-1.5	-0.9	MHz
AFT tolerance frequency 1	ΔFa1		-150	0	150	kHz
VCO1 maximum variable range (U)	dfu		1.0	1.5		MHz
VCO1 maximum variable range (L)	dfl			-1.5	-1	MHz
VCO control sensitivity	β		1.2	3.2	5.0	kHz/mV
Synchronization ratio	V _S		25.0	28.5	31.5	%

1st SIF Block

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Conversion gain	V _G		22	28	32	dB
4.5MHz output level	S _O		80	120	160	mVrms
1st SIF maximum input	S _{i max}		50	100		mVrms
1st SIF input resistance	R _i (SIF)	41.25MHz		2		kΩ
1st SIF input capacitance	C _i (SIF)	41.25MHz		3		pF

LA75695VA

SIF Block

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Limiting sensitivity	V_i (lim)		48	52	58	dB μ V
FM detector output voltage	V_O (FM)	4.5MHz \pm 25kHz *	420	500	620	mVrms
AM rejection ratio	AMR		50	60		dB
Distortion	THD			0.3	0.8	%
SIF S/N	S/N (FM)		63	69		dB

* IF the dynamic range of the FM detection output needs to be widened, connect a resistor and a capacitor in series between pin 23 and GND for level adjustment.



SIF Converter

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Maximum output level	V max		110	116	122	dB μ V

Package Dimensions


unit : mm

3287

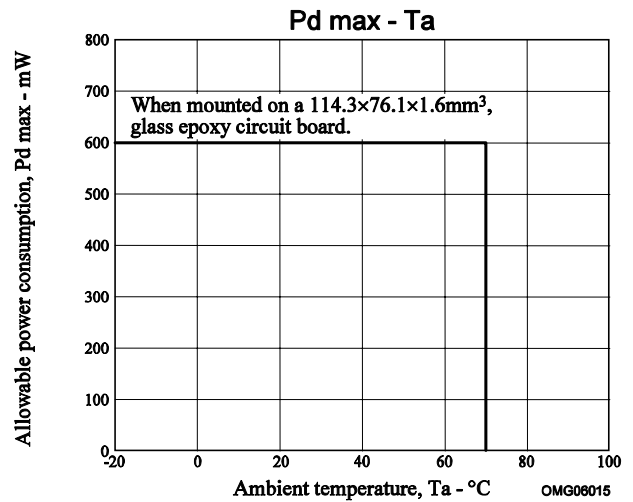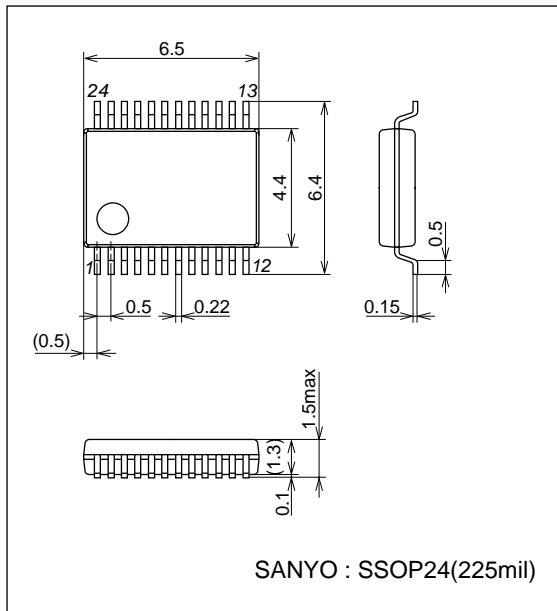

LA75695VA

Pin Assignment

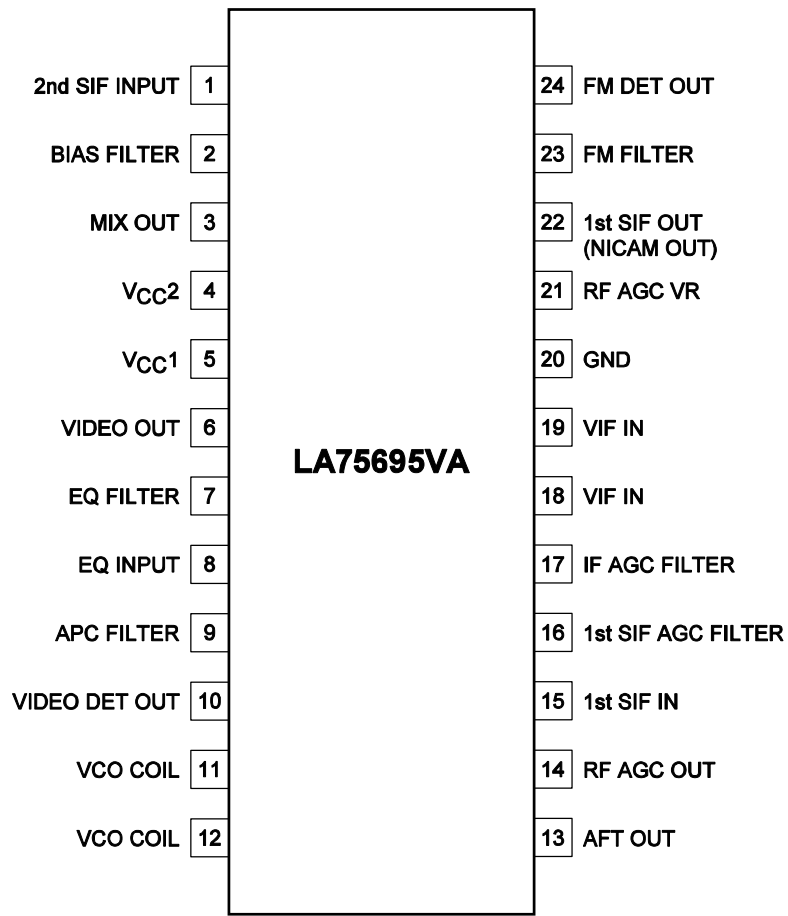


Top view

OMP06139


LA75695VA

Block Diagram and AC Characteristics Test Circuit

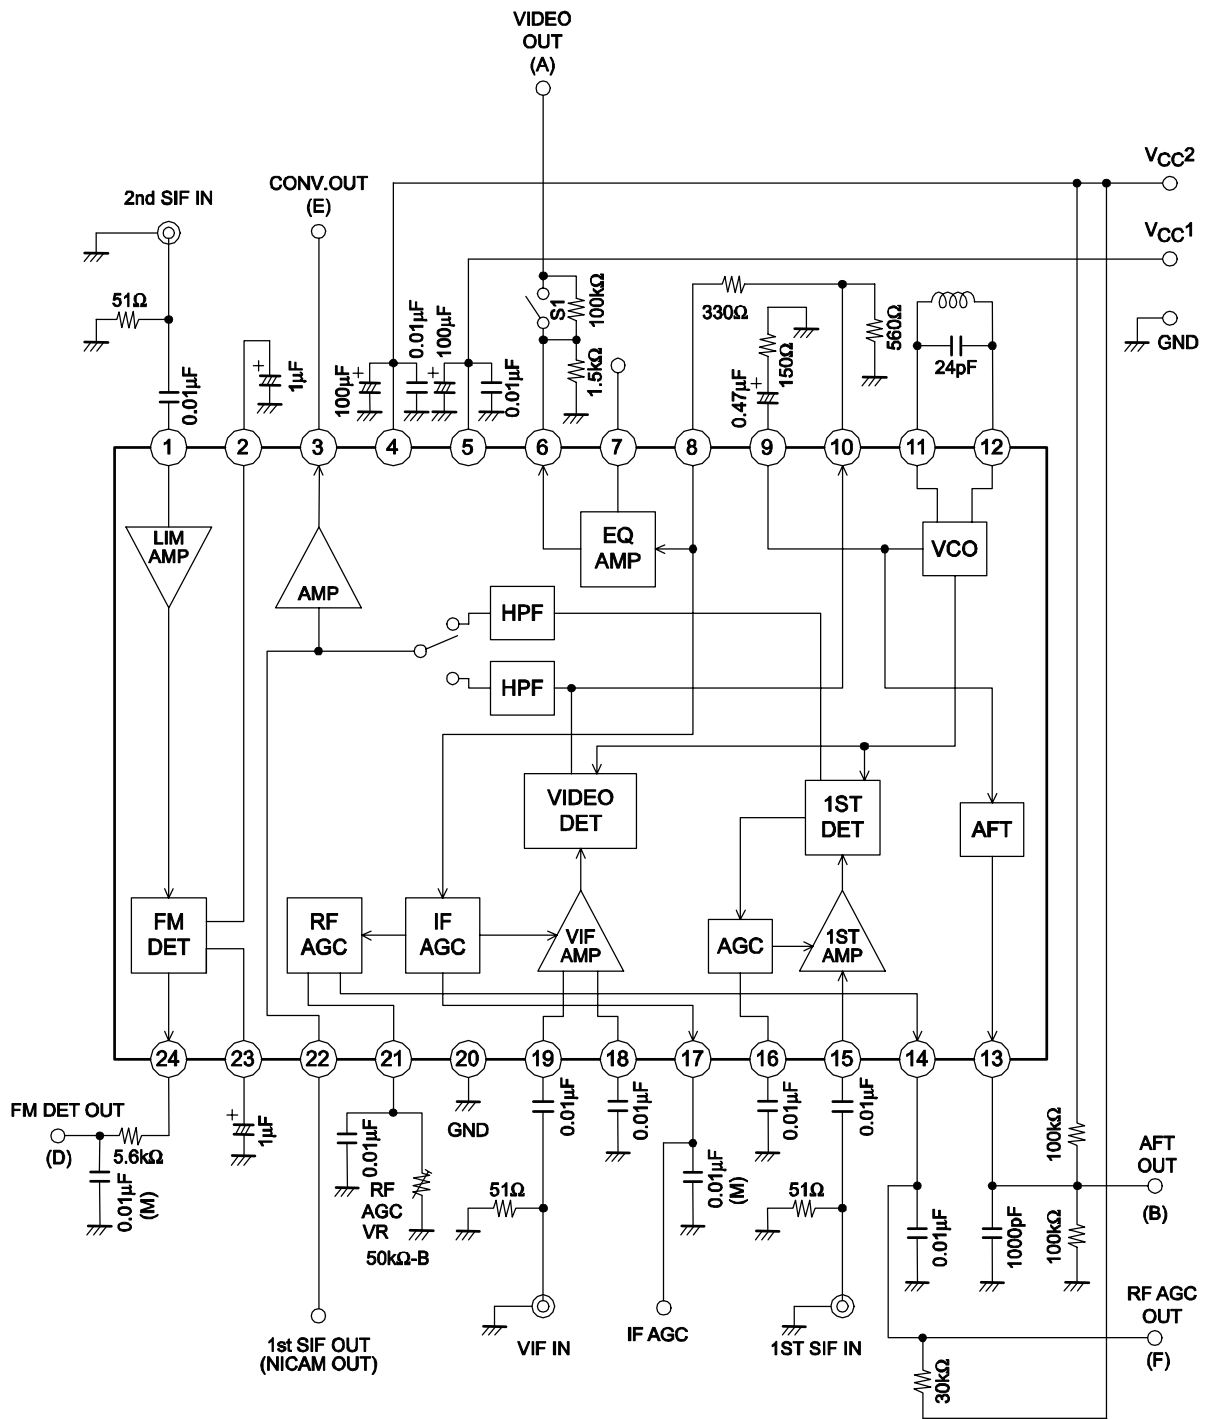

OMB06057

Input Impedance Test Circuit

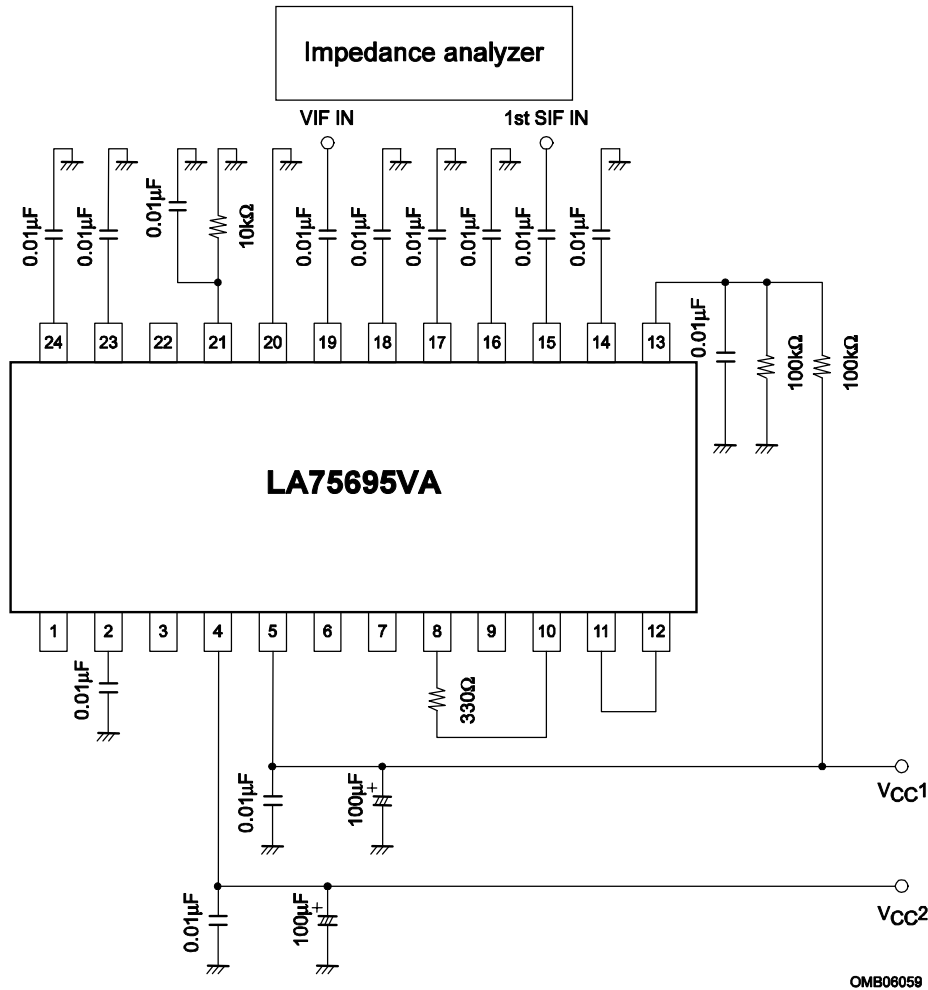

OMB06059

Test Conditions

V1. Circuit current [I5]

- (1) Internal AGC
- (2) Input a 45.75MHz 10mVrms continuous wave to the VIF input pin.
- (3) RF AGC Vr MAX
- (4) Connect an ammeter to the VCC1 and measure the incoming current.

V2. Circuit current [I4]

- (1) Internal AGC
- (2) Input a 45.75MHz 10mVrms continuous wave to the VIF input pin.
- (3) RF AGC Vr MAX
- (4) Connect an ammeter to the VCC2 and measure the incoming current.

V3. V4. Maximum RF AGC voltage, Minimum RF AGC voltage [V14H, V14L]

- (1) Internal AGC
- (2) Input a 45.75MHz 10mVrms continuous wave to the VIF input pin.
- (3) Adjust the RF AGC Vr (resistor value max.) and measure the maximum RF AGC voltage. F
- (4) Adjust the RF AGC Vr (resistor value min.) and measure the minimum RF AGC voltage. F

V5. Input sensitivity [Vi]

- (1) Internal AGC
- (2) fp = 45.75MHz 15kHz 78% AM (VIF input)
- (3) Turn off the S1 and put 100kΩ through.
- (4) VIF input level at which the 15kHz detection output level at test point A becomes V_O -3dB.

V6. AGC range [GR]

- (1) Apply the V_{CC} voltage to the external AGC, IF AGC (pin 17).
- (2) In the same manner as for the V5 (input sensitivity), measure the VIF input level at which the detection output level becomes $V_o -3dB$ V_{il}
- (3) $GR = V_{il} - V_i$

V7. Maximum allowable input [V_i max]

- (1) Internal AGC
- (2) $f_p = 45.75MHz$ 15kHz 78% AM (VIF input)
- (3) VIF input level at which the detection output level at test point A is video output (V_o) $\pm 1dB$.

V8. No-signal video output voltage [V_6]

- (1) Apply the V_{CC} voltage to the external AGC, IF AGC (pin 17).
- (2) Measure the DC voltage of VIDEO output (A).

V9. Sync. signal tip voltage [V_{6tip}]


- (1) Internal AGC
- (2) Input a 45.75MHz 10mVrms continuous wave to the VIF input pin.
- (3) Measure the DC voltage of VIDEO output (A).

V10. Video output level [V_o]

- (1) Internal AGC
- (2) $f_p = 45.75MHz$ 15kHz 78% AM $V_i = 10mVrms$ (VIF input)
- (3) Measure the peak value of the detection output level at test point A. (V_{p-p})

V11.V12. Black noise threshold level and clamp voltage [V_{BTH} , V_{BCL}]

- (1) Apply DC voltage to the external AGC, IF AGC (pin 17) and adjust the voltage.
- (2) $f_p = 45.75MHz$ 400Hz 40% AM 10mVrms (VIF input)
- (3) Adjust the IF AGC (pin 17) voltage to operate the noise canceller.
Measure the V_{BTH} , V_{BCL} at test point A.

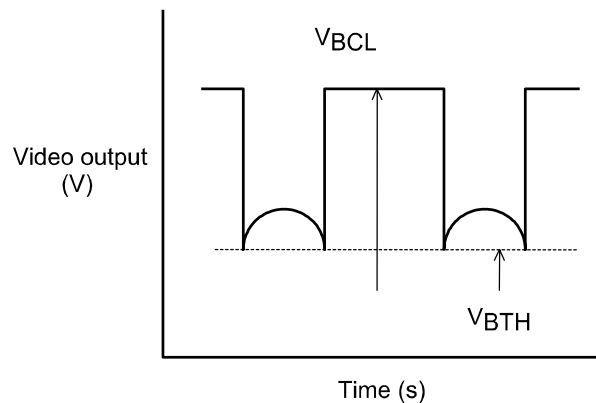

OMG06012


V13. Video S/N [S/N]

- (1) Internal AGC
- (2) $f_p = 45.75MHz$ CW = 10mVrms (VIF input)
- (3) Measure the noise voltage at test point A in RMS volts through a 10kHz to 4MHz band-pass filter.
..... Noise voltage (N)

$$(4) S/N = 20 \log \frac{\text{Video portion (V}_{p-p})}{\text{Noise voltage (V}_{rms})} = 20 \log \frac{1.12 V_{p-p}}{\text{Noise voltage (V}_{rms})} \text{ (dB)}$$

V14. C/S beat [IC-S]

- (1) Apply DC voltage to the external AGC IF AGC (pin 17) and adjust the voltage.
- (2) $f_p = 45.75\text{MHz}$ CW; 10mVrms
 $f_c = 42.17\text{MHz}$ CW; 10mVrms – 10dB
 $f_s = 41.25\text{MHz}$ CW; 10mVrms – 10dB
- (3) Adjust the IF AGC (pin 17) voltage so that the output DC level at test point A becomes 2.4V.
- (4) Measure the difference between the levels for 3.58MHz and 0.92MHz components at test point A.

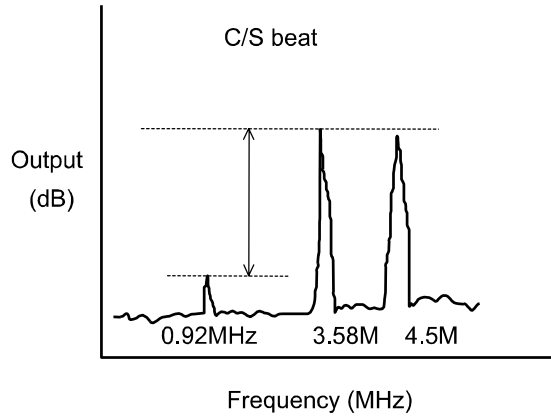

OMG06011

V15. Frequency characteristics [fc]

- (1) Apply DC voltage to the external AGC IF AGC (pin 17) and adjust the voltage.
- (2) SG1 : 45.75MHz continuous wave 10mVrms
 SG2 : 45.65MHz to 39.75MHz continuous wave 2mVrms
 Add the SG1 and SG2 signals using a T pat and adjust each SG signal level so that the above-mentioned levels are reached and input the added signals to the VIF IN.
- (3) First set the SG2 frequency to 45.65MHz, and then adjust the IF AGC voltage (V17) so that the output level at test point A becomes 0.5Vp-p. V1
- (4) Set the SG2 frequency to 39.75MHz and measure the output level. V2
- (5) Calculate as follows :

$$f_c = 20 \log \frac{V_2}{V_1} \text{ (dB)}$$

V16.V17. Differential gain, differential phase [DG, DP]

- (1) Internal AGC
- (2) $f_p = 45.75\text{MHz}$ APL50% 87.5% modulation video signal $V_i = 10\text{mVrms}$
- (3) Measure the DG and DP at test point A.


V18. No-signal AFT voltage [V13]

- (1) Internal AGC
- (2) Measure the DC voltage at the AFT output (B).

LA75695VA

V19.V20.V21. Maximum, minimum AFT output voltage, AFT detection sensitivity [V_{13H} , V_{13L} , S_f]

- (1) Internal AGC
- (2) $f_p = 45.75\text{MHz} \pm 1.5\text{MHz}$ Sweep = 10mVrms (VIF input)
- (3) Maximum voltage : V_{13H} , minimum voltage : V_{13L} .
- (4) Measure the frequency deviation at which the voltage at test point B changes from V_1 to V_2 Δf

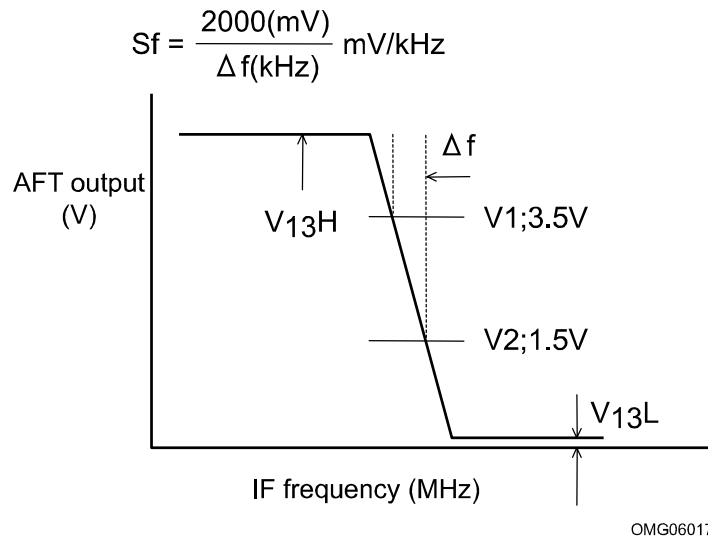

V22.V23. VIF input resistance, Input capacitance [R_i , C_i]

- (1) Referring to the Input Impedance Test Circuit, measure R_i and C_i with an impedance analyzer.

V24.V25. APC pull-in range [f_{pu} , f_{pl}]

- (1) Internal AGC
- (2) $f_p = 39\text{MHz}$ to 51MHz continuous wave; 10mVrms
- (3) Adjust the SG signal frequency to be higher than $f_p = 45.75\text{MHz}$ to bring the PLL to unlocked state.
Note : The PLL is assumed to be in unlocked state when a beat signal appears at test point A.
- (4) When the SG signal frequency is lowered, the PLL is brought to locked state again. f_1
- (5) Lower the SG signal frequency to bring the PLL to unlock state.
- (6) When the SG signal frequency is raised, the PLL is brought to locked state again. f_2
- (7) Calculate as follows :
 $f_{pu} = f_1 - 45.75\text{MHz}$
 $f_{pl} = f_2 - 45.75\text{MHz}$

V26. AFT tolerance frequency 1 [d_{fa1}]

- (1) Internal AGC
- (2) SG1 : 43.75MHz to 47.75MHz variable continuous wave 10mVrms
- (3) Adjust the SG1 signal frequency so that the AFT output DC voltage (test point B) becomes 2.5V ; that SG1 signal frequency is f_1 .
- (4) External AGC (Adjust the V_{17} .)
- (5) Apply 5V to the IF AGC (pin 17) and then pick up the VCO oscillation frequency from GND, etc.; and measure the frequency f_2
- (6) Calculate as follows :
AFT tolerance frequency : $d_{fa1} = f_2 - f_1$ (kHz)

V27.V28. VCO maximum variable range (U, L) [d_{fu} , d_{fl}]

- (1) Apply the V_{CC} voltage to the external AGC, IF AGC (pin 17).
- (2) Pick up the VCO oscillation frequency from the VIDEO output (A), GND, etc. and adjust the VCO coil so that the frequency becomes 45.75MHz .
- (3) f_l is taken as the frequency when 1V is applied to the APC pin (pin 9).
In the same manner, f_u is taken as the frequency when 5V is applied to the APC pin (pin 9).
 $d_{fu} = f_L - 45.75\text{MHz}$
 $d_{fl} = f_L - 45.75\text{MHz}$

V29. VCO control sensitivity [β]

- (1) Apply the V_{CC} voltage to the external AGC, IF AGC (pin 17).
- (2) Pick up the VCO oscillation frequency from the VIDEO output (A), GND, etc. and adjust the VCO coil so that the frequency becomes 45.75MHz.
- (4) f_1 is taken as the frequency when 3.0V is applied to the APC pin (pin 9).
In the same manner, f_2 is taken as the frequency when 3.4V is applied to the APC pin (pin 9).

$$\beta = \frac{f_2 - f_1}{400} \text{ (kHz/mV)}$$

V30. Synchronization ratio [V_S]

- (1) Internal AGC
- (2) $f_p = 45.75\text{MHz}$ 87.5% 10STEP B/W
 $V_i = 10\text{mVrms}$
- (3) Measure the output amplitude at the measuring point A. V_{video}
- (4) Measure the pedestal voltage (DC) at the measuring point A. V_{ped}
 $V_S = (V_{\text{ped}} - V_{6\text{tip}}) / V_{\text{video}} \times 100 \text{ (\%)}$

F1. 1st SIF conversion gain [V_G]

- (1) Internal AGC
- (2) $f_p = 45.75\text{MHz}$ CW; 10mV (VIF input)
 $f_s = 41.25\text{MHz}$ CW; 500 μV (1st SIF input) V_1
- (3) Detection output level at test point C (V_{rms}) V_2 (4.5MHz)
- (4) $V_G = 20 \log \frac{V_2}{V_1} \text{ dB}$

F2. 4.5MHz output level [S_O]

- (1) Internal AGC
- (2) $f_p = 45.75\text{MHz}$ CW; 10mV (VIF input)
 $f_s = 41.25\text{MHz}$ CW; 10mV (1st SIF input) V_1
- (3) Detection output level at test point C (4.5MHz) S_O (mVrms)

F3. 1st SIF maximum input [$S_i \text{ max}$]

- (1) Internal AGC
- (2) $f_p = 45.75\text{MHz}$ CW; 10mV (VIF input)
 $f_s = 41.25\text{MHz}$ CW; variable (1st SIF input)
- (3) Input level at which the detection output at test point C (4.5MHz) becomes $S_O \pm 2\text{dB}$ $S_i \text{ max}$

F4.F5. 1st SIF input resistance, Input capacitance [R_i (SIF1), C_i (SIF1)]

- (1) Using an input analyzer, measure R_i and C_i in the input impedance measuring circuit.

S1. SIF limiting sensitivity [V_i (lim)]

- (1) Apply the V_{CC} voltage to the external AGC, IF AGC (pin 17).
- (2) $f_s = 4.5\text{MHz}$ $f_m = 400\text{Hz}$ $\Delta F = \pm 25\text{kHz}$ (SIF input)
- (3) Set the SIF input level to 100mVrms and then measure the level at test point D. V_1
- (4) Lower the SIF input level until $V_1 - 3\text{dB}$ occurs. Measure the input level at that moment.

S2.S4. FM detection output voltage, distortion factor [V_O (FM), THD]

- (1) Apply the V_{CC} voltage to the external AGC, IF AGC (pin 17).
- (2) $f_s = 4.5\text{MHz}$ $f_m = 400\text{Hz}$ $\Delta F = \pm 25\text{kHz}$ (SIF input $V_i = 100\text{mVrms}$)
- (3) Assign the level at test point D to the FM detection output voltage and measure the distortion factor.

S3. AM rejection ratio [AMR]

- (1) Apply the V_{CC} voltage to the external AGC, IF AGC (pin 17).
- (2) $f_s = 4.5\text{MHz}$ $f_m = 400\text{Hz}$ AM = 30% (SIF input $V_i = 100\text{mVrms}$)
- (3) Measure the output level at test point D. V_{AM}

$$(4) \text{AMR} = 20 \log \frac{V_O \text{ (FM)}}{V_{\text{AM}}} \text{ dB}$$

S5. SIF S/N [S/N (FM)]

- (1) External AGC ($V_{17} = V_{CC}$)
- (2) $f_s = 4.5\text{MHz}$ NO MOD $V_i = 100\text{mVrms}$
- (3) Measure the output level at test point D. V_n

$$(4) S/N (FM) = 20\log \frac{V_O (FM)}{V_n} \text{ dB}$$


C2. SIF converter maximum output level [V max]

- (1) Internal AGC
- (2) $f_p = 45.75\text{MHz}$ CW; 10mV (VIF input)
 $f_s = 41.25\text{MHz}$ CW; 10mV (1st SIF input)
- (3) Measure the 4.5MHz component at test point E (MIX output). V max (dB μ V)

Note 1) Unless otherwise specified for VIF test, apply the V_{CC} voltage to the IF AGC and adjust the VCO coil so that oscillation occurs at 45.75MHz.

2) Unless otherwise specified, the SW1 must be ON.

Sample Application Circuit

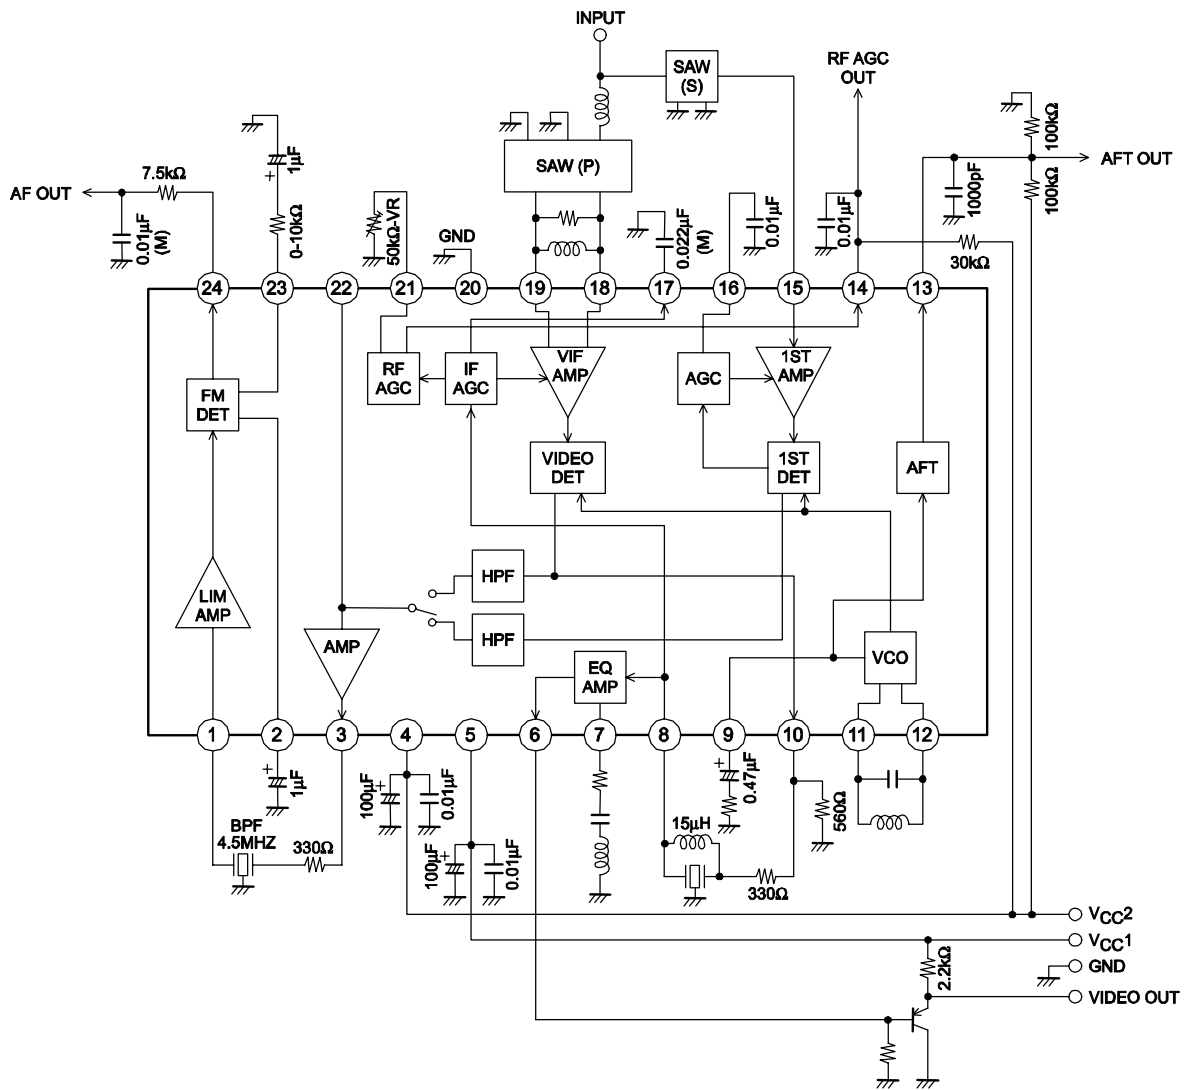

OMB06058

* When using a 5V common power supply for V_{CC1} and V_{CC2} , connect an L (= 10 μ H) across pins 4 to 5, and disconnect C (100 μ F and 0.01 μ F) from pin 4.

- Specifications of any and all SANYO Semiconductor products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Semiconductor Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO Semiconductor products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Semiconductor Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO Semiconductor believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of April, 2006. Specifications and information herein are subject to change without notice.