

MULTI-LAYER DIELECTRIC FILTER



2.0 x 1.25 x 0.95mm

ADFC21 Series

*RoHS COMPLIANT

STANDARD SPECIFICATIONS:

ADFC21-2400.00 - A			
CHARACTERISTICS	UNIT	TYP.	TOL.
Center Frequency Fc	MHz	2400.00	*+/-5.0
Bandwidth	MHz	+/-50.0	*+/-5.0
Insertion Loss	dB	≤1.8	*+/-0.5
Ripple	dB	≤1.0	≤0.5
V.S.W.R.	BW	≤2.0	*+/-0.2
Relative Attenuation			
880 ~ 915 MHz	dB	≥30	*+/-3.0
1710 ~ 1910 MHz	dB	≥30	*+/-3.0
2100 ~ 2170 MHz	dB	≥6	*+/-3.0
5000 ~ 6500 MHz	dB	≥20	*+/-3.0

*Post Environmental Tolerance

Operating Temperature	-40°C to +85°C
Storage Temperature	-40°C to +85°C
Impedance @ Input/Output	50Ω
Input Power	0.5W
Reliability (MTBF)	1x10 ⁻⁶ /pc.hr

ADFC21-2450.00 - A			
CHARACTERISTICS	UNIT	TYP.	TOL.
Center Frequency Fc	MHz	2450.00	*+/-5.0
Bandwidth	MHz	+/-50.0	*+/-5.0
Insertion Loss	dB	≤0.5	*+/-0.5
Ripple	dB	≤1.0	*+/-0.5
V.S.W.R.	BW	≤2.0	*+/-0.2
Relative Attenuation			
2 X fo MHz	dB	≥27	*+/-3.0
3 X fo MHz	dB	≥30	*+/-3.0
4 X fo MHz	dB	≥30	*+/-3.0

*Post Environmental Tolerance

ADFC21-5510.00 - A			
CHARACTERISTICS	UNIT	TYP.	TOL.
Center Frequency Fc	MHz	5510.00	*+/-5.0
Bandwidth	MHz	+/-362.5	*+/-5.0
Insertion Loss	dB	≤2.3	*+/-0.5
Ripple	dB	≤1.2	*+/-0.5
V.S.W.R.	BW	≤2.0	*+/-0.2
Relative Attenuation			
@ 4000 MHz	dB	≥30	*+/-3.0
@ 4600 MHz	dB	≥30	*+/-3.0
@ 11800 MHz	dB	≥25	*+/-3.0

*Post Environmental Tolerance


ADFC21-4885.00 - A			
CHARACTERISTICS	UNIT	TYP.	TOL.
Center Frequency Fc	MHz	4885.00	*+/-5.0
Bandwidth	MHz	+/-62.5	*+/-5.0
Insertion Loss	dB	≤2.5	*+/-0.5
Ripple	dB	≤1.0	*≤0.5
V.S.W.R.	BW	≤2.0	*+/-0.2
Relative Attenuation			
1607 ~ 1649 MHz	dB	≥30	*+/-3.0
3214 ~ 3298 MHz	dB	≥30	*+/-3.0
6429 ~ 6596 MHz	dB	≥28	*+/-3.0

*Post Environmental Tolerance

ADFC21-5800.00 - A			
CHARACTERISTICS	UNIT	TYP.	TOL.
Center Frequency Fc	MHz	5800.00	*+/-5.0
Bandwidth	MHz	+/-62.5	*+/-5.0
Insertion Loss	dB	≤2.5	*+/-0.5
Ripple	dB	≤1.0	*≤0.5
V.S.W.R.	BW	≤2.0	*+/-0.2
Relative Attenuation			
3000 ~ 3400 MHz	dB	≥35	*+/-3.0
@ 6800 MHz	dB	≥10	*+/-3.0
@ 8500 MHz	dB	≥25	*+/-3.0

*Post Environmental Tolerance

MULTI-LAYER DIELECTRIC FILTER




2.0 x 1.25 x 0.95mm

ADFC21 Series

* RoHS COMPLIANT

OUTLINE DRAWING:

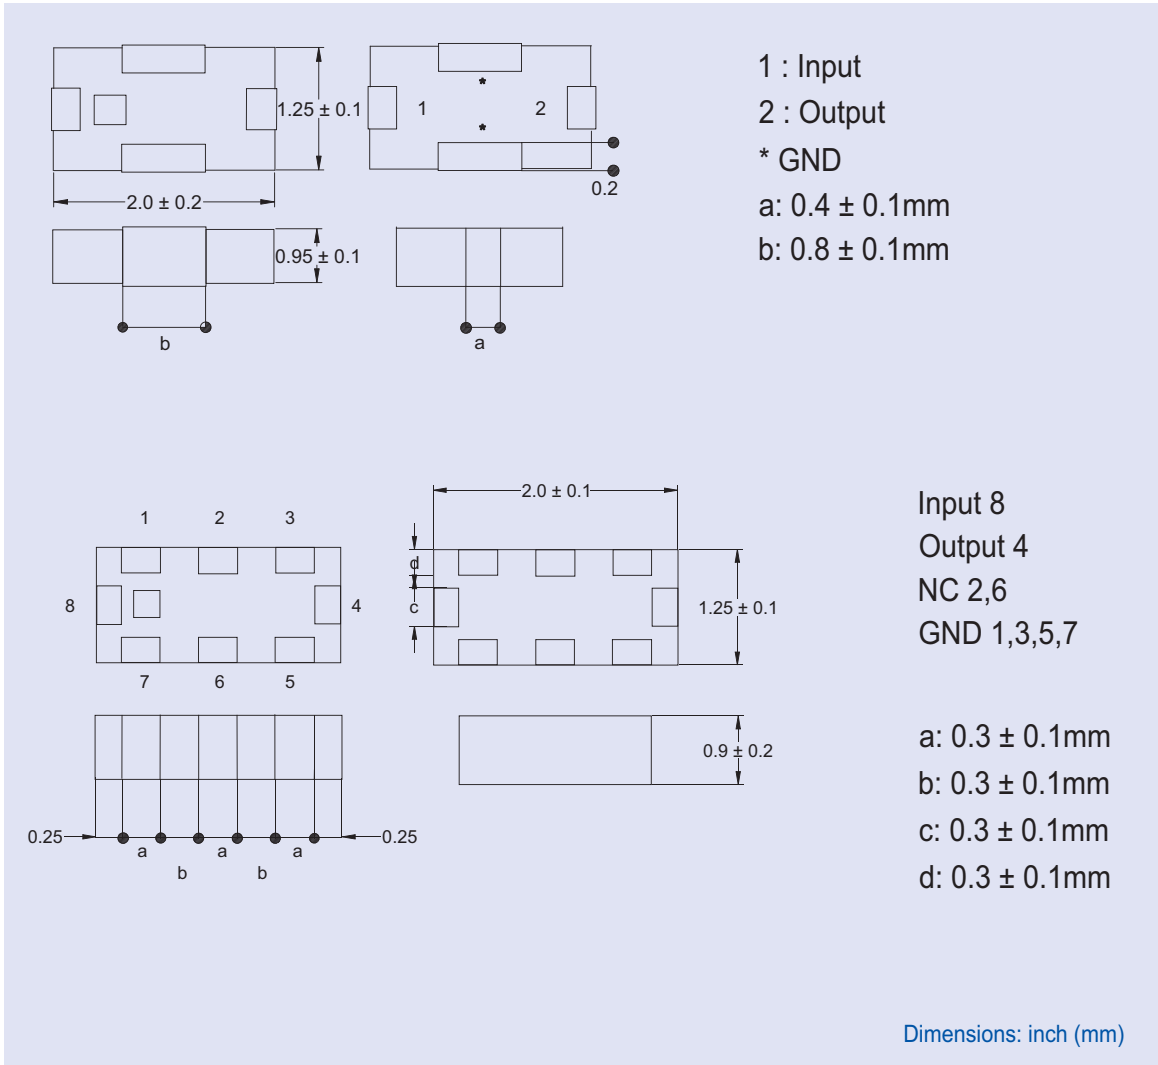

PACKAGING: -T= Tape and Reel (1,000pcs/reel)