

Pitch: .050" x .100"

HIGH DENSITY IDT PLUG, SHIELDED (FOR DISCRETE WIRE)

SPECIFICATIONS

ENVIRONMENTAL

Temperature Range: -55°C to +105°C

MECHANICAL

Insulator Material: Glass-filled thermoplastic, black, UL94V-0

Shell Material: Steel

Contact Material: Copper Alloy

Contact Plating: Gold flash or 10µ IN

Terminates To: Discrete cable, 28 or 30 AWG

ELECTRICAL


Current Rating: 1 AMP

CA- HDP- -

POSITION	PLATING	WIRE GAUGE
50	A = gold flash	28 = 28 AWG
68	B = 10µ IN gold	30 = 30 AWG

DIMENSIONS		
Position	A	B
50	1.577 [40.05]	1.200 [30.48]
68	2.027 [51.48]	1.650 [41.91]

Backshell is available.
Plastic = CA-XXBSP-L
Metal = CA-68BSM-X

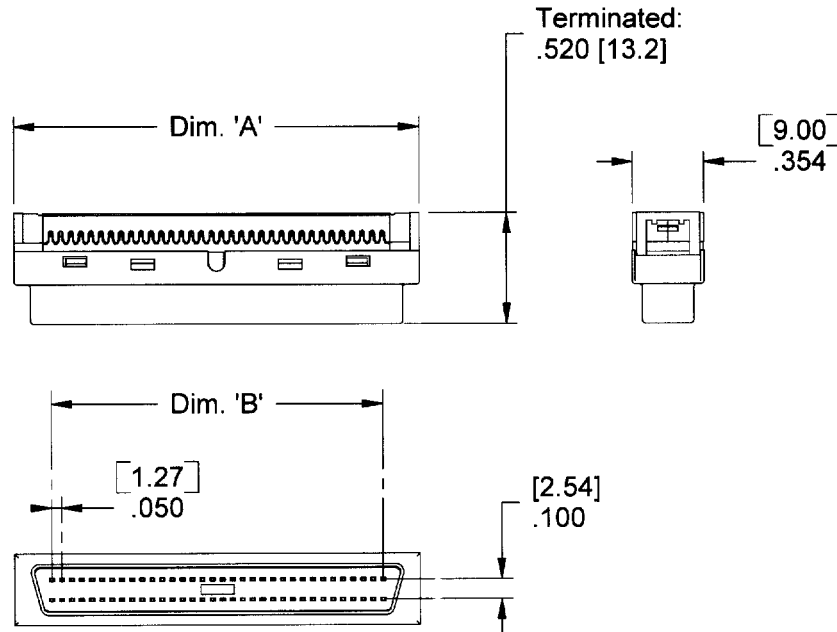

Drawing Number CA-620380

For more information please contact our customer service department or visit our website at circuitassembly.com