




SMJ 1001-7B

Quad-Diode Mixer

Product Features

- Input IP3 +13 dBm
- RF Freq 500 - 1000 MHz
- LO Freq 500 - 1000 MHz
- IF Freq DC - 500 MHz
- LO Drive Level +7 dBm

Functional Diagram

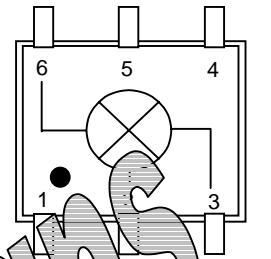

Pin No.	Description
1	LO Input
2	RF Input
3	IF Output
4-5	Ground
6	Ground

Specifications

Parameters	Units	Minimum	Typical	Maximum	Comments
RF Frequency	MHz	500		1000	
LO Frequency	MHz	500		1000	
IF Frequency	MHz	DC		500	
SSB Conversion Loss			10		
L-R Isolation			32		
L-I Isolation	dB		26		
IIP3	dBm		+13		
LO Drive	dBm		+7		
RF - Return Loss	dB		11		
LO - Return Loss	dB		14		
IF - Return Loss	dB		11		

Test conditions unless otherwise noted
 1. Tested in a 50 Ohm system, low Side LO.

Recommended Maximum Rating

Parameters	Rating
Operating Case Temperature	-40 to +70 °C
Storage Temperature	-65 to +100 °C
RF Input Power at 25°C (continuous)	+13 dBm

Ordering Information



Part No.	Description
SMJ 1001-7B	Diode Mixer (Available in Tape & Reel)
SMJ 1001-7B-PCB	Fully Assembled Application Circuit




SMJ 1001-7B

Quad-Diode Mixer

OUTLINE DRAWING

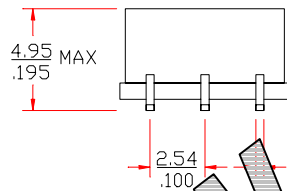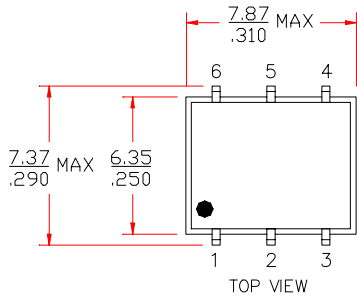


mm
inch

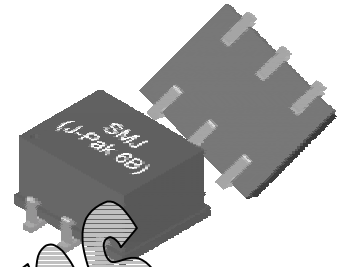


Not For New Designs

LAND PATTERN

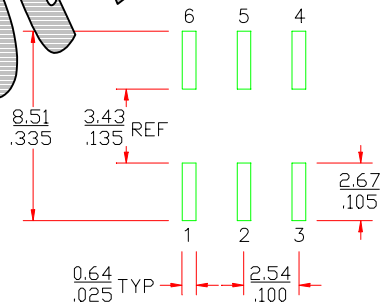

MOUNTING CONFIGURATION

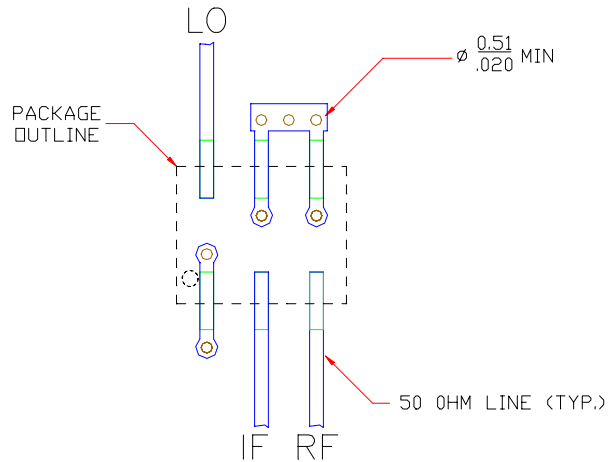

FUNCTION	PIN NO.
GROUND	1
IF	2
RF	3
GROUND	4-5
LO	6

- Notes:
1. Ground vias are critical for RF grounding considerations.
 2. If your PCB design rules allow, ground vias should be placed under the land pattern for better RF performance. Otherwise ground vias should be placed as close land pattern as possible.
 3. Trace width depends on PC board.