



Part Number: ASLS-5 (Alternate Part No: S1314)
Shock / Acceleration Switch
Product Data Sheet

PICTURE



OPERATION

ACCELERATE THIS DIRECTION TO CLOSE CONTACTS

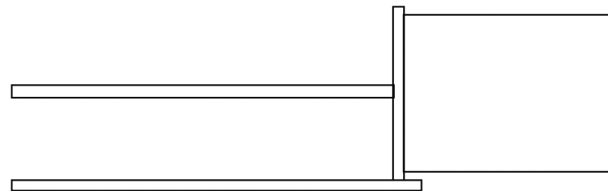


WORKING POSITION

FEATURES

- Resistant to Severe Environmental Conditions
- Case Material Steel-Gold Plated
- Hermetically Sealed & Inert Gas Filled

✓ RoHS Compliant

DIMENSIONS

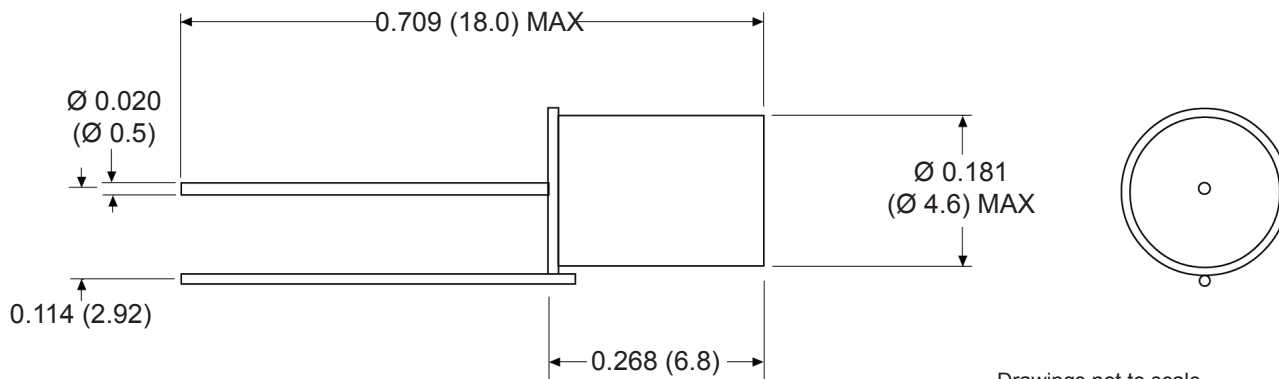

Drawings not to scale.
 All dimensions in inches (mm) nominal.

SPECIFICATION

| | |
|-----------------------|-----------------------------------|
| Contact Form / Style | Normally Open |
| Contact Capacity | 24 VDC MAX, 0.25 A MAX, 5 VA. MAX |
| Contact Resistance | 10 Ω MAX |
| Operating Temperature | -20° +85°C |
| Storage Temperature | -25° +90°C |
| Activation Level | 5 - 9.9 G |

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405

Belgium: + 32 (0)12 390400 - Comus Europe Ltd (Assemtch) UK: +44 (0) 1255 862236 - Germany: +49 (0)911 923 15 943 - Netherlands: +31(0)45 54 39 345 - India: +(91) (44) 43219090

©2015 Copyright Comus International, 454 Allwood Road, Clifton NJ 07012, USA