

# AN6123MS

## Speech network IC with ALC

### ■ Overview

The AN6123MS is an ALC IC for level control of audio signal (300 Hz to 3 kHz).


Adopting a mini 5-pin package, mounting on a small area is possible.

### ■ Features


- Wide supply voltage operation range of  $V_{CC} = 2.4 \text{ V}$  to  $6.0 \text{ V}$
- Small current consumption of  $I_{CC} = 500 \mu\text{A}$
- Reduction of a bad effect by the external noise thanks to a package for a rear side mounting.

### ■ Applications

- Cordless telephone, PDC, PHS telephone

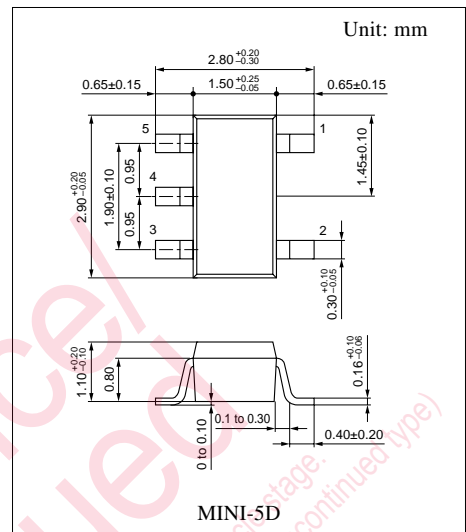

### ■ Block Diagram

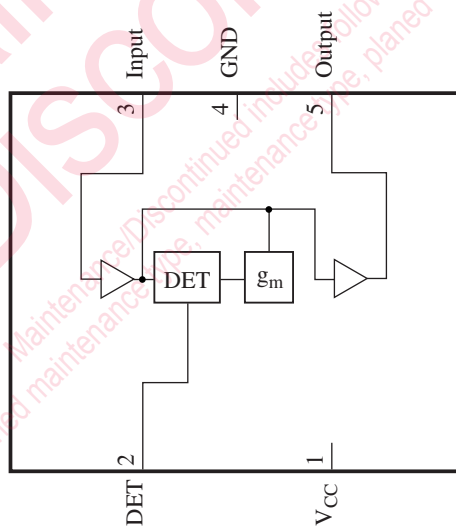

### ■ Pin Descriptions

Pin No.	Description	
1	V <sub>CC</sub>	Supply voltage pin
2	DET	Detection pin
3	Input	Signal input pin
4	GND	Grounding pin
5	Output	Signal output pin

### ■ Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Supply voltage	V <sub>CC</sub>	6.5	V
Supply current	I <sub>CC</sub>	3.0	mA
Power dissipation	P <sub>D</sub>	19.5	mW
Operating ambient temperature *	T <sub>opr</sub>	-20 to +75	°C
Storage temperature *	T <sub>stg</sub>	-55 to +125	°C

Note) \*: Except for the operating ambient temperature and storage temperature, all ratings are for T<sub>a</sub> = 25°C.

### ■ Recommended Operating Range

Parameter	Symbol	Range	Unit
Supply voltage	V <sub>CC</sub>	2.4 to 6.0	V

### ■ Electrical Characteristics at V<sub>CC</sub> = 3.0 V, f = 1 kHz, T<sub>a</sub> = 25°C

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Operating current	I <sub>CC</sub>	Without signal input	—	450	900	μA


#### • Design reference data

Note) The characteristics listed below are theoretical values based on the IC design and are not guaranteed.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Voltage gain	G <sub>V</sub>	V <sub>IN</sub> = -40 dBm	22	24	26	dB
Output level	V <sub>O</sub>	V <sub>IN</sub> = -10 dBm	-9.5	-7.5	-5.5	dBm
ALC control range	ΔALC	Output level varying amount at V <sub>IN</sub> = -25 dBm, V <sub>IN</sub> = 0 dBm	-1.5	—	1.5	dB
Total harmonic distortion factor	THD	At V <sub>IN</sub> = -10 dBm	—	1	3	%
Output noise voltage	V <sub>NO</sub>	Terminated by CCIT filter input 2 kΩ	—	-70	-60	dBm
Input impedance	Z <sub>IN</sub>	Pin 3 input impedance	15	30	45	kΩ
Output impedance	Z <sub>OUT</sub>	Pin 5 output impedance	200	400	600	Ω


Application Notes

1. I/O characteristics and distortion

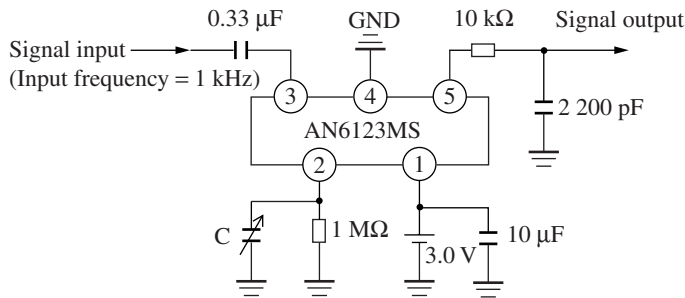


The I/O characteristics in the circuit shown on the left can be referred to in the graph below. Also note that if the C in the circuit is lowered, the distortion characteristics will become worse (Graph 2).

Graph 1. I/O characteristics and distortion (when C = 10 μF)

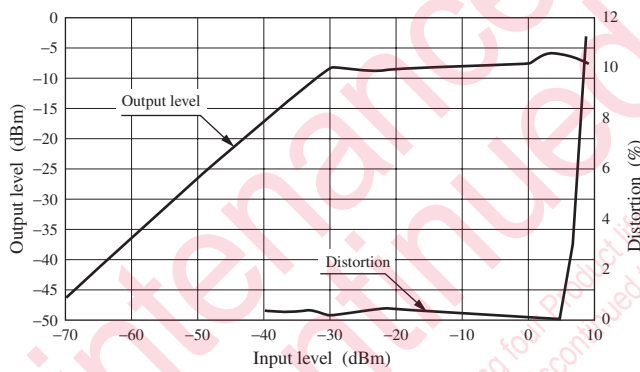


Graph 2. Distortion characteristics when C is variable

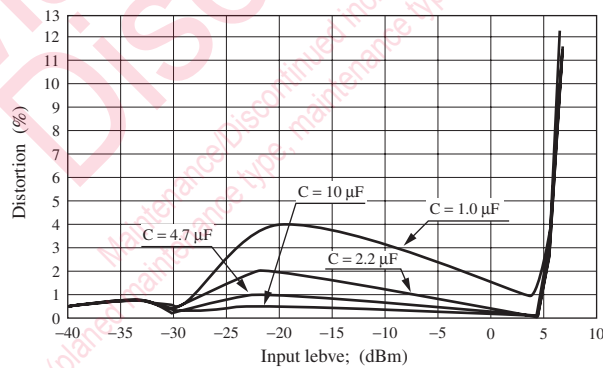

■ Application Notes (continued)


2. Input level adjustment for maximum output

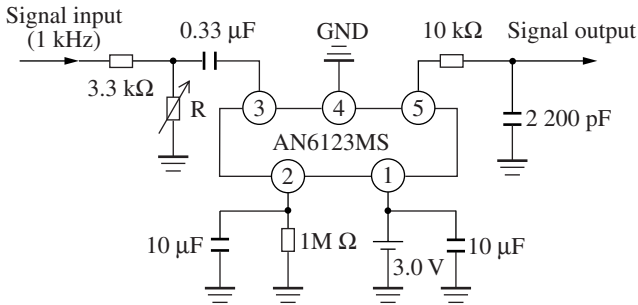


You can adjust R in the left circuit diagram to find the operation point for a maximum output level. For example, since the input level for a maximum output is  $-30$  dBm when R is open and the attenuation in the input stage is  $20 \log(3k/6.3k) = -6.4$  dB when R is  $3$  k $\Omega$ . This means a total gain loss is  $-6.4$  dB as compared with open mode, hence the input level to get the maximum output is  $-23.6$  dBm.

Likewise, the attenuation is  $12.7$  dB for  $R = 1$  k $\Omega$  and the desired input level becomes  $17.3$  dBm.

I/O characteristics

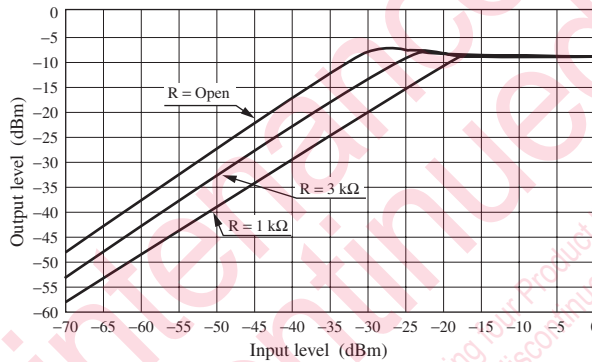


3. Output level adjustment for a maximum output

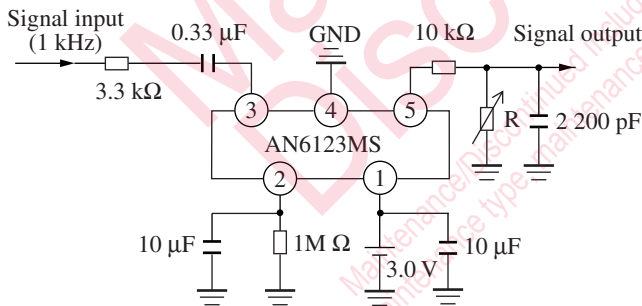

The maximum output level can be adjusted by R in the left circuit diagram.


Since the maximum output is  $-7.5$  dBm when R is open, it is  $20 \log(20k/30k) = -3.5$  dBm at  $R = 20$  k $\Omega$ . It is an attenuated value of by  $3.4$  dB against open mode. Therefore, the maximum output becomes  $-11$  dBm. Likewise, for  $R = 10$  k $\Omega$ , attenuation is  $6$  dB and the maximum output becomes  $-13.5$  dBm.

I/O characteristics

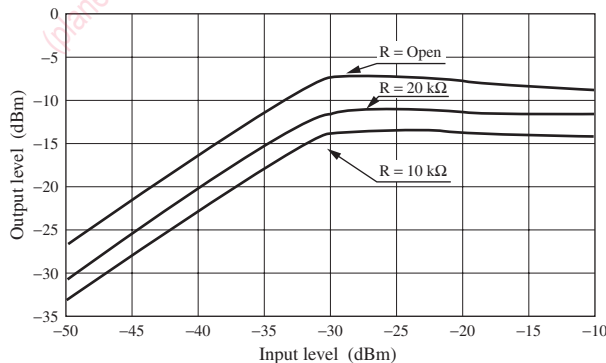


Application Notes (continued)


4. Frequency characteristics

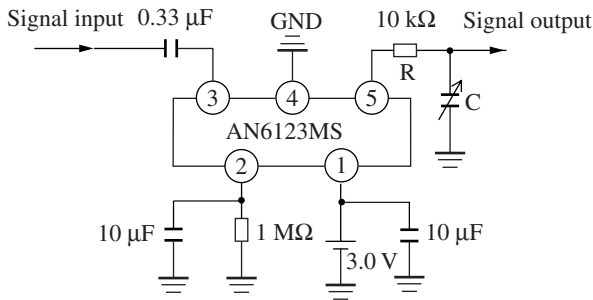

The AN6123MS itself has an almost flat frequency characteristic in the audio frequency band. The high-band frequency is set with R and C shown in the left circuit. The cut-off frequency  $f_c$  at  $R = 10\text{ k}\Omega$  and  $C = 2\text{ 200 pF}$ , that is the frequency at which the frequency characteristic deteriorates by 3 dB, is  $f_c = 1/2\pi CR = 7.2\text{ kHz}$ . At  $R = 10\text{ k}\Omega$  and  $C = 1\text{ 000 pF}$ , it is 16 kHz. (Refer to the graph.)

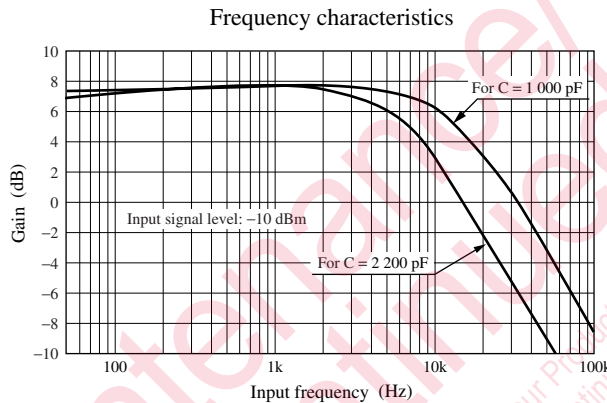

Application Circuit Example

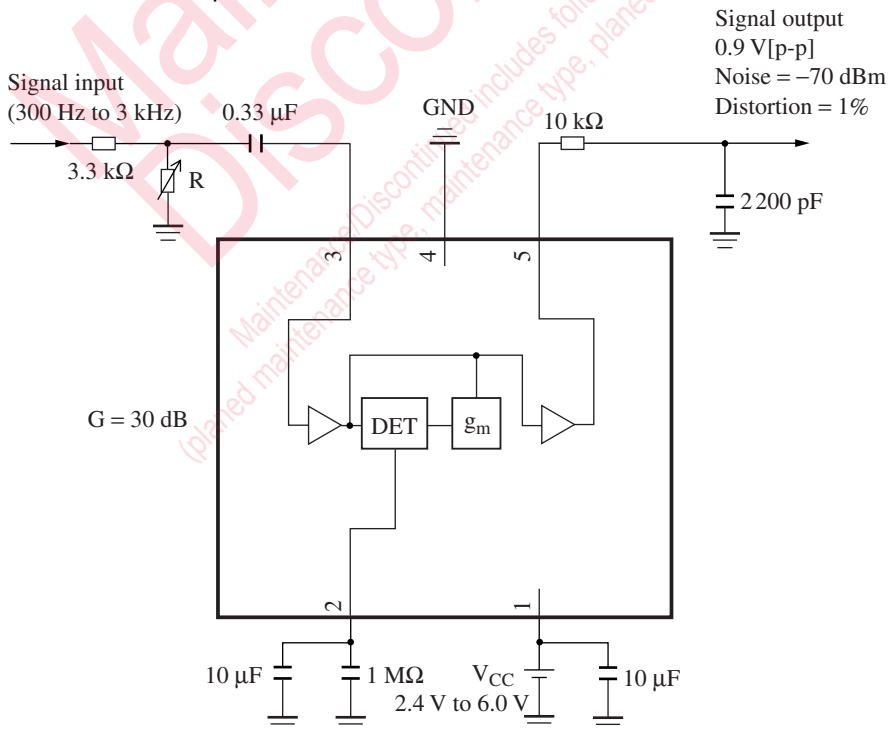

## Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products, and no license is granted under any intellectual property right or other right owned by our company or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).  
Consult our sales staff in advance for information on the following applications:
  - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
  - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
  - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.