

FHD-H01K-0300M



RealFlex® 5 Fiber Optic Drop Cable, hardened SC/APC-stub, 5 mm cable, 300 m

- Hardened connectors are factory-terminated and environmentally sealed for use in optical drop cable deployments
- Hardened drop cables incorporate hardened connector technology that is designed to withstand the rugged outside plant environment
- Hardened drop cables simplify installation and maintenance by reducing splicing requirements in the distribution portion of the network

Product Classification

Brand	RealFlex®
Product Series	FHD
Product Type	Fiber drop cable assembly
Regional Availability	EMEA

Construction Materials

Jacket UV Resistance	UV stabilized
Fiber Type	G.657.A2
Total Fibers, quantity	1
Fiber Mode	Singlemode
Jacket Color	Black

Dimensions

Cable Weight	36.0 kg/km
Cord Length	300.00 m 984.25 ft
Diameter Over Jacket	5.00 mm 0.20 in

Environmental Specifications

Environmental Space	Low Smoke Zero Halogen (LSZH)
Operating Temperature	-25 °C to +70 °C (-13 °F to +158 °F)
Qualification Standards	NEMA type 6, 10 ft waterhead Telcordia GR-20 Telcordia GR-3120
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)

General Specifications

Interface, connector A	Hardened full-size SC/APC
Interface, connector B	Unterminated
Color, boot A	Black
Connector A, quantity	1

FHD-H01K-0300M

Connector B, quantity	0
Package Quantity	1
Transmission Standards	IEC 61753-1 IEC 61754-4 IEC 61755
Color, connector A	Black


Mechanical Specifications

Cable Crush Resistance, maximum	8 N/mm
Minimum Bend Radius, loaded	100 mm
Minimum Bend Radius, unloaded	150 mm
Tensile Load, long term, maximum	300 N
Tensile Load, short term, maximum	1300 N

Optical Performance

Insertion Loss, maximum, connector A	0.40 dB
Return Loss, minimum, connector A	60.00 dB

Outline Drawing

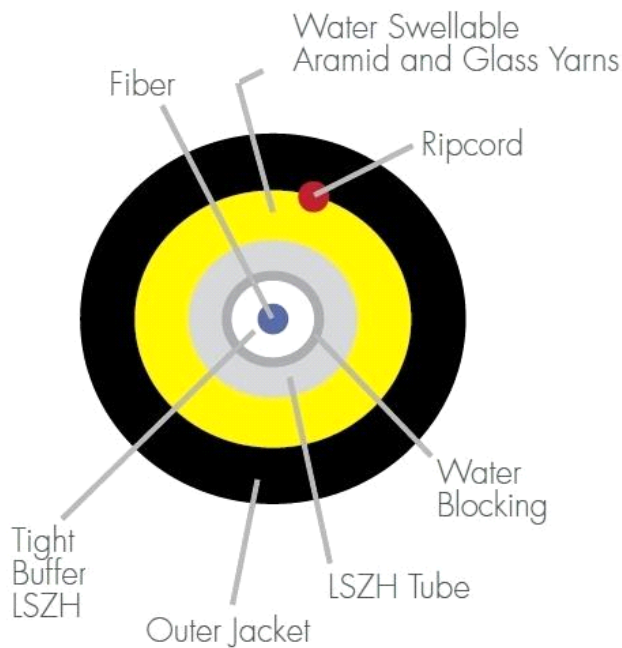

Regulatory Compliance/Certifications

Agency
RoHS 2011/65/EU

Classification
Compliant

