


Agilent AT-42070 Up to 6 GHz Medium Power Silicon Bipolar Transistor

Data Sheet

Description

Agilent's AT-42070 is a general purpose NPN bipolar transistor that offers excellent high frequency performance. The AT-42070 is housed in a hermetic, high reliability gold-ceramic 70 mil microstrip package. The 4 micron emitter-to-emitter pitch enables this transistor to be used in many different functions. The 20 emitter finger interdigitated geometry yields a medium sized transistor with impedances that are easy to match for low noise and medium power applications. This device is designed for use in low noise, wideband amplifier, mixer and oscillator applications in the VHF, UHF, and microwave frequencies. An optimum noise match near 50Ω up to 1 GHz, makes this device easy to use as a low noise amplifier.

70 mil Package

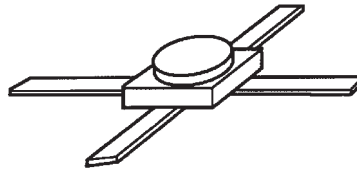

The AT-42070 bipolar transistor is fabricated using Agilent's 10 GHz f_T Self-Aligned-Transistor (SAT) process. The die is nitride passivated for surface protection. Excellent device uniformity, performance and reliability are produced by the use of ion-implantation, self-alignment techniques, and gold metalization in the fabrication of this device.

Features

- **High Output Power:**
21.0 dBm Typical $P_{1\text{ dB}}$ at 2.0 GHz
20.5 dBm Typical $P_{1\text{ dB}}$ at 4.0 GHz
- **High Gain at 1 dB Compression:**
15.0 dB Typical $G_{1\text{ dB}}$ at 2.0 GHz
10.0 dB Typical $G_{1\text{ dB}}$ at 4.0 GHz
- **Low Noise Figure:**
1.9 dB Typical NF_0 at 2.0 GHz
- **High Gain-Bandwidth Product:** 8.0 GHz Typical f_T
- **Hermetic Gold-ceramic Microstrip Package**



AT-42070 Absolute Maximum Ratings

| Symbol | Parameter | Units | Absolute Maximum ^[1] |
|------------------|------------------------------------|-------|---------------------------------|
| V _{EBO} | Emitter-Base Voltage | V | 1.5 |
| V _{CBO} | Collector-Base Voltage | V | 20 |
| V _{CEO} | Collector-Emitter Voltage | V | 12 |
| I _C | Collector Current | mA | 80 |
| P _T | Power Dissipation ^[2,3] | mW | 600 |
| T _j | Junction Temperature | °C | 200 |
| T _{STG} | Storage Temperature | °C | -65 to 200 |

Thermal Resistance^[2,4]:

$$\theta_{jc} = 150^{\circ}\text{C}/\text{W}$$

Notes:

1. Permanent damage may occur if any of these limits are exceeded.
2. T_{CASE} = 25°C.
3. Derate at 6.7 mW/°C for T_C > 110°C.
4. The small spot size of this technique results in a higher, though more accurate determination of θ_{jc} than do alternate methods. See MEASUREMENTS section "Thermal Resistance" for more information.

Electrical Specifications, T_A = 25°C

| Symbol | Parameters and Test Conditions ^[1] | Units | Min. | Typ. | Max. |
|---------------------------------|---|----------------------------|------|------|--------------|
| S _{21E} ² | Insertion Power Gain; V _{CE} = 8 V, I _C = 35 mA | f = 2.0 GHz f = 4.0 GHz | dB | 10.5 | 11.5 5.5 |
| P _{1dB} | Power Output @ 1 dB Gain Compression V _{CE} = 8 V, I _C = 35 mA | f = 2.0 GHz f = 4.0 GHz | dBm | | 21.0 20.5 |
| G _{1dB} | 1 dB Compressed Gain; V _{CE} = 8 V, I _C = 35 mA | f = 2.0 GHz f = 4.0 GHz | dB | | 15.0 10.0 |
| NF _O | Optimum Noise Figure; V _{CE} = 8 V, I _C = 10 mA | f = 2.0 GHz f = 4.0 GHz | dB | | 1.9 3.0 |
| G _A | Gain @ NF _O ; V _{CE} = 8 V, I _C = 10 mA | f = 2.0 GHz f = 4.0 GHz | dB | | 14.0 10.5 |
| f _T | Gain Bandwidth Product: V _{CE} = 8 V, I _C = 35 mA | | GHz | | 8.0 |
| h _{FE} | Forward Current Transfer Ratio; V _{CE} = 8 V, I _C = 35 mA | | — | 30 | 150 |
| I _{CBO} | Collector Cutoff Current; V _{CB} = 8 V | | μA | | 0.2 |
| I _{EBO} | Emitter Cutoff Current; V _{EB} = 1 V | | μA | | 2.0 |
| C _{CB} | Collector Base Capacitance ^[1] ; V _{CB} = 8 V, f = 1 MHz | | pF | 0.28 | |

Note:

1. For this test, the emitter is grounded.

AT-42070 Typical Performance, $T_A = 25^\circ\text{C}$

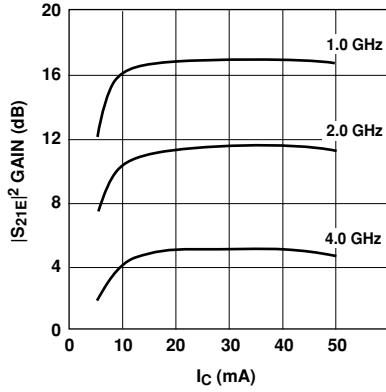


Figure 1. Insertion Power Gain vs. Collector Current and Frequency. $V_{CE} = 8\text{ V}$.

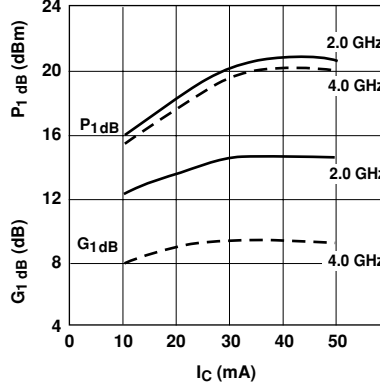


Figure 2. Output Power and 1 dB Compressed Gain vs. Collector Current and Frequency. $V_{CE} = 8\text{ V}$.

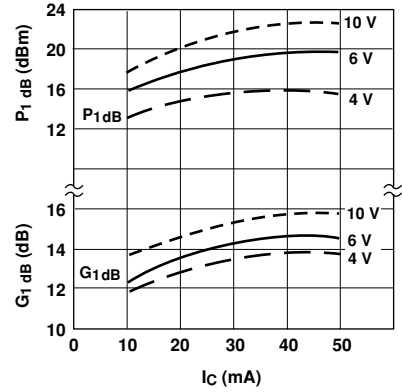


Figure 3. Output Power and 1 dB Compressed Gain vs. Collector Current and Voltage. $f = 2.0\text{ GHz}$.

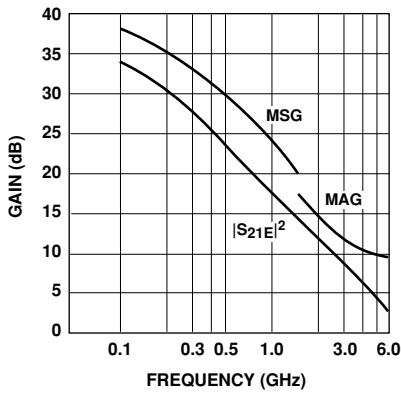


Figure 4. Insertion Power Gain, Maximum Available Gain and Maximum Stable Gain vs. Frequency. $V_{CE} = 8\text{ V}$, $I_C = 35\text{ mA}$.

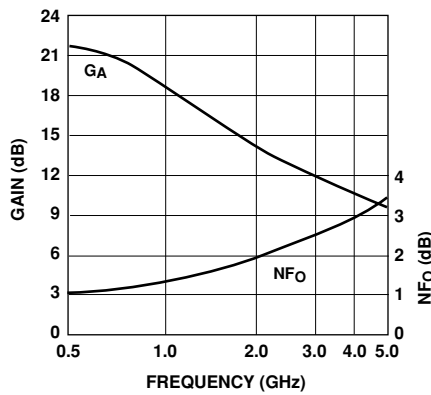


Figure 5. Noise Figure and Associated Gain vs. Frequency. $V_{CE} = 8\text{ V}$, $I_C = 10\text{ mA}$.

AT-42070 Typical Scattering Parameters,Common Emitter, $Z_O = 50 \Omega$, $T_A = 25^\circ\text{C}$, $V_{CE} = 8 \text{ V}$, $I_C = 10 \text{ mA}$

| Freq. GHz | S_{11} | | dB | S_{21} | | dB | S_{12} | | S_{22} | |
|--------------|----------|------|------|----------|------|-------|----------|------|----------|------|
| | Mag. | Ang. | | Mag. | Ang. | | Mag. | Ang. | Mag. | Ang. |
| 0.1 | .70 | -49 | 28.5 | 26.56 | 154 | -36.0 | .016 | 77 | .91 | -18 |
| 0.5 | .69 | -137 | 21.5 | 11.85 | 105 | -29.6 | .033 | 34 | .50 | -41 |
| 1.0 | .69 | -165 | 16.0 | 6.34 | 85 | -27.2 | .044 | 29 | .40 | -44 |
| 1.5 | .68 | -179 | 12.7 | 4.33 | 72 | -27.4 | .043 | 37 | .38 | -48 |
| 2.0 | .69 | 169 | 10.3 | 3.26 | 62 | -25.6 | .052 | 42 | .37 | -54 |
| 2.5 | .69 | 164 | 8.5 | 2.64 | 56 | -25.4 | .054 | 46 | .37 | -55 |
| 3.0 | .70 | 157 | 6.9 | 2.22 | 48 | -23.8 | .065 | 52 | .39 | -63 |
| 3.5 | .70 | 151 | 5.6 | 1.91 | 39 | -22.4 | .076 | 51 | .41 | -71 |
| 4.0 | .69 | 144 | 4.5 | 1.68 | 30 | -21.4 | .085 | 55 | .43 | -77 |
| 4.5 | .68 | 137 | 3.5 | 1.50 | 22 | -20.4 | .096 | 49 | .46 | -83 |
| 5.0 | .68 | 128 | 2.7 | 1.37 | 14 | -19.4 | .107 | 50 | .48 | -87 |
| 5.5 | .68 | 117 | 2.0 | 1.26 | 5 | -18.3 | .121 | 45 | .48 | -91 |
| 6.0 | .70 | 107 | 1.2 | 1.15 | -3 | -17.6 | .132 | 44 | .48 | -98 |

AT-42070 Typical Scattering Parameters,Common Emitter, $Z_O = 50 \Omega$, $T_A = 25^\circ\text{C}$, $V_{CE} = 8 \text{ V}$, $I_C = 35 \text{ mA}$

| Freq. GHz | S_{11} | | dB | S_{21} | | dB | S_{12} | | S_{22} | |
|--------------|----------|------|------|----------|------|-------|----------|------|----------|------|
| | Mag. | Ang. | | Mag. | Ang. | | Mag. | Ang. | Mag. | Ang. |
| 0.1 | .52 | -95 | 33.4 | 46.52 | 139 | -40.0 | .010 | 50 | .77 | -29 |
| 0.5 | .66 | -163 | 23.1 | 14.33 | 95 | -34.4 | .019 | 46 | .34 | -42 |
| 1.0 | .67 | 179 | 17.3 | 7.36 | 80 | -29.6 | .033 | 51 | .28 | -41 |
| 1.5 | .67 | 169 | 13.9 | 4.97 | 69 | -28.0 | .040 | 59 | .27 | -44 |
| 2.0 | .68 | 160 | 11.4 | 3.74 | 60 | -27.3 | .053 | 59 | .27 | -51 |
| 2.5 | .69 | 157 | 9.6 | 3.04 | 55 | -23.8 | .065 | 65 | .28 | -53 |
| 3.0 | .69 | 151 | 8.1 | 2.55 | 47 | -22.8 | .072 | 65 | .28 | -62 |
| 3.5 | .69 | 145 | 6.8 | 2.20 | 39 | -21.4 | .086 | 59 | .30 | -72 |
| 4.0 | .68 | 139 | 5.7 | 1.93 | 20 | -20.2 | .097 | 60 | .33 | -80 |
| 4.5 | .67 | 132 | 4.7 | 1.74 | 22 | -19.3 | .109 | 54 | .36 | -85 |
| 5.0 | .67 | 123 | 4.0 | 1.59 | 13 | -18.0 | .126 | 50 | .38 | -90 |
| 5.5 | .67 | 113 | 3.2 | 1.46 | 5 | -17.2 | .138 | 46 | .39 | -94 |
| 6.0 | .69 | 103 | 2.5 | 1.34 | -4 | -16.4 | .152 | 40 | .38 | -102 |

A model for this device is available in the DEVICE MODELS section.


AT-42070 Noise Parameters: $V_{CE} = 8 \text{ V}$, $I_C = 10 \text{ mA}$

| Freq. GHz | NF_O dB | Γ_{opt} | | $R_N/50$ |
|--------------|--------------|----------------|------|----------|
| | | Mag | Ang | |
| 0.1 | 1.0 | .05 | 15 | 0.13 |
| 0.5 | 1.1 | .06 | 75 | 0.13 |
| 1.0 | 1.5 | .10 | 126 | 0.12 |
| 2.0 | 1.9 | .23 | 172 | 0.11 |
| 4.0 | 3.0 | .45 | -145 | 0.17 |

Ordering Information

| Part Number | No. of Devices |
|-------------|----------------|
| AT-42070 | 10 |

70 mil Package Dimensions

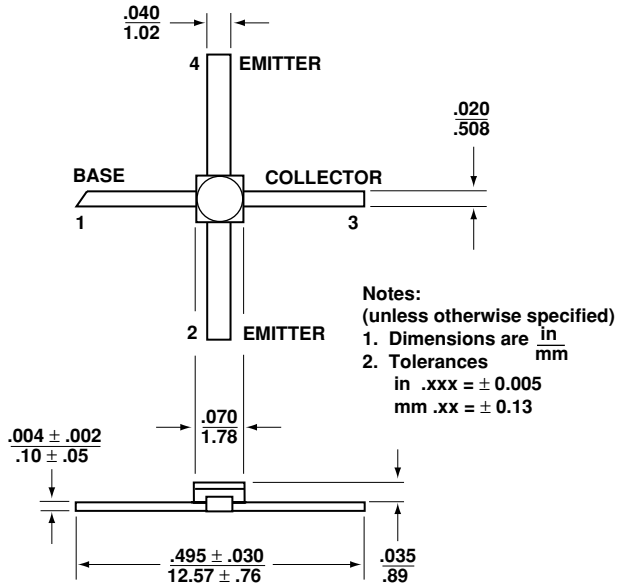

www.agilent.com/semiconductors

For product information and a complete list of distributors, please go to our web site.

For technical assistance call:

Americas/Canada: +1 (800) 235-0312 or
(916) 788-6763

Europe: +49 (0) 6441 92460

China: 10800 650 0017

Hong Kong: (65) 6756 2394

India, Australia, New Zealand: (65) 6755 1939

Japan: (+81 3) 3335-8152(Domestic/International), or
0120-61-1280(Domestic Only)

Korea: (65) 6755 1989

Singapore, Malaysia, Vietnam, Thailand, Philippines,
Indonesia: (65) 6755 2044

Taiwan: (65) 6755 1843

Data subject to change.

Copyright © 2005 Agilent Technologies, Inc.

Obsoletes 5966-4945E

March 28, 2005

5989-2654EN



Agilent Technologies