

# MEMORY

## LOW POWER SRAM CARD

PCMCIA Rel.2/JEIDA Ver.4 conformable

**MB98A9061x/9071x-20**

### LOW POWER STATIC RANDOM ACCESS MEMORY CARD 64 K/128 K-BYTE

#### ■ DESCRIPTION

The Fujitsu MB98A9061x and MB98A9071x are Static Random Access Memory (SRAM) cards capable of storing and retrieving large amounts of data. The memory circuits are housed in a credit-card sized 68-pin package. Internal circuitry is protected by two metal panels, one at the top and the bottom of the card, that help to reduce chip damage from electrostatic discharge.


When the SRAM card is not powered by its system, an on-board, replaceable lithium battery (coin-type) is used to retain data. When the lithium battery must be replaced, rechargeable battery that are built into the SRAM card, maintain data. (See the BLOCK DIAGRAM for location of batteries.)

A unique feature of the Fujitsu memory cards allows the user to organize the card into either an 8-bit or a 16-bit bus configuration. All cards are portable and operate on low power at high speed.

In accordance with the Personal Computer Memory Card International Association (PCMCIA) and Japan Electrical Industry Development Association (JEIDA) industry standard specification, SRAM cards offer additional EEPROM memory that is used to store attribute data. The attribute memory is an SRAM card option. (See page 3 for a description of the three available options.)

- Credit card size: 85.6 mm (length) × 54.0 mm (width) × 3.3 mm (thick).
- PCMCIA/JEIDA conformed two-piece 68-pin connector (with a two-row built-in 68-pin receptacle)
- Low operating and standby power consumption
- Built-in, rechargeable batteries for data retention during lithium battery replacement
- Battery voltage detect and write protect function

#### ■ PACKAGE

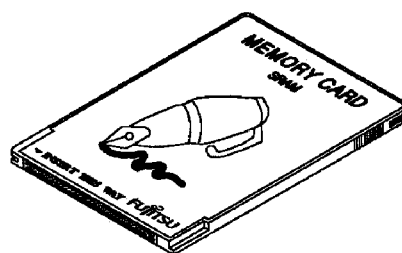

CRD-68P-M04

# MB98A9061x/9071x-20

## ■ ATTRIBUTE MEMORY OPTIONS

PCMCIA and JEIDA standard memory cards from Fujitsu provide a separate EEPROM memory address space for recording fundamental card information. It is used by the card manufacturers to record basic configuration information such as device type, size, speed, etc.

The attribute memory is selected by asserting the  $\overline{\text{REG}}$  pin on the card interface. Option descriptions as follows:

### OPTION 1: Attribute memory is not supported. REG Pin: Not Contacted

(JEIDA Ver.3 conformable)

Part Number	Main Memory		Attribute Memory		Memory Organization*
	Memory Device	Access Time	Memory Device	Access Time	
MB98A90611	256 K SRAM × 2 pcs	200 ns	—	—	64 K × 8 bits/32 K × 16 bits
MB98A90711	256 K SRAM × 4 pcs	200 ns	—	—	128 K × 8 bits/64 K × 16 bits

### OPTION 2: Attribute memory in a separate location is not supported.

When the  $\overline{\text{REG}}$  line is asserted, “FF” is output to the data bus to indicate that attribute data may be stored in main memory.

(PCMCIA Rel.2/JEIDA Ver.4 conformable)

Part Number	Main Memory		Attribute Memory		Memory Organization*
	Memory Device	Access Time	Memory Device	Access Time	
MB98A90612	256 K SRAM × 2 pcs	200 ns	—	—	64 K × 8 bits/32 K × 16 bits
MB98A90712	256 K SRAM × 4 pcs	200 ns	—	—	128 K × 8 bits/64 K × 16 bits

### OPTION 3: Attribute memory is supported. The data is stored in an 16K-bit EEPROM.

When the  $\overline{\text{REG}}$  line is asserted, data stored in EEPROM is output to the data bus.


(PCMCIA Rel.2/JEIDA Ver.4 conformable)

Part Number	Main Memory		Attribute Memory		Memory Organization*
	Memory Device	Access Time	Memory Device	Access Time	
MB98A90613	256 K SRAM × 2 pcs	200 ns	EEPROM × 1 pcs	300 ns	64 K × 8 bits/32 K × 16 bits
MB98A90713	256 K SRAM × 4 pcs	200 ns	EEPROM × 1 pcs	300 ns	128 K × 8 bits/64 K × 16 bits

**Note:** \* To be configured by user.

# MB98A9061x/9071x-20

Fig. 1 - MB98A9061x/9071x BLOCK DIAGRAM

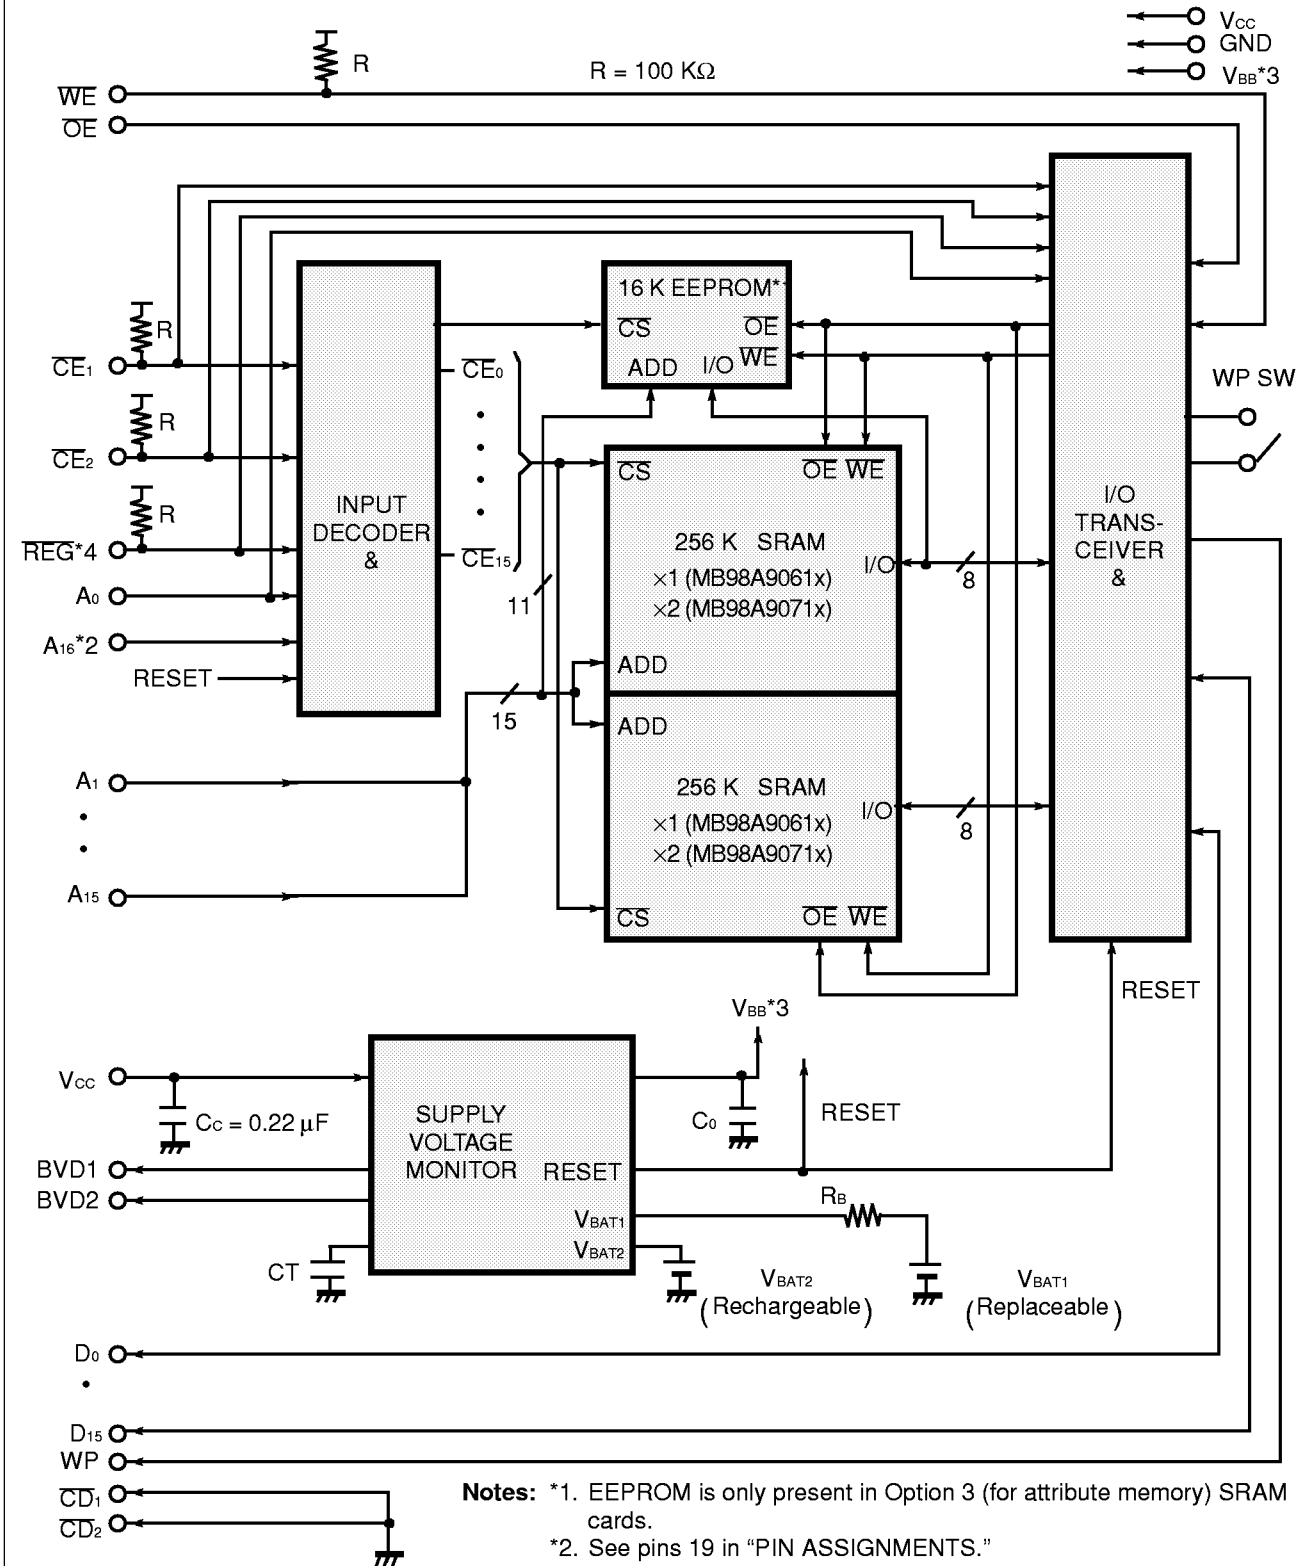

# MB98A9061x/9071x-20

## ■ PIN ASSIGNMENTS


MB98A9061x	MB98A9071x	Pin No.		MB98A9061x	MB98A9071x
GND	GND	1	35	GND	GND
D <sub>3</sub>	D <sub>3</sub>	2	36	$\overline{CD}_1$	$\overline{CD}_1$
D <sub>4</sub>	D <sub>4</sub>	3	37	D <sub>11</sub>	D <sub>11</sub>
D <sub>5</sub>	D <sub>5</sub>	4	38	D <sub>12</sub>	D <sub>12</sub>
D <sub>6</sub>	D <sub>6</sub>	5	39	D <sub>13</sub>	D <sub>13</sub>
D <sub>7</sub>	D <sub>7</sub>	6	40	D <sub>14</sub>	D <sub>14</sub>
$\overline{CE}_1$	$\overline{CE}_1$	7	41	D <sub>15</sub>	D <sub>15</sub>
A <sub>10</sub>	A <sub>10</sub>	8	42	$\overline{CE}_2$	$\overline{CE}_2$
$\overline{OE}$	$\overline{OE}$	9	43	N.C.	N.C.
A <sub>11</sub>	A <sub>11</sub>	10	44	N.C.	N.C.
A <sub>9</sub>	A <sub>9</sub>	11	45	N.C.	N.C.
A <sub>8</sub>	A <sub>8</sub>	12	46	N.C.	N.C.
A <sub>13</sub>	A <sub>13</sub>	13	47	N.C.	N.C.
A <sub>14</sub>	A <sub>14</sub>	14	48	N.C.	N.C.
$\overline{WE}$	$\overline{WE}$	15	49	N.C.	N.C.
N.C.	N.C.	16	50	N.C.	N.C.
V <sub>CC</sub>	V <sub>CC</sub>	17	51	V <sub>CC</sub>	V <sub>CC</sub>
N.C.	N.C.	18	52	N.C.	N.C.
N.C.	A <sub>16</sub>	19	53	N.C.	N.C.
A <sub>15</sub>	A <sub>15</sub>	20	54	N.C.	N.C.
A <sub>12</sub>	A <sub>12</sub>	21	55	N.C.	N.C.
A <sub>7</sub>	A <sub>7</sub>	22	56	N.C.	N.C.
A <sub>6</sub>	A <sub>6</sub>	23	57	N.C.	N.C.
A <sub>5</sub>	A <sub>5</sub>	24	58	N.C.	N.C.
A <sub>4</sub>	A <sub>4</sub>	25	59	N.C.	N.C.
A <sub>3</sub>	A <sub>3</sub>	26	60	N.C.	N.C.
A <sub>2</sub>	A <sub>2</sub>	27	61	REG/N.C.*	REG/N.C.*
A <sub>1</sub>	A <sub>1</sub>	28	62	BVD2	BVD2
A <sub>0</sub>	A <sub>0</sub>	29	63	BVD1	BVD1
D <sub>0</sub>	D <sub>0</sub>	30	64	D <sub>8</sub>	D <sub>8</sub>
D <sub>1</sub>	D <sub>1</sub>	31	65	D <sub>9</sub>	D <sub>9</sub>
D <sub>2</sub>	D <sub>2</sub>	32	66	D <sub>10</sub>	D <sub>10</sub>
WP	WP	33	67	$\overline{CD}_2$	$\overline{CD}_2$
GND	GND	34	68	GND	GND

\* : N.C. terminal in MB98A9XX11 series.

## ■ PIN DESCRIPTIONS

Symbol	Pin Name	Input/Output	Function
A <sub>0</sub> to A <sub>16</sub>	Address Input	Input	Address Inputs, A <sub>0</sub> to A <sub>16</sub> .
D <sub>0</sub> to D <sub>15</sub>	Data Input/Output	Input/Output	Data Inputs/Outputs. The data bus size (8-bit or 16-bit) selected with $\overline{CE1}$ and $\overline{CE2}$ .
$\overline{CE1}$	Card Enable for Lower Byte	Input	Active Low – Lower byte (D <sub>0</sub> to D <sub>7</sub> ) is selected for read/write function of SRAM cards.
$\overline{CE2}$	Card Enable for Upper Byte	Input	Active Low – Upper byte (D <sub>8</sub> to D <sub>15</sub> ) is selected for read/write function of SRAM cards.
$\overline{REG}$	Attribute Memory Select	Input	Active Low – Attribute memory is selected for read/write function of identification data of SRAM cards. (N.C. or "FF" data or attribute data.)
$\overline{OE}$	Output Enable	Input	Active Low – Output enable for SRAM cards.
$\overline{WE}$	Write Enable	Input	Active Low – Write enable for SRAM cards.
$\overline{CD1}$ , $\overline{CD2}$	Card Detect	Output	These pins detect if the card has been correctly inserted. Both pins are tied to GND internally.
WP	Write Protect	Output	Write controller for SRAM cards This pin outputs the On/Off status of "WP Switch".
BVD1	Battery Voltage Detect 1	Output	These pins indicate the battery condition of the SRAM cards. a) BVD1 = BVD2 = V <sub>OH</sub> – Battery voltage is a safe level. b) BVD2 = V <sub>OL</sub> , BVD1 = V <sub>OH</sub> – Battery voltage is lower than 2.65 V. Battery should be replaced. c) BVD1 = BVD2 = V <sub>OL</sub> – Battery voltage is lower than 2.37 V, or battery is not present.
BVD2	Battery Voltage Detect 2	Output	
V <sub>cc</sub>	Power Supply	—	Power Supply Voltage (+5.0 V ±5%)
GND	Ground	—	System Ground
N.C.	No Connection	—	

## ■ PIN LOCATIONS

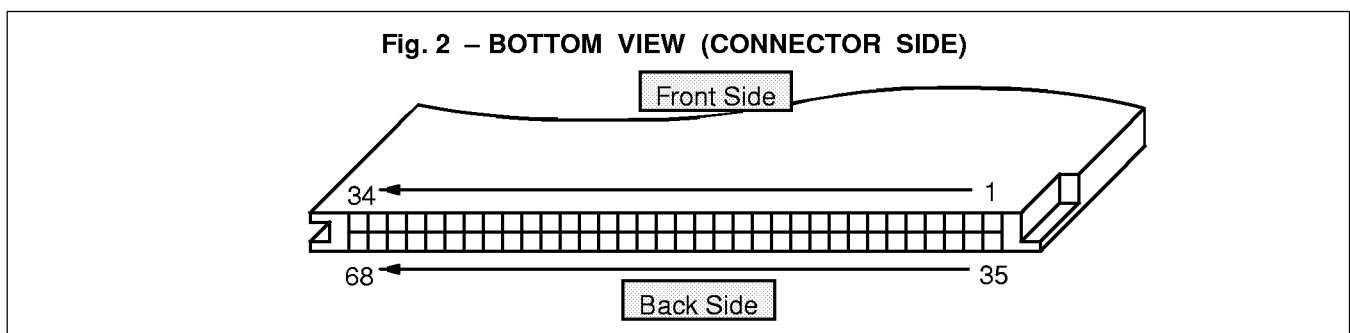

# MB98A9061x/9071x-20

## FUNCTIONAL TRUTH TABLE

MAIN MEMORY FUNCTION \*1 (REG = V<sub>IH</sub>)

CE <sub>2</sub>	CE <sub>1</sub>	A <sub>0</sub> (Byte)	OE	WE	WP	Mode	Data Input/Output		WP SW
							D <sub>15</sub> to D <sub>8</sub>	D <sub>7</sub> to D <sub>0</sub>	
H	H	X	X	X	L	Standby	High-Z		NP
H	L	L	L	H	L	Read (×8)	High-Z	D <sub>OUT</sub> (Lower Byte)	NP
H	L	H	L	H	L	Read (×8)	High-Z	D <sub>OUT</sub> (Upper Byte)	NP
H	L	L	H*2	L	L	Write (×8)	High-Z	D <sub>IN</sub> (Lower Byte)	NP
H	L	H	H*2	L	L	Write (×8)	High-Z	D <sub>IN</sub> (Upper Byte)	NP
L	H	X	L	H	L	Read (×8)	D <sub>OUT</sub> (Upper Byte)	High-Z	NP
L	H	X	H*2	L	L	Write (×8)	D <sub>IN</sub> (Upper Byte)	High-Z	NP
L	L	X	L	H	L	Read (×16)	D <sub>OUT</sub>		NP
L	L	X	H	L	L	Write (×16)	D <sub>IN</sub>		NP
X	X	X	H	H	L	Output Disable	High-Z		NP

H	H	X	X	X	H	Standby	High-Z		P
H	L	L	L	H	H	Read (×8)	High-Z	D <sub>OUT</sub> (Lower Byte)	P
H	L	H	L	H	H	Read (×8)	High-Z	D <sub>OUT</sub> (Upper Byte)	P
H	L	L	H*2	L	H	Output Disable	High-Z		P
H	L	H	H*2	L	H	Output Disable	High-Z		P
L	H	X	L	H	H	Read (×8)	D <sub>OUT</sub> (Upper Byte)	High-Z	P
L	H	X	H*2	L	H	Output Disable	High-Z		P
L	L	X	L	H	H	Read (×16)	D <sub>OUT</sub>		P
L	L	X	H	L	H	Output Disable	High-Z		P
X	X	X	H	H	H	Output Disable	High-Z		P

- Notes:** \*1. H = V<sub>IH</sub>, L = V<sub>IL</sub>, X = Either V<sub>IL</sub> or V<sub>IH</sub>, WP SW = Write Protect Switch, NP = Non Protect, P = Protect  
\*2. H-level is recommended though it is functional at L-level.

# MB98A9061x/9071x-20

## ATTRIBUTE MEMORY FUNCTION \*1 (REG = V<sub>IL</sub>) \*2

CE <sub>2</sub>	CE <sub>1</sub>	A <sub>0</sub> (Byte)	OE	WE	WP	Mode	Data Input/Output		WP SW
							D <sub>15</sub> to D <sub>8</sub>	D <sub>7</sub> to D <sub>0</sub>	
H	H	X	X	X	L	Standby	High-Z		NP
H	L	L	L	H	L	Read (×8)	High-Z	D <sub>OUT</sub> *3 (Lower Byte)	NP
H	L	H	L	H	L	Read (×8)	High-Z	H	NP
H	L	L	H	L	L	Write (×8)	High-Z	D <sub>IN</sub> (Lower Byte)	NP
H	L	H	H	L	L	Write (×8)	High-Z	X	NP
L	H	X	L	H	L	Read (×8)	H	High-Z	NP
L	H	X	H	L	L	Write (×8)	High-Z	High-Z	NP
L	L	X	L	H	L	Read (×16)	H	D <sub>OUT</sub> *3 (Lower Byte)	NP
L	L	X	H	L	L	Write (×16)	X	D <sub>IN</sub> (Lower Byte)	NP
X	X	X	H	H	L	Output Disable	High-Z		NP

H	H	X	X	X	H	Standby	High-Z		P
H	L	L	L	H	H	Read (×8)	High-Z	D <sub>OUT</sub> *3 (Lower Byte)	P
H	L	H	L	H	H	Read (×8)	High-Z	H	P
H	L	L	H	L	H	Output Disable	High-Z		P
H	L	H	H	L	H	Output Disable	High-Z		P
L	H	X	L	H	H	Read (×8)	H	High-Z	P
L	H	X	H	L	H	Output Disable	High-Z		P
L	L	X	L	H	H	Read (×16)		D <sub>OUT</sub> *3 (Lower Byte)	P
L	L	X	H	L	H	Output Disable	High-Z		P
X	X	X	H	H	H	Output Disable	High-Z		P

**Notes:** \*1. H = V<sub>IH</sub>, L = V<sub>IL</sub>, X = Either V<sub>IL</sub> or V<sub>IH</sub>, WP SW = Write Protect Switch, NP = Non Protect, P = Protect

\*2. N.C. for MB98A90611 and 90711.

\*3. H-level is output for MB98A90612 and 90712.

# MB98A9061x/9071x-20

## ■ ADDRESS CONFIGURATIONS \*1 (MAIN MEMORY)

### 8-BIT BUS ORGANIZATION ( $\overline{CE}_1 = V_{IL}, \overline{CE}_2 = V_{IH}$ )

A <sub>16</sub> to A <sub>0</sub>					$\overline{CE}_2$	$\overline{CE}_1$	D <sub>15</sub> to D <sub>8</sub>	D <sub>7</sub> to D <sub>0</sub>
000	0000	0000	0000	0000	H	L	-----	0 Add.
000	0000	0000	0000	0001	H	L	-----	1 Add.
000	0000	0000	0000	0010	H	L	-----	2 Add.
000	0000	0000	0000	0011	H	L	-----	3 Add.
↓	↓	↓	↓	↓	↓	↓	↓ ↓	↓ ↓
111	1111	1111	1111	1100	H	L	-----	524284 Add.
111	1111	1111	1111	1101	H	L	-----	524285 Add.
111	1111	1111	1111	1110	H	L	-----	524286 Add.
111	1111	1111	1111	1111	H	L	-----	524287 Add.

### 8-BIT BUS ORGANIZATION ( $\overline{CE}_1 = V_{IH}, \overline{CE}_2 = V_{IL}$ ) \*2

A <sub>16</sub> to A <sub>0</sub>					$\overline{CE}_2$	$\overline{CE}_1$	D <sub>15</sub> to D <sub>8</sub>	D <sub>7</sub> to D <sub>0</sub>
000	0000	0000	0000	000X	L	H	1 Add.	-----
000	0000	0000	0000	001X	L	H	3 Add.	-----
000	0000	0000	0000	010X	L	H	5 Add.	-----
000	0000	0000	0000	011X	L	H	7 Add.	-----
↓	↓	↓	↓	↓	↓	↓	↓ ↓	↓ ↓
111	1111	1111	1111	100X	L	H	524281 Add.	-----
111	1111	1111	1111	101X	L	H	524283 Add.	-----
111	1111	1111	1111	110X	L	H	524285 Add.	-----
111	1111	1111	1111	111X	L	H	524287 Add.	-----

### 16-BIT BUS ORGANIZATION ( $\overline{CE}_1 = V_{IL}, \overline{CE}_2 = V_{IL}$ )

A <sub>16</sub> to A <sub>0</sub>					$\overline{CE}_2$	$\overline{CE}_1$	D <sub>15</sub> to D <sub>8</sub>	D <sub>7</sub> to D <sub>0</sub>
000	0000	0000	0000	000X	L	L	1 Add.	0 Add.
000	0000	0000	0000	001X	L	L	3 Add.	2 Add.
000	0000	0000	0000	010X	L	L	5 Add.	4 Add.
000	0000	0000	0000	011X	L	L	7 Add.	6 Add.
↓	↓	↓	↓	↓	↓	↓	↓ ↓	↓ ↓
111	1111	1111	1111	100X	L	L	524281 Add.	524280 Add.
111	1111	1111	1111	101X	L	L	524283 Add.	524282 Add.
111	1111	1111	1111	110X	L	L	524285 Add.	524284 Add.
111	1111	1111	1111	111X	L	L	524287 Add.	524286 Add.

Notes: \*1. H = V<sub>IH</sub>, L = V<sub>IL</sub>, X = Either 0 or 1.

\*2. Even addresses are not available in this mode.

## ■ ABSOLUTE MAXIMUM RATINGS (See WARNING)

Parameter	Symbol	Value	Unit
Supply Voltage	$V_{CC}$	-0.5 to +6.0	V
Input Voltage	$V_{IN}$	-0.5 to $V_{CC} + 0.5$	V
Output Voltage	$V_{OUT}$	-0.5 to $V_{CC} + 0.5$	V
Ambient Temperature	$T_A$	-10 to +60 *1	°C
Storage Temperature	$T_{STG}$	-20 to +65 *2	°C

**Notes:** \*1. This value does not apply to the replaceable battery.

\*2. This value does not apply to the replaceable battery and data retention.

**WARNING:** Semiconductor devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

## ■ RECOMMENDED OPERATING CONDITIONS

(Referenced to GND)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Supply Voltage	$V_{CC}$	4.75	5.0	5.25	V
Ground	GND	—	0	—	V
Input High Voltage	$V_{IH}$	2.4	—	$V_{CC} + 0.3$	V
Input Low Voltage	$V_{IL}$	-0.3	—	0.8	V
Ambient Temperature *	$T_A$	0	—	+55	°C

**Note:** \* This value does not apply to the replaceable lithium battery. See  $V_{BAT1}$  in Fig.1.

**WARNING:** Recommended operating conditions are normal operating ranges for the semiconductor device. All the device's electrical characteristics are warranted when operated within these ranges.

Always use semiconductor devices within the recommended operating conditions. Operation outside these ranges may adversely affect reliability and could result in device failure.

No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their FUJITSU representative beforehand.

## ■ CAPACITANCE

( $T_A = 25^\circ\text{C}$ ,  $f = 1\text{ MHz}$ ,  $V_{IN} = V_{IO} = \text{GND}$ )

Parameter	Notes	Symbol	Min.	Typ.	Max.	Unit
Input Capacitance	*1	$C_{IN}$	—	—	50	pF
I/O Capacitance	*2	$C_{IO}$	—	—	50	pF

**Notes:** \*1. This value does not apply to  $\overline{CE}_1$ ,  $\overline{CE}_2$ ,  $\overline{REG}$  and  $\overline{WE}$ .

\*2. This value does not apply to  $\overline{BVD}_1$ ,  $\overline{BVD}_2$ ,  $\overline{CD}_1$  and  $\overline{CD}_2$ .

# MB98A9061x/9071x-20

## ■ DC CHARACTERISTICS

(At recommended operating conditions unless otherwise noted.)

Parameter	Notes	Symbol	Condition	Min.	Typ.	Max.	Unit
Standby Supply Current	*1	$I_{SB1}$	$\overline{CE}_1, \overline{CE}_2 \geq V_{CC} - 0.2 \text{ V}$	—	—	0.5	mA
		$I_{SB2}$	$\overline{CE}_1, \overline{CE}_2 = V_{IH}$	—	—	5.0	mA
Active Supply Current		$I_{CC1}$	$V_{IN} = V_{IH} \text{ or } V_{IL}$ $\overline{CE}_1, \overline{CE}_2 = V_{IL}, I_{OUT} = 0 \text{ mA}$	—	—	110	mA
Operating Supply Current		$I_{CC2}$	$V_{IN} = V_{IH} \text{ or } V_{IL}$ , Cycle = Min Duty = 100%, $I_{OUT} = 0 \text{ mA}$ $\overline{OE} = V_{IH}$ during Write Cycle	—	—	190	mA
Input Leakage Current	*2	$I_{LI}$	$V_{IN} = 0 \text{ V to } V_{CC}$	-10	—	10	$\mu\text{A}$
Output Leakage Current	*3	$I_{L/O}$	$V_{OUT} = 0 \text{ V to } V_{CC}$ , $\overline{CE}_1, \overline{CE}_2 = V_{IH}$ or $\overline{OE} = V_{IH}$ or $\overline{WE} = V_{IL}$	-10	—	10	$\mu\text{A}$
Output High Voltage	*4	$V_{OH}$	$I_{OH} = -1.0 \text{ mA}$	2.4	—	—	V
Output Low Voltage		$V_{OL}$	$I_{OL} = 2.1 \text{ mA}$	—	—	0.4	V

**Notes:** \*1. This value does not apply to recharge current from system or replaceable lithium battery to rechargeable battery.


\*2. This value does not apply to  $\overline{CE}_1$ ,  $\overline{CE}_2$ ,  $\overline{REG}$  and  $\overline{WE}$ .

\*3. This value does not apply to BVD1, BVD2,  $\overline{CD}_1$ ,  $\overline{CD}_2$  and WP.

\*4. This value does not apply to BVD1, BVD2,  $\overline{CD}_1$  and  $\overline{CD}_2$ .

**Fig. 3 – AC TEST CONDITIONS**

• Output Load

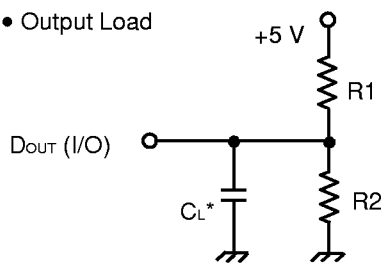

• Input Pulse Levels: 0.6 V to 2.6 V

• Input Pulse Rise and Fall Times: 5 ns (Transition between 0.8 V and 2.4 V)

• Timing Reference Levels

Input:  $V_{IL} = 0.8 \text{ V}$ ,  $V_{IH} = 2.4 \text{ V}$

Output:  $V_{OL} = 0.8 \text{ V}$ ,  $V_{OH} = 2.0 \text{ V}$

	R1	R2	CL	Parameters Measured
Load I	1.8 k $\Omega$	990 $\Omega$	100 pF	All parameters except $t_{CLZ}$ , $t_{OLZ}$ , $t_{CHZ}$ , $t_{OHZ}$ , $t_{RCLZ}$ , $t_{ROLZ}$ , $t_{RCHZ}$ , $t_{ROHZ}$ , $t_{WLZ}$ and $t_{WHZ}$
Load II	1.8 k $\Omega$	990 $\Omega$	5 pF	$t_{CLZ}$ , $t_{OLZ}$ , $t_{CHZ}$ , $t_{OHZ}$ , $t_{RCLZ}$ , $t_{ROLZ}$ , $t_{RCHZ}$ , $t_{ROHZ}$ , $t_{WLZ}$ and $t_{WHZ}$

## ■ AC CHARACTERISTICS

(At recommended operating conditions unless otherwise noted.)

### MAIN MEMORY READ CYCLE

Parameter	Notes	Symbol	Min.	Max.	Unit
Read Cycle Time		t <sub>RC</sub>	200	—	ns
Address Access Time		t <sub>AA</sub>	—	200	ns
Card Enable Access Time		t <sub>CE</sub>	—	200	ns
Output Enable Access Time		t <sub>OE</sub>	—	100	ns
Output Hold from Address Change		t <sub>OH</sub>	5	—	ns
Card Enable to Output Low-Z	*1, 2	t <sub>CLZ</sub>	5	—	ns
Output Enable to Output Low-Z	*1, 2	t <sub>OLZ</sub>	5	—	ns
Card Enable to Output High-Z	*1, 2	t <sub>CHZ</sub>	—	50	ns
Output Enable to Output High-Z	*1, 2	t <sub>OHZ</sub>	—	50	ns

### ATTRIBUTE MEMORY READ CYCLE \*3

Parameter	Notes	Symbol	Min.	Max.	Unit
Read Cycle Time		t <sub>RRC</sub>	300	—	ns
Address Access Time		t <sub>RAA</sub>	—	300	ns
Card Enable Access Time		t <sub>RCE</sub>	—	300	ns
Output Enable Access Time		t <sub>ROE</sub>	—	150	ns
Output Hold from Address Change		t <sub>ROH</sub>	5	—	ns
Card Enable to Output Low-Z	*1, 2	t <sub>RCLZ</sub>	5	—	ns
Output Enable to Output Low-Z	*1, 2	t <sub>ROLZ</sub>	5	—	ns
Card Enable to Output High-Z	*1, 2	t <sub>RCHZ</sub>	—	60	ns
Output Enable to Output High-Z	*1, 2	t <sub>ROHZ</sub>	—	60	ns

**Notes:** \*1. Transition is measured at the point of  $\pm 500$  mV from steady state voltage.


\*2. This parameter is specified using Load II in Fig.3.

\*3. This parameter is for MB98A90613 and 90713.


# MB98A9061x/9071x-20


## MAIN MEMORY READ CYCLE TIMING DIAGRAM (WE = VIH, REG = VIH)

READ CYCLE 1:  $\overline{CE}_1 = \overline{OE} = V_{IL}, \overline{CE}_2 = V_{IH}$  : × 8-bit Bus Organization

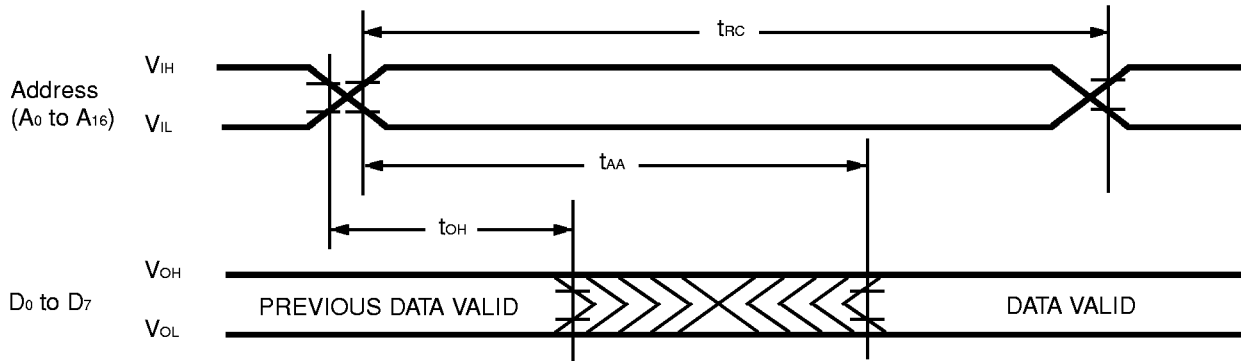

READ CYCLE 2:  $\overline{CE}_1 = V_{IH}, \overline{CE}_2 = \overline{OE} = V_{IL}$  : × 8-bit Bus Organization  
 $\overline{CE}_1 = \overline{CE}_2 = \overline{OE} = V_{IL}$  : × 16-bit Bus Organization

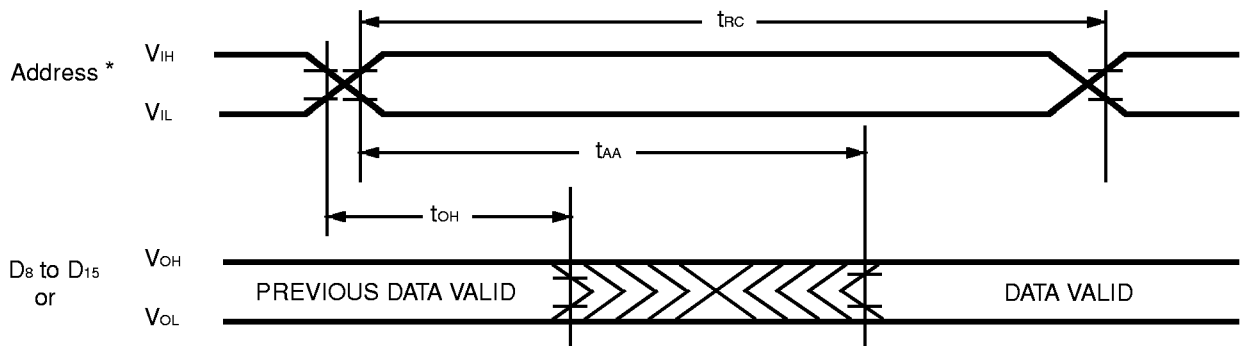



 : Undefined

**Note:** \* A<sub>0</sub> = Either V<sub>IH</sub> or V<sub>IL</sub>.

## MAIN MEMORY READ CYCLE TIMING DIAGRAM ( $\overline{WE} = V_{IH}$ , $\overline{REG} = V_{IH}$ )


READ CYCLE 3:  $\overline{CE}_2 = V_{IH}$ : × 8-bit Bus Organization

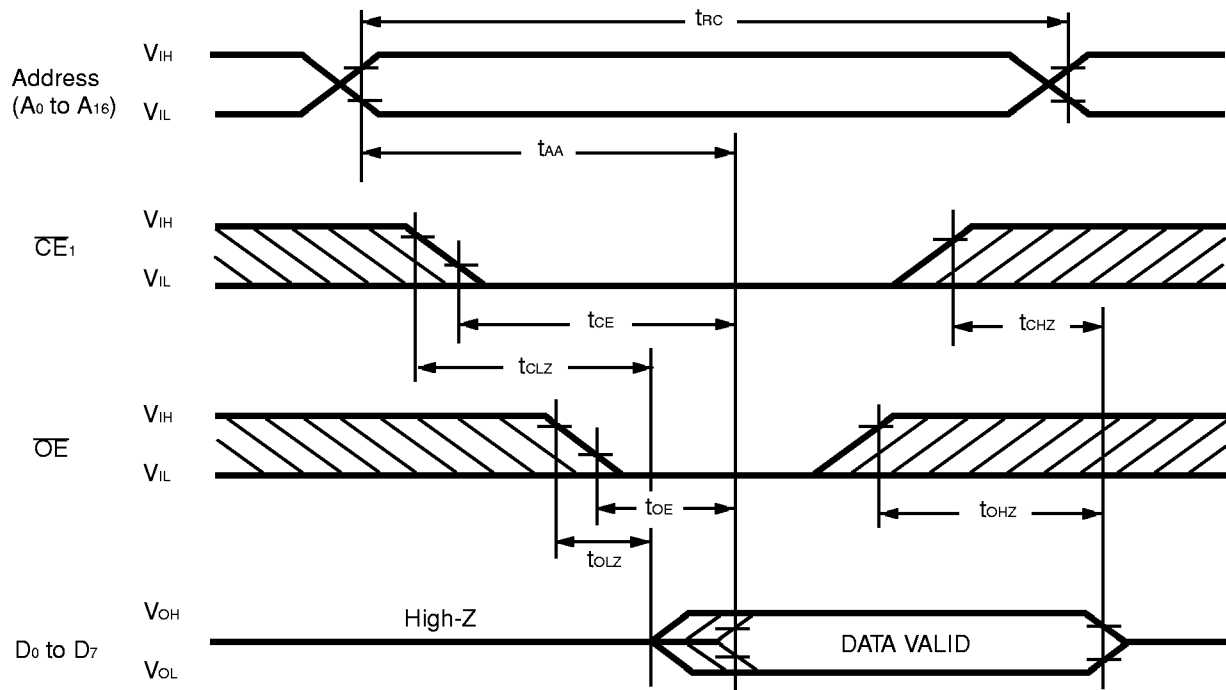

 : Undefined


# MB98A9061x/9071x-20

## MAIN MEMORY READ CYCLE TIMING DIAGRAM (WE = V<sub>IH</sub>, REG = V<sub>IH</sub>)

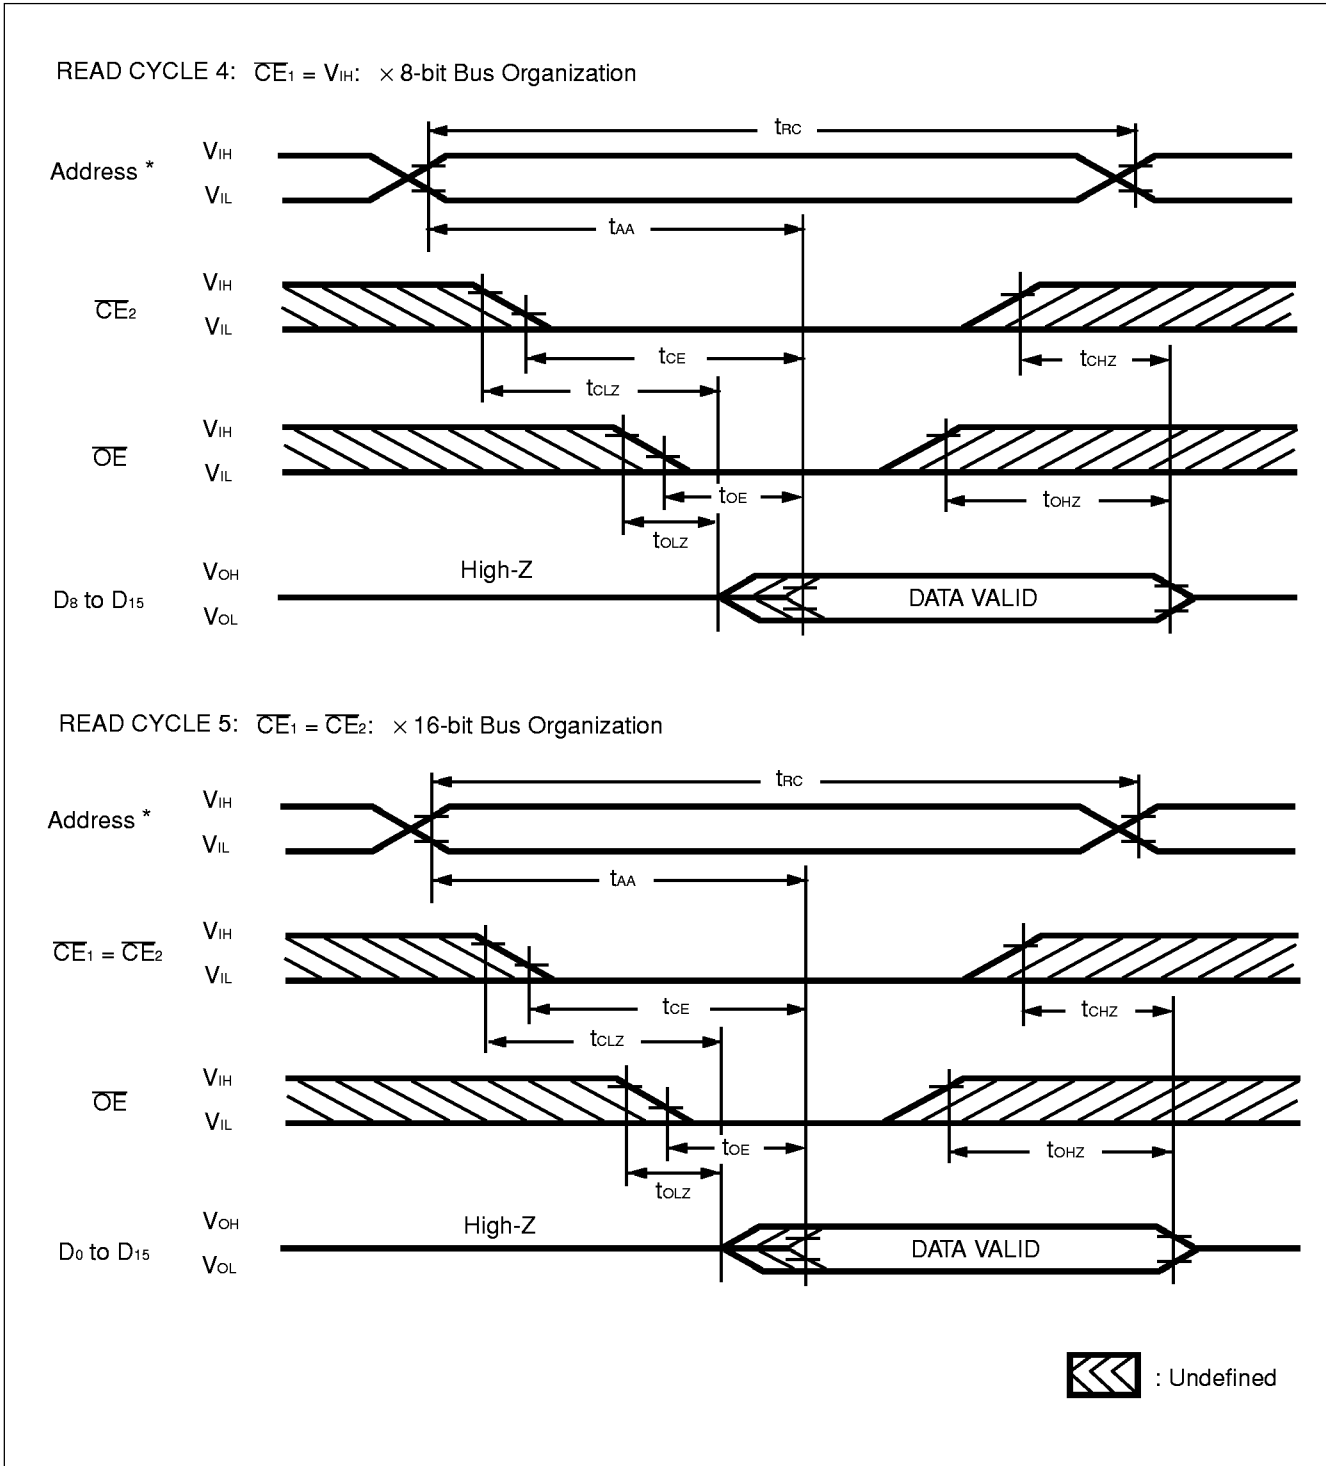

**Note:** \* A<sub>0</sub> = Either V<sub>IH</sub> or V<sub>IL</sub>.


## ATTRIBUTE MEMORY READ CYCLE TIMING DIAGRAM (WE = V<sub>IH</sub>, REG = V<sub>IL</sub>) \*1

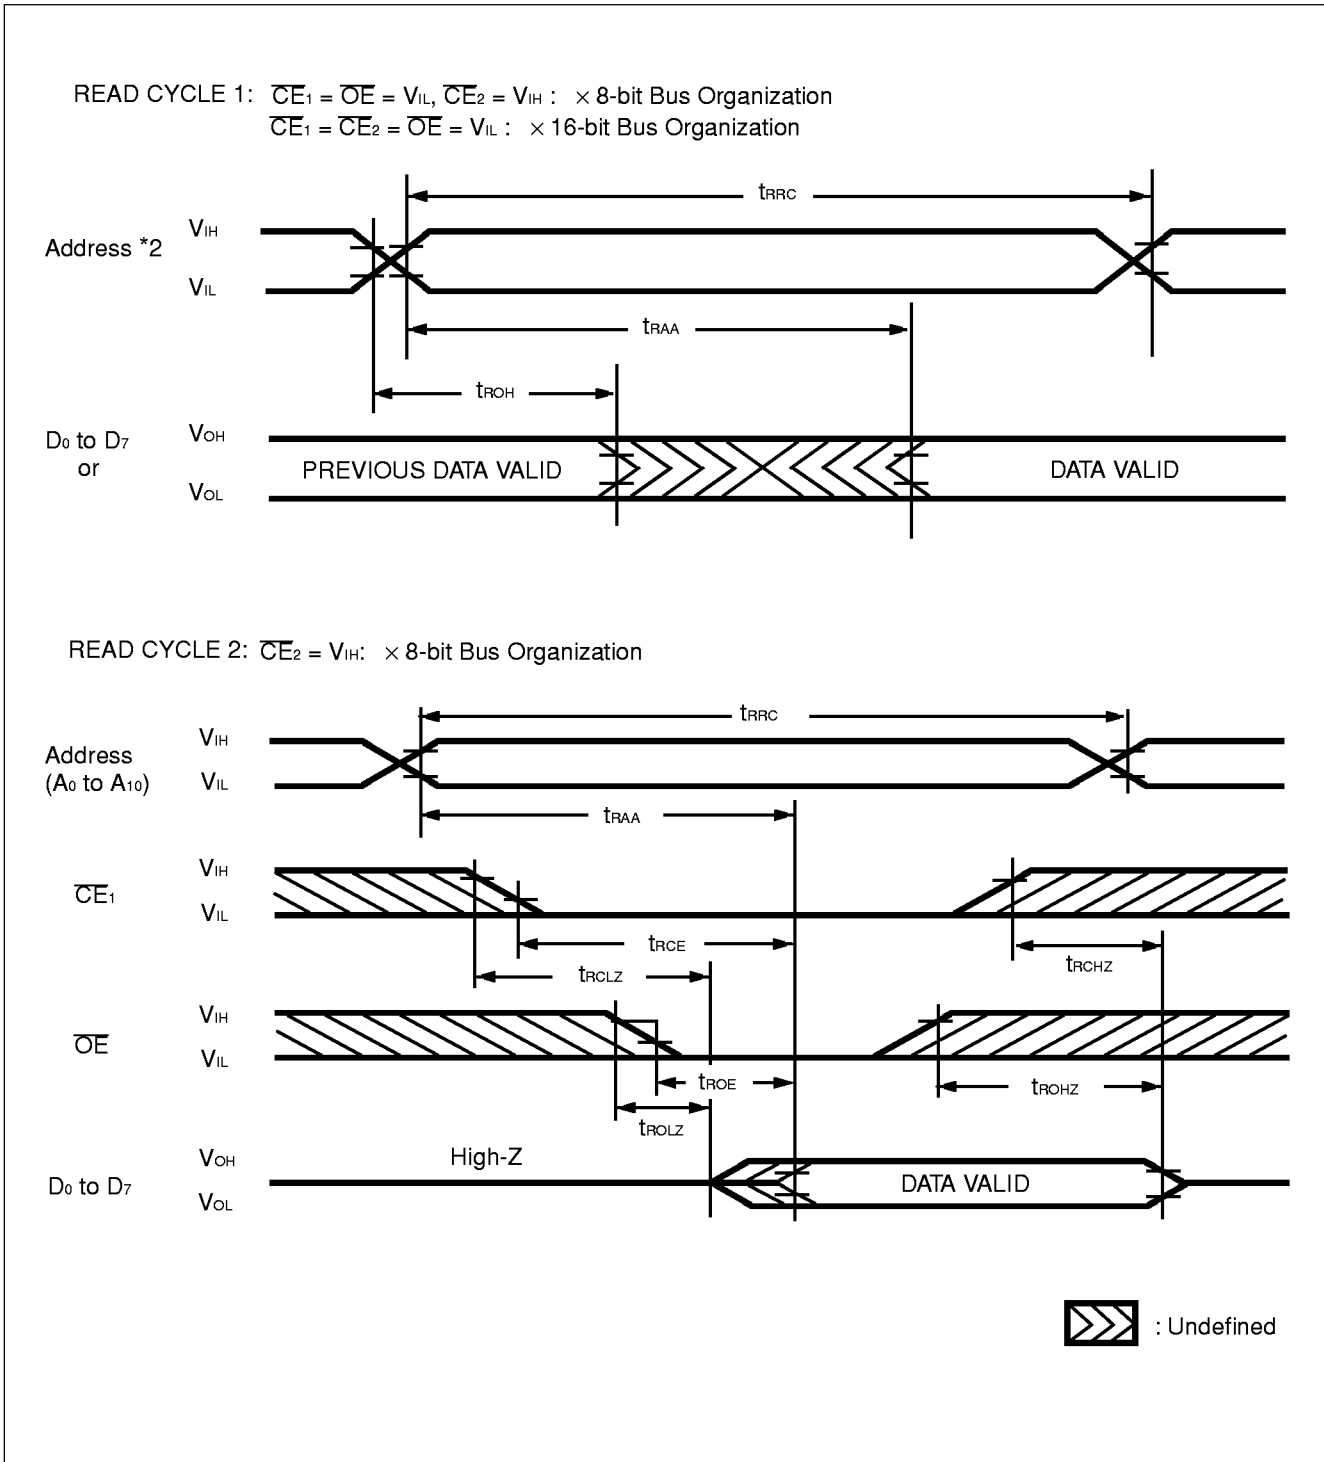

- Notes:**
- \*1. This timing diagram is for MB98A90613 and 90713. "FF" data is available on MB98A90612 and 90712 only.
  - \*2. A<sub>0</sub> = Either V<sub>IH</sub> or V<sub>IL</sub> for a 16-bit bus organization.
  - \*3. H-level is output from D<sub>8</sub> to D<sub>15</sub>.

# MB98A9061x/9071x-20

## ATTRIBUTE MEMORY READ CYCLE TIMING DIAGRAM (WE = VIH, REG = VIL) \*1

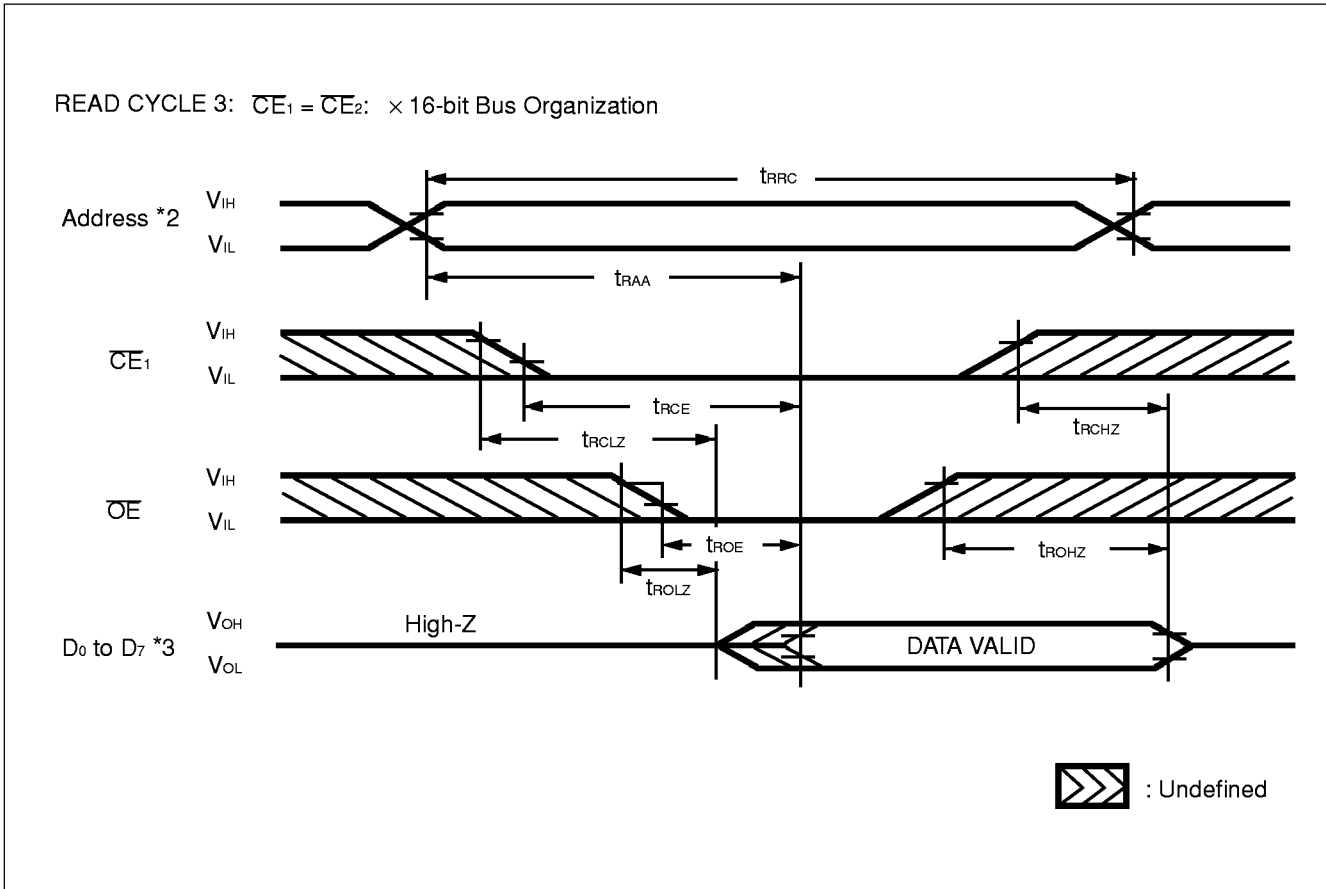

- Notes:** \*1. This timing diagram is for MB98A90613 and 90713. "FF" data is available on MB98A90612 and 90712 only.  
 \*2.  $A_0$  = Either  $V_{IH}$  or  $V_{IL}$ .  
 \*3. H-level is output from  $D_8$  to  $D_{15}$ .

## MAIN MEMORY WRITE CYCLE \*1

Parameter	Notes	Symbol	Min.	Max.	Unit
Write Cycle Time		t <sub>wc</sub>	200	—	ns
Address Valid to End of Write		t <sub>aw</sub>	140	—	ns
Chip Select to End of Write		t <sub>cw</sub>	140	—	ns
Data Valid to End of Write		t <sub>dw</sub>	60	—	ns
Data Hold Time		t <sub>dh</sub>	30	—	ns
Write Pulse Width		t <sub>wp</sub>	120	—	ns
Address Set Up Time		t <sub>as</sub>	20	—	ns
Write Recovery Time		t <sub>wr</sub>	30	—	ns
Output Enable to Output Low-Z	*2	t <sub>olz</sub>	5	—	ns
Output Enable to Output High-Z	*2	t <sub>ohz</sub>	—	50	ns
Write Enable to Output Low-Z	*2, 3	t <sub>wlz</sub>	5	—	ns
Write Enable to Output High-Z	*2, 3	t <sub>whz</sub>	—	50	ns
Output Enable Set Up Time		t <sub>oes</sub>	10	—	ns
Output Enable Hold Time		t <sub>oeh</sub>	10	—	ns

## ATTRIBUTE MEMORY WRITE CYCLE \*4

Parameter	Symbol	Min.	Max.	Unit
Byte Write Cycle Time	t <sub>rwr</sub>	—	10	ms
Address Set Up Time	t <sub>ras</sub>	20	—	ns
Chip Enable Set Up Time	t <sub>rCS</sub>	0	—	ns
Output Enable Set Up Time	t <sub>roes</sub>	20	—	ns
Write Pulse Width	t <sub>rwp</sub>	100	—	ns
Address Hold Time	t <sub>raH</sub>	50	—	ns
Data Set Up Time	t <sub>rds</sub>	50	—	ns
Data Hold Time	t <sub>rdH</sub>	20	—	ns
Chip Enable Hold Time	t <sub>rCH</sub>	0	—	ns
Output Enable Hold Time	t <sub>roeh</sub>	20	—	ns
Write Recovery Time	t <sub>rre</sub>	50	—	ns
End of Write to Output Time	t <sub>rrbo</sub>	—	100	ns
Number of Write per Byte	N	10000	—	Times
Write Enable Hold Time	t <sub>rweH</sub>	10	—	ns

**Notes:** \*1. If  $\overline{OE}$ ,  $\overline{CE}_1$ , and  $\overline{CE}_2$  are in the Read Mode during this period, then the I/O pins are in the output state and the input signals of the phase opposite to the outputs must be applied.

\*2. Transition is measured at the point of  $\pm 500$  mV from steady state voltage.


\*3. This parameter is specified only during write cycle with  $\overline{OE} = V_{IL}$  and specified using Load II in Fig.3.

\*4. This parameter is for MB98A90613 and 90713.


# MB98A9061x/9071x-20

## MAIN MEMORY WRITE CYCLE TIMING DIAGRAM (WE = CONTROLLED, $\overline{CE} = V_{IH}$ )

WRITE CYCLE 1:  $\overline{CE}_2 = V_{IH}$  : × 8-bit Bus Organization

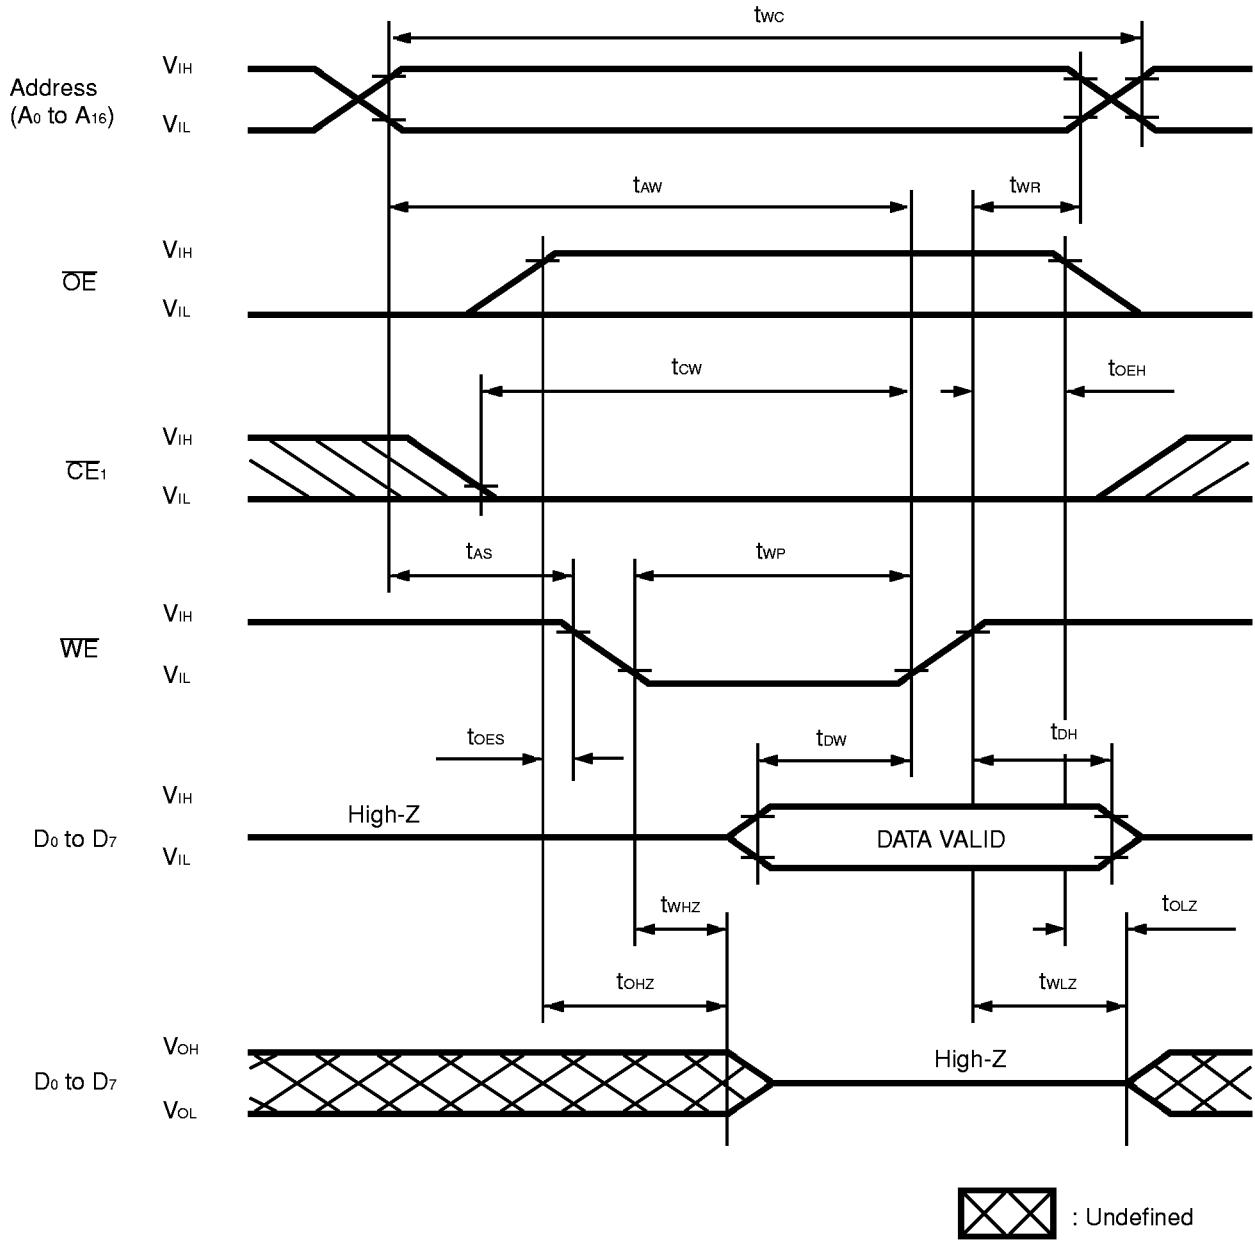


## MAIN MEMORY WRITE CYCLE TIMING DIAGRAM (WE = CONTROLLED, $\overline{\text{REG}} = V_{\text{IH}}$ )

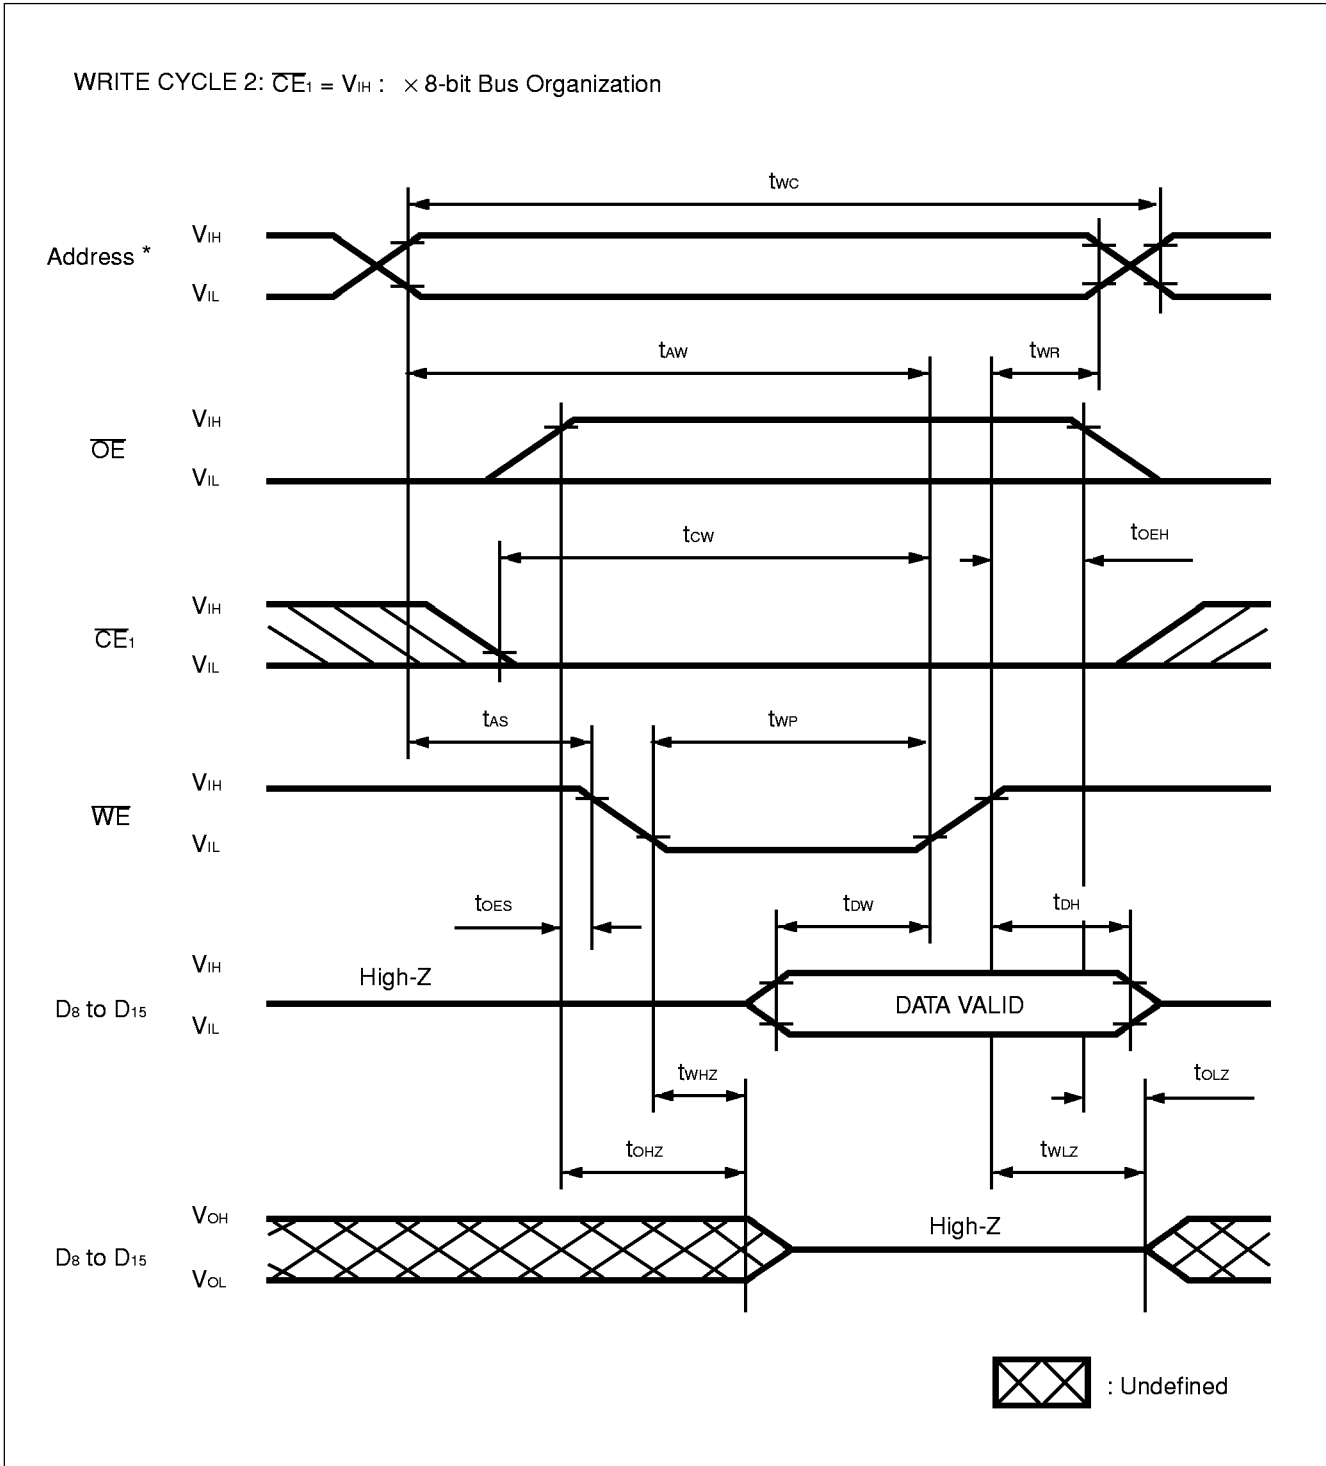

**Note:** \* A<sub>0</sub> = Either  $V_{\text{IH}}$  or  $V_{\text{IL}}$ .


# MB98A9061x/9071x-20

## MAIN MEMORY WRITE CYCLE TIMING DIAGRAM ( $\overline{WE}$ = CONTROLLED, $\overline{REG} = V_{IH}$ )

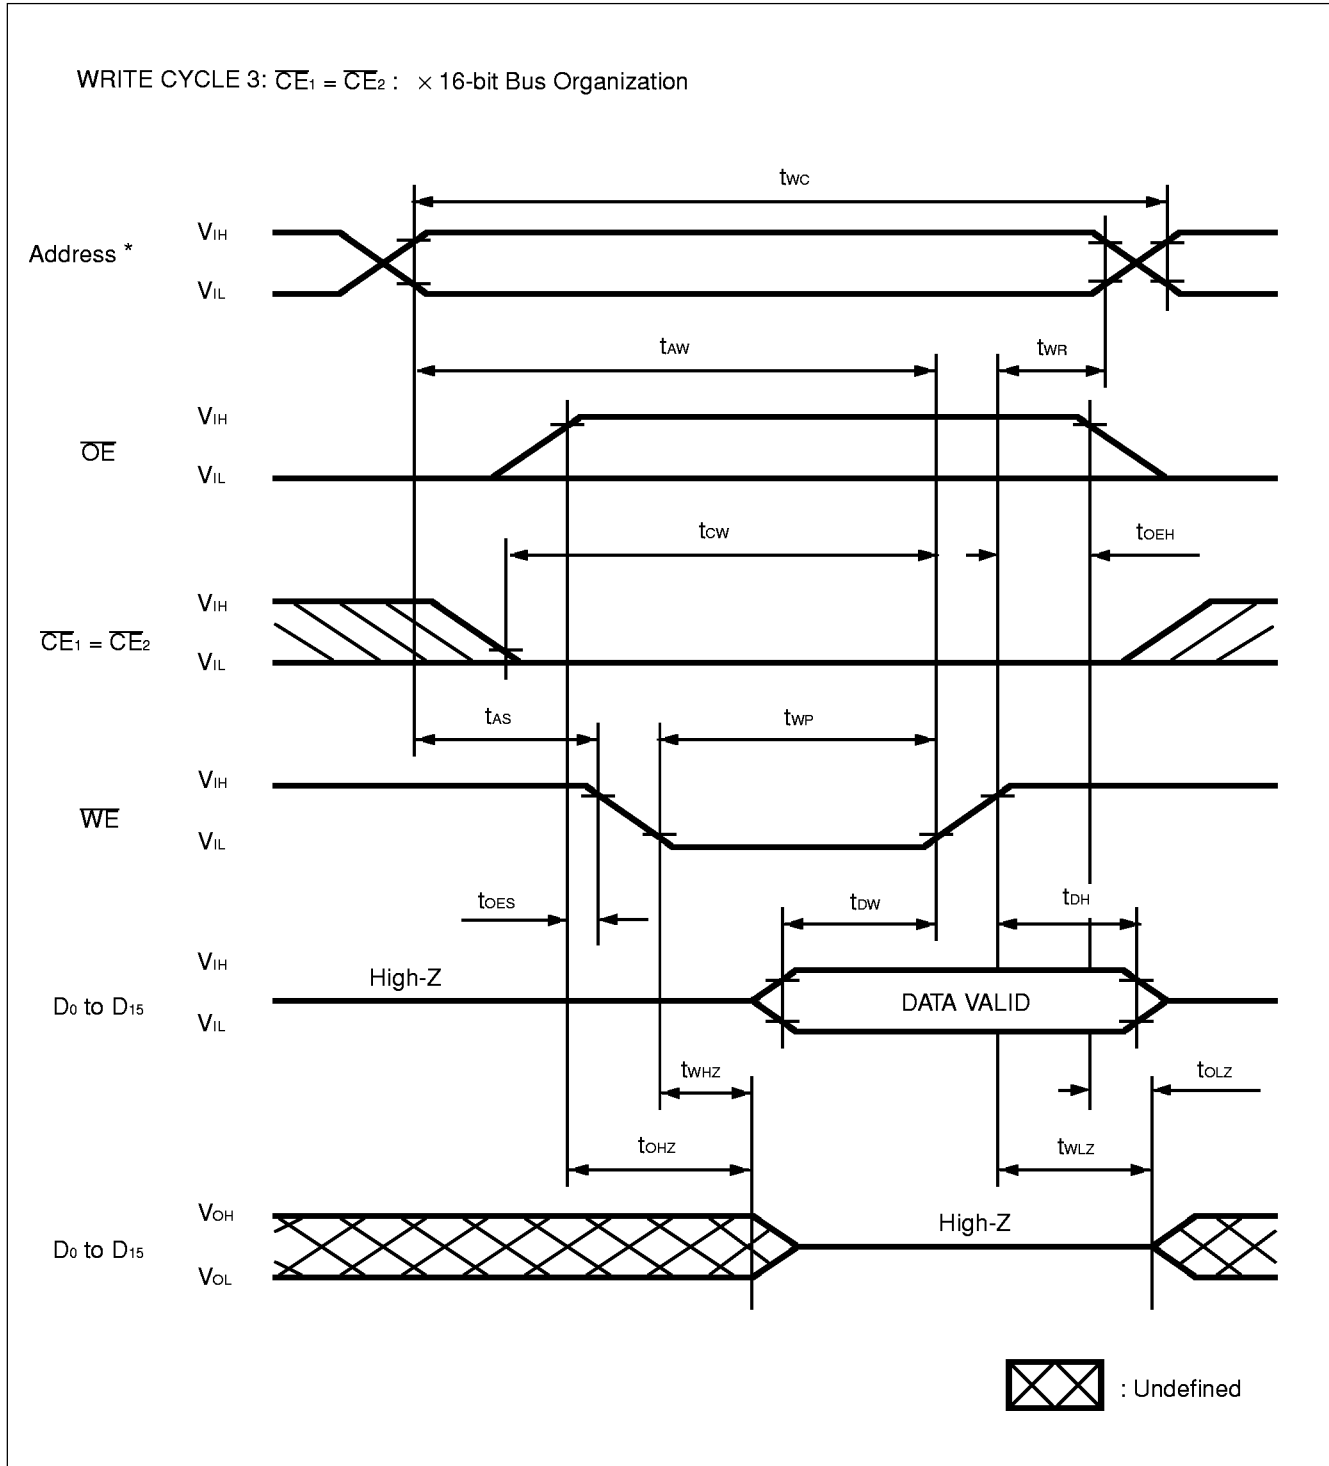

**Note:** \*  $A_0$  = Either  $V_{IH}$  or  $V_{IL}$ .


## MAIN MEMORY WRITE CYCLE TIMING DIAGRAM ( $\overline{CE} = \text{CONTROLLED}$ , $\overline{REG} = V_{IH}$ )

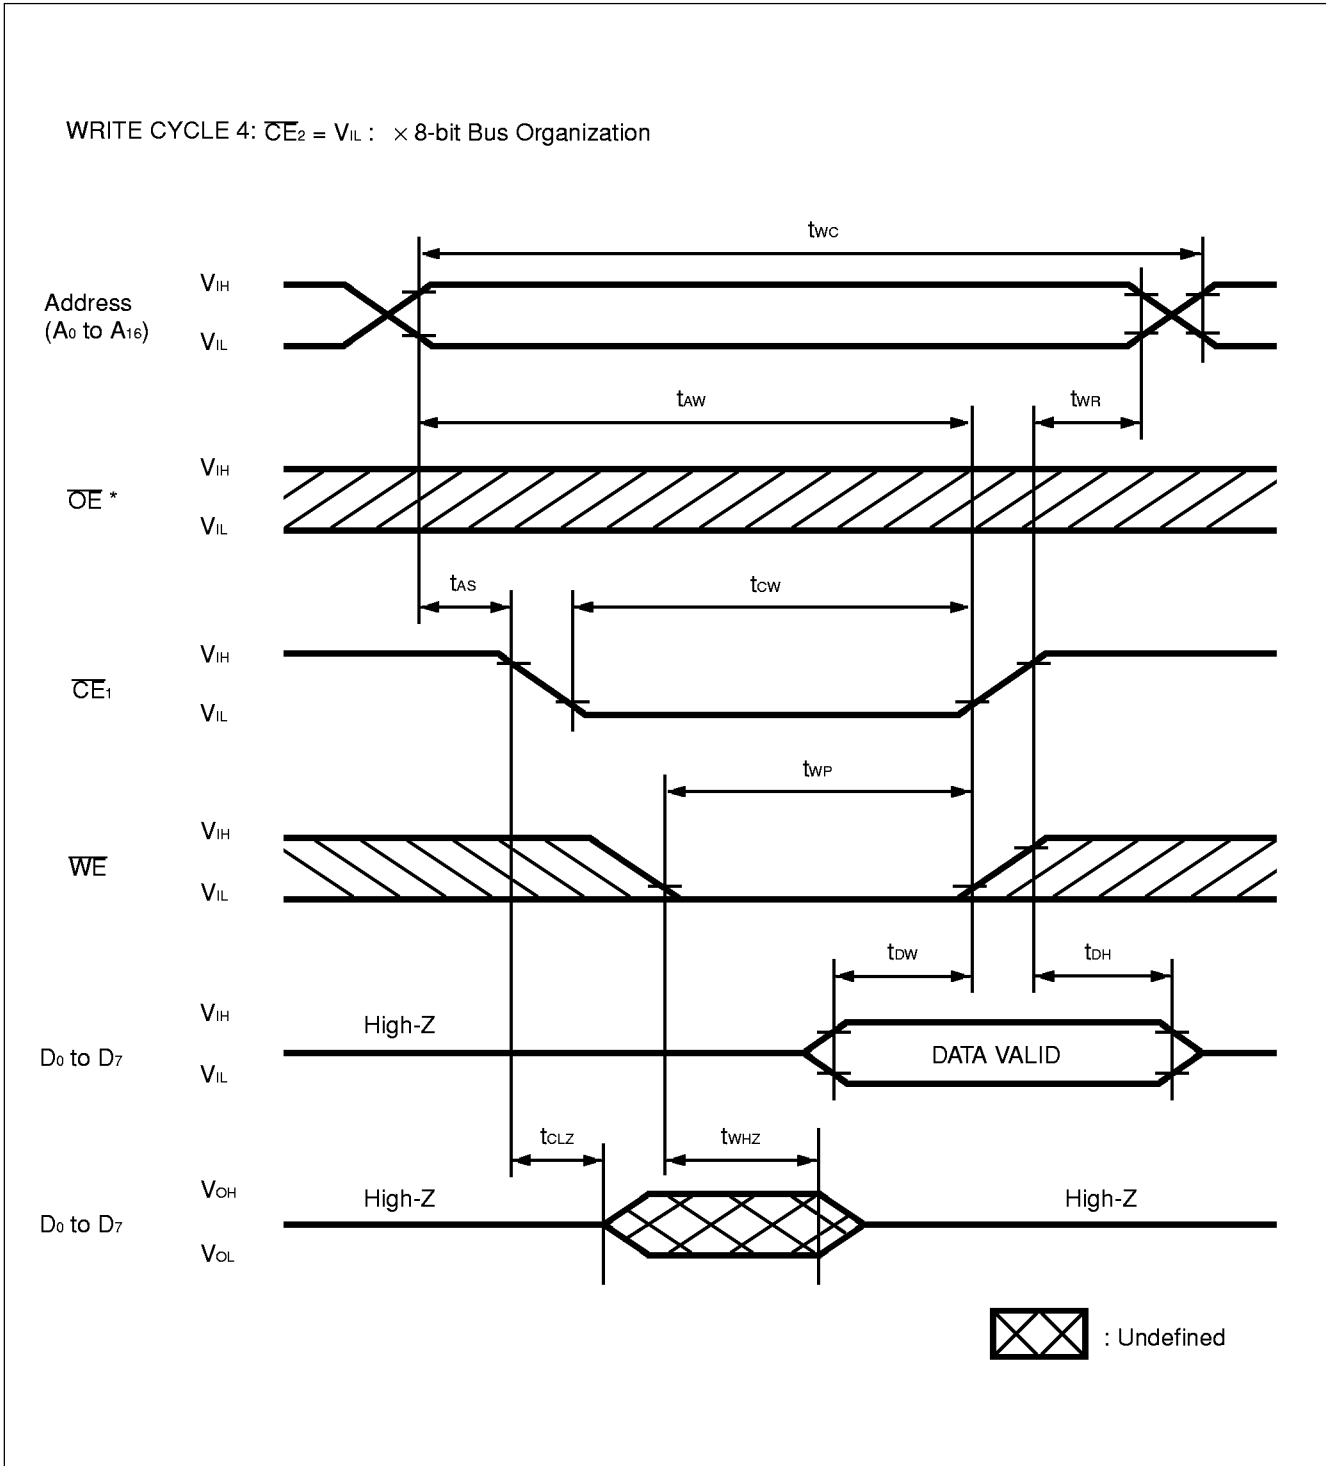

**Note:** \* H-level is recommended for stable operation though the card is operable at L-level.


# MB98A9061x/9071x-20

## MAIN MEMORY WRITE CYCLE TIMING DIAGRAM ( $\overline{CE} = \text{CONTROLLED}$ , $\overline{REG} = V_{IH}$ )

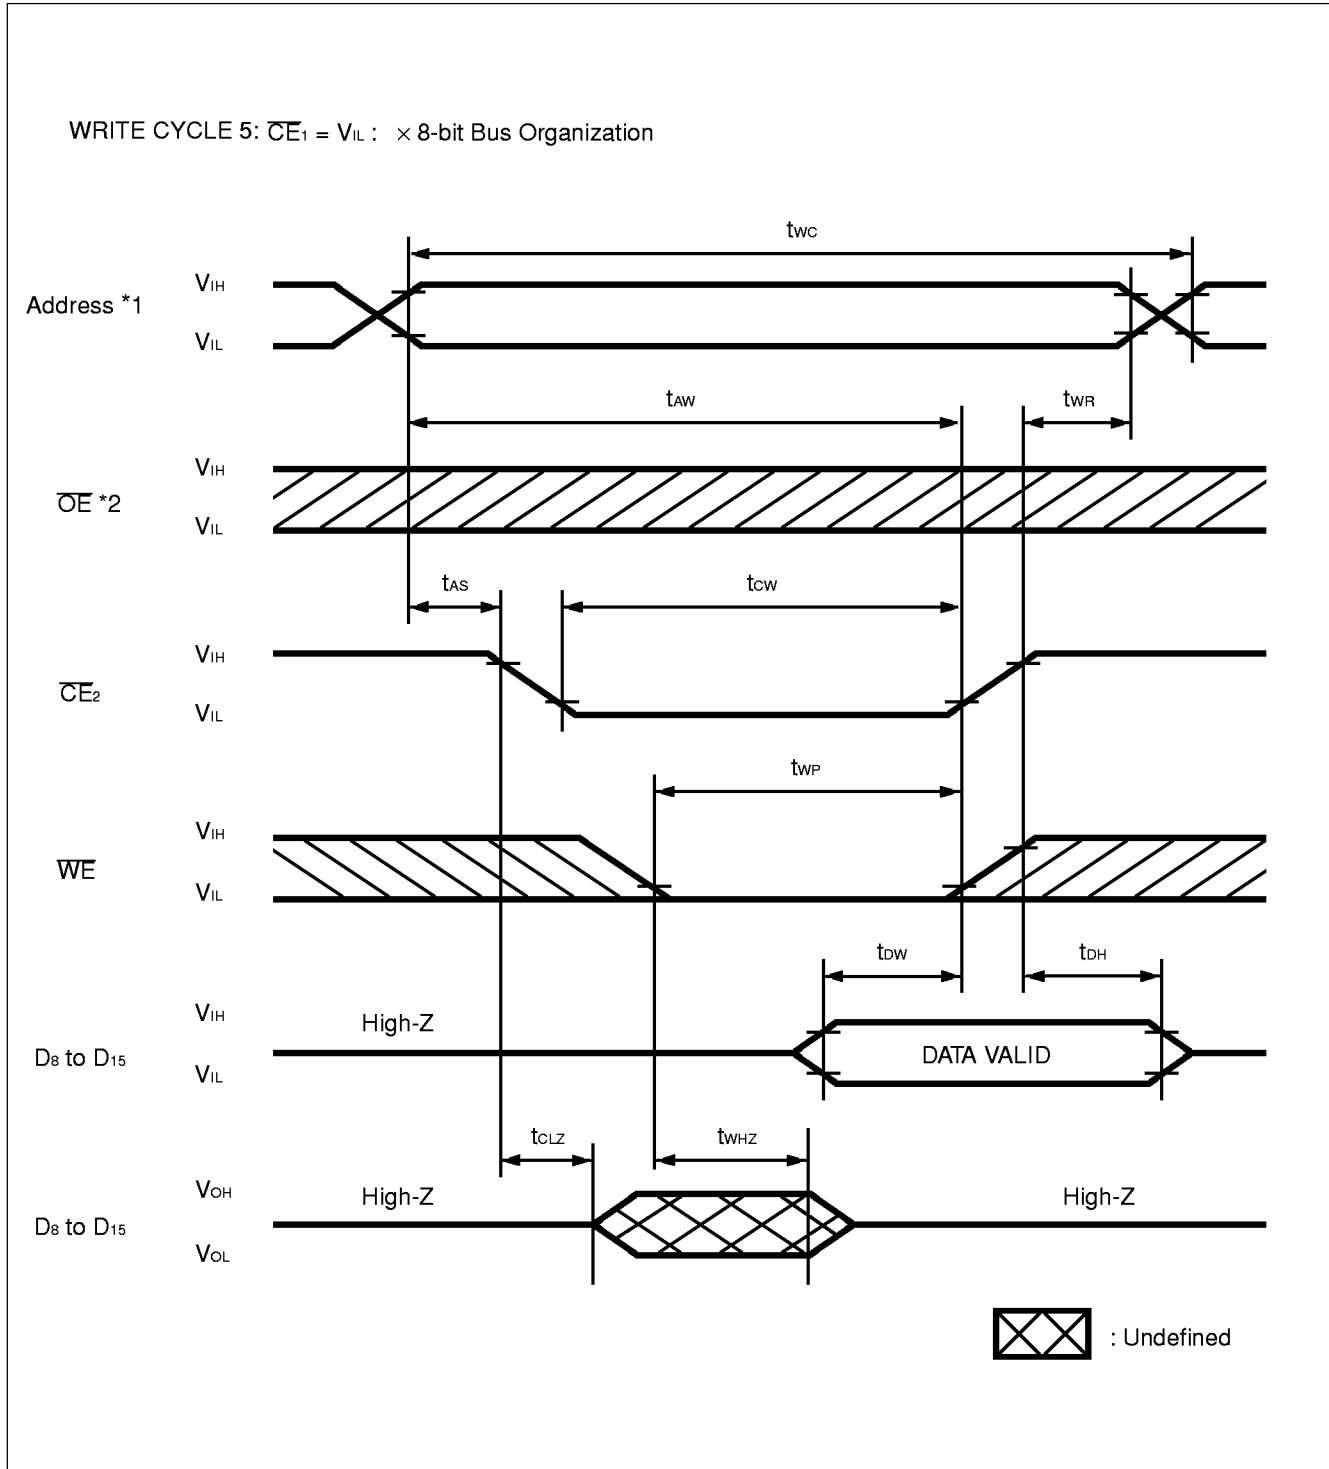

- Notes:**
- \*1.  $A_0 = \text{Either } V_{IH} \text{ or } V_{IL}$ .
  - \*2. H-level is recommended for stable operation though the card is operable at L-level.


## MAIN MEMORY WRITE CYCLE TIMING DIAGRAM ( $\overline{CE} = \text{CONTROLLED}$ , $\overline{REG} = V_{IH}$ )

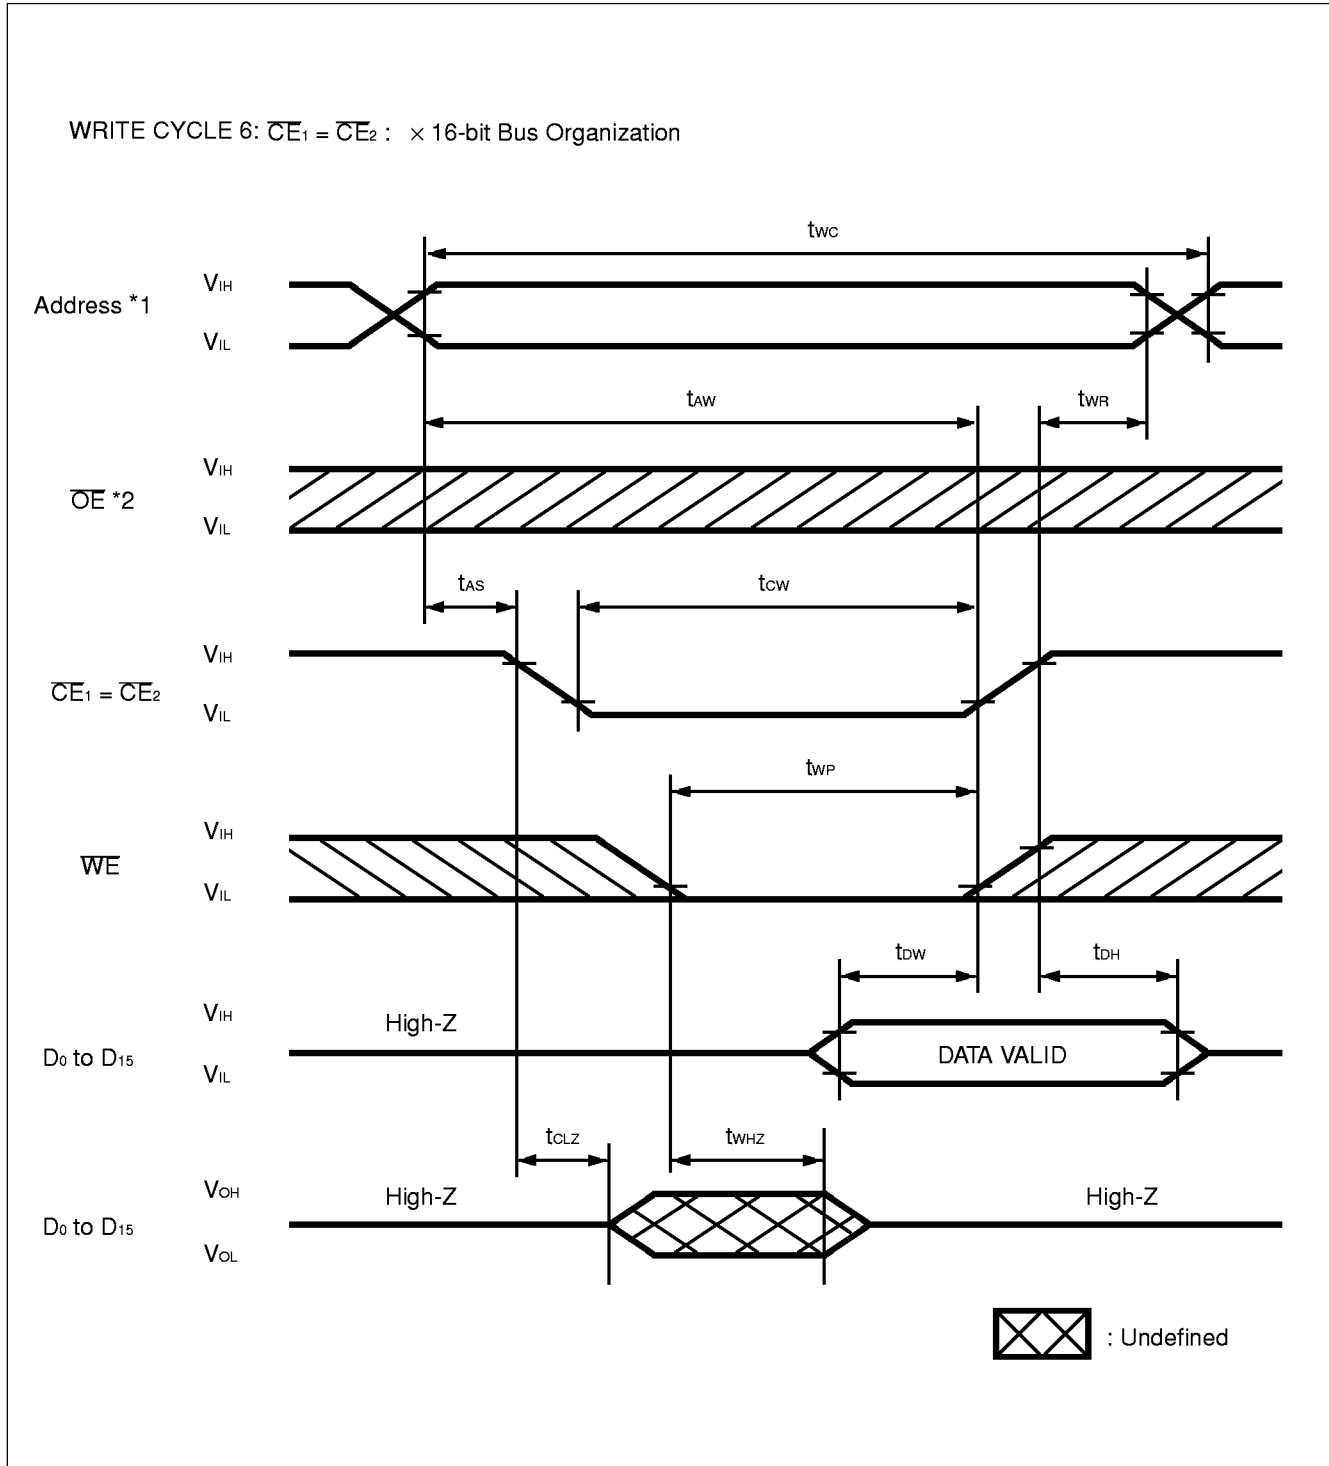

- Notes:**
- \*1.  $A_0 = \text{Either } V_{IH} \text{ or } V_{IL}$ .
  - \*2. H-level is recommended for stable operation though the card is operable at L-level.


# MB98A9061x/9071x-20

## ATTRIBUTE MEMORY WRITE CYCLE TIMING DIAGRAM (WE = CONTROLLED, REG = V<sub>IL</sub>) \*1

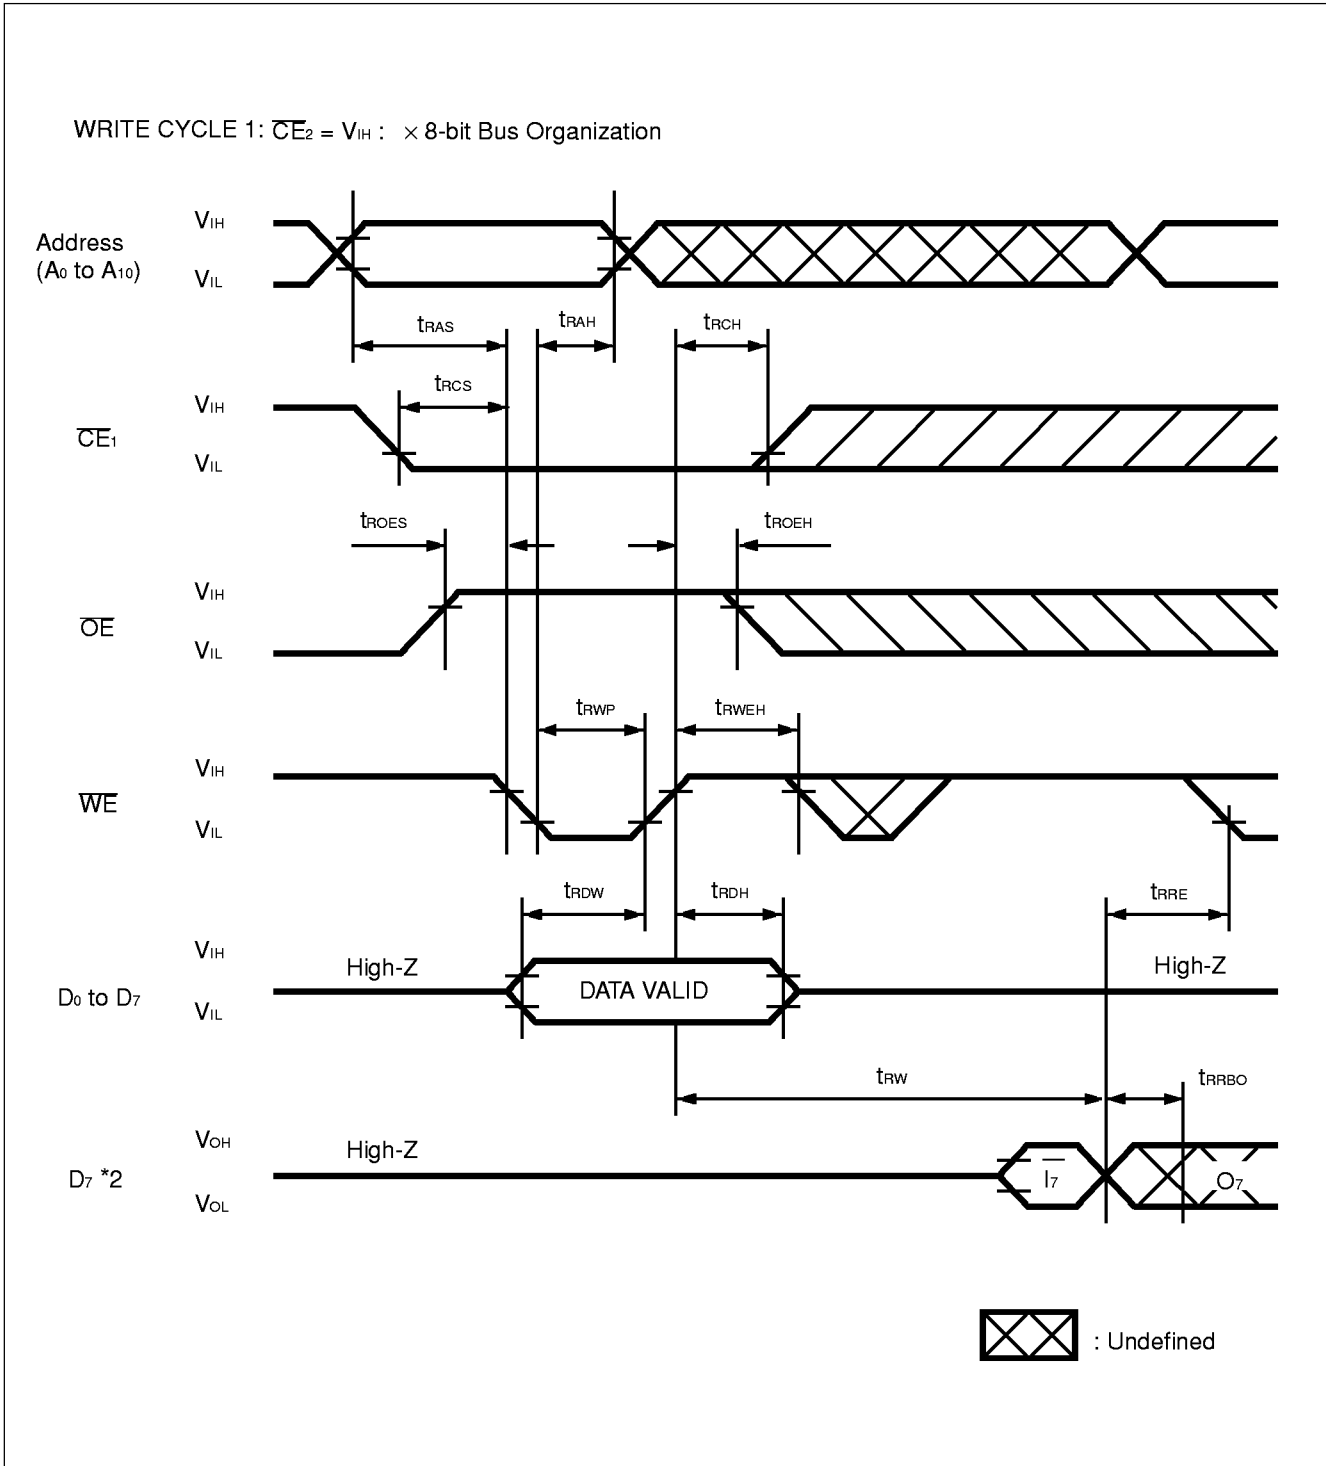

- Notes:** \*1. This timing diagram is for MB98A90613 and 90713. "FF" data is available on MB98A90612 and 90712 only.  
 \*2. Data polling operation.


## ATTRIBUTE MEMORY WRITE CYCLE TIMING DIAGRAM (WE = CONTROLLED, REG = V<sub>IL</sub>) \*1

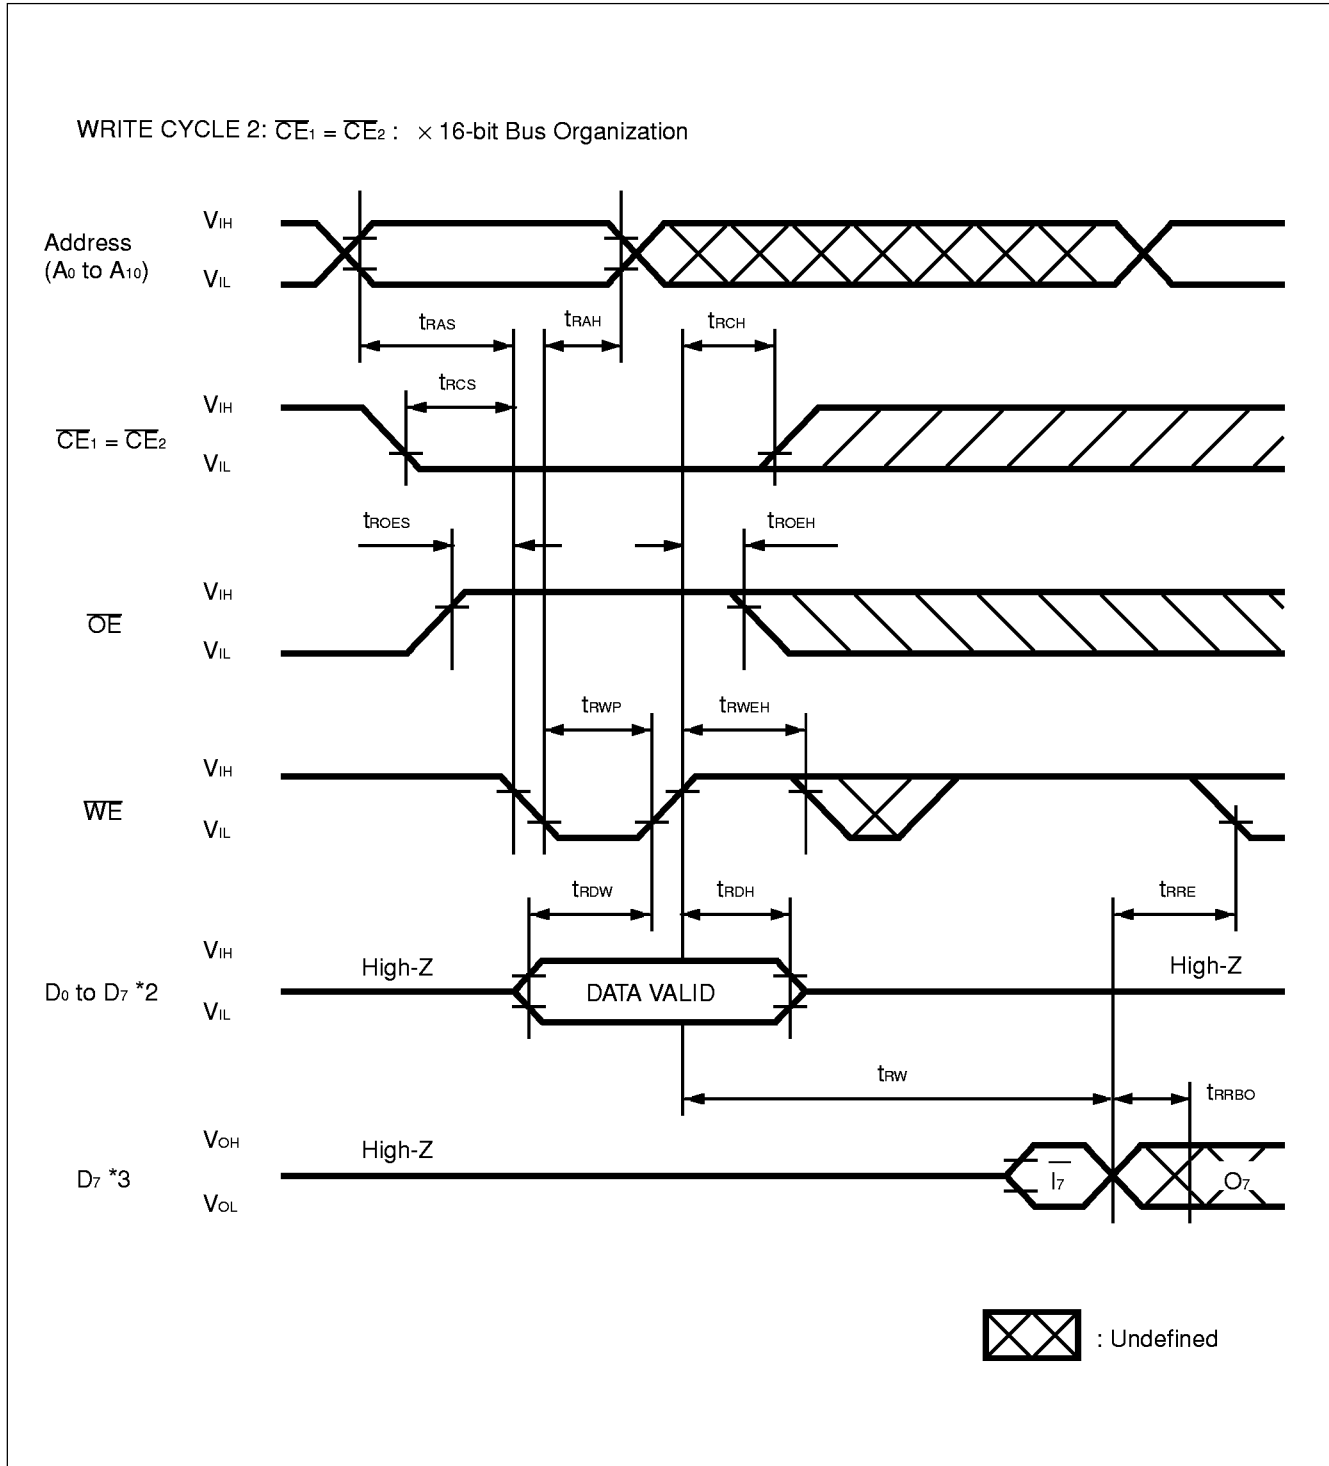

- Notes:**
- \*1. This timing diagram is for MB98A90613 and 90713. "FF" data is available on MB98A90612 and 90712 only.
  - \*2. Input levels of terminals D<sub>8</sub> to D<sub>15</sub> are not specified.
  - \*3. Data polling operation.


# MB98A9061x/9071x-20

## ATTRIBUTE MEMORY WRITE CYCLE TIMING DIAGRAM ( $\overline{CE}_2 = V_{IH}$ : $\times 8$ -bit Bus Organization) \*1

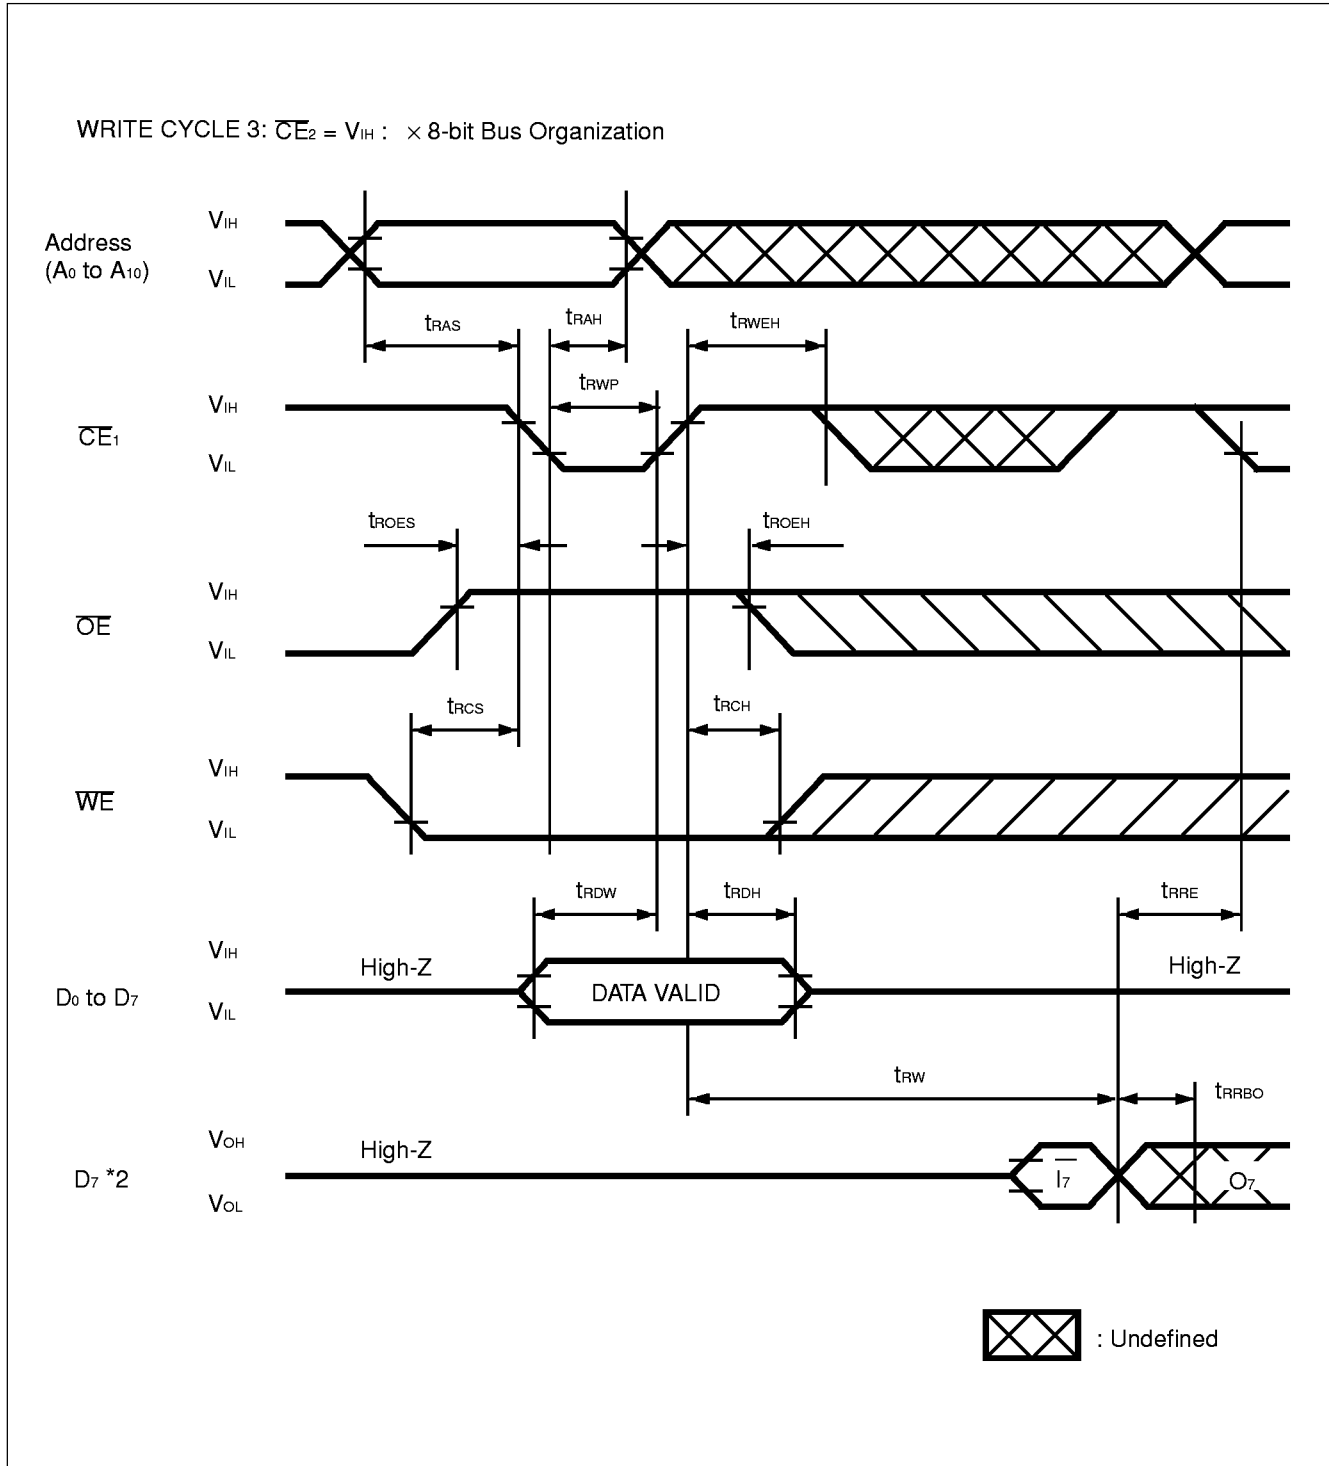

- Notes:** \*1. This timing diagram is for MB98A90613 and 90713. "FF" data is available on MB98A90612 and 90712 only.  
 \*2. Data polling operation.

## ATTRIBUTE MEMORY WRITE CYCLE TIMING DIAGRAM ( $\overline{CE} = \text{CONTROLLED}$ , $\overline{REG} = V_{IL}$ ) \*1

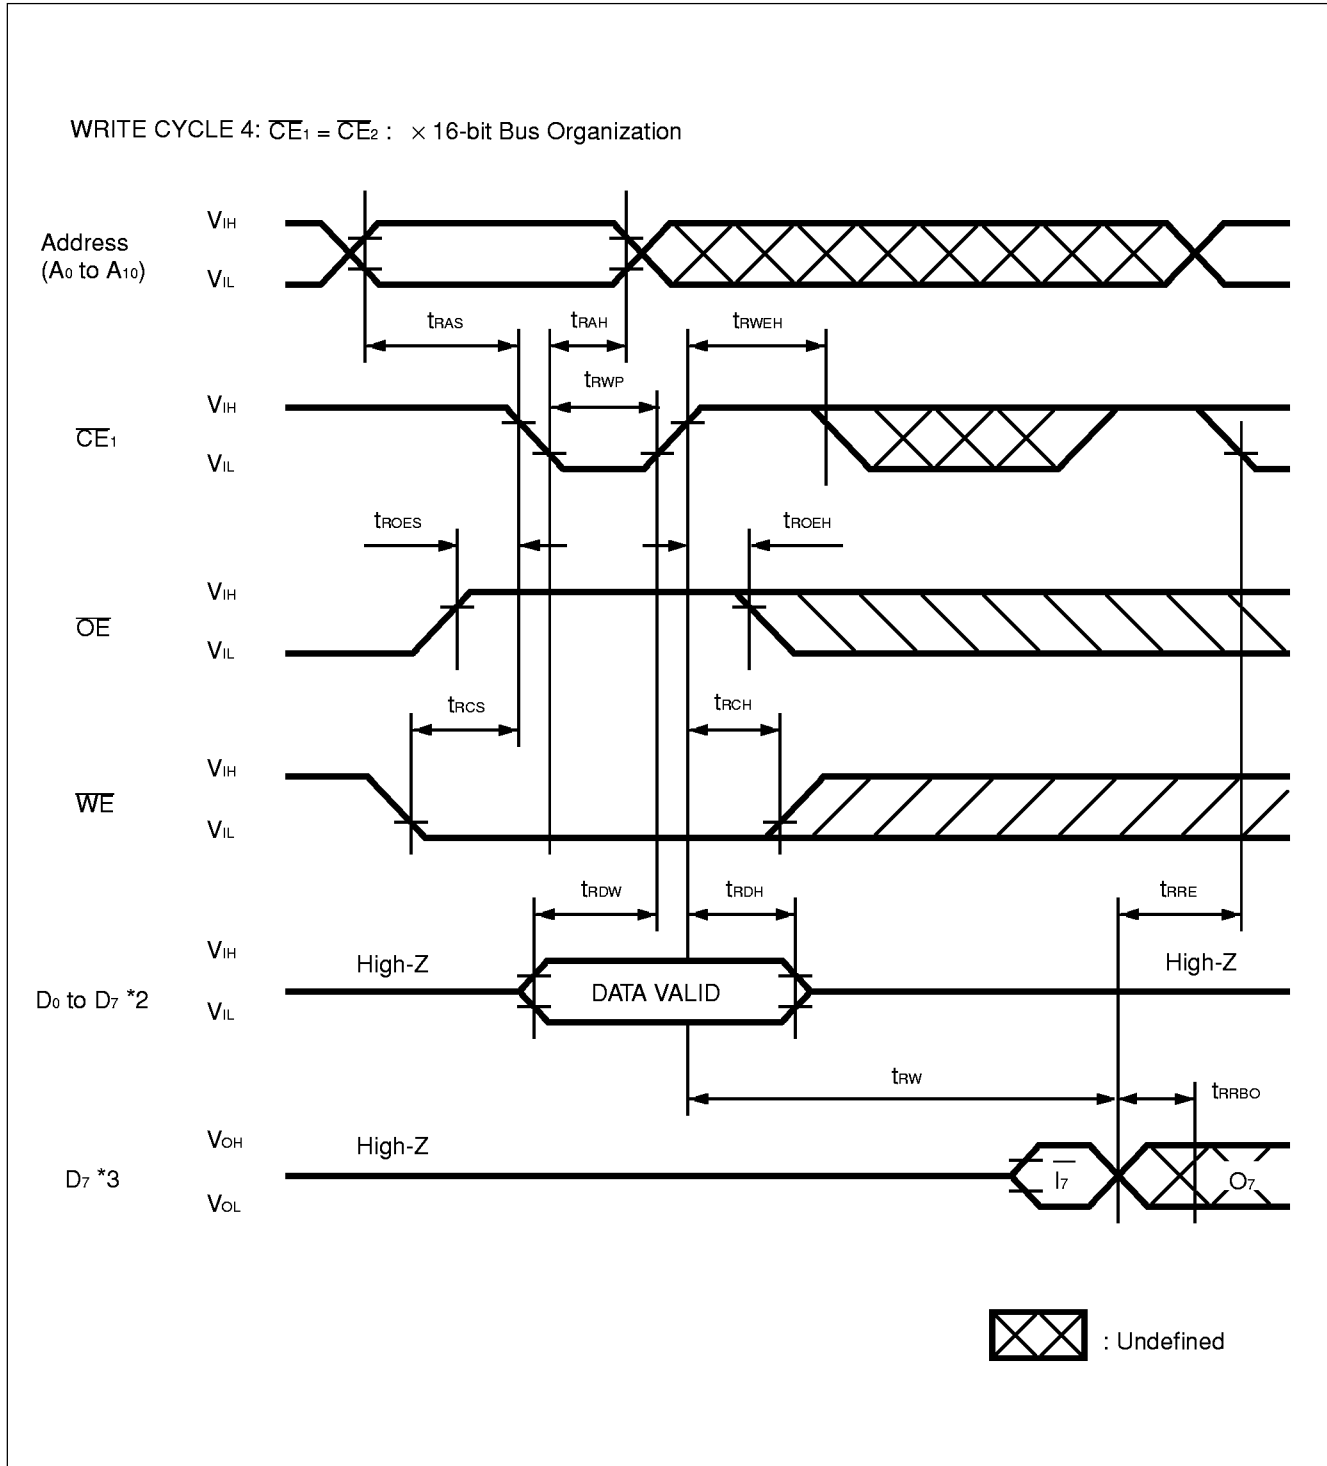


- Notes:**
- \*1. This timing diagram is for MB98A90613 and 90713. "FF" data is available on MB98A90612 and 90712 only.
  - \*2. Input levels of terminals D<sub>8</sub> to D<sub>15</sub> are not specified.
  - \*3. Data polling operation.

# MB98A9061x/9071x-20


## POWER SUPPLY SEQUENCE CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max.	Unit
Detection Rising Voltage	$V_{INH}$	4.2	4.3	4.4	V
Detection Falling Voltage	$V_{INL}$	4.1	4.2	4.3	V
Battery Backup Recovery Time	$t_{BR}$	3.0	—	—	ms
Data Retention Rising Time	$t_{DRSU}$	—	—	0.5	ms
Battery Backup Set up Time	$t_{BS}$	10	—	—	$\mu$ s
Data Retention Falling Time	$t_{DRSF}$	0	—	—	ns

### POWER-ON TIMING DIAGRAM

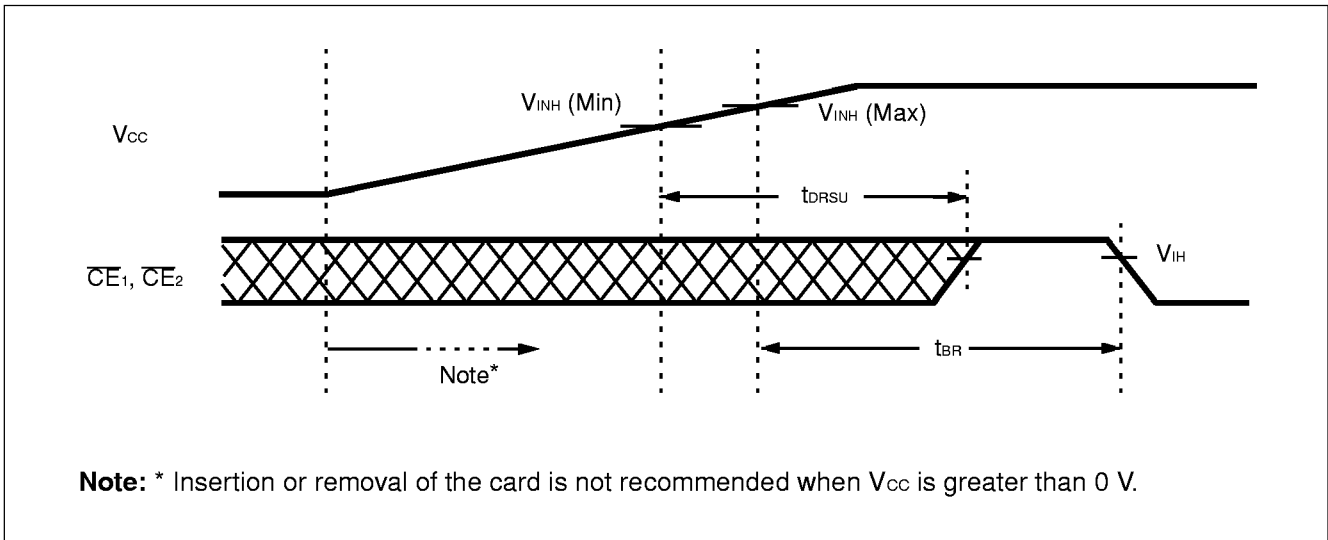

### POWER-OFF TIMING DIAGRAM

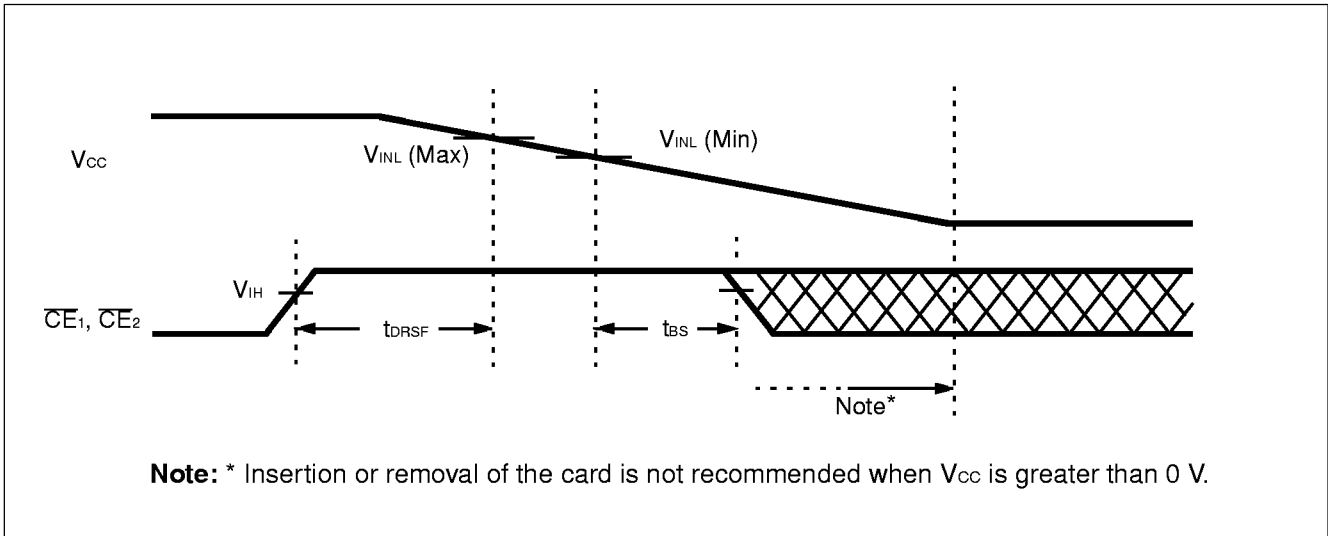

## ■ UNIQUE FEATURES FOR SRAM CARD

### 1. REPLACEABLE BATTERIES FOR THE SRAM CARD

The battery used in the SRAM Card is a 3.0 V Lithium battery (coin type) with the following specifications:

Diameter	: 20.0 (mm)
Thickness	: 2.5 (mm)
Weight	: 2.5 (g) Approx.
Type	: CR2025, or equivalent

### 2. APPROXIMATE DATA RETENTION TIME WITH BATTERY SUPPORT ONLY

Part Number	Approx. Data Retention Time * ( $T_A = 20^\circ\text{C}$ )	
MB98A9061x	7 years min.	15 years typ.
MB98A9071x	4 years min.	8 years typ.

\* Determined by the memory density of the card;  
i.e., greater card density means less battery time.

### 3. REPLACING THE BATTERY IN THE SRAM CARD

- Insert a slender pointed object, such as the end of a paper clip, into the hole on the upper side of the card. (See Fig. 4.)
- Release the battery holder by pressing the paper clip against the catch and pulling the battery holder straight out from the card. (The battery cavity is located at the top of the card. See Fig. 5.) When the battery holder is free from the card the battery will fall out.
- Replace the old battery with a fresh one. Be certain to match battery polarity to the + and – shown on the holder.
- Place the new battery into the holder, squeeze the holder containing the new battery tightly, and reinsert it into the battery cavity.

#### **WARNING**

Battery MUST be replaced within 30 minutes\* or data will be lost.

**Note:** \*With condition that the SRAM card had been inserted into application system more than 10 minutes.

Fig. 4 – SRAM CARD DRAWING (TOP VIEW)


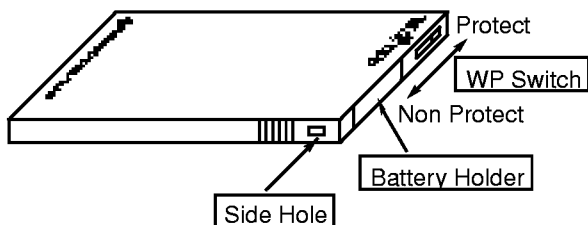


Fig.5 – BATTERY CASE DRAWING (TOP VIEW)

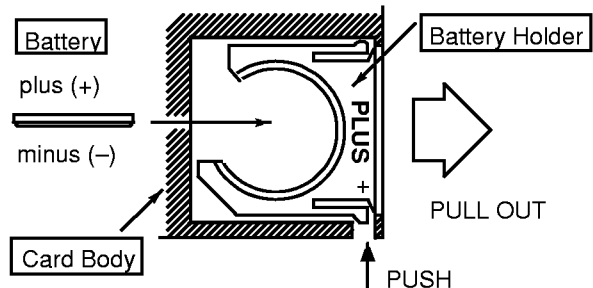

## 4. SPECIAL MONITORING PINS


### 4.1 BVD1, BVD2: Voltage Monitoring Pins

These pins monitor the voltage of the battery which must be maintained at 2.65 V or greater for data retention. The condition of the battery is determined by reading the output signals on BVD1 and BVD2.

1. When  $BVD1=BVD2=V_{OH}$   
Battery voltage is sufficient to guarantee data retention; i.e.,  $\geq 2.65$  V.
2. When  $BVD2=V_{OL}$ ,  $BVD1=V_{OH}$   
Battery voltage is lower than 2.65 V and should be replaced to safeguard data.
3. When  $BVD1=BVD2=V_{OL}$   
Battery voltage is less than 2.37 V: the level is dangerous. There is a possibility that data has not retained.

### 4.2 $\overline{CD}_1$ , $\overline{CD}_2$ : Card Detection Pins

These pins detect the insertion of the card into the system. (See Fig. 6.)  
When the memory card has been correctly inserted,  $\overline{CD}_1$  and  $\overline{CD}_2$  are detected by the system.  $\overline{CD}_1$ ,  $\overline{CD}_2$  are tied to ground on the card side as shown in Fig. 6.

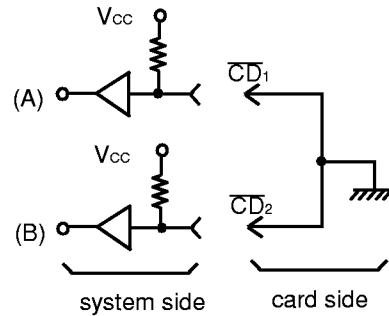


- Fig. 6 -

### 4.3 WP: Write Protect Pins

This pin monitors the position of the Write Protect switch. As shown in Fig. 7, the SRAM card has a Write Protect switch at the top of the card.

To write to the card, the switch must be turned to the "Non Protect" position and the  $\overline{WE}$  pin low. L-level is output on the WP pin.


To prevent writing to the card, the switch must be turned to the "Protect" position. H-level is output on

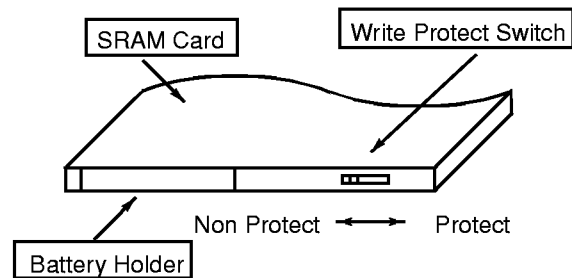

- Fig. 7 -

WP Switch	WP Pin
Protect	H
Non Protect	L

## ■ PACKAGE DIMENSIONS

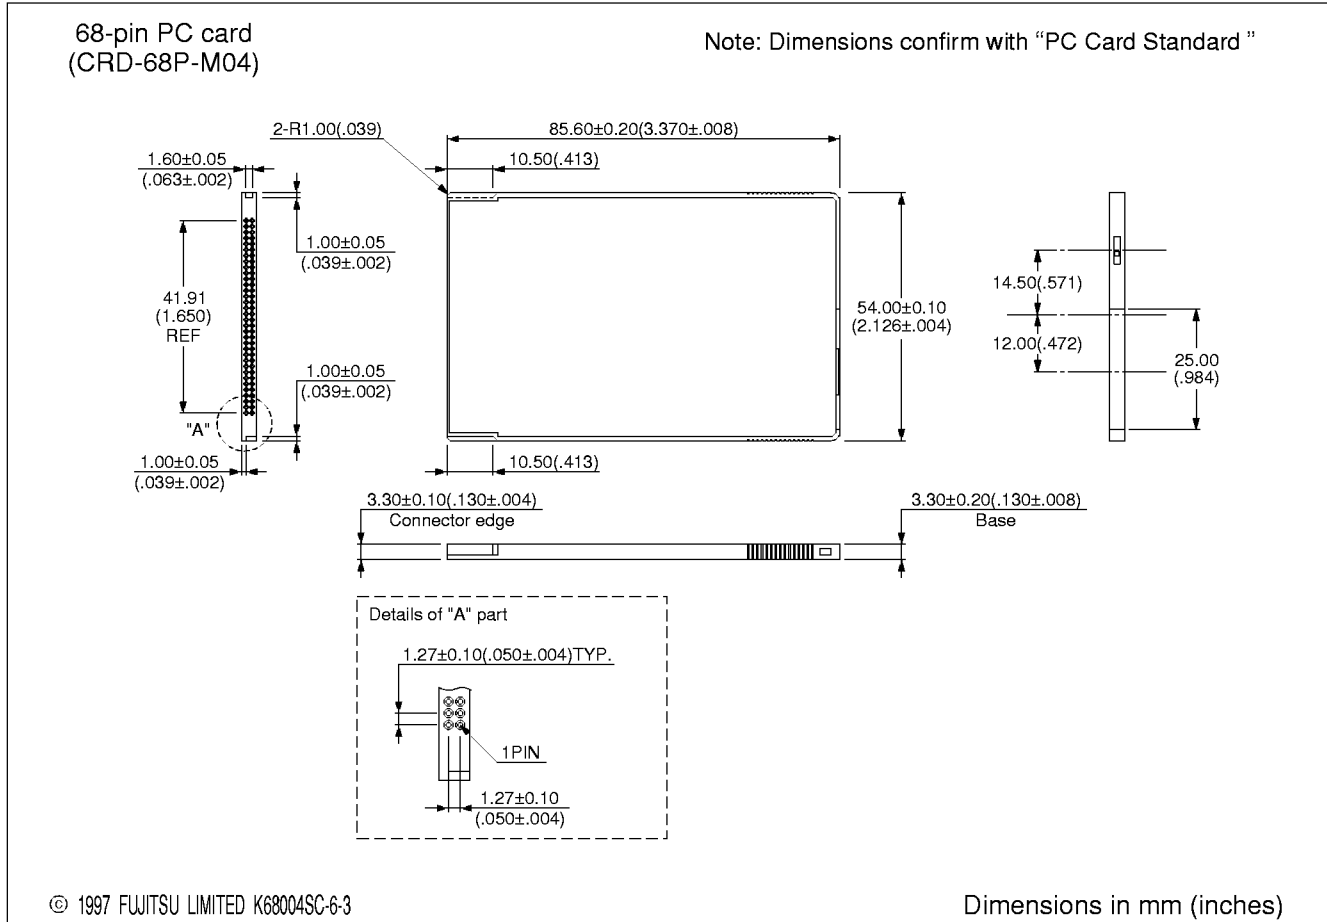

## ■ DEVICE HANDLING PRECAUTIONS

This device is composed of fine electronic parts, so take care in handling or keeping it as below.

- The card is made fine, so do not keep it in the high temperature nor high humidity, place line in the direct sun-shine nor near the heater.
- The card should not be bent, scratched, dropped nor be shocked violently.
- This device should never be taken a part. It could destroy the card or your personal computer hardware.
- To help you handle this device safely, request us the device specifications when purchasing this device.

## FUJITSU LIMITED

*For further information please contact:*

### **Japan**

FUJITSU LIMITED  
Corporate Global Business Support Division  
Electronic Devices  
KAWASAKI PLANT, 4-1-1, Kamikodanaka  
Nakahara-ku, Kawasaki-shi  
Kanagawa 211-8588, Japan  
Tel: (044) 754-3763  
Fax: (044) 754-3329

<http://www.fujitsu.co.jp/>

### **North and South America**

FUJITSU MICROELECTRONICS, INC.  
Semiconductor Division  
3545 North First Street  
San Jose, CA 95134-1804, USA  
Tel: (408) 922-9000  
Fax: (408) 922-9179

Customer Response Center  
*Mon. - Fri.: 7 am - 5 pm (PST)*  
Tel: (800) 866-8608  
Fax: (408) 922-9179

<http://www.fujitsumicro.com/>

### **Europe**

FUJITSU MIKROELEKTRONIK GmbH  
Am Siebenstein 6-10  
D-63303 Dreieich-Buchsschlag  
Germany  
Tel: (06103) 690-0  
Fax: (06103) 690-122

<http://www.fujitsu-edc.com/>

### **Asia Pacific**

FUJITSU MICROELECTRONICS ASIA PTE LTD  
#05-08, 151 Lorong Chuan  
New Tech Park  
Singapore 556741  
Tel: (65) 281-0770  
Fax: (65) 281-0220

<http://www.fmap.com.sg/>

F9802

© FUJITSU LIMITED Printed in Japan

All Rights Reserved.

The contents of this document are subject to change without notice. Customers are advised to consult with FUJITSU sales representatives before ordering.

The information and circuit diagrams in this document presented as examples of semiconductor device applications, and are not intended to be incorporated in devices for actual use. Also, FUJITSU is unable to assume responsibility for infringement of any patent rights or other rights of third parties arising from the use of this information or circuit diagrams.

FUJITSU semiconductor devices are intended for use in standard applications (computers, office automation and other office equipment, industrial, communications, and measurement equipment, personal or household devices, etc.).

#### **CAUTION:**

Customers considering the use of our products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage, or where extremely high levels of reliability are demanded (such as aerospace systems, atomic energy controls, sea floor repeaters, vehicle operating controls, medical devices for life support, etc.) are requested to consult with FUJITSU sales representatives before such use. The company will not be responsible for damages arising from such use without prior approval.

Any semiconductor devices have inherently a certain rate of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Control Law of Japan, the prior authorization by Japanese government should be required for export of those products from Japan.