

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0496160715

Status:


Active

Overview:

HSAutoLink Interconnect Systems

Description:

0.80mm Pitch HSAutoLink Right-Angle Header, Through Hole, 5 Circuit, Type B

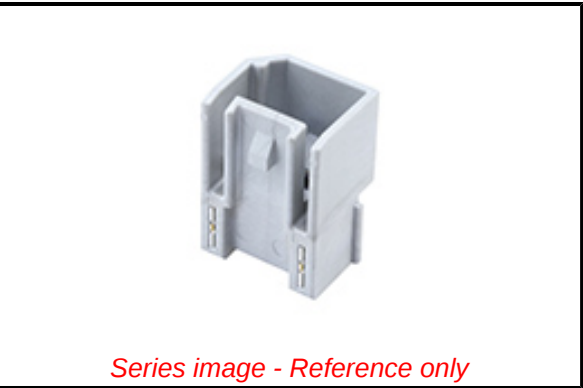

Documents:	
Drawing (PDF)	Packaging Specification PK-49616-001-001 (PDF)
3D Model (PDF)	Datasheet (PDF)
3D Model	RoHS Certificate of Compliance (PDF)
Product Specification PS-49616-001-001 (PDF)	
General	
Product Family	PCB Headers
Series	49616
Application	Automotive, Signal, Wire-to-Board
Comments	Higher current rating achievable, please contact PM for additional technical information.
Component Type	PCB Header
Overview	HSAutoLink Interconnect Systems
Product Name	HSAutoLink
Taxonomy	PCB Headers and Receptacles
UPC	883906124663
Physical	
Breakaway	No
Circuits (Loaded)	5
Circuits (maximum)	5
Color - Resin	Gray
Durability (mating cycles max)	25
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	3.700/g
Number of Rows	1
Orientation	Right Angle
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	0.80mm
Pitch - Termination Interface	0.80mm
Plating min - Mating	0.762µm
Plating min - Termination	3.810µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	No
Stackable	No
Temperature Range - Operating	-40° to +85°C
Termination Interface: Style	Through Hole
Electrical	

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

Not Contained per -
D(2022)9120-DC (17
Jan 2023)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China RoHS

Green Image

ELV

Compliant

RoHS Phthalates

Not Contained

Search Parts in this Series

[49616](#) Series

Mates With

HS AutoLink Cable Assembly [111014](#) , [111015](#) , [111005](#) , [111041](#) , [111019](#) , [111020](#)

Current - Maximum per Contact

1.0A

Voltage - Maximum

5V (RMS)

Material Info

Reference - Drawing Numbers

Packaging Specification

PK-49616-001-001

Product Specification

PS-49616-001-001

Sales Drawing

SD-49616-002-001

This document was generated on 04/10/2023

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION