


Trans-Guard[®] FX Fuse

Construction

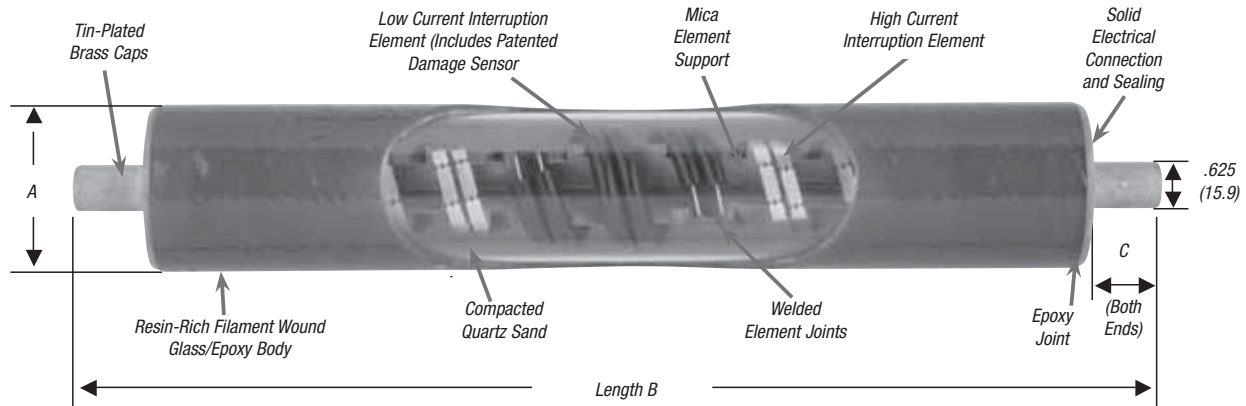

Dimensional Information for Trans-Guard[®] FX Fuses

NOMINAL FUSE VOLTAGE RATING (kV)	CURRENT RATING (AMPS)	DIMENSIONS INCHES (MM)			STANDARD MOUNTING CODE
		A	B	C	
5.5	3-75	2.25-2.18" (57.0-55.3mm)	10.00-9.90" (254.0-251.5mm)	1.02-1.00" (25.9-25.4mm)	4
	80-200	3.32-3.25" (84.4-82.5mm)	17.51-17.35" (444.8-440.7mm)	1.21-1.17" (30.7-29.7mm)	6
8.3	3-50	2.25-2.18" (57.0-55.3mm)	10.00-9.90" (254.0-251.5mm)	1.02-1.00" (25.9-25.4mm)	4
	65-80	2.25-2.18" (57.0-55.3mm)	14.31-14.21" (363.5-360.9mm)	1.02-1.00" (25.9-25.4mm)	5
	65-125	3.32-3.25" (84.4-82.5mm)	14.70-14.54" (373.4-369.3mm)	1.21-1.17" (30.7-29.7mm)	5
15.5	3-50	2.25-2.18" (57.0-55.3mm)	14.31-14.21" (363.5-360.9mm)	1.02-1.00" (25.9-25.4mm)	5
	65	2.25-2.18" (57.0-55.3mm)	17.12-17.02" (434.8-432.3mm)	1.02-1.00" (25.9-25.4mm)	6
	65-100	3.32-3.25" (84.4-82.5mm)	17.51-17.35" (444.8-440.7mm)	1.21-1.17" (30.7-29.7mm)	6
23.0	6-50	2.25-2.18" (57.0-55.3mm)	17.12-17.02" (434.8-432.3mm)	1.02-1.00" (25.9-25.4mm)	6

Blown Fuse Indicator — Type 1



Before Operation



After Operation

Trans-Guard® FX Fuse

Power & High Voltage — Current-Limiting Fuses
Electrical Characteristics Of Trans-Guard® FX Fuses (Single Fuses)

NOMINAL FUSE VOLTAGE RATING (kV)	FUSE DIAMETER (IN.)	CURRENT RATING (AMPS)	FUSE CAT. NO.	RATED MAXIMUM VOLTAGE (kV)	MAXIMUM CONTINUOUS CURRENT (IN AIR) (6) (7)			PEAK ARC VOLTAGE (5) (kV)	MINIMUM MELT I ² T (AMP ² -SEC)	MAXIMUM MELT I ² T (3) (4) (AMP ² -SEC)	RMAT (8) (°C)
					25° C	40° C	55° C				
5.5	2.2	3	HTFX220003	5.5	5.0	4.9	4.7	30	100	238	140
		6	HTFX220006		11.0	10.5	10.0	25	620	1,764	
		8	HTFX220008		13.5	13.0	12.5	23	800.0	2,560	
		10	HTFX220010		16.0	15.5	15.0	23	800.0	2,560	
		12	HTFX220012		20.5	19.5	19.0	21	920.0	4,814	
		18	HTFX220018		23.5	22.5	22.0	18	1,310	5,815	
		20	HTFX220020		27.5	26.5	25.5	18	1,620	6,779	
		25	HTFX220025		37.0	35.5	34.5	18	3,660	13,747	
		30	HTFX220030		41.0	39.5	38.5	18	5,250	18,863	
		40	HTFX220040		50.0	48.5	47.0	18	8,700	31,415	
		50	HTFX220050		57.0	55.0	53.5	18	12,800	44,260	
		65	HTFX220065		69.5	67.5	64.0	17	20,500	95,000	
75	HTFX220075	78.5	76.0	72.0	17	30,200	129,000				
5.5	3.3	80	HTFX320080	5.5	99	96	94	15	22,100	110,000	71
		100	HTFX320100		126	122	118	15	56,700	280,000	
		125	HTFX320125		142	138	134	15	78,300	380,000	
		150	HTFX320150		184	178	173	15	176,000	860,000	
		200	HTFX320200		208	202	196	15	259,000	1,270,000	
8.3	2.2	3	HTFX230003	10.0	5.0	4.9	4.7	30	100	350	140
		6	HTFX230006		11.0	10.5	10.0	32	620	2,700	
		8	HTFX230008		13.5	13.0	12.5	28	800	4,000	
		10	HTFX230010		16.0	15.5	15.0	28	800	4,000	
		12	HTFX230012		20.5	19.5	19.0	26	920	8,000	
		18	HTFX230018		23.5	22.5	22.0	26	1,310	9,500	
		20	HTFX230020		27.5	26.5	25.5	26	1,620	11,000	
		25	HTFX230025		37.0	35.5	34.5	26	3,660	22,000	
		30	HTFX230030		41.0	39.5	38.5	26	5,250	30,000	
		40	HTFX230040		50.0	48.5	47.0	26	8,700	50,000	
	50	HTFX230050	57.0	55.0	53.5	26	12,800	70,000			
	65	HTFX230065	87.0	84.0	81.5	23	34,000	200,000			
	80	HTFX230080	100.0	98.0	95.0	22	51,200	280,000			
	65	HTFX330065	81.0	79.0	77.0	25	25,200	100,000	71		
	80	HTFX330080	95.0	92.0	89.0	25	47,200	185,000			
100	HTFX330100	120.0	117.0	113.0	25	78,300	330,000				
125	HTFX330125	135.0	131.0	127.0	25	115,150	480,000				
15.5	2.2	3	HTFX240003 (1)	17.2	5.0	4.9	4.7	51	100	510	140
		6	HTFX240006		11.0	10.5	10.0	54	620	2,600	
		8	HTFX240008		13.5	13.0	12.5	46	800	3,700	
		10	HTFX240010		16.0	15.5	15.0	46	800	3,700	
		12	HTFX240012		20.5	19.5	19.0	43	920	6,500	
		18	HTFX240018		23.5	22.5	22.0	45	1,310	8,000	
		20	HTFX240020		27.5	26.5	25.5	45	1,620	10,000	
		25	HTFX240025		37.0	35.5	34.5	45	3,660	22,000	
		30	HTFX240030		41.0	39.5	38.5	45	5,250	30,000	
		40	HTFX240040		50.0	48.5	47.0	45	8,700	50,000	
		50	HTFX240050		53.0	51.5	50.0	45	12,800	70,000	
		65	HTFX240065		72.0	70.0	68.0	39	28,300	164,000	
	65	HTFX340065	78.0	75.0	73.0	40	25,200	110,000	71		
	80	HTFX340080	88.0	85.0	82.0	40	39,400	185,000			
	100	HTFX340100	114.0	110.0	107.0	40	80,000	380,000			

Trans-Guard® FX Fuse

Electrical Characteristics Of Trans-Guard® FX Fuses (Single Fuses) (continued)

NOMINAL FUSE VOLTAGE RATING (kV)	FUSE DIAMETER (IN.)	CURRENT RATING (AMPS)	FUSE CAT. NO.	RATED MAXIMUM VOLTAGE (kV)	MAXIMUM CONTINUOUS CURRENT (IN AIR) (6)			PEAK ARC VOLTAGE (5) (kV)	MINIMUM MELT I ² T (AMP ² -SEC)	MAXIMUM MELT I ² T (3) (4) (AMP ² -SEC)	RMAT (8) (°C)
					25° C	40° C	55° C				
23.0	2.2	6	HTFX250006	23.0	11.0	10.5	10.0	67	620	3,100	140
		8	HTFX250008		13.5	13.0	12.5	61	800	4,800	
		10	HTFX250010		16.0	15.5	15.0	61	800	4,800	
		12	HTFX250012		20.5	19.5	19.0	60	920	8,300	
		18	HTFX250018		23.5	22.5	22.0	60	1,310	11,200	
		20	HTFX250020		27.5	26.5	25.5	60	1,620	13,000	
		25	HTFX250025		37.0	35.5	34.5	60	3,660	28,000	
		30	HTFX250030		41.0	39.5	38.5	60	5,250	38,000	
		40	HTFX250040		48.0	46.5	45.0	60	8,700	61,000	
		50	HTFX250050		55.0	53.0	51.5	60	12,800	82,000	

Electrical Characteristics of Trans-Guard® FX Fuses (Parallel Fuses)

NOMINAL FUSE VOLTAGE RATING (kV)	FUSE DIAMETER (IN.)	CURRENT RATING (AMPS)	FUSE CAT. NO.	RATED MAXIMUM VOLTAGE (kV)	MAXIMUM CONTINUOUS CURRENT (IN AIR) (6)			PEAK ARC VOLTAGE (5) (kV)	MINIMUM MELT I ² T (AMP ² -SEC)	MAXIMUM MELT I ² T (3) (4) (AMP ² -SEC)	RMAT (8) (°C)
					25° C	40° C	55° C				
8.3	2.2	60	HTFX230030	10.0	80.0	77.0	75.0	26	21,000	120,000	140
		80	HTFX230040		98.0	95.0	92.0	26	34,000	180,000	
		100	HTFX230050	8.8	111.0	108.0	105.0	24	51,200	250,000	
		130	HTFX230065		170.0	165.0	160.0	22	136,000	670,000	
		160	HTFX230080		198.0	191.0	186.0	21	204,800	890,000	
	3.3	130	HTFX330065	8.3	158.0	154.0	151.0	24	100,800	400,000	71
		160	HTFX330080		186.0	180.0	175.0	24	189,000	740,000	
		200	HTFX330100		235.0	229.0	221.0	24	313,000	1,300,000	
		250	HTFX330125		265.0	256.0	249.0	24	460,500	1,800,000	
15.5	2.2	60	HTFX240030	17.2	80.0	77.0	75.0	45	21,000	110,000	140
		80	HTFX240040		98.0	95.0	92.0	45	34,800	170,000	
		100	HTFX240050		104.0	101.0	98.0	45	51,200	310,000	
	3.3	130	HTFX340065	15.5	152.0	147.0	143.0	39	100,800	440,000	71
		160	HTFX340080		172.0	167.0	160.0	39	157,500	740,000	
		200	HTFX340100		222.0	214.0	208.0	39	320,000	1,520,000	

Notes for charts on pages H-72-H-73:

- Designs have a 50,000 Amps RMS. Symmetrical Rating (except 3A 17.2kV, which was tested at 44kA maximum).
- Current ratings shown in chart above are achieved by using a parallel combination of two fuses (order two fuses). To facilitate equal sharing of the interrupting duty, the two fuses should be resistance matched ($\pm 2\%$) and be mounted such that the current paths to and from each fuse are symmetrical.
- Tabulated Maximum Total I²t values are for currents of 50,000 amperes at the nominal voltage of the fuse (except for fuses having a rated maximum voltage of 8.8kV, in which case the maximum total I²t values are at 8.8kV). Fuses that have a rated maximum voltage higher than their nominal voltage rating will have a higher I²t let-through when applied at voltages up to these higher values. For example, maximum total I²t values are increased by approximately 30% when 8.3kV fuses are applied at 10kV and approximately 25% when 15.5kV fuses are used at 17.2kV.
- Maximum total I²t values are reduced for currents below 50,000A. For example, at 10,000A, maximum total I²t values are approximately 15% less than the published values.
- Peak arc voltages quoted are for 50,000A currents at the rated maximum voltage listed. Reduced currents and voltages will reduce the peak arc voltage. Consult the factory for further information.
- Maximum continuous currents at higher ambient temperatures, and in confining enclosures:
 - These may be determined by derating the fuses by .2% per degree C over 25° C (for example, at 85° C the derating would be $60 \times .2 = 12\%$, making the maximum continuous current of a 30A fuse $41 \times .88 = 36.1A$).
 - When fuses are applied in a confining enclosure, such as a drywell canister, additional derating of a fuse's maximum continuous current is necessary. Specifically, the maximum continuous current for fuses used in a dry-well canister, with the canister completely submerged in oil, will be reduced by an additional 2% (3% for fuses having a rated maximum voltage of 8.8kV). When calculating the derating for temperature, as described above, the temperature of the oil surrounding the canister should be used. For other types of enclosures, please consult the factory.
- Reduction in the long time melting current of the fuses (approximately one hour and longer) due to higher ambient temperatures and use in enclosures is the same as described above for "Maximum Continuous Current". See time-current characteristics for melting characteristics in this time region.
- The 2.2"-dia. 80A and 160A (paralleled 80A) fuses have an RMAT of 140° C at a reduced rated maximum voltage of 5.5kV.

Trans-Guard® FX Fuse

Recommended Trans-Guard® FX Mounted in a Standard Drywell Canister in Oil (at a max. oil temp. of 100° C)

FUSE VOLTAGE	RECOMMENDED FUSE CURRENT RATINGS (AMPERES)																	
	5.5kV				8.3kV				15.5kV				23kV					
1-PHASE TRANSFORMER KVA	TRANSFORMER 1-PHASE VOLTAGE RATING (kV) PHASE-TO-GROUND																	
	2.4		4.16		4.8		7.2		7.62		12		14.4		16		19.9	
	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B
10	6 ^a	8	6 ^a		3		3 ^a		3 ^a		3 ^a		3 ^a		3 ^a		6 ^a	
15	8	12	6		6		3		3		3 ^a		3 ^a		3 ^a		6 ^a	
25	18	20	8	12	8 ^b	10	6		6		3		3		3		6 ^a	
37.5	20	30	12	18	12 ^b	18	8	10		8		6		6 ^a		6 ^a		6 ^a
50	30	40	18	20	18	20	10	12	10	12		6		6		6		6 ^a
75	50	75	25	40	20	30	12	20	12	20	8	12	8	10		8		6
100	65	80*	30	50	25	40	20	25	20	25	12 ^b	18	10	12	10 ^b	12		8
167	100*		65	80*	50	65	30	50	30	50	20	25	18	25	18	20	12	18
250			80*		80*		50	60*	50	60*	25	40	20	40	20	30	18	25
333					100*		60*	100*	60*	100*	40	60*	30	50	25	40	20	30
500											60*	80*	50	80*	40	60*	40	50
750											80*		80*		60*	100*		
1000															100*			

Recommended 8.3kV Trans-Guard® FX Mounted in 15.5kV Drywell Canister in Oil (at a max. oil temp. of 100° C)

FUSE VOLTAGE	RECOMMENDED FUSE CURRENT RATINGS (AMPERES)									
	8.3kV									
1-PHASE TRANSFORMER KVA	TRANSFORMER 1-PHASE VOLTAGE RATING (kV) PHASE-TO-GROUND									
	2.4		4.16		4.8		7.2		7.62	
	A	B	A	B	A	B	A	B	A	B
75		80								
100	65	80								
167	X†	160*	65	80		80				
250	160*		80	130*	80	130*		65		65
333			130*	160*	X†	160*	65	X†	65	X†
500			160*		160*		130*			130*

†X=Use an 8.3kV Drywell Canister. See top chart for fuse recommendations.

Notes:

Column A = 140–200% of transformer rating and Column B = 200–300% of transformer rating.

Fuses recommended in bottom chart must be mounted in a 15.5kV mounting code 5 drywell canister.

Recommended fuses meet inrush criteria of 12 times transformer full load current for .1 second and 25 times transformer full load current for .01 second. Fuses also meet cold load pickup criteria of six times transformer full load current for 1 second and three times transformer full load current for 10 seconds.

* Indicates parallel fuse applications.

a Fuse allows greater than 300% of transformer rating.

b Fuse allows greater than 200% of transformer rating.

Trans-Guard® FX Fuse

Recommended Trans-Guard® FX Mounted in a Standard Drywell Canister in Oil (at a max. oil temp. of 100° C)

FUSE VOLTAGE	RECOMMENDED FUSE CURRENT RATINGS (AMPERES)																			
	5.5kV			8.3kV			15.5kV			23kV										
3-PHASE TRANSFORMER kVA	TRANSFORMER 3-PHASE VOLTAGE RATING (kV) PHASE-TO-PHASE																			
	2.4		4.16		4.8		7.2-7.96		8.32		12.47		13.2-14.4		20.8		22.9-24.9 ^c		34.5 ^c	
	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B
15	6		3		3		3 ^a		3 ^a		3 ^a		3 ^a		6 ^a		6 ^a		6 ^a	
22.5	8	10	6		6 ^a		3		3		3 ^a		3 ^a		6 ^a		6 ^a		6 ^a	
30	10	18	6		6		6 ^a		3		3 ^a		3 ^a		6 ^a		6 ^a		6 ^a	
45	18	20	8	12	8 ^b	10	6		6		3		3		6 ^a		6 ^a		6 ^a	
75	25	40	18	20	12	18	8	12	8 ^b	10	6		6		6 ^a		6 ^a		6 ^a	
100	40	50	20	25	18	20	12 ^b	18	10	12	8	6	8		6 ^a		6 ^a		6 ^a	
112.5	40	65	20	30	20	25	12	18	12 ^b	18	8 ^b	10	8		6		6 ^a		6 ^a	
150	50	80*	25	40	25	40	18	20	18	20	10	18	10 ^b	12	6		6		6 ^a	
200	75	100*	40	65	30	50	20	30	20	25	12	20	12 ^b	18	8	10	8		6	
225	80*		40	75	40	65	25	40	20	30	18	20	12	20	8	12	8	10	6	
300			65	80*	50	80*	30	50	30	40	20	25	20	25	12	18	12 ^b	18	8	
500			100*		80*		60*	80*	50	80*	30	50	30	40	20	25	18	25	12	18
750							80*		80*		50	80*	50	60*	25	40	25	40	18	25
1000											60*	100*	60*	80*	40		40		20	30
1500													100*				50			40
2000																				50

Recommended 8.3kV Trans-Guard® FX Mounted in 15.5kV Drywell Canister in Oil (at a max. oil temp. of 100° C)

FUSE VOLTAGE	RECOMMENDED FUSE CURRENT RATINGS (AMPERES)										
	8.3kV										
3-PHASE TRANSFORMER kVA	TRANSFORMER 3-PHASE VOLTAGE RATING (kV) PHASE-TO-PHASE										
	2.4		4.16		4.8		7.2-7.96		8.32		
	A	B	A	B	A	B	A	B	A	B	
112.5		65									
150		80									
200	80	X†		65							
225	80	130*		65		65					
300	130 ^b *	160*		65	80		80				
500	160*		X†	160*		80	130*	65	80 ^c	80 ^c	
750			160*			130*		80 ^c	130*	80 ^c	130*
1000						160*		130*	160 ^a *	130 ^b *	160 ^a *
1500								160 ^a *		130*	

†X=Use an 8.3kV Drywell Canister. See top chart for fuse recommendations.

Notes:

Column A = 140–200% of transformer rating and Column B = 200–300% of transformer rating.

Fuses recommended in bottom chart must be mounted in a 15.5kV mounting code 5 drywell canister.

Recommended fuses meet inrush criteria of 12 times transformer full load current for .1 second and 25 times transformer full load current for .01 second. Fuses also meet cold load pickup criteria of 6 times transformer full load current for 1 second and 3 times transformer full load current for 10 seconds.

* Indicates parallel fuse applications.

a Fuse allows greater than 300% of transformer rating.

b Fuse allows greater than 200% of transformer rating.

c Recommendations limited to gndY-gndY transformers with no more than 50% delta connected secondary load. Phase-to-ground rated fuses are frequently recommended for gndY-gndY three phase transformers. In some cases, the fuses recommended in bottom chart may be suitable for use with transformers that are not gndY-gndY (contact the factory further information).

Trans-Guard® FX Fuse

Recommended Trans-Guard® FX Mounted in Air at 40° C Ambient Temperature

FUSE VOLTAGE	RECOMMENDED FUSE CURRENT RATINGS (AMPERES)																					
	5.5kV			8.3kV			15.5kV			23kV												
3-PHASE TRANSFORMER kVA	TRANSFORMER 3-PHASE VOLTAGE RATING (kV) PHASE-TO-PHASE																					
	2.4		4.16		4.8		7.2-7.96		8.32		12.47		13.2-14.4		20.8		22.9-24.9 ^c		34.5 ^c			
	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B		
15		6		3		3		3 ^a		3 ^a		3 ^a		3 ^a		6 ^a		6 ^a		6 ^a		
22.5			8		6 ^a		6 ^a		3 ^a		3 ^a		3 ^a		6 ^a		6 ^a		6 ^a		6 ^a	
30		10 ^b		12		6		6		6 ^a		3		3 ^a		6 ^a		6 ^a		6 ^a		6 ^a
45		12		18		8		8		6 ^a		6 ^a		3		3		6 ^a		6 ^a		6 ^a
75		20		40		12		18		12 ^b		18		8		8		6 ^a		6 ^a		6 ^a
100		25		40		18		20		18		20		12		10 ^b		12		8		8
112.5		30		50		20		25		18		20		12 ^b		18		12		8		8
150		40		65		25		30		20		25		18		20		12		18		18
200		65		80		30		50		25		40		20		25		18		20		18
225		80		100		40		65		40		50		25		30		20		30		30
300		80		125		50		80		40		75		25		40		25		30		30
500		150				80		125		80		100		50		(65)		100		40		(65)
750				125		200		125		150		(65)		100		(65)		(80)		(80)		(80)
1000				200		150				100		(130)*		200*		(80)		(130)*		(130)*		(130)*
1500										(160)*		200*		(130)*		200*		(130)*		200*		200*
2000										200*				200*		250*		130*		200*		130*
2500														130*		200*		160*		130*		200*
3000														200*				200*				

Notes:

Column A = 140–200% of transformer rating and Column B = 200–300% of transformer rating.

Recommended fuses meet inrush criteria of 12 times transformer full load current for .1 second and 25 times transformer full load current for .01 second. Fuses also meet cold load pickup criteria of 6 times transformer full load current for 1 second and 3 times transformer full load current for 10 seconds.

* Indicates parallel fuse applications.

Ratings in parenthesis are 2.2"-dia. fuses (catalog numbers HTFX230065, HTFX230080 and HTFX240065).

a Fuse allows greater than 300% of transformer rating.

b Fuse allows greater than 200% of transformer rating.

c Recommendations limited to gndY-gndY transformers with no more than 50% delta connected secondary load. Phase-to-ground rated fuses are frequently recommended for gndY-gndY three phase transformers.

Trans-Guard® FX Fuse

Fuse Ordering Information

To order the proper fuse for a particular application, first determine the correct fuse voltage and current rating using either the appropriate application table (pages H-74–H-76) or the published performance data (pages H-72–H-73, the applicable TCCs and Peak Let-Through Characteristics). Then refer to the chart below to determine the appropriate catalog number.

Fuse Catalog Numbers

CURRENT RATING (AMPS)	FUSE DIAMETER (IN.)	CAT. NO.			
		5.5kV	8.3kV	15.5kV	23.0kV
3	2.2	HTFX220003	HTFX230003	HTFX240003	—
6		HTFX220006	HTFX230006	HTFX240006	HTFX250006
8		HTFX220008	HTFX230008	HTFX240008	HTFX250008
10		HTFX220010	HTFX230010	HTFX240010	HTFX250010
12		HTFX220012	HTFX230012	HTFX240012	HTFX250012
18		HTFX220018	HTFX230018	HTFX240018	HTFX250018
20		HTFX220020	HTFX230020	HTFX240020	HTFX250020
25		HTFX220025	HTFX230025	HTFX240025	HTFX250025
30		HTFX220030	HTFX230030	HTFX240030	HTFX250030
40		HTFX220040	HTFX230040	HTFX240040	HTFX250040
50		HTFX220050	HTFX230050	HTFX240050	HTFX250050
60*		—	HTFX230030	HTFX240030	—
65		HTFX220065	HTFX230065	HTFX240065	—
75		HTFX220075	HTFX230075	—	—
80*		—	HTFX230080	—	—
80*		—	HTFX230040	HTFX240040	—
100*		—	HTFX230050	HTFX240050	—
130*		—	HTFX230065	—	—
160*	—	HTFX230080	—	—	
65	3.3	—	HTFX330065	HTFX340065	—
80		HTFX320080	HTFX330080	HTFX340080	—
100		HTFX320100	HTFX330100	HTFX340100	—
125		HTFX320125	HTFX330125	—	—
130*		—	HTFX330065	HTFX340065	—
150		HTFX320150	—	—	—
160*		—	HTFX330080	HTFX340080	—
200		HTFX320200	—	—	—
200*		—	HTFX330100	HTFX340100	—
250*		—	HTFX330125	—	—

Notes:

- To order a fuse having a blown fuse indicator, replace the 7th character ("0") in the catalog number with a "1" (Example: HTFX241040). Please note that indicator fuses are not suitable for use in drywell canister applications. Also, an indicator option is not available on 3A fuses.

* Current ratings shown are achieved by using a parallel combination of two fuses (order two fuses). Contact factory for ordering information concerning outdoor and under-oil fuse versions.