

DATA SHEET

80C52/80C32

CMOS SINGLE-CHIP
8 BIT MICROCONTROLLER

- 80C52 - CMOS SINGLE -CHIP 8 BIT MICRO-CONTROLLER with factory mask-programmable ROM
- 80C32 - CMOS SINGLE - CHIP 8-BIT CONTROL ORIENTED CPU with RAM and I/O

80C52/C32 : 0 to 12 MHz
80C52-1/C32-1 : 0 to 16 MHz
80C52S/C32S : 0 to 20 MHz
80C52-L/C32-L : $V_{CC} = 2.7 \text{ V}$ to 5.5 V (0 to 6 MHz)
80C52F : SECRET ROM

FEATURES

- POWER CONTROL MODES
- 256 x 8 BIT RAM
- 32 PROGRAMMABLE I/O LINES
- THREE 16-BIT TIMER/COUNTER
- 64 K PROGRAM MEMORY SPACE
- FULLY STATIC DESIGN
- HIGH PERFORMANCE SAJI VI CMOS PROCESS
- BOOLEAN PROCESSOR
- 6 INTERRUPT SOURCES
- PROGRAMMABLE SERIAL PORT
- 64 K DATA MEMORY SPACE
- TEMPERATURE RANGE : Commercial, Industrial, Automotive and Military

DESCRIPTION

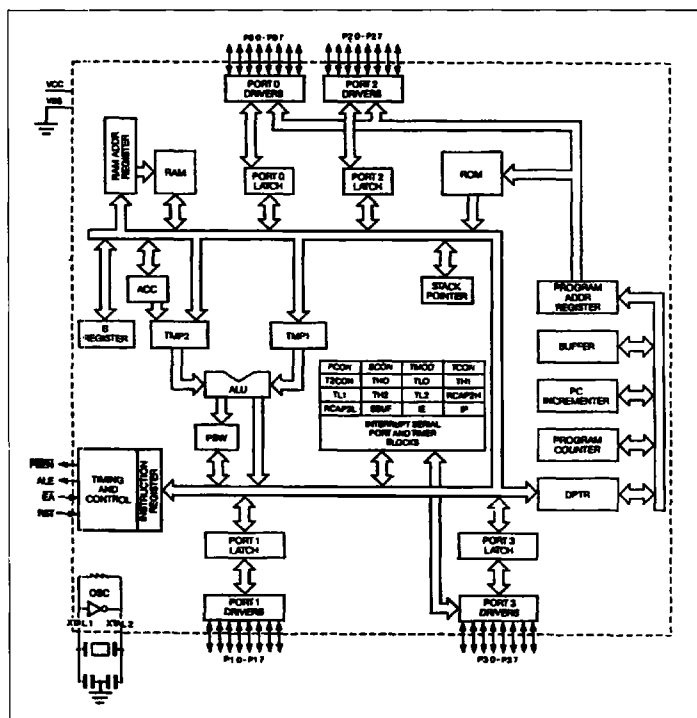


Figure 1 : Block Diagram.

MHS's 80C52 and 80C32 are high performance CMOS versions of the 8052/8032 NMOS single chip 8 bit μC and is manufactured using a self-aligned silicon gate CMOS process (SAJI VI).

The fully static design of the MHS 80C52/80C32 allows to reduce system power consumption by bringing the clock frequency down to any value, even DC, without loss of data.

The 80C52 retains all the features of the 8052 : 8 K bytes of ROM ; 256 bytes of RAM ; 32 I/O lines ; three 16 bit timers ; a 6-source, 2-level interrupt structure ; a full duplex serial port ; and on-chip oscillator and clock circuits.

In addition, the 80C52 has two software-selectable modes of reduced activity for further reduction in power consumption. In the Idle Mode the CPU is frozen while the RAM, the timers, the serial port, and the interrupt system continue to function. In the Power Down Mode the RAM is saved and all other functions are inoperative.

The 80C32 is identical to the 80C52 except that it has no on-chip ROM.

MHS provides a new member in the 80C52 Family named "80C52F" which permits full protection of the internal ROM contents.

With a non protected 80C52, it is very easy to read out the contents of the internal 8 K bytes of ROM.

Three methods exist, two of them are special test modes and the last one is by means of MOVC instructions.

- **Test mode "VER"** : Using this special test mode, the internal ROM contents are output on port P0 ; the address being applied on ports P2 (AD15...AD8) and P1 (AD7...AD0).
- **Test mode "TMB"** : With this second test mode, the contents of the 80C52 internal bus is presented on port P1 during the PH2 clock phases.
- **Using MOVC instructions** : If EA = 0, and following a reset, the 80C52 fetches its instructions from external program memory. It is then possible to write a small program whose purpose is to dump the internal ROM contents by means of MOVC A, @A + DPTR and MOVC A, @A + PC instructions.

80C52F WITH PROGRAM PROTECTION FEATURES

This new version adds ROM protection features in some strategic points of the 80C52F in order to eliminate the possibility of reading the ROM contents (once the protection has been programmed) by one of the three forementioned methods (VER and TMB test modes, or MOVC instructions).

Nevertheless the customer must note the following :

- Once the protection has been programmed, the 80C52F program always starts at address 0 in the internal ROM.
- The application program must be self contained in the internal 8 K of ROM, otherwise it would be possible to trap the program counter address in the ex-

ternal PROM/EPROM (beyond 8 K) and then to dump the internal ROM contents by means of a patch using MOVC instructions.

Thus, if an extra EPROM is necessary, it is advised to ensure that it will contain only constants or tables.


TEST OF THE ON-CHIP PROGRAM MEMORY

- **Before protection is activated** : The 80C52F can be tested as any normal 80C52 (using test equipment or any other methods).
- **After protection is activated** : It is then no longer possible to dump the internal ROM contents.

HOW TO PROGRAM THE PROTECTION MECHANISM

- To burn correctly the fuse a specific configuration of inputs must be settled as below :
 - RST = ALE = 1
 - P2.7 = 1

Furthermore PSEN signal must be tied at + 9 V $\pm$ 5 % level voltage and a pulse must be applied on P2.6 input Port. The timing on P2.6 is shown below :

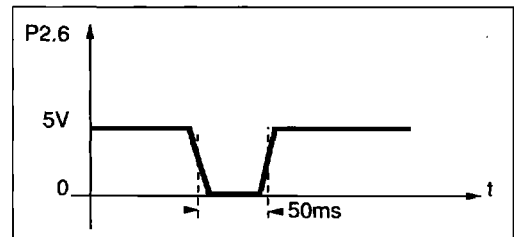

Time Rise and Fall Rise $\leq$ 100 μ s.

- The electrical schematic shows a typical application to deliver P2.6 signal.

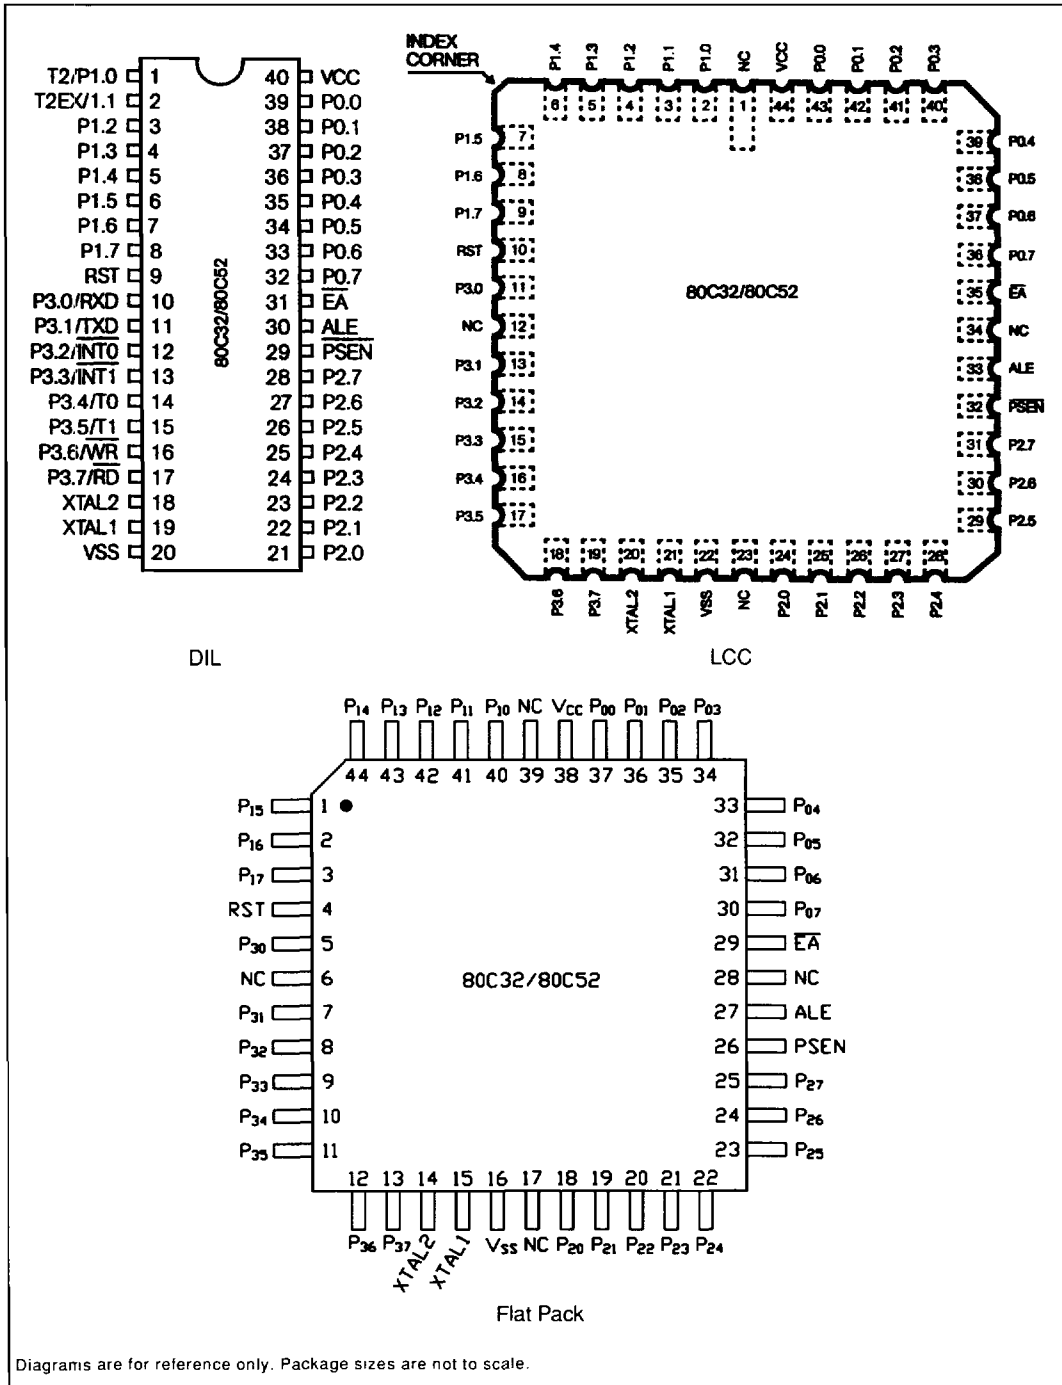


Figure 4 : Configurations.

IDLE AND POWER DOWN OPERATION

Figure 5 shows the internal Idle and Power Down clock configuration. As illustrated, Power Down operation stops the oscillator. Idle mode operation allows the interrupt, serial port, and timer blocks to continue to function while the clock to the CPU is gated off.

These special modes are activated by software via the Special Function Register, PCON. Its hardware address is 87H. PCON is not bit addressable.

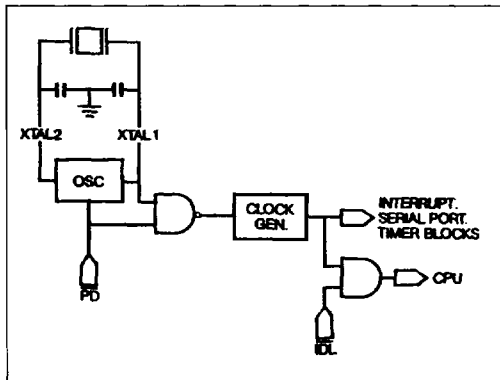


Figure 5 : Idle and Power Down Hardware.

PCON : Power Control Register

(MSB)							(LSB)
SMOD	—	—	—	GF1	GF0	PD	IDL

Symbol Position Name and Function

SMOD	PCON.7	Double Baud rate bit. When set to a 1, the baud rate is doubled when the serial port is being used in either modes 1, 2 or 3.
—	PCON.6	(Reserved)
—	PCON.5	(Reserved)
—	PCON.4	(Reserved)
GF1	PCON.3	General-purpose flag bit.
GF0	PCON.2	General-purpose flag bit.
PD	PCON.1	Power Down bit. Setting this bit activates power down operation.
IDL	PCON.0	Idle mode bit. Setting this bit activates idle mode operation.

If 1's are written to PD and IDL at the same time. PD takes precedence. The reset value of PCON is (0XXX0000).

IDLE MODE

The instruction that sets PCON.0 is the last instruction executed before the Idle mode is activated. Once in the Idle mode the CPU status is preserved in its entirety : the Stack Pointer, Program Counter, Program Status Word, Accumulator, RAM, and all other register maintain their data during Idle. Table 2 describes the status of the external pins during Idle mode.

There are two ways to terminate the Idle mode. Activation of any enabled interrupt will cause PCON.0 to be cleared by hardware, terminating Idle mode. The interrupt is serviced, and following RETI, the next instruction to be executed will be the one following the instruction that wrote 1 to PCON.0.

The flag bits GF0 and GF1 may be used to determine whether the interrupt was received during normal execution or during the Idle mode. For example, the instruction that writes to PCON.0 can also set or clear one or both flag bits. When Idle mode is terminated by an enabled interrupt, the service routine can examine the status of the flag bits.

The second way of terminating the Idle is with a hardware reset. Since the oscillator is still running, the hardware reset needs to be active for only 2 machine cycles (24 oscillator periods) to complete the reset operation.

Power Down Mode

The instruction that sets PCON.1 is the last executed prior to entering power down. Once in power down, the oscillator is stopped. The contents of the onchip RAM and the Special Function Register is saved during power down mode. A hardware reset is the only way of exiting the power down mode. the hardware reset initiates the Special Function Register (see Table 2). In the Power Down mode, V_{CC} may be lowered to minimize circuit power consumption. Care must be taken to ensure the voltage is not reduced until the power down mode is entered, and that the voltage is restored before the hardware reset is applied which frees the oscillator. Reset should not be released until the oscillator has re-

MODE	PROGRAM MEMORY	ALE	PSEN	PORT0	PORT1	PORT2	PORT3
Idle	Internal	1	1	Port Data	Port Data	Port Data	Port Data
Idle	External	1	1	Floating	Port Data	Address	Port Data
Power Down	Internal	0	0	Port Data	Port Data	Port Data	Port Data
Power Down	External	0	0	Floating	Port Data	Port Data	Port Data

Table 2 : Status of the external pins during Idle and Power Down modes.

started and stabilized.

Table 2 describes the status of the external pins while in the power down mode. It should be noted that if the power down mode is activated while in external program memory, the port data that is held in the Special Function Register P2 is restored to Port 2. If the data is a 1, the port pin is held high during the power down mode by the strong pullup, T1, shown in Figure 6.

STOP CLOCK MODE

Due to static design, the MHS 80C32/C52 clock speed can be reduced until 0 MHz without any data loss in memory or registers. This mode allows step by step utilization, and permits to reduce system power consumption by bringing the clock frequency down to any value. At 0 MHz, the power consumption is the same as in the Power Down Mode.

80C52 I/O PORTS

The I/O port drive of the 80C52 is similar to the 8052. The I/O buffers for Ports 1, 2 and 3 are implemented as shown in figure 6.

When the port latch contains a 0, all pFETs in figure 6 are off while the nFET is turned on. When the port latch makes a 0-to-1 transition, the nFET turns off. The strong pFET, T1, turns on for two oscillator periods, pulling the output high very rapidly. As the output line is drawn high, pFET T3 turns on through the inverter to supply the I_{OH} source current. This inverter and T form a latch which holds the 1 and is supported by T2.

When Port 2 is used as an address port, for access to external program or data memory, any address bit that contains a 1 will have its strong pullup turned on for the entire duration of the external memory access.

When an I/O pin on Ports 1, 2 or 3 is used as an input, the user should be aware that the external circuit must sink current during the logical 1-to-0 transition. The maximum sink current is specified as I_{TL} under the D.C.

Specifications. When the input goes below approximately 2 V, T3 turns off to save I_{CC} current. Note, when returning to a logical 1, T2 is the only internal pullup that is on. This will result in a slow rise time if the user's circuit does not force the input line high.

PIN DESCRIPTIONS

V_{CC}

Supply voltage during normal, Idle, and Power Down operation.

Port 0

Port 0 is an 8-bit open drain bi-directional I/O port. Port 0 pins that have 1's written to them float, and in that state can be used as high-impedance inputs.

Port 0 is also the multiplexed low-order address and data bus during accesses to external Program and Data Memory. In this application it uses strong internal pullups when emitting 1's. Port 0 also outputs the code bytes during program verification in the 80C52. External pullups are required during program verification. Port 0 can sink eight LS TTL inputs.

Port 1

Port 1 is an 8-bit bi-directional I/O port with internal pullups. Port 1 pins that have 1's written to them are pulled high by the internal pullups, and in that state can be used as inputs. As inputs, Port 1 pins that are externally being pulled low will source current (I_{IL} , on the data sheet) because of the internal pullups.

Port 1 also receives the low-order address byte during program verification. In the 80C52, Port 1 can sink/source three LS TTL inputs. It can drive CMOS inputs without external pullups.

Port 2

Port 2 is an 8-bit bi-directional I/O port with internal pullups. Port 2 pins that have 1's written to them are pulled high by the internal pullups, and in that state can be used as inputs. As inputs, Port 2 pins that are externally being pulled low will source current (I_{IL} , on the data sheet) because of the internal pullups. Port 2 emits the high-order address byte during fetches from external Program Memory and during accesses to external Data Memory that use 16-bit addresses ($MOVX @DPTR$). In this application, it uses strong internal pullups when emitting 1's. During accesses to external Data Memory that use 8-bit addresses ($MOVX @Ri$), Port 2 emits the contents of the P2 Special Function Register.

It also receives the high-order address bits and control signals during program verification in the 80C52. Port 2 can sink/source three LS TTL inputs. It can drive CMOS inputs without external pullups.

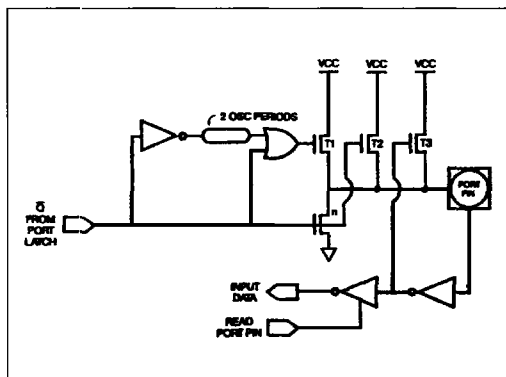


Figure 6 : I/O Buffers in the 80C52 (Ports 1, 2, 3).

Port 3

Port 3 is an 8-bit bi-directional I/O port with internal pullups. Port 3 pins that have 1's written to them are pulled high by the internal pullups, and in that state can be used as inputs. As inputs, Port 3 pins that are externally being pulled low will source current (IIL, on the data sheet) because of the pullups. It also serves the function of various special features of the MHS 51 Family, as listed below.

Port Pin	Alternate Function
P3.0	RXD (serial input port)
P3.1	TXD (serial output port)
P3.2	INT0 (external interrupt 0)
P3.3	INT1 (external interrupt 1)
P3.4	T0 (Timer 0 external input)
P3.5	T1 (Timer 1 external input)
P3.6	WR (external Data Memory write strobe)
P3.7	RD (external Data Memory read strobe)

Port 3 can sink/source three LS TTL inputs. It can drive CMOS inputs without external pullups.

RST

A high level on this for two machine cycles while the oscillator is running resets the device. An internal pull-down resistor permits Power-On reset using only a capacitor connected to Vcc.

ALE

Address Latch Enable output for latching the low byte of the address during accesses to external memory. ALE is activated as though for this purpose at a constant rate of 1/6 the oscillator frequency except during an external data memory access at which time on ALE pulse is skipped. ALE can sink/source 8 LS TTL inputs. It can drive CMOS inputs without an external pullup.

PSEN

Program Store Enable output is the read strobe to external Program Memory. PSEN is activated twice each machine cycle during fetches from external Program Memory. (However, when executing out of external Program Memory, two activations of PSEN are skipped during each access to external Data Memory). PSEN is not activated during fetches from internal Program Memory. PSEN can sink/source 8 LS TTL inputs. It can drive CMOS inputs without an external pullup.

EA

When EA is held high, the CPU executed out of internal Program Memory (unless the Program Counter exceeds 1FFFH). When EA is held low, the CPU executes only out of external Program Memory. EA must not be floated.

XTAL1

Input to the inverting amplifier that forms the oscillator. Receives the external oscillator signal when an external oscillator is used.

XTAL2

Output of the inverting amplifier that forms the oscillator, and input to the internal clock generator. This pin should be floated when an external oscillator is used.

OSCILLATOR CHARACTERISTICS

XTAL1 and XTAL2 are the input and output respectively, of an inverting amplifier which is configured for use as an on-chip oscillator, as shown in figure 7. Either a quartz crystal or ceramic resonator may be used. To drive the device from an external clock source, XTAL1 should be driven while XTAL2 is left unconnected as shown in figure 8. There are no requirements on the duty cycle of the external clock signal, since the input to the internal clocking circuitry is through a divide-by-two flip-flop, but minimum and maximum high and low times specified on the Data Sheet must be observed.

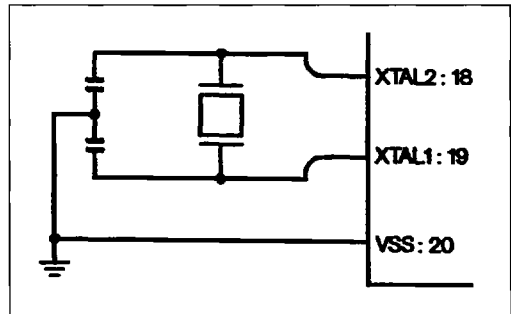


Figure 7 : Crystal Oscillator.

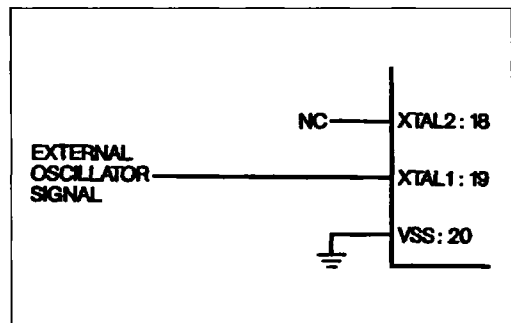


Figure 8 : External Drive Configuration.

TIMER/EVENT COUNTER 2

Timer 2 is a 16-bit timer/counter like Timers 0 and 1, it can operate either as a timer or as an event counter. This is selected by bit C/T2 in the Special Function Register T2CON (Figure 1). It has three operating modes: "capture", "autoload" and "baud rate generator", which are selected by bits in T2CON as shown in

RCLK + TCLK	CP/RL2	TR2	MODE
0	0	1	16-bit auto-reload
0	1	1	16-bit capture
1	X	1	baud rate generator
X	X	0	(off)

Table 1 : Timer 2 Operating Modes.

Table 1.

In the capture mode there are two options which are selected by bit EXEN2 in T2CON; If EXEN2 = 0, then Timer 2 is a 16-bit timer or counter which upon overflow-

ing sets bit TF2, the Timer 2 overflow bit, which can be used to generate an interrupt. If EXEN2 = 1, then Timer 2 still does the above, but with the added feature that a 1-to-0 transition at external input T2EX causes the current value in the Timer 2 registers, TL2 and TH2, to be captured into registers RCAP2L and RCAP2H, respectively. (RCAP2L and RCAP2H are new Special Function Register in the 80C52). In addition, the transition at T2EX causes bit EXF2 in T2CON to be set, and EXF2, like TF2, can generate an interrupt.

The capture mode is illustrated in Figure 2.

In the auto-reload mode there are again two options, which are selected by bit EXEN2 in T2CON. If EXEN2 = 0, then when Timer 2 rolls over it does not only set TF2 but also causes the Timer 2 register to be reloaded with the 16-bit value in registers RCAP2L and RCAP2H, which are preset by software. If EXEN2 = 1, then Timer 2 still does the above, but with the added feature that a 1-to-0 transition at external input T2EX will also trigger the 16-bit reload and set EXF2.

The auto-reload mode is illustrated in Figure 3.

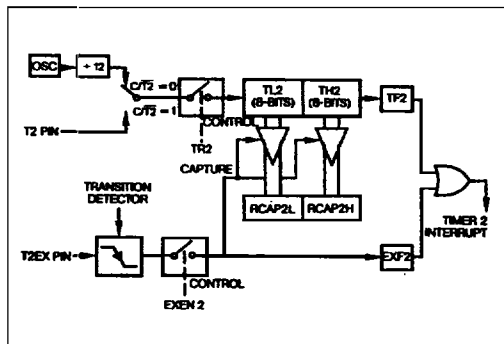


Figure 2 : Timer 2 in Capture Mode.

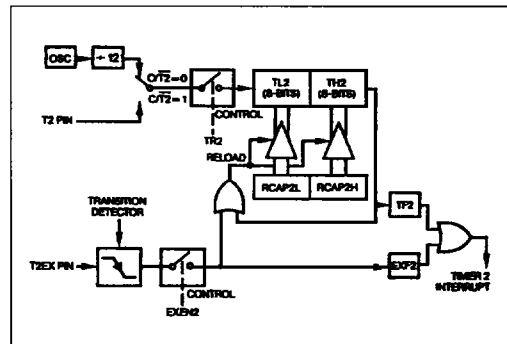


Figure 3 : Timer in Auto-Reload Mode.

(MSB)				(LSB)			
TF2	EXF2	RCLK	TCLK	EXEN2	TR2	C/ $\overline{T}$ 2	CP/ $\overline{RL}$ 2

The baud rate generator mode is selected by :
RCLK = 1 and/or TCLK = 1.

Symbol	Position	Name and Significance
TF2	T2CON.7	Timer 2 overflow flag set by a Timer 2 overflow and must be cleared by software. TF2 will not be set when either RCLK = 1 OR TCLK = 1.
EXF2	T2CON.6	Timer 2 external flag set when either a capture or reload is caused by a negative transition on T2EX and EXEN2 = 1. When Timer 2 interrupt is enabled, EXF2 = 1 will cause the CPU to vector to the Timer 2 interrupt routine. EXF2 must be cleared by software.
RCLK	T2CON.5	Receive clock flag. When set, causes the serial port to use Timer 2 overflow pulses for its receive clock in modes 1 and 3. RCLK = 0 causes Timer 1 overflow to be used for the receive clock.
TCLK	T2CON.4	Transmit clock flag. When set, causes the serial port to use Timer 2 overflow pulses for its transmit clock in modes 1 and 3. TCLK = 0 causes Timer 1 overflows to be used for the transmit clock.
EXEN2	T2CON.3	Timer 2 external enable flag. When set, allows capture or reload to occur as a result of a negative transition on T2EX if Timer 2 is not being used to clock the serial port. EXEN2 = 0 causes Timer 2 to ignore events at T2EX.
TR2	T2CON.2	Start/stop control for Timer 2. A logic 1 starts the timer.
C/ $\overline{T}$ 2	T2CON.1	Timer or counter select. (Timer 2) 0 = Internal timer (OSC/12) 1 = External event counter (falling edge triggered).
CP/ $\overline{RL}$ 2	T2CON.0	Capture/Reload flag. When set, captures will occur on negative transitions at T2EX if EXEN2 = 1. When cleared, auto reloads will occur either with Timer 2

T2CON : Timer/Counter 2 Control Register.

ELECTRICAL CHARACTERISTICS

* NOTICE

ABSOLUTE MAXIMUM RATINGS*

Ambient Temperature Under Bias :

C = commercial 0°C to 70°C

I = industrial - 40°C to +85°C

Storage Temperature - 65°C to + 150°C

Voltage on V_{CC} to V_{SS} - 0.5 V to + 7 VVoltage on Any Pin to V_{SS} - 0.5 V to V_{CC} + 0.5 V

Power Dissipation 1 W**

** This value is based on the maximum allowable die temperature and the thermal resistance of the package.

Stresses at or above those listed under " Absolute Maximum Ratings " may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions may affect device reliability.

DC CHARACTERISTICS

T_A = - 40°C to 85°C ; V_{SS} = 0 V ; V_{CC} = 5 V ± 10 % ; F = 0 to 16 MHz

SYMBOL	PARAMETER	MIN	MAX	UNIT	TEST CONDITIONS
V _{IL}	Input Low Voltage	- 0.5	0.2 V _{CC} - 0.1	V	
V _{IH}	Input High Voltage (Except XTAL and RST)	0.2 V _{CC} + 0.9	V _{CC} + 0.5	V	
V _{IH1}	Input High Voltage (RST and XTAL1)	0.7 V _{CC}	V _{CC} + 0.5	V	
V _{OL}	Output Low Voltage (Port 1, 2, 3)		0.45	V	I _{OL} = 1.6 mA (note 3)
V _{OL1}	Output Low Voltage Port 0, ALE, PSEN		0.45	V	I _{OL} = 3.2 mA (note 3)
V _{OH}	Output High Voltage Ports 1, 2, 3	0.9 V _{CC}		V	I _{OH} = - 10 µA
		0.75 V _{CC}		V	I _{OH} = - 25 µA
		2.4		V	I _{OH} = - 60 µA V _{CC} = 5 V ± 10 %
V _{OH1}	Output High Voltage (Port 0 in External Bus Mode, ALE, PSEN)	0.9 V _{CC}		V	I _{OH} = - 80 µA
		0.75 V _{CC}		V	I _{OH} = - 300 µA
		2.4		V	I _{OH} = - 800 µA V _{CC} = 5 V ± 10 %
I _{IL}	Logical 0 Input Current Ports 1, 2, 3		C - 50 I - 60	µA	V _{in} = 0.45 V
I _{LI}	Input Leakage Current (Port 0, $\overline{EA}$)		± 10	µA	0.45 < V _{in} < V _{CC}
I _{TL}	Logical 1 to 0 Transition Current (Ports 1, 2, 3)		- 650	µA	V _{in} = 2.0 V
I _{PD}	Power Supply Current (Power Down Mode)		50	µA	V _{CC} = 2.0 V to 6 V (note 2)
RRST	RST Pulldown Resistor	50	150	kΩ	
C _{IO}	Capacitance of I/O Buffer		10	pF	f _C = 1 MHz, T _A = 25°C
I _{CC}	Power Supply Current				(notes 1, 2)
	Active Mode 12 MHz		22	mA	
	16 MHz		27	mA	
	20 MHz		32	mA	
	Idle Mode 12 MHz		7	mA	
	16 MHz		9	mA	
	20 MHz		11	mA	

Note 1 : See figures 9 through 12 for I_{CC} test conditions.

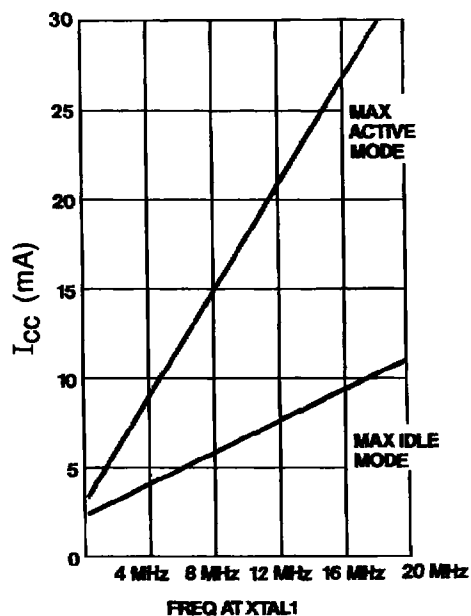


Figure 9 : I_{CC} vs. Frequency. Valid only within frequency specifications of the device under test.

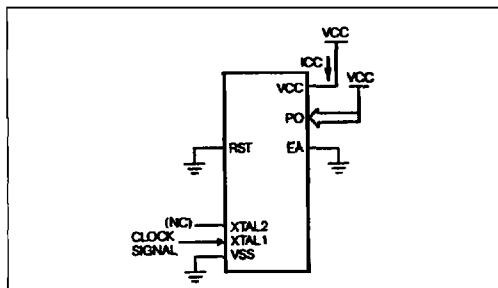


Figure 10 : I_{CC} Test Condition, Idle Mode. All other pins are disconnected.

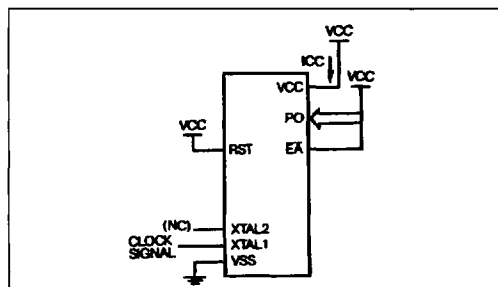


Figure 11 : I_{CC} Test Condition, Active Mode. All other pins are disconnected.

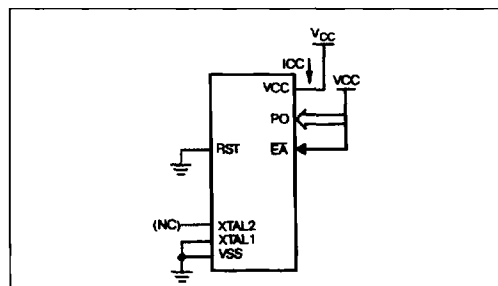


Figure 12 : I_{CC} Test Condition, Power Down Mode. All other pins are disconnected.

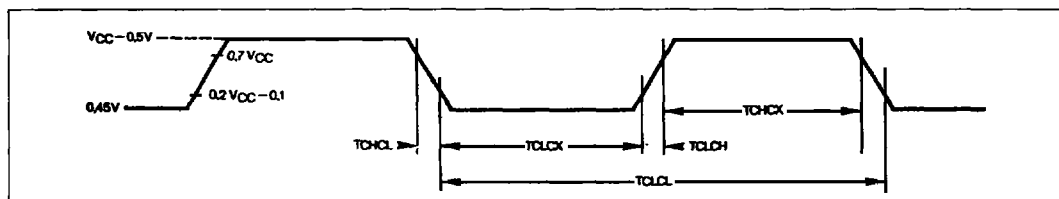


Figure 13 : Clock Signal Waveform for ICC Tests in Active and Idle Modes. TCHL = TCHX = 5 ns.

Note 2 : ICC is measured with all output pins disconnected ; XTAL1 driven with TCLCH, TCHCL = 5 ns, VIL = VSS + .5 V, VIH = VCC - .5 V ; XTAL2 N.C. ; EA = RST = Port 0 = VCC. ICC would be slightly higher if a crystal oscillator used.

Idle ICC is measured with all output pins disconnected ; XTAL1 driven with TCLCH, TCHCL = 5 ns, VIL = VSS + .5 V, VIH = VCC - .5 V ; XTAL2 N.C. ; Port 0 = VCC ; EA = RST = VSS.

Power Down ICC is measured with all output pins disconnected ; EA = PORT 0 = VCC ; XTAL2 N.C. ; RST = VSS.

Note 3 : Capacitance loading on Ports 0 and 2 may cause spurious noise pulses to be superimposed on the VOLS of ALE and Ports 1 and 3. The noise is due to external bus capacitance discharging into the Port 0 and Port 2 pins when these pins make 1 to 0 transitions during bus operations. In the worst cases (capacitive loading 100 pF), the noise pulse on the ALE line may exceed 0.45 V may exceed 0.45 V with maxi VOL peak 0.6 V. A Schmitt Trigger use is not necessary.

EXTERNAL CLOCK DRIVE CHARACTERISTICS (XTAL 1)

SYMBOL	PARAMETER	VARIABLE CLOCK FREQ = 0 to 16 MHz		UNIT
		MIN	MAX	
1/TCLCL	Oscillator Frequency	50		ns
TCHCX	High Time	20		ns
TCLCX	Low Time	20		ns
TCLCH	Rise Time		20	ns
TCHCL	Fall Time		20	ns

A.C. CHARACTERISTICS

TA = - 40°C to 85°C ; VSS = 0 V ; VCC = 5 V $\pm$ 10 %

EXTERNAL PROGRAM MEMORY CHARACTERISTICS

SYMBOL	PARAMETER	MIN	MAX	UNIT
TLHLL	ALE Pulse Width	2TCLCL-40		ns
TAVLL	Address Valid to ALE	TCLCL-55		ns
TLLAX	Address Hold After ALE	TCLCL-35		ns
TLLIV	ALE to Valid Instr in		4TCLCL-100	ns
TLLPL	ALE to PSEN	TCLCL-40		ns
TPLPH	PSEN Pulse Width	3TCLCL-45		ns
TPLIV	PSEN to Valid Instr in		3TCLCL-105	ns
TPXIX	Input Instr Hold After PSEN	0		ns
TPXIZ	Input Instr Float After PSEN		TCLCL-25	ns
TPXAV	PSEN to Address Valid	TCLCL-8		ns
TAVIV	Address to Valid Instr in		5TCLCL-105	ns
TPLAZ	PSEN Low to Address Float		10	ns

EXTERNAL DATA MEMORY CHARACTERISTICS

SYMBOL	PARAMETER	MIN	MAX	UNIT
TRLRH	$\overline{RD}$ Pulse Width	6TCLCL-100		ns
TWLWH	$\overline{WR}$ Pulse Width	6TCLCL-100		ns
TLLAX	Data Address Hold After ALE	TCLCL-50		ns
TRLDV	$\overline{RD}$ to Valid Data in		5TCLCL-165	ns
TRHDX	Data Hold After $\overline{RD}$	0		ns
TRHDZ	Data Float After $\overline{RD}$		2TCLCL-70	ns
TLLDV	ALE to Valid Data in		8TCLCL-150	ns
TAVDV	Address to Valid Data in		9TCLCL-165	ns
TLLWL	ALE to $\overline{WR}$ or $\overline{RD}$	3TCLCL-50	3TCLCL+50	ns
TAVWL	Address to $\overline{WR}$ or $\overline{RD}$	4TCLCL-130		ns
TQVWX	Data Valid to $\overline{WR}$ Transition	TCLCL-60		ns
TQVWH	Data Setup to $\overline{WR}$ High	7TCLCL-150		ns
TWHQX	Data Hold After $\overline{WR}$	TCLCL-50		ns
TRLAZ	RD Low to Address Float		0	ns
TWHLH	$\overline{RD}$ or $\overline{WR}$ High to ALE High	TCLCL-40	TCLCL+40	ns

ABSOLUTE MAXIMUM RATINGS*

Ambient Temperature Under Bias :

A = Automotive - 40°C to +125°C

M = Military - 55°C to + 125°C

Storage Temperature - 65°C to + 150°C

Voltage on Any Pin to V_{SS} - 0.5 V to V_{CC} + 0.5 VVoltage on V_{CC} to V_{SS} - 0.5 V to 6.5 V

Power Dissipation 1 W

*** NOTICE :**

Stresses above those listed under " Absolute Maximum Ratings " may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

DC CHARACTERISTICST_A = - 55°C to + 125°C ; V_{SS} = 0 V ; V_{CC} = 5 V ± 10 % ; F = 0 to 12 MHz

SYMBOL	PARAMETER	MIN	MAX	UNIT	TEST CONDITIONS
V _{IL}	Input Low Voltage	- 0.5	0.2 V _{CC} - 0.1	V	
V _{IH}	Input High Voltage (Except XTAL1, RST)	0.2 V _{CC} + 0.9	V _{CC} + 0.5	V	
V _{IH1}	Input High Voltage (XTAL1, RST)	0.7 V _{CC}	V _{CC} + 0.5	V	
V _{OL}	Output Low Voltage (Ports 1, 2, 3)		0.45	V	I _{OL} = 1.6 mA (note 2)
V _{OL1}	Output Low Voltage (Port 0, ALE, PSEN)		0.45	V	I _{OL} = 3.2 mA (note 2)
V _{OH}	Output High Voltage (Ports 1, 2, 3)	2.4		V	I _{OH} = - 60 µA V _{CC} = 5 V ± 10 %
		0.75 V _{CC}		V	I _{OH} = - 25 µA
		0.9 V _{CC}		V	I _{OH} = - 10 µA
V _{OH1}	Output High Voltage (Port 0 in External Bus Mode, ALE, PSEN)	2.4		V	I _{OH} = - 800 µA V _{CC} = 5 V ± 10 %
		0.75 V _{CC}		V	I _{OH} = - 300 µA
		0.9 V _{CC}		V	I _{OH} = - 80 µA
I _{IL}	Logical 0 Input Current Ports 1, 2, 3		- 75	µA	V _{in} = 0.45 V
I _{TL}	Logical 1 to 0 Transition Current		- 750	µA	V _{in} = 2 V
I _{LI}	Input Leakage Current (Port 0, $\overline{EA}$)		± 10	µA	0.45 < V _{in} < V _{CC}
RRST	Reset Pulldown Resistor	50	150	kΩ	
C _{IO}	Pin Capacitance		10	pF	Test Freq = 1 MHz, T _A = 25°C
I _{PD}	Power Down Current		75	µA	V _{CC} = 2 to 5.5 V (note 1)
I _{CC}	Power supply current Active mode 12 MHz Idle mode 12 MHz		25	mA	V _{CC} = 5.5 V
			10	mA	V _{CC} = 5.5 V

Note 1 : I_{CC} is measured with all output pins disconnected ; XTAL1 driven with TCLCH, TCHCL = 5 ns, V_{IL} = V_{SS} + .5 V, V_{IH} = V_{CC} - .5 V ; XTAL2 N.C. ; EA = RST = Port 0 = V_{CC}. I_{CC} would be slightly higher if a crystal oscillator used.

Idle I_{CC} is measured with all output pins disconnected ; XTAL1 driven with TCLCH, TCHCL = 5 ns, V_{IL} = V_{SS} + .5 V, V_{IH} = V_{CC} - .5 V ; XTAL2 N.C. ; Port 0 = V_{CC} ; EA = RST = V_{SS}.

Power Down I_{CC} is measured with all output pins disconnected ; EA = PORT 0 = V_{CC} ; XTAL2 N.C. ; RST = V_{SS}.

Note 2 : Capacitance loading on Ports 0 and 2 may cause spurious noise pulses to be superimposed on the VOLS of ALE and Ports 1 and 3. The noise is due to external bus capacitance discharging into the Port 0 and Port 2 pins when these pins make 1 to 0 transitions during bus operations. In the worst cases (capacitive loading 100 pF), the noise pulse on the ALE line may exceed 0.45 V may exceed 0.45 V with maxi VOL peak 0.6 V. A Schmitt Trigger use is not necessary.

AC PARAMETERS :

TA = -55°C to +125°C ; VSS = 0 V ; VCC = 5 V ± 10 %

(Load Capacitance for Port 0, ALE, and PSEN ≈ 100 pf ; Load Capacitance for All Other Outputs = 80 pf).

EXTERNAL PROGRAM MEMORY CHARACTERISTICS

FREQ = 12 MHz (MAX)

SYMBOL	PARAMETER	MIN	MAX	UNIT
TLHLL	ALE Pulse Width	2TCLCL-55		ns
TAVLL	Address Valid to ALE	TCLCL-70		ns
TLLAX	Address Hold After ALE	TCLCL-35		ns
TLLIV	ALE to Valid Instr in		4TCLCL-115	ns
TLLPL	ALE to PSEN	TCLCL-55		ns
TPLPH	PSEN Pulse Width	3TCLCL-60		ns
TPLIV	PSEN to Valid Instr in		3TCLCL-120	ns
TPXIX	Input Instr Hold After PSEN	0		ns
TPXIZ	Input Instr Float After PSEN		TCLCL-40	ns
TPXAV	PSEN to Address Valid	TCLCL-8		ns
TAVIV	Address to Valid Instr in		5TCLCL-120	ns
TPLAZ	PSEN Low to Address Float		25	ns

EXTERNAL DATA MEMORY CHARACTERISTICS

SYMBOL	PARAMETER	MIN	MAX	UNIT
TRLRH	RD Pulse Width	6TCLCL-100		ns
TWLWH	WR Pulse Width	6TCLCL-100		ns
TLLAX	Data Address Hold After ALE	TCLCL-50		ns
TRLDV	RD to Valid Data in		5TCLCL-185	ns
TRHDX	Data Hold After RD	0		ns
TRHDZ	Data Float After RD		2TCLCL-85	ns
TLLDV	ALE to Valid in		8TCLCL-170	ns
TAVDV	Address to Valid Data in		9TCLCL-185	ns
TLLWL	ALE to WR or RD	3TCLCL-65	3TCLCL+65	ns
TAVWL	Address to WR or RD	4TCLCL-145		ns
TQVWX	Data Valid to WR Transition	TCLCL-75		ns
TQVWH	Data Setup to WR High	7TCLCL-150		ns
TWHQX	Data Hold After WR	TCLCL-65		ns
TRLAZ	RD Low to Address Float		0	ns
TWHLH	RD or WR High to ALE High	TCLCL-65	TCLCL+65	ns


SERIAL PORT TIMING - SHIFT REGISTER MODE

A.C. CHARACTERISTICS

TA = -40°C to 85°C ; VSS = 0 V ; VCC = 5 V ± 10 %

SYMBOL	PARAMETER	MIN	MAX	UNIT
TXLXL	Serial Port Clock Time	12TCLCL		μs
TQVXH	Output Data Setup to Clock Rising Edge	10TCLCL-133		ns
TXHQX	Output Data Hold After Clock Rising Edge	2TCLCL-117		ns
TXHDX	Input Data Hold After Clock Rising Edge	0		ns
TXHDV	Clock Rising Edge to Input Data Valid		10TCLCL-133	ns

SHIFT REGISTER TIMING WAVEFORMS

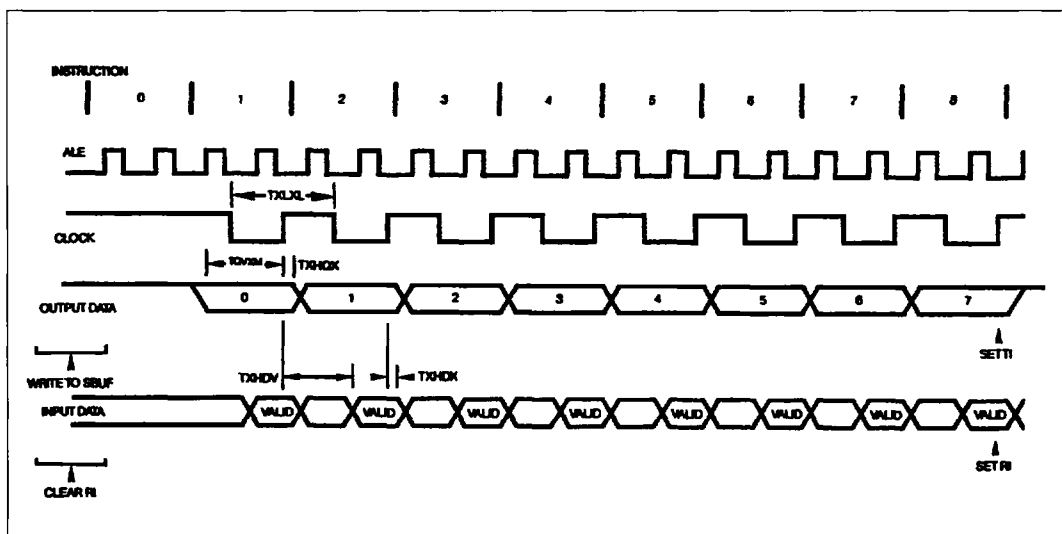

6

EXPLANATION OF THE AC SYMBOLS

Each timing symbol has 5 characters. The first character is always a "T" (stands for time). The other characters, depending on their positions, stand for the name of a signal or the logical status of that signal. The following is a list of all the characters and what they stand for.


A : Address.
C : Clock.
D : Input data.
H : Logic level HIGH.
I : Instruction (program memory contents).
L : Logic level LOW, or ALE.
P : PSEN.

Example :

TAVLL = Time for Address Valid to ALE low.
TLLPL = Time for ALE low to PSEN low.

Q : Output data.
R : READ signal.
T : Time.
V : Valid.
W : WRITE signal.
X : No longer a valid logic level.
Z : Float.

CLOCK WAVEFORMS

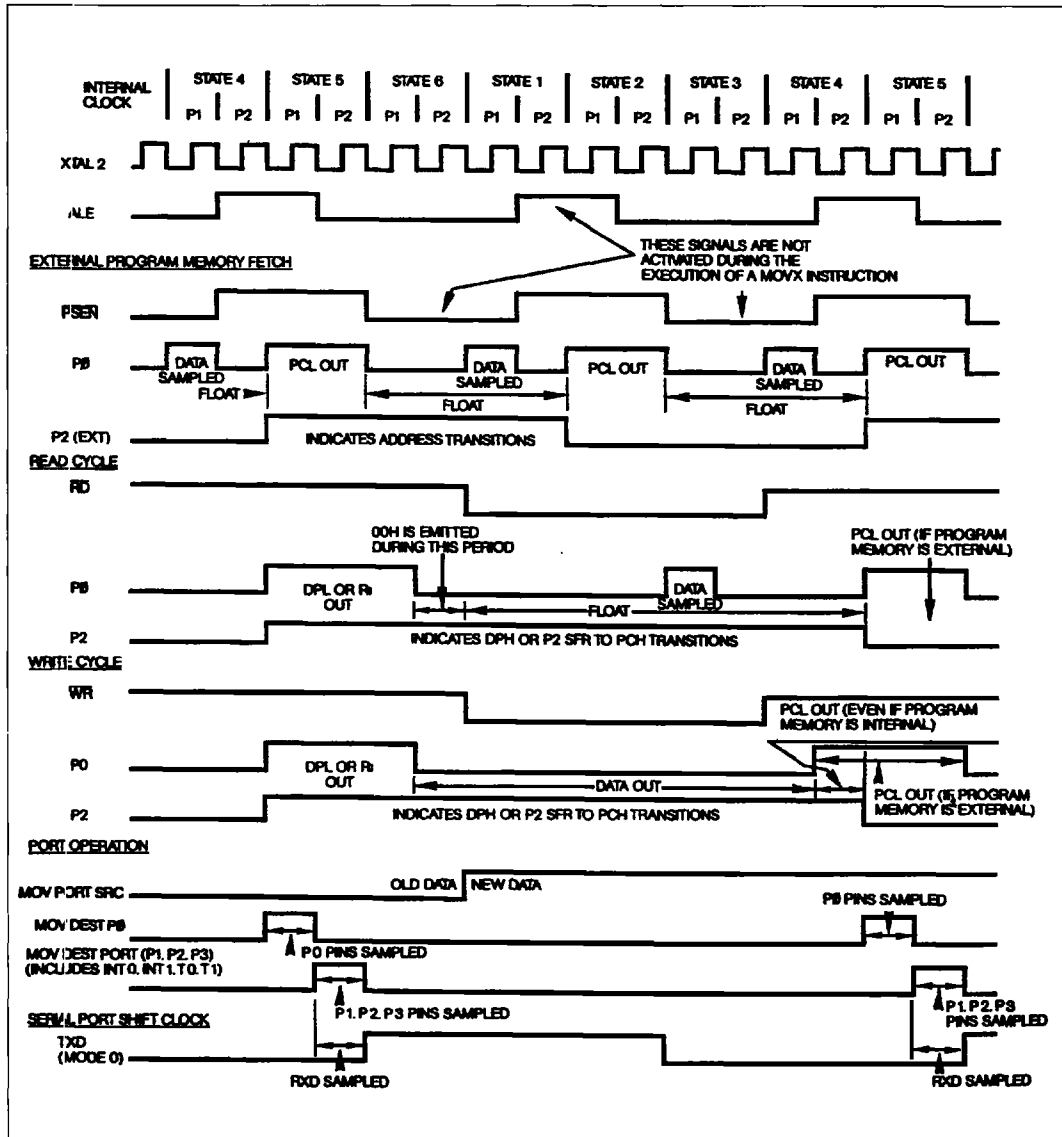

6

This diagram indicates when signals are clocked internally. The time it takes the signals to propagate to the pins, however, ranges from 25 to 125 ns. This propagation delay is dependent on variables such as temperature and pin loading. Propagation also varies from output to output and component. Typically though ($T_A = 25^\circ\text{C}$ fully loaded) $\overline{RD}$ and $\overline{WR}$ propagation delays are approximately 50 ns. The other signals are typically 85 ns. Propagation delays are incorporated in the AC specifications.

ARITHMETIC OPERATIONS			BYTE	CYC
MNEMONIC		DESCRIPTION		
ADD	A, Rn	Add register to Accumulator	1	1
ADD	A, direct	Add direct byte to Accumulator	2	1
ADD	A, @Ri	Add indirect RAM to Accumulator	1	1
ADD	A, #data	Add immediate data to Accumulator	2	1
ADDC	A, Rn	Add register to Accumulator with Carry	1	1
ADDC	A, direct	Add direct byte to A with Carry flag	2	1
ADDC	A, @Ri	Add indirect RAM to A with Carry flag	1	1
ADDC	A, #data	Add immediate data to A with Carry flag	2	1
SUBB	A, Rn	Subtract register from A with Borrow	1	1
SUBB	A, direct	Subtract direct byte from A with Borrow	2	1
SUBB	A, @Ri	Subtract indirect RAM from A with Borrow	1	1
SUBB	A, #data	Subtract immed. data from A with Borrow	2	1
INC	A	Increment Accumulator	1	1
INC	Rn	Increment register	1	1
INC	direct	Increment direct byte	2	1
INC	@Ri	Increment indirect RAM	1	1
INC	DPTR	Increment Data Pointer	1	2
DEC	A	Decrement Accumulator	1	1
DEC	Rn	Decrement register	1	1
DEC	direct	Decrement direct byte	2	1
DEC	@Ri	Decrement indirect RAM	1	1
MUL	AB	Multiply A & B	1	4
DIV	AB	Divide A by B	1	4
DA	A	Decimal Adjust Accumulator	1	1
LOGICAL OPERATIONS			BYTE	CYC
MNEMONIC		DESCRIPTION		
ANL	A, Rn	AND register to Accumulator	1	1
ANL	A, direct	AND direct byte to Accumulator	2	1
ANL	A, @Ri	AND indirect RAM to Accumulator	1	1
ANL	A, #data	AND immediate data to Accumulator	2	1
ANL	direct, A	AND Accumulator to direct byte	2	1
ANL	direct, #data	AND immediate data to direct byte	3	2
ORL	A, Rn	OR register to Accumulator	1	1
ORL	A, direct	OR direct byte to Accumulator	2	1
ORL	A, @Ri	OR indirect RAM to Accumulator	1	1
ORL	A, #data	OR immediate data to Accumulator	2	1
ORL	direct, A	OR Accumulator to direct byte	2	1
ORL	direct, #data	OR immediate data to direct byte	3	2
XRL	A, Rn	Exclusive-OR register to Accumulator	1	1
XRL	A, direct	Exclusive-OR direct byte to Accumulator	2	1
XRL	A, @Ri	Exclusive-OR indirect RAM to A	1	1
XRL	A, #data	Exclusive-OR immediate data to A	2	1
XRL	direct, A	Exclusive-OR Accumulator to direct byte	2	1
XRL	direct, #data	Exclusive-OR immediate data to direct	3	2
CLR	A	Clear Accumulator	1	1
CPL	A	Complement Accumulator	1	1
RL	A	Rotate Accumulator Left	1	1
RLC	A	Rotate A Left through the Carry flag	1	1
RR	A	Rotate Accumulator Right	1	1
RRC	A	Rotate A Right through Carry flag	1	1
SWAP	A	Swap nibbles within the Accumulator	1	1

Table 1 : MHS - 51 Instruction Set Description.

DATA TRANSFER		DESCRIPTION	BYTE	CYC
MNEMONIC				
MOV	A, Rn	Move register to Accumulator	1	1
MOV	A, direct	Move direct byte to Accumulator	2	1
MOV	A, @Ri	Move indirect RAM to Accumulator	1	1
MOV	A, #data	Move immediate data to Accumulator	2	1
MOV	Rn, A	Move Accumulator to register	1	1
MOV	Rn, direct	Move direct byte to register	2	2
MOV	Rn, #data	Move immediate data to register	2	1
MOV	direct, A	Move Accumulator to direct byte	2	1
MOV	direct, Rn	Move register to direct byte	2	2
MOV	direct, direct	Move direct byte to direct	3	2
MOV	direct, @Ri	Move indirect RAM to direct byte	2	2
MOV	direct, #data	Move immediate data to direct byte	3	2
MOV	@Ri, A	Move Accumulator to indirect RAM	1	1
MOV	@Ri, direct	Move direct byte to indirect RAM	2	2
MOV	@Ri, #data	Move immediate data to indirect RAM	2	1
MOV	DPTR, #data 16	Load Data Pointer with a 16-bit constant	3	2
MOVC	A, @A + DPTR	Move Code byte relative to DPTR to A	1	2
MOVC	A, @A + PC	Move Code byte relative to PC to A	1	2
MOVB	A, @Ri	Move External RAM (8-bit addr) to A	1	2
MOVB	A, @DPTR	Move External RAM (16-bit addr) to A	1	2
MOVB	@Ri, A	Move A to External RAM (8-bit addr)	1	2
MOVB	@DPTR, A	Move A to External RAM (16-bit addr)	1	2
PUSH	direct	Push direct byte onto stack	2	2
POP	direct	Pop direct byte from stack	2	2
XCH	A, Rn	Exchange register with Accumulator	1	1
XCH	A, direct	Exchange direct byte with Accumulator	2	1
XCH	A, @Ri	Exchange indirect RAM with A	1	1
XCHD	A, @Ri	Exchange low-order nibble ind RAM with A	1	1
BOOLEAN VARIABLE MANIPULATION				
MNEMONIC		DESCRIPTION	BYTE	CYC
CLR	C	Clear Carry flag	1	1
CLR	bit	Clear direct bit	2	1
SETB	C	Set Carry flag	1	1
SETB	bit	Set direct Bit	2	1
CPL	C	Complement Carry flag	1	1
CPL	bit	Complement direct bit	2	1
ANL	C,bit	AND direct bit to Carry flag	2	2
ANL	C,/bit	AND complement of direct bit to Carry	2	2
ORL	C,bit	OR direct bit to Carry flag	2	2
ORL	C,/bit	OR complement of direct bit to Carry	2	2
MOV	C,bit	Move direct bit to Carry flag	2	1
MOV	bit, C	Move Carry flag to direct bit	2	2
PROGRAM AND MACHINE CONTROL				
MNEMONIC		DESCRIPTION	BYTE	CYC
ACALL	addr 11	Absolute Subroutine Call	2	2
LCALL	addr 16	Long Subroutine Call	3	2
RET		Return from subroutine	1	2
RETI		Return from interrupt	1	2
AJMP	addr 11	Absolute Jump	2	2
LJMP	addr 16	Long Jump	3	2
SJMP	rel	Short Jump (relative addr)	2	2
JMP	@A + DPTR	Jump indirect relative to the DPTR	1	2
JZ	rel	Jump if Accumulator is Zero	2	2
JNZ	rel	Jump if Accumulator is Not Zero	2	2
JC	rel	Jump if Carry flag is set	2	2
JNC	rel	Jump if No Carry flag	2	2

Table 1. (Cont.)

PROGRAM AND MACHINE CONTROL (cont.)				
MNEMONIC		DESCRIPTION	BYTE	CYC
JB	bit, rel	Jump if direct Bit set	3	2
JNB	bit, rel	Jump if direct Bit Not set	3	2
JBC	bit, rel	Jump if direct Bit is set & Clear bit	3	2
CJNE	A, direct, rel	Compare direct to A & Jump if Not Equal	3	2
CJNE	A, #data, rel	Comp. immed. to A & Jump if Not Equal	3	2
CJNE	Rn, #data, rel	Comp. immed. to reg & Jump if Not Equal	3	2
CJNE	@Ri, #data, rel	Comp. immed. to ind. & Jump if Not Equal	3	2
DJNZ	Rn, rel	Decrement register & Jump if Not Zero	2	2
DJNZ	direct, rel	Decrement direct & Jump if Not Zero	3	2
NOP		No operation	1	1

Table 1. (Cont.)

Notes on data addressing modes :

- Rn – Working register R0-R7
- direct – 128 internal RAM locations, any I/O port, control or status register
- @Ri – Indirect internal RAM location addressed by register R0 or R1
- #data – 8-bit constant included in instruction
- #data 16 – 16-bit constant included as bytes 2 & 3 of instruction
- bit – 128 software flags, any I/O pin, control or status bit

Notes on program addressing modes :

- addr 16 – Destination address for LCALL & LJMP may be anywhere within the 64-k program memory address space
- Addr 11 – Destination address for ACALL & AJMP will be within the same 2-k page of program memory as the first byte of the following instruction
- rel – SJMP and all conditional jumps include an 8-bit offset byte. Range is + 127 – 128 bytes relative to the first byte of the following instruction.

All mnemonics copyrighted © Intel Corporation 1979

HEX CODE	NUMB. OF BYTES	MNEM.	OPERANDS	HEX CODE	NUMB. OF BYTES	MNEM.	OPERANDS
00	1	NOP		33	1	RLC	A
01	2	AJMP	code addr	34	2	ADDC	A, #data
02	3	LJMP	code addr	35	2	ADDC	A, data addr
03	1	RR	A	36	1	ADDC	A, @R0
04	1	INC	A	37	1	ADDC	A, @R1
05	2	INC	data addr	38	1	ADDC	A, R0
06	1	INC	@R0	39	1	ADDC	A, R1
07	1	INC	@R1	3A	1	ADDC	A, R2
08	1	INC	R0	3B	1	ADDC	A, R3
09	1	INC	R1	3C	1	ADDC	A, R4
0A	1	INC	R2	3D	1	ADDC	A, R5
0B	1	INC	R3	3E	1	ADDC	A, R6
0C	1	INC	R4	3F	1	ADDC	A, R7
0D	1	INC	R5	40	2	JC	code addr
0E	1	INC	R6	41	2	AJMP	code addr
0F	1	INC	R7	42	2	ORL	data addr, A
10	3	JBC	bit addr, code addr	43	3	ORL	data addr, #data
11	2	ACALL	code addr	44	2	ORL	A, #data
12	3	LCALL	code addr	45	2	ORL	A, data addr
13	1	RRC	A	46	1	ORL	A, @R0
14	1	DEC	A	47	1	ORL	A, @R1
15	2	DEC	data addr	48	1	ORL	A, R0
16	1	DEC	@R0	49	1	ORL	A, R1
17	1	DEC	@R1	4A	1	ORL	A, R2
18	1	DEC	R0	4B	1	ORL	A, R3
19	1	DEC	R1	4C	1	ORL	A, R4
1A	1	DEC	R2	4D	1	ORL	A, R5
1B	1	DEC	R3	4E	1	ORL	A, R6
1C	1	DEC	R4	4F	1	ORL	A, R7
1D	1	DEC	R5	50	2	JNC	code addr
1E	1	DEC	R6	51	2	ACALL	code addr
1F	1	DEC	R7	52	2	ANL	data addr, A
20	3	JB	bit addr, code addr	53	3	ANL	data addr, #data
21	2	AJMP	code addr	54	2	ANL	A, #data
22	1	RET		55	2	ANL	A, data addr
23	1	RL	A	56	1	ANL	A, @R0
24	2	ADD	A, data	57	1	ANL	A, @R1
25	2	ADD	A, data addr	58	1	ANL	A, R0
26	1	ADD	A, @R0	59	1	ANL	A, R1
27	1	ADD	A, @R1	5A	1	ANL	A, R2
28	1	ADD	A, R0	5B	1	ANL	A, R3
29	1	ADD	A, R1	5C	1	ANL	A, R4
2A	1	ADD	A, R2	5D	1	ANL	A, R5
2B	1	ADD	A, R3	5E	1	ANL	A, R6
2C	1	ADD	A, R4	5F	1	ANL	A, R7
2D	1	ADD	A, R5	60	2	JZ	code addr
2E	1	ADD	A, R6	61	2	AJMP	code addr
2F	1	ADD	A, R7	62	2	XRL	data addr A
30	3	JNB	bit addr, code addr	63	3	XRL	data addr, #data
31	2	ACALL	code addr	64	2	XRL	A, #data
32	1	RETI		65	2	XRL	A, data addr

Table 2 : Instruction Opcodes in Hexadecimal Order.

HEX CODE	NUMB. OF BYTES	MNEM.	OPERANDS
66	1	XRL	A, @R0
67	1	XRL	A, @R1
68	1	XRL	A, R0
69	1	XRL	A, R1
6A	1	XRL	A, R2
6B	1	XRL	A, R3
6C	1	XRL	A, R4
6D	1	XRL	A, R5
6E	1	XRL	A, R6
6F	1	XRL	A, R7
70	2	JNZ	code addr
71	2	ACALL	code addr
72	2	ORL	C, bit addr
73	1	JMP	@A + DPTR
74	2	MOV	A, #data
75	3	MOV	data addr, #data
76	2	MOV	@R0, #data
77	2	MOV	@R1, #data
78	2	MOV	R0, #data
79	2	MOV	R1, #data
7A	2	MOV	R2, #data
7B	2	MOV	R3, #data
7C	2	MOV	R4, #data
7D	2	MOV	R5, #data
7E	2	MOV	R6, #data
7F	2	MOV	R7, #data
80	2	SJMP	code addr
81	2	AJMP	code addr
82	2	ANL	C, bit addr
83	1	MOVC	A, @A + PC
84	1	DIV	AB
85	3	MOV	data addr, data addr
86	2	MOV	data addr, @R0
87	2	MOV	data addr, @R1
88	2	MOV	data addr, R0
89	2	MOV	data addr, R1
8A	2	MOV	data addr, R2
8B	2	MOV	data addr, R3
8C	2	MOV	data addr, R4
8D	2	MOV	data addr, R5
8E	2	MOV	data addr, R6
8F	2	MOV	data addr, R7
90	3	MOV	DPTR, #data
91	2	ACALL	code addr
92	2	MOV	bit addr, C
93	1	MOVC	A, @A + DPTR
94	2	SUBB	A, #data
95	2	SUBB	A, data addr
96	1	SUBB	A, @R0
97	1	SUBB	A, @R1
98	1	SUBB	A, R0

HEX CODE	NUMB. OF BYTES	MNEM.	OPERANDS
99	1	SUBB	A, R1
9A	1	SUBB	A, R2
9B	1	SUBB	A, R3
9C	1	SUBB	A, R4
9D	1	SUBB	A, R5
9E	1	SUBB	A, R6
9F	1	SUBB	A, R7
A0	2	ORL	C, bit addr
A1	2	AJMP	code addr
A2	2	MOV	C, bit addr
A3	1	INC	DPTR
A4	1	MUL	AB
A5		reserved	
A6	2	MOV	@R0, data addr
A7	2	MOV	@R1, data addr
A8	2	MOV	R0, data addr
A9	2	MOV	R1, data addr
AA	2	MOV	R2, data addr
AB	2	MOV	R3, data addr
AC	2	MOV	R4, data addr
AD	2	MOV	R5, data addr
AE	2	MOV	R6, data addr
AF	2	MOV	R7, data addr
B0	2	ANL	C, bit addr
B1	2	ACALL	code addr
B2	2	CPL	Bit addr
B3	1	CPL	C
B4	3	CJNE	A, #data, code addr
B5	3	CJNE	A, data addr, code addr
B6	3	CJNE	@R0, #data, code addr
B7	3	CJNE	@R1, #data, code addr
B8	3	CJNE	R0, #data, code addr
B9	3	CJNE	R1, #data, code addr
BA	3	CJNE	R2, #data, code addr
BB	3	CJNE	R3, #data, code addr
BC	3	CJNE	R4, #data, code addr
BD	3	CJNE	R5, #data, code addr
BE	3	CJNE	R6, #data, code addr
BF	3	CJNE	R7, #data, code addr
C0	2	PUSH	data addr
C1	2	AJMP	code addr
C2	2	CLR	bit addr
C3	1	CLR	C
C4	1	SWAP	A
C5	2	XCH	A, data addr
C6	1	XCH	A, @R0
C7	1	XCH	A, @R1
C8	1	XCH	A, R0
C9	1	XCH	A, R1
CA	1	XCH	A, R2
CB	1	XCH	A, R3

Table 2. (Cont.)

HEX CODE	NUMB. OF BYTES	MNEM.	OPERANDS	HEX CODE	NUMB. OF BYTES	MNEM.	OPERANDS
CC	1	XCH	A, R4	E6	1	MOV	A, @R0
CD	1	XCH	A, R5	E7	1	MOV	A, @R1
CE	1	XCH	A, R6	E8	1	MOV	A, R0
CF	1	XCH	A, R7	E9	1	MOV	A, R1
D0	2	POP	data addr	EA	1	MOV	A, R2
D1	2	ACALL	code addr	EB	1	MOV	A, R3
D2	2	SETB	bit addr	EC	1	MOV	A, R4
D3	1	SETB	C	ED	1	MOV	A, R5
D4	1	DA	A	EE	1	MOV	A, R6
D5	3	DJNZ	data addr, code addr	EF	1	MOV	A, R7
D6	1	XCHD	A, @R0	F0	1	MOVX	@DPTR, A
D7	1	XCHD	A, @R1	F1	2	ACALL	code addr
D8	2	DJNZ	R0, code addr	F2	1	MOVX	@R0, A
D9	2	DJNZ	R1, code addr	F3	1	MOVX	@R1, A
DA	2	DJNZ	R2, code addr	F4	1	CPL	A
DB	2	DJNZ	R3, code addr	F5	2	MOV	data addr, A
DC	2	DJNZ	R4, code addr	F6	1	MOV	@R0, A
DD	2	DJNZ	R5, code addr	F7	1	MOV	@R1, A
DE	2	DJNZ	R6, code addr	F8	1	MOV	R0, A
DF	2	DJNZ	R7, code addr	F9	1	MOV	R1, A
E0	1	MOVX	A, @DPTR	FA	1	MOV	R2, A
E1	2	AJMP	code addr	FB	1	MOV	R3, A
E2	1	MOVX	A, @R0	FC	1	MOV	R4, A
E3	1	MOVX	A, @R1	FD	1	MOV	R5, A
E4	1	CLR	A	FE	1	MOV	R6, A
E5	2	MOV	A, data addr	FF	1	MOV	R7, A

Table 2. (Cont.)

