


The RF Line  
**Triple Video Driver  
Hybrid Amplifier**

A high performance triple CRT driver designed specially for use as the video channel final stage in high resolution color monitors.

- Typical 10–90% Transitions Times are 3.0 ns
- 110 MHz – 3.0 dB Bandwidth at 40 Vp–p Output
- 220 MHz Pixel Frequency
- Up to 60 Vp–p Output Swing with 70 V Supply Voltage
- Low Power Consumption
- Excellent Gray–scale Linearity
- Unconditional Stability
- Gold Metallization System for the Ultimate in Reliability

**MHW3628**

**3.0 ns  
TRIPLE VIDEO DRIVER  
HYBRID  
AMPLIFIER**

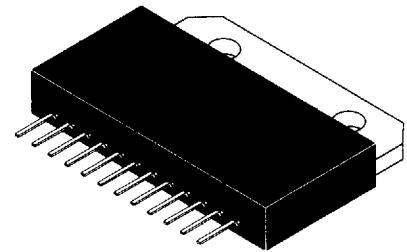

CASE 455-01, STYLE 1

**MAXIMUM RATINGS**

| Rating                           | Symbol    | Value       | Unit |
|----------------------------------|-----------|-------------|------|
| Supply Voltage                   | $V_{CC}$  | 80          | Vdc  |
| Operating Case Temperature Range | $T_C$     | -20 to +100 | °C   |
| Storage Temperature Range        | $T_{stg}$ | -40 to +100 | °C   |

**ELECTRICAL CHARACTERISTICS** ( $T_C = 25^\circ\text{C}$ ,  $V_{CC} = 70\text{ V}$ ,  $C_{LOAD} = 10\text{ pF}$ , 40 V Peak-to-Peak Output Swing with 35 Vdc Offset,  $R_1 = 287\ \Omega$ ,  $C_1 = 60\text{ pF Typ}$ )

| Characteristic   | Symbol      | Min  | Typ  | Max  | Unit |
|--|-------------|------|------|------|------|
| Supply Current (With Input Open Circuited) Per Channel   | $I_{CC}$    | 33   | 37   | 41   | mA   |
| Input DC Voltage (With Input Open Circuited)   | $V_{inDC}$  | 1.15 | 1.4  | 1.65 | V    |
| Input DC Voltage (With Input Open Circuited)   | $V_{outDC}$ | 32   | 33   | 37   | V    |
| Voltage Gain (1) (2)   | $A_V$       | —    | 12.7 | —    | V/V  |
| Transient Response (2)   |             |      |      |      |      |
| — Rise Time (10% to 90%)   | $t_r$       | —    | 3.0  | 3.4  | ns   |
| — Overshoot  | $V_{OS,r}$  | —    | 2.0  | 7.0  | %    |
| — Fall Time (90% to 10%)   | $t_f$       | —    | 2.8  | 3.2  | ns   |
| — Overshoot  | $V_{OS,f}$  | —    | 2.0  | 7.0  | %    |
| Operating Supply Current per Channel ( $V_{out} = 40\text{ V Peak-to-Peak}$ , 50 MHz Square Wave with 40 V Offset) (3) | $I_{CC}$    | —    | 70   | —    | mA   |
| Linearity Error ( $V_{out} = 5.0\text{ V to }+75\text{ V}$ )   | —           | —    | —    | 5.0  | %    |

(1)  $A_V = V_{out}/V_S$

(2) Input Signal is normally a 62.5 KHz square wave of 3.2 V peak-to-peak with 1.4 Vdc offset. Input  $t_r$ ,  $t_f < 1.0\text{ ns}$

(3) Output is not short circuit protected

## TYPICAL CHARACTERISTICS

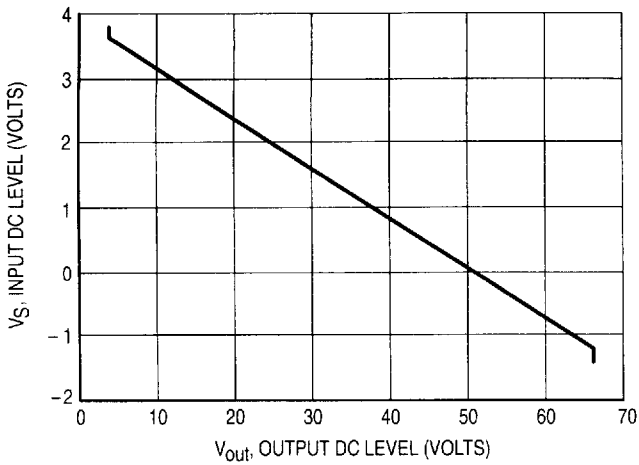


Figure 1.  $V_S$  versus  $V_{out}$

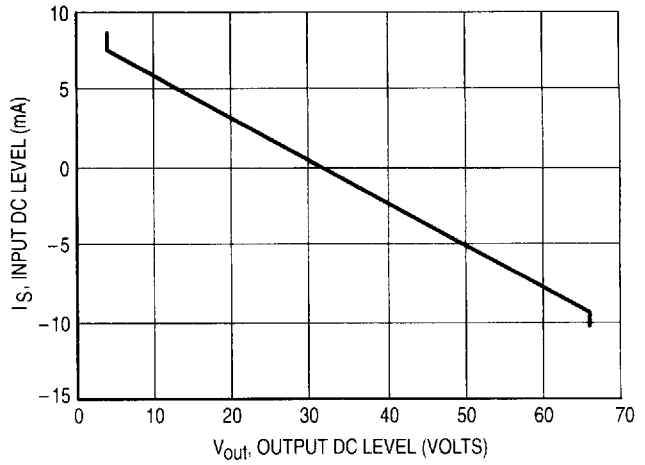


Figure 2.  $I_S$  versus  $V_{out}$

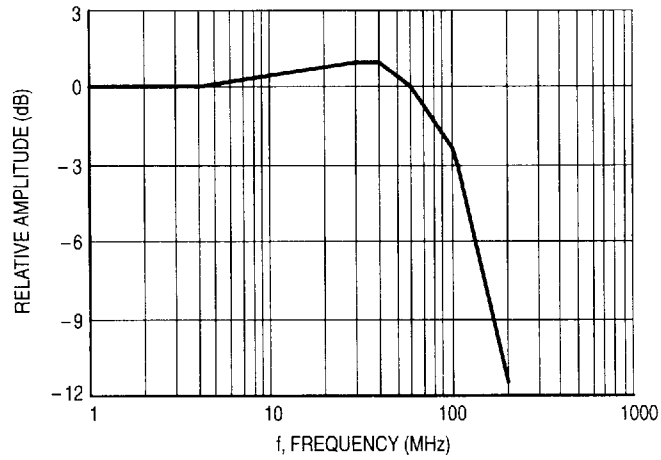


Figure 3. Frequency Response


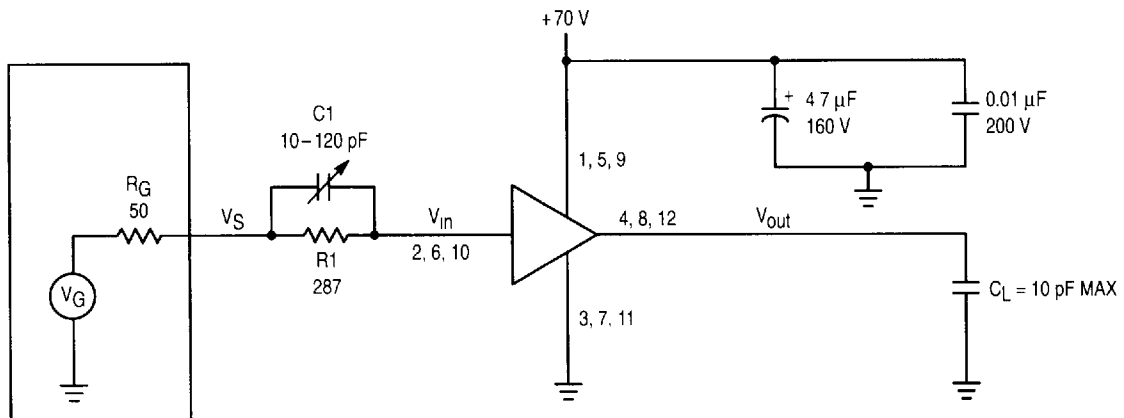


Figure 4. Hybrid Amplifier Test Circuit

# PACKAGE DIMENSIONS

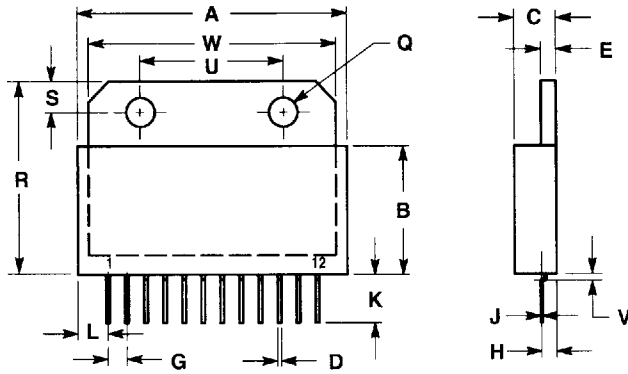

## NOTES

- 1 DIMENSIONING AND TOLERANCING PER ANSI Y14.5M 1982
- 2 CONTROLLING DIMENSION INCH

| DIM | INCHES |       | MILLIMETERS |       |
|-----|--------|-------|-------------|-------|
|     | MIN    | MAX   | MIN         | MAX   |
| A   | —      | 1.415 | —           | 35.94 |
| B   | —      | 0.685 | —           | 16.89 |
| C   | 0.210  | 0.225 | 5.33        | 5.72  |
| D   | 0.020  | —     | 0.51        | —     |
| E   | 0.070  | 0.085 | 1.78        | 2.16  |
| G   | 0.095  | 0.105 | 2.41        | 2.67  |
| H   | 0.065  | 0.085 | 1.65        | 2.16  |
| J   | 0.010  | —     | 0.25        | —     |
| K   | 0.250  | —     | 5.33        | —     |
| L   | 0.150  | 0.160 | 3.81        | 4.06  |
| Q   | 0.140  | 0.155 | 3.56        | 3.94  |
| R   | 0.995  | 1.015 | 25.27       | 25.78 |
| S   | 0.155  | 0.165 | 3.94        | 4.19  |
| U   | 0.745  | 0.755 | 18.92       | 19.18 |
| V   | —      | 0.025 | —           | 0.64  |
| W   | 1.295  | 1.305 | 32.89       | 33.15 |

## STYLE 1

- PIN 1 +VCC
- 2 VIN
- 3 GROUND
- 4 VOUT
- 5 +VCC
- 6 VIN
- 7 GROUND
- 8 VOUT
- 9 -VCC
- 10 VIN
- 11 GROUND
- 12 VOUT

CASE 455-01  
ISSUE O