

Printview: Connecting cable; Plug - free end; 4-pole; 2 m long; coding a; PVC insulated; Conductor ends, bonded: 9 mm - Item No.: 771-9994/207-202

Connecting cable; Plug - free end; 4-pole; 2 m long; coding a; PVC insulated; Conductor ends, bonded: 9 mm

Item No.: 771-9994/207-202



Connecting cable; Plug - free end; 4-pole; 2 m long; coding a; PVC insulated; Conductor ends, bonded: 9 mm

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	771-9994/207-202
GTIN / EAN	4050821039501
Content	1
Order amount	1
Customer item number	

Notes

All WINSTA® components are 100% protected against mismatching in terms of:a.) plugging different number of polesb.) plugging when turned by 180°c.) plugging when laterally staggeredd.) plugging one pole
Note on Continuous Service Temperature:-35 °C ... +85 °CPVC cable for temperatures 70 °C (including halogen-free)Insulating parts for temperatures 105 °CMating cycles: 100, with resistive load IN = 25A, tested (4 mm²/AWG 12)

Technical data


Miscellaneous

No. of poles	4
Pin spacing	10 mm / 0.394 in %
Total number of potentials	4
Potential marking	N ⏚ 2 L 1 L'
Color	white
Connector color	white

Printview: Connecting cable; Plug - free end; 4-pole; 2 m long; coding a; PVC insulated; Conductor ends, bonded: 9 mm - Item No.: 771-9994/207-202

Technical data	
Coding	A
Rated voltage (III / 3) [V]	400 [V]
Rated surge voltage (III / 3) [kV]	6 [kV]
Nominal current [A]	20 [A]
Mating cycles	200, without resistive load
Strip length	9 mm / 0.35 in
Mating force of a plug-in connection	approx. 20 ... 70 N (depending on pole number)
Unmating force of a plug-in connection	when unlocked: approx. 20 ... 70 N (depending on pole number)
Retention force of a plug-in connection	when locked: > 80N
Insulating material	Polyamide 66 (PA 66)
Flammability rating per UL 94	V0
Contact material	Copper or copper alloy, surface-treated
Processing temperature	-5°C ... +40°C
Fire load [MJ]	59.68 [MJ]
Weight [g]	408.299 [g]
Marking	N Erdung 2 L 1 L'

Images & drawings

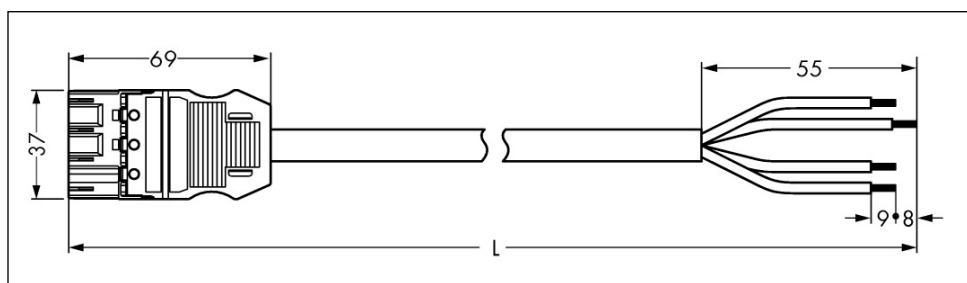

Printview: Connecting cable; Plug - free end; 4-pole; 2 m long; coding a; PVC insulated; Conductor ends, bonded: 9 mm - Item No.: 771-9994/207-202

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.