


EB72F71 Series

- Oven Controlled Crystal Oscillators (OCXO)
- LVCMOS Output
- +3.3V Supply Voltage
- AT-Cut Crystal Used
- External Voltage Control Function
- 5 pin DIP Metal Package

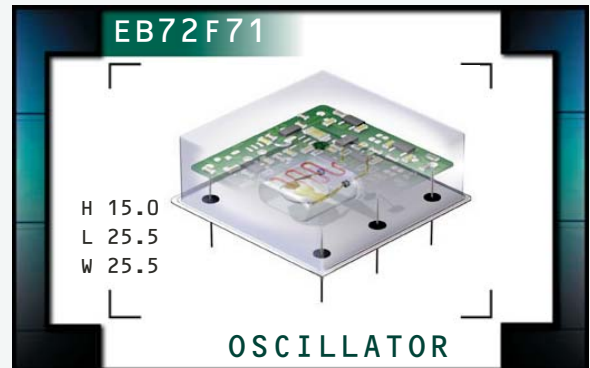

ELECTRICAL SPECIFICATIONS

Frequency Range	10.000MHz, 12.288MHz, 12.800MHz, 16.000MHz, 19.440MHz, or 20.000MHz	
Operating Temperature Range (OTR)	0°C to 50°C, 0°C to 70°C, or -20°C to 70°C	
Storage Temperature Range	-55°C to 125°C	
Supply Voltage (V_{DD})	3.3V _{DC} ±5%	
Frequency Tolerance / Stability		
vs. Initial Tolerance	at Nominal V _{DD} and V _C , at 25°C	±1.0ppm or ±500ppb Maximum
vs. Temperature Stability	at Nominal V _{DD} and V _C	±80ppb, ±100ppb, ±200ppb, ±280ppb, or ±500ppb Maximum
vs. V _{DD}	V _{DD} ±5%	±20ppb Maximum
vs. Load	V _{load} ±5%	±20ppb Maximum
vs. Aging (1 Day)	after 72 Hours of Operation	±3.0ppb Maximum
vs. Aging (1 Year)	after 72 Hours of Operation	±500ppb Maximum
vs. Aging (10 Years)	after 72 Hours of Operation	±3.0ppm Maximum
Crystal Cut	AT-Cut	
Warm Up Time	to ±500ppb of Final Frequency at 1 Hour at 25°C	3 Minutes Maximum
Power Consumption	at Steady State, at 25°C	1.2 Watts Maximum
	During Warm Up, at 25°C	3.6 Watts Maximum
Output Voltage Logic High (V_{OH})	I _{OH} = -4mA	2.6V _{DC} Minimum
Output Voltage Logic Low (V_{OL})	I _{OL} = +4mA	0.4V _{DC} Maximum
Rise Time / Fall Time	Measured at 20% to 80% of Waveform	6nSec Maximum
Duty Cycle	Measured at 50% of Waveform	50 ±5(%)
Load Drive Capability		15pF Maximum
Frequency Deviation	Referenced to F ₀ at V _C = 1.65V _{DC} ; V _{DD} = 5.0V _{DC} over OTR	±5ppm Minimum
Control Voltage Range		0.0V _{DC} to V _{DD}
Control Voltage (V_C)		1.65V _{DC} ±1.65V _{DC}
Transfer Function		Positive Transfer Characteristic
Reference Voltage Output		2.8V _{DC} ±0.2V _{DC} (Pin 4)
Linearity		±10% Maximum
Input Impedance		10kOhms Typical
Typical Phase Noise (at 12.800MHz)	1Hz Offset	-70dBc/Hz
	10Hz Offset	-95dBc/Hz
	100Hz Offset	-120dBc/Hz
	1kHz Offset	-135dBc/Hz
	10kHz Offset	-140dBc/Hz

MANUFACTURER ECLIPTEK CORP.	CATEGORY OSCILLATOR	SERIES EB72F71	PACKAGE 5 pin DIP	VOLTAGE 3.3V	CLASS OS2E	REV. DATE 05/07
--------------------------------	------------------------	-------------------	----------------------	-----------------	---------------	--------------------

PART NUMBERING GUIDE

EB72F71 D 10 B V 2 - 20.000M

INITIAL TOLERANCE

C=±1.0ppm
D=±500ppb

FREQUENCY STABILITY

2 Digit Code Per Table 1

OPERATING TEMPERATURE RANGE

1 Letter Code Per Table 1

FREQUENCY

DUTY CYCLE


2=50% ±5%

VOLTAGE CONTROL OPTION


V=Voltage Control on Pin 3 and Reference Voltage Output on Pin 4

TABLE 1: PART NUMBERING CODES						
Operating Temperature Range	FREQUENCY STABILITY X Denotes availability					
		±80ppb	±100ppb	±200ppb	±280ppb	±500ppb
	Code	08	10	20	28	50
0°C to +50°C	A	X	X	X	X	X
0°C to +70°C	B		X	X	X	X
-20°C to +70°C	C				X	X


MECHANICAL DIMENSIONS
ALL DIMENSIONS IN MILLIMETERS



Pin 1: Output
Pin 2: Case/Ground
Pin 3: Voltage Control



Pin 4: Reference Voltage Output
Pin 5: Supply Voltage

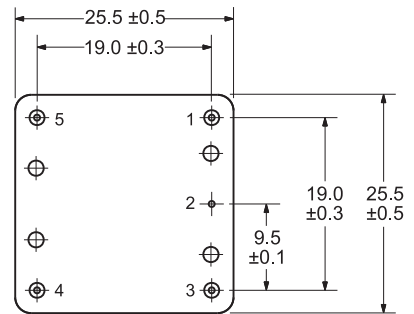

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

Characteristic

Gross Leak Test
Mechanical Shock
Vibration
Lead Integrity
Solderability
Temperature Cycling
Resistance to Soldering Heat
Resistance to Solvents

Specification

MIL-STD-883, Method 1014, Condition C
MIL-STD-202, Method 213, Condition C
MIL-STD-883, Method 2007, Condition A
MIL-STD-883, Method 2004
MIL-STD-883, Method 2002
MIL-STD-883, Method 1010
MIL-STD-883, Method 210
MIL-STD-883, Method 215

MARKING SPECIFICATIONS

Line 1: ECLIPTEK

Line 2: XX.XXX M

Frequency in MHz
(5 Digits Maximum + Decimal)

Line 3: XX Y ZZ

Week of Year
Last Digit of Year
Ecliptek Manufacturing Identifier

Note: Pin 1 shall be designated with a dot

MANUFACTURER ECLIPTEK CORP.	CATEGORY OSCILLATOR	SERIES EB72F71	PACKAGE 5 pin DIP	VOLTAGE 3.3V	CLASS OS2E	REV. DATE 05/07
--------------------------------	------------------------	-------------------	----------------------	-----------------	---------------	--------------------