

Wideband Fiber Optic Coupler 1430 nm, 75:25 Ratio




TW1430R3F1

Description

Thorlabs' TW1430R3F1 single mode wideband fiber coupler is designed to operate from 1330 to 1430 nm with ≤ 0.15 dB of excess loss.

Specifications


TW1430R3F1	
Coupling Ratio ^a	75:25
Coupling Ratio Tolerance	$\pm 3.5\%$
Center Wavelength	1430 nm
Minimum Bandwidth ^b	± 100 nm
Insertion Loss ^{a,c}	≤ 1.6 dB / ≤ 6.8 dB
Excess Loss ^{a,c}	≤ 0.15 dB
Uniformity ^{a,c}	≤ 0.6 dB
Polarization-Dependent Loss (PDL) ^a	≤ 0.2 dB
Optical Return Loss (ORL) / Directivity ^a	≥ 60 dB
Max Power Level ^d	1 W (With Connectors or Bare Fiber) 5 W (Spliced)
Fiber Type ^e	SMF-28e+
Fiber Cut-Off Wavelength ^b	≤ 1260 nm
Port Configuration	1x2
Fiber Lead Length and Tolerance	1.0 m $+0.075$ m / -0.0 m
Connectors	2.0 mm Narrow Key FC/PC
Package Size	$\varnothing 0.12$ " x 2.95" ($\varnothing 3.2$ mm x 75 mm)
Jacket	$\varnothing 900$ μ m Hytrel [®] Loose Tube
Pigtail Tensile Load	10 N
Operating Temperature Range	-40 to 85 °C
Storage Temperature Range	-40 to 85 °C



- All values are specified at room temperature over the bandwidth without connectors and measured through the white input port as indicated below.
- Below the fiber cut-off wavelength, single mode operation is not guaranteed (see the graph on the following page).
- This specification excludes the water absorption region centered around 1383 nm.
- Specifies the total maximum power allowed through the component. Coupler performance and reliability under high-power conditions must be determined within the user's setup. See Usage Tips for safety and handling information.
- Other fiber types may be available upon request. Please contact techsupport@thorlabs.com with inquiries.



Typical Performance Plots

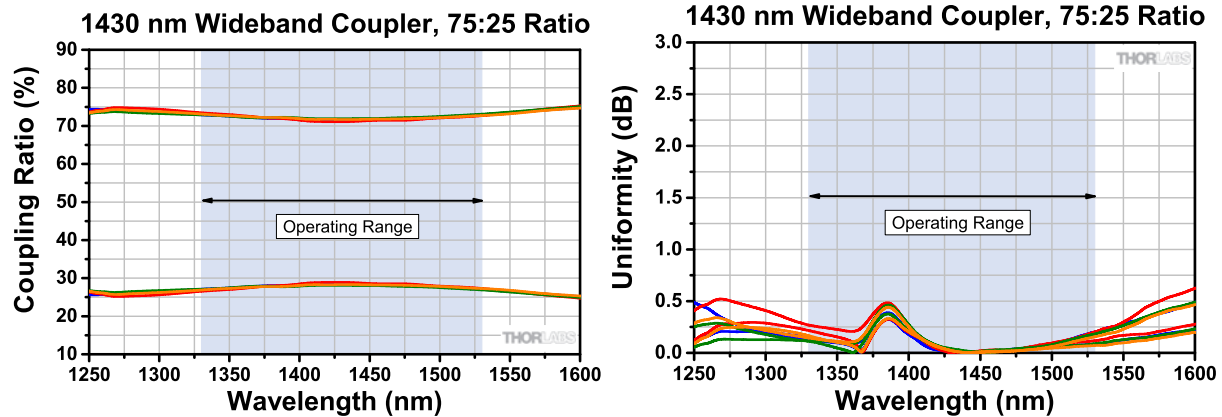

These persistence plots show the coupling ratio and uniformity performance of four TW1430R3F1 couplers (tap and signal outputs from the same coupler are indicated by matching colors on each graph). The blue-shaded region denotes the coupler's full operating wavelength range. The uniformity specification excludes the water absorption peak around 1383 nm. All data was measured without connectors.

Usage Tips

- 1) Before connecting a component to a system, make sure the light source is turned off. Inspect both the input and output fiber ends; debris or contamination on the end face can lead to fiber damage when operated at high powers.
- 2) After connecting the component, the system should be tested and aligned using a light source at low power. The system power can be ramped up slowly to the desired output power while periodically verifying all components are properly aligned and that coupling efficiency is not changing with respect to optical launch power.
- 3) Optical connectors can be removed and the device can be spliced into a setup for operation at higher optical powers. Fiber ends should always be cleaned and cleaved prior to splicing.