

Ceramic High Pass Filter

2640 to 7000 MHz

HFCN-2275+ HFCN-2275



BLUE CELL™

CASE STYLE: FV1206

Model	Price	Qty.
HFCN-2275+	\$1.99	(10-49)
HFCN-2275	\$1.99	(10-49)
HFCN-2275D+	\$2.49	(10-49)
HFCN-2275D	\$2.49	(10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	7W max. at 25°C


*Passband rating, derate linearly to 3W at 100°C ambient.

Pin Connections

RF IN	1**
RF OUT	3**
GROUND	2,4

**RF IN & RF OUT can be interchanged

Outline Drawing

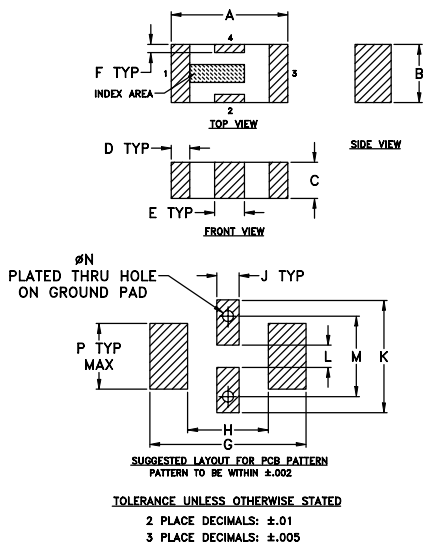


Outline Dimensions (inch)

A	B	C	D	E	F	G
.126	.063	.037	.024	.020	.009	.169
3.20	1.60	0.94	0.51	0.81	0.23	4.29

H	J	K	L	M	N	P	wt
.087	.024	.122	.024	.087	.012	.071	grams
2.21	0.61	3.10	0.61	2.21	0.30	1.80	.020

Demo Board MCL P/N: TB-270 Suggested PCB Layout (PL-137)

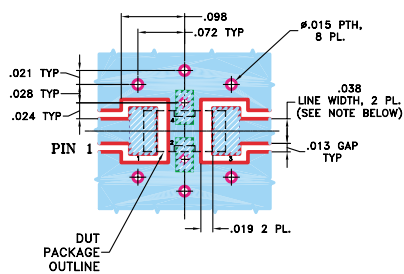

Features

- low cost
- small size
- 7 sections
- temperature stable
- dc block in/out, breakdown voltage, 1kV typ.
- excellent power handling, 7W

Applications


- sub-harmonic rejection and dc blocking
- transmitters/receivers
- lab use

High Pass Filter Electrical Specifications¹ (T_{AMB}=25°C)


MODEL NO.	STOP BAND (MHz) Min.	f _{co} , MHz Nom. (loss > 3 dB) Typ.	PASSBAND (MHz) (loss < 1.3 dB) Max.	(loss < 2 dB) Typ.	VSWR Typ. Frequency (MHz) 1.5:1 Stopband	POWER INPUT (W)	NO. OF SECTIONS	
HFCN-2275(+)	1400	1770	2275	2640-6230	2450-7000	20:1	2580-6000	7

1. For Applications requiring DC voltage to be applied to the Input or output, use HFCN-2275D (DC Resistance to ground is 100 Mohms min.)

typical frequency response





schematic



Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1.00	98.51	434.30
500.00	54.08	59.91
1470.00	44.75	36.97
1770.00	25.43	24.48
2280.00	2.90	2.59
2480.00	1.26	1.35
2580.00	0.98	1.17
3000.00	0.64	1.02
4000.00	0.52	1.16
6080.00	0.75	1.56
6520.00	0.99	1.96
7000.00	1.51	2.61
8000.00	2.77	4.33
10000.00	4.28	3.95
11000.00	25.26	12.89

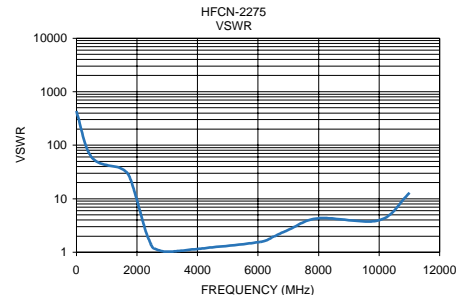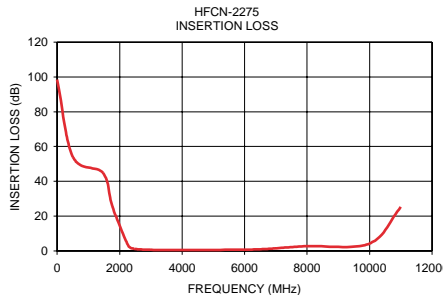

designers kit available

Kit No.	No. of Units in Kit	Description	Price \$ per Kit
K1-HFCN	40	5 of each: HFCN-650,-740,-1200,-1500,-1760,-2000,-2275,-2700	79.95



Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

REV. D
M98898
EDR-6464/4
HFCN-2275
AD/RS/CP
050610