


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

KV-59-23

REVISIONS

ISSUE	CHANGES
6	CN 35975 C REDRAWN ME 01/13/95

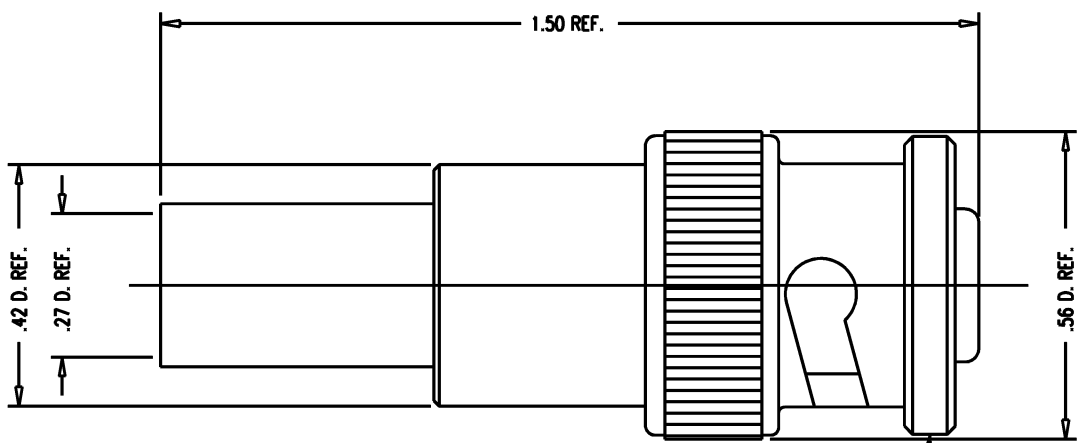

STAMP: KINGS KV-59-23

- NOTES:**
- FOR USE WITH RG-59, 62, & 210/U CABLE.
 - FOR CABLING INSTRUCTIONS SEE CP-417.
 - FOR CABLE TRIMMING USE KTJ-70 & KTD-36.
 - FOR CRIMPING USE DIE KTH-2002.
 - INTERFACE PER MIL-STD-348, FIG. 303-1.
 - K-CRIP SLEEVE AND CENTER CONTACT TO BE SUPPLIED UNASSEMBLED.
 - MATERIALS:**
INSULATOR: TEFLON, ASTM-D-1457
GASKET: SIL. RUB., ZZ-R-765
SPRING WASHER: BER. COP., ASTM-B-196
ALL OTHER PARTS: BRASS, QQ-B-626
 - FINISHES:**
CENTER CONTACT: SILVER PLT. PER QQ-S-365
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
 - ELECTRICAL CHARACTERISTICS:**
VOLTAGE RATING: 3500 VRMS
INSULATION RESISTANCE: 5000 MEGOHMS

QGS0061

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

PLUG, MHV

DRAWN	ME	01/13/95
-------	----	----------

DESIGN	LI	01/23/95
--------	----	----------

APPR.		DATE
-------	--	------

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

KV-59-23

GSD