


G3VM-□1BR□/□1ER□

MOS FET Relays DIP 6-pin, High-current and Low-ON-resistance Type

MOS FET Relays in DIP 6-pin packages that achieve the low ON resistance and high switching capacity of a mechanical relay

- Load voltage: 20 V, 30 V, 40 V, 60 V, or 100 V
- 20-V Relay: Continuous load current of 4 A (8 A) max. *
- 30-V Relay: Continuous load current of 5 A (10 A) max. *
- 40-V Relay: Continuous load current of 3.5 A (7 A) max. *
- 60-V Relay: Continuous load current of 4 A (8 A) max. *
- 100-V Relay: Continuous load current of 3.5 A (7 A) max. *

* Values in parentheses are for connection C.

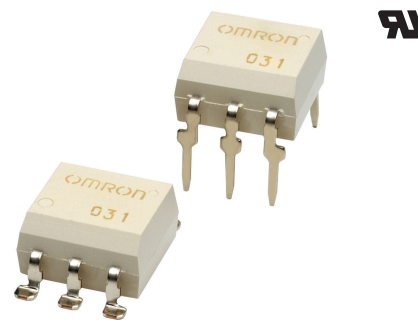

Note: The actual product is marked differently from the image shown here.


Application Examples

- Communication equipment
- Security equipment
- Test & Measurement equipment
- Industrial equipment


Package

(Unit : mm, Average)

DIP 6-pin
PCB Terminals



Surface-mounting Terminals



Note: The actual product is marked differently from the image shown here.

Model Number Legend

G3VM-□□□□□
1 2 3 4 5

- 1. Load Voltage**
2 : 20 V
3 : 30 V
4 : 40 V
6 : 60 V
10 : 100 V
- 2. Contact form**
1 : 1a (SPST-NO)
- 3. Package**
B : DIP 6-pin with PCB terminals
E : DIP 6-pin with surface-mounting terminals
- 4. Additional functions**
R : Low ON resistance
- 5. Other informations**
When specifications overlap, serial code is added in the recorded order.

Ordering Information

| Package | Contact form | Load voltage (peak value) * | Continuous load current (peak value) * | | Stick packaging | | | Tape packaging | |
|---------|--------------|-----------------------------|--|--------------|-----------------|----------------------------|--------------------------|-------------------|--------------------------|
| | | | Connection A, B | Connection C | Model | | Minimum package quantity | Model | Minimum package quantity |
| | | | | | PCB Terminals | Surface-mounting Terminals | | | |
| DIP6 | 1a (SPST-NO) | 20 V | 4 A | 8 A | G3VM-21BR | G3VM-21ER | 50 pcs. | G3VM-21ER(TR) | 1,500 pcs. |
| | | 30 V | 5 A | 10 A | G3VM-31BR | G3VM-31ER | | G3VM-31ER(TR05) | 500 pcs. |
| | | 40 V | 3.5 A | 7 A | G3VM-41BR | G3VM-41ER | | G3VM-41ER(TR) | 1,500 pcs. |
| | | 60 V | 2.5 A | — | G3VM-61BR | G3VM-61ER | | G3VM-61ER(TR) | |
| | | | 3 A | 6 A | G3VM-61BR1 | G3VM-61ER1 | | G3VM-61ER1(TR) | |
| | | 100 V | 4 A | 8 A | G3VM-61BR2 | G3VM-61ER2 | | G3VM-61ER2(TR05) | 500 pcs. |
| | | | 2 A | 4 A | G3VM-101BR | G3VM-101ER | | G3VM-101ER(TR) | 1,500 pcs. |
| | | | 3.5 A | 7 A | G3VM-101BR1 | G3VM-101ER1 | | G3VM-101ER1(TR05) | 500 pcs. |

* The AC peak and DC value are given for the load voltage and continuous load current.


Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR)" to the end of the model number.

■ Absolute Maximum Ratings (Ta = 25°C)

| Item | Symbol | G3VM-21BR | G3VM-31BR | G3VM-41BR | G3VM-61BR | G3VM-61BR1 | G3VM-61BR2 | G3VM-101BR | G3VM-101BR1 | Unit | Measurement conditions | | | |
|-----------------------------------|-------------------------------------|--------------|-----------|------------|-------------|------------|-------------|-------------|-------------|------------|------------------------|-------|--|--------------|
| | | G3VM-21ER | G3VM-31ER | G3VM-41ER | G3VM-61ER | G3VM-61ER1 | G3VM-61ER2 | G3VM-101ER | G3VM-101ER1 | | | | | |
| Input | LED forward current | IF | | | | | | | | | 30 | mA | | |
| | Repetitive peak LED forward current | IFP | | | | | | | | | 1 | A | 100 μs pulses, 100 pps | |
| | LED forward current reduction rate | ΔIF/°C | | | | | | | | | -0.3 | mA/°C | Ta ≥ 25°C | |
| | LED reverse voltage | VR | | 5 | 6 | 5 | | | 6 | 5 | 6 | V | | |
| Connection temperature | | TJ | | | | | | | | | 125 | | °C | |
| Load voltage (AC peak/DC) | | VOFF | | 20 | 30 | 40 | 60 | | 100 | | V | | | |
| Output | Continuous load current | Connection A | Io | 4 | 5 | 3.5 | 2.5 | 3 | 4 | 2 | 3.5 | A | Connection A: AC peak/DC Connection B and C: DC | |
| | | Connection B | | 8 | 10 | 7 | - | 6 | 8 | 4 | 7 | | | |
| | | Connection C | | | | | | | | | | | | |
| | ON current reduction rate | Connection A | ΔIo/°C | -40 | -50 | -35 | -22 | -30 | -40 | -20 | -35 | mA/°C | Ta ≥ 25°C | |
| Connection B | -80 | -100 | | -70 | - | -60 | -80 | -40 | -70 | | | | | |
| Connection C | | | | | | | | | | | | | | |
| Pulse ON current | | Iop | | 12 | 15 | 10.5 | 7.5 | 9 | 12 | 6 | 10.5 | A | t=100 ms, Duty=1/10 | |
| Connection temperature | | TJ | | | | | | | | | 125 | | °C | |
| Dielectric strength between I/O * | | VI-O | | | | | | | | | 2,500 | | Vrms | AC for 1 min |
| Ambient operating temperature | | Ta | | -40 to +85 | -40 to +110 | -40 to +85 | -20 to +85 | -40 to +85 | -40 to +110 | -40 to +85 | -40 to +110 | °C | With no icing or condensation | |
| Ambient storage temperature | | Tstg | | | -55 to +125 | | -40 to +125 | -55 to +125 | | | °C | | | |
| Soldering temperature | | - | | | | | | | | | 260 | | °C | 10 s |

* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Connection Diagram

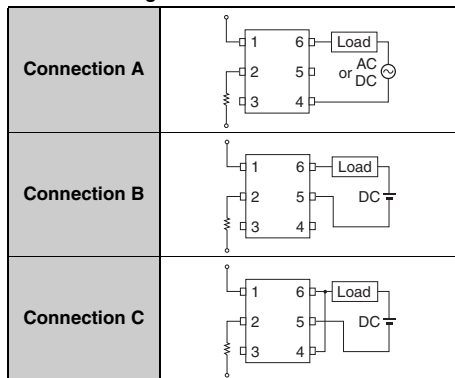


Note: Only connection A can be used for the G3VM-61BR/ER.

Electrical Characteristics (Ta = 25°C)

| Item | Symbol | | G3VM-21BR | G3VM-31BR | G3VM-41BR | G3VM-61BR | G3VM-61BR1 | G3VM-61BR2 | G3VM-101BR | G3VM-101BR1 | Unit | Measurement conditions | |
|---|-------------------|--------------|-----------------|-----------|-----------|-----------|------------|------------|------------|---|---|---|---|
| | | | G3VM-21ER | G3VM-31ER | G3VM-41ER | G3VM-61ER | G3VM-61ER1 | G3VM-61ER2 | G3VM-101ER | G3VM-101ER1 | | | |
| LED forward voltage | V _F | Minimum | 1.18 | 1.5 | 1.18 | | 1.5 | | 1.18 | 1.5 | V | I _F =10 mA | |
| | | Typical | 1.33 | 1.64 | 1.33 | | 1.64 | | 1.33 | 1.64 | | | |
| | | Maximum | 1.48 | 1.8 | 1.48 | | 1.8 | | 1.48 | 1.8 | | | |
| Reverse current | I _R | Maximum | 10 | | | | | | | | | μA | V _R =5 V |
| Capacitance between terminals | C _T | Typical | 70 | | | | | | | | | pF | V=0, f=1 MHz |
| Trigger LED forward current | I _{FT} | Typical | 0.5 | 0.2 | 0.5 | 1 | 0.5 | 0.3 | 0.5 | 0.2 | mA | I _o =1 A | |
| | | Maximum | 3 | | | | | | | | | | |
| Release LED forward current | I _{FC} | Minimum | 0.1 | 0.01 | 0.1 | | 0.01 | | 0.1 | 0.01 | mA | I _{OFF} =10 μA | |
| Maximum resistance with output ON | R _{ON} | Connection A | Typical | 20 | | 30 | 65 | 40 | 35 | 100 | 50 | mΩ | G3VM-21BR/21ER/ 41BR/41ER/61BR1/ 61ER1/101BR/101ER: I _F =5 mA, I _o =2 A, t < 1s G3VM-61BR/61ER: I _F =10 mA, t=10 ms, I _o =2 A G3VM-31BR/31ER/ 61BR2/61ER2/ 101BR1/101ER1: I _F =5 mA I _o =3 A t < 1s |
| | | | Maximum | 50 | 40 | 60 | 100 | 70 | 60 | 200 | 80 | | |
| | | Connection B | Typical | 10 | | 15 | - | 20 | 18 | 50 | 24 | | |
| Connection C | Typical | 5 | | 8 | - | 10 | 9 | 25 | 12 | G3VM-21BR/21ER/ 41BR/41ER/61BR1/ 61ER1/101BR/101ER: I _F =5 mA, I _o =4 A, t < 1s G3VM-31BR/31ER: I _F =5 mA, I _o =10 A, t < 1s G3VM-61BR2/61ER2: I _F =5 mA, I _o =8 A, t < 1s G3VM-101BR1/101ER1: I _F =5 mA, I _o =7 A, t < 1s | | | |
| Current leakage when the relay is open | I _{LEAK} | Typical | - | 0.01 | - | 0.001 | - | 0.01 | - | 0.01 | μA | V _{OFF} =Load voltage ratings | |
| | | Maximum | 1 | | 0.01 | | 1 | | | | | | |
| Capacitance between terminals | C _{OFF} | Typical | 1000 | 1100 | 1000 | 400 | 1100 | 640 | 1000 | 450 | pF | V=0, f=1 MHz | |
| Capacitance between I/O terminals | C _{I-O} | Typical | 0.8 | | | | | | | | | pF | f=1 MHz, V _s =0 V |
| Insulation resistance between I/O terminals | R _{I-O} | Minimum | 1000 | | | | | | | | | MΩ | V _{I-O} =500 VDC, RoH ≤ 60% |
| | | Typical | 10 ⁸ | | | | | | | | | | |
| Turn-ON time | t _{ON} | Typical | 2.5 | 0.8 | 2 | 1.5 | 2 | 1.2 | 2 | 0.8 | ms | I _F =5 mA, R _L =200 Ω, V _{DD} =20 V * | |
| | | Maximum | 5 | | | 3 | 5 | | | | | | |
| Turn-OFF time | t _{OFF} | Typical | 0.1 | | 0.2 | 0.1 | | | | ms | I _F =5 mA, R _L =200 Ω, V _{DD} =20 V * | | |
| | | Maximum | 1 | 0.5 | 1 | 0.6 | 1 | 0.5 | 1 | | | 0.5 | |

* Turn-ON and Turn-OFF Times



■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.

| Item | Symbol | | G3VM-21BR | G3VM-31BR | G3VM-41BR | G3VM-61BR | G3VM-61BR1 | G3VM-61BR2 | G3VM-101BR | G3VM-101BR1 | Unit |
|--|-----------------|---------|-----------|-----------|-----------|-----------|------------|------------|------------|-------------|------|
| | | | G3VM-21ER | G3VM-31ER | G3VM-41ER | G3VM-61ER | G3VM-61ER1 | G3VM-61ER2 | G3VM-101ER | G3VM-101ER1 | |
| Load voltage (AC peak/DC) | V _{DD} | Maximum | 16 | 24 | 32 | 48 | | | 80 | | V |
| | | Minimum | 5 | | | 10 | 5 | | | mA | |
| Operating LED forward current | I _F | Typical | 10 | | | – | 10 | | | | |
| | | Maximum | 25 | | | 20 | 25 | | | | |
| Continuous load current (AC peak/DC) | I _o | Maximum | 4 | 5 | 3.5 | 2.5 | 3 | 4 | 2 | 3.5 | A |
| | | Minimum | -20 | -40 | -20 | | | -40 | -20 | -40 | |
| Ambient operating temperature | T _a | Maximum | 65 | 85 | 65 | 60 | 65 | 85 | 65 | 85 | |


■Spacing and Insulation

| Item | Minimum | Unit |
|------------------------------|---------|------|
| Creepage distances | 7.0 | mm |
| Clearance distances | 7.0 | |
| Internal isolation thickness | 0.4 | |


Engineering Data

LED forward current vs. Ambient temperature


G3VM-21BR/21ER/41BR/41ER/
61BR1/61ER1/101BR/101ER

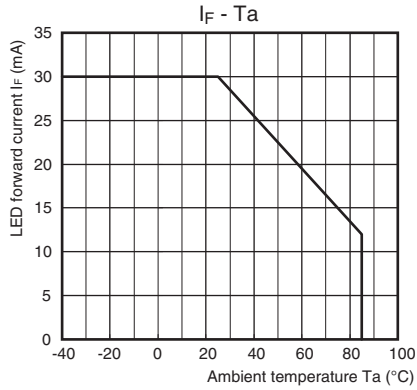

G3VM-61BR/61ER

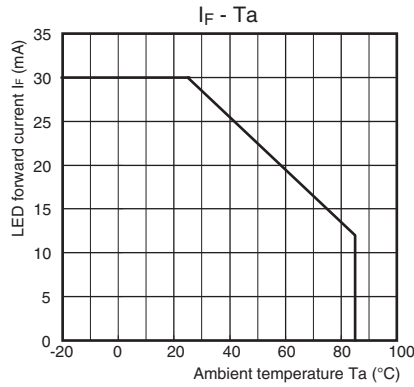


G3VM-31BR/31ER/61BR2/61ER2/
101BR1/101ER1

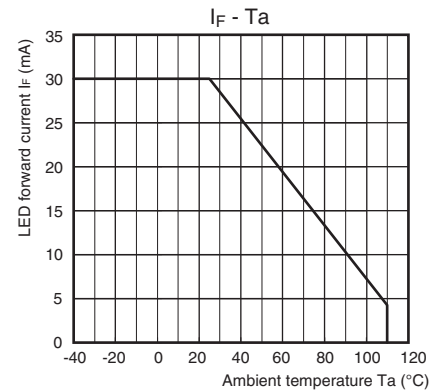


LED forward current vs. LED forward voltage

G3VM-21BR/21ER/41BR/41ER/61BR/
61ER/61BR1/61ER1/101BR/101ER

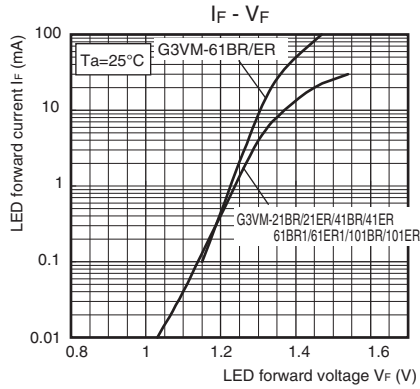


G3VM-31BR/31ER/61BR2/61ER2/
101BR1/101ER1

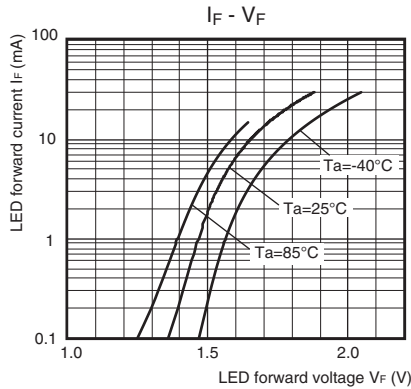


Continuous load current vs. Ambient temperature


G3VM-21BR/21ER/41BR/41ER

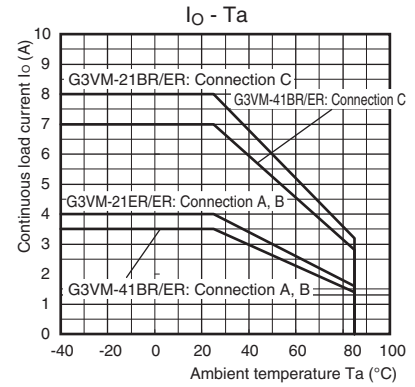


G3VM-61BR1/61ER1/101BR/101ER

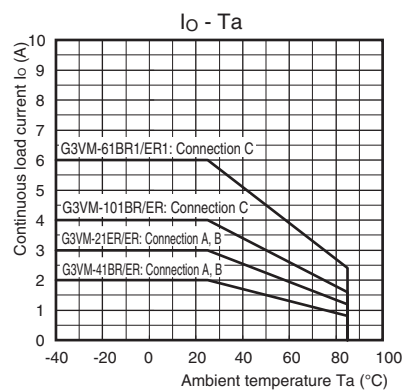

G3VM-61BR/61ER

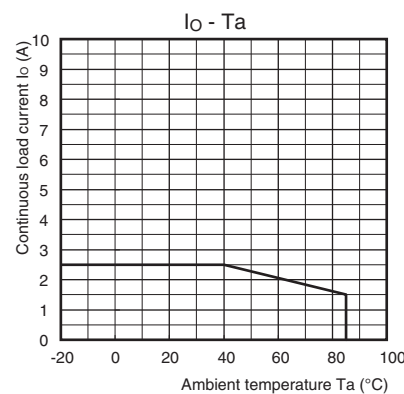


G3VM-31BR/31ER/61BR2/61ER2/
101BR1/101ER1

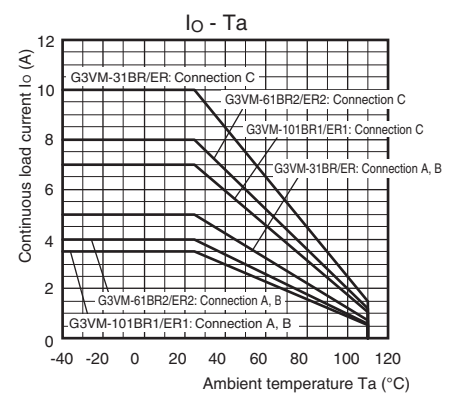


Engineering Data

● Continuous load current vs. On-state voltage

G3VM-21BR/21ER/41BR/41ER/61BR/61ER/61BR1/61ER1/101BR/101ER

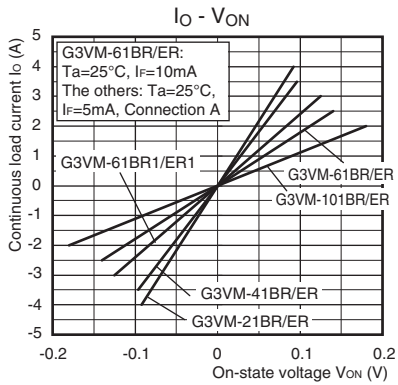


G3VM-31BR/31ER/61BR2/61ER2/101BR1/101ER1

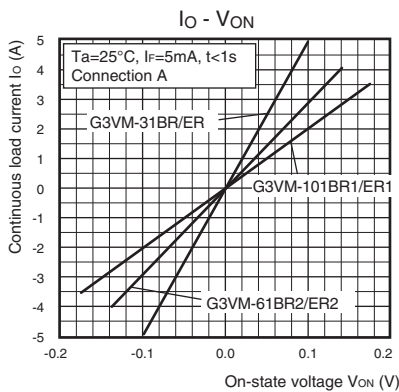


● On-state resistance vs. Ambient temperature

G3VM-21BR/21ER/41BR/41ER/61BR/61ER/61BR1/61ER1/101BR/101ER

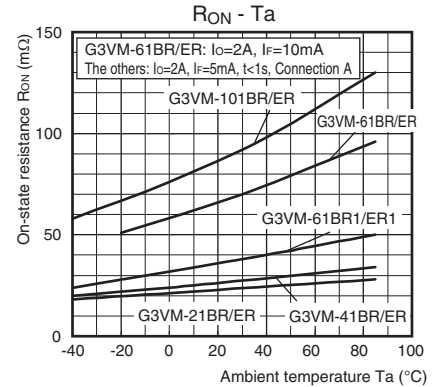


● Trigger LED forward current vs. Ambient temperature


G3VM-21BR/21ER/41BR/41ER/61BR/61ER/61BR1/61ER1/101BR/101ER

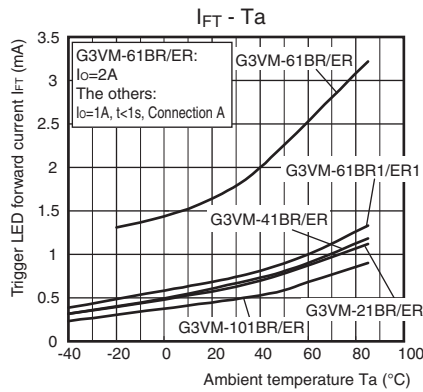

G3VM-31BR/31ER/61BR2/61ER2/101BR1/101ER1

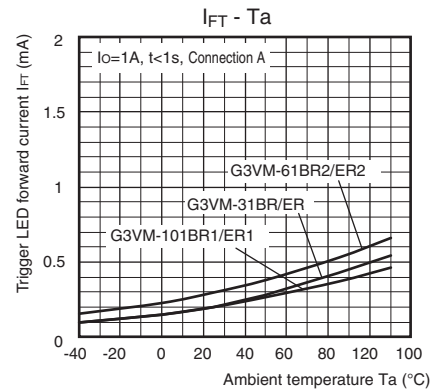


G3VM-31BR/31ER/61BR2/61ER2/101BR1/101ER1

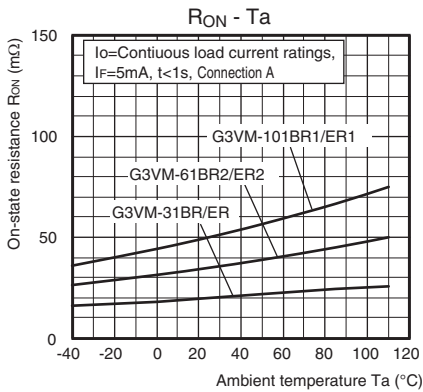


● Turn ON, Turn OFF time vs. LED forward current


G3VM-21BR/21ER/41BR/41ER

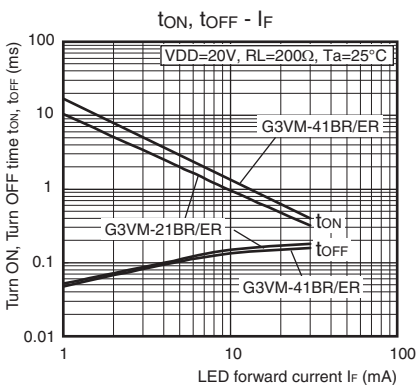

G3VM-61BR/61ER/61BR1/61ER1/101BR/101ER

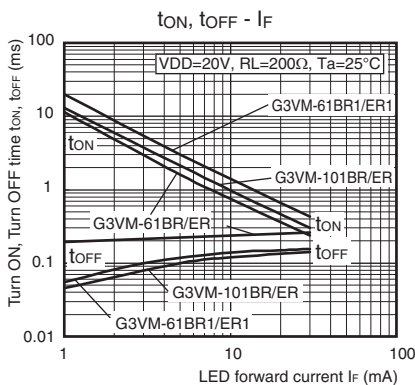

G3VM-31BR/31ER/61BR2/61ER2/101BR1/101ER1

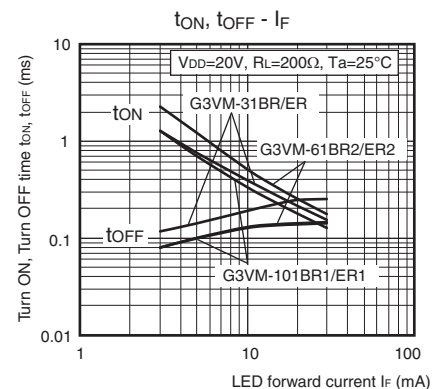


DIP G3VM-□1BR□/□1ER□


Engineering Data

Turn ON, Turn OFF time vs. Ambient temperature


G3VM-21BR/21ER/41BR/41ER

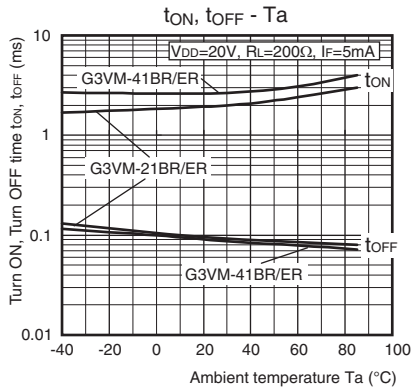

G3VM-61BR/61ER/61BR1/61ER1/101BR/101ER

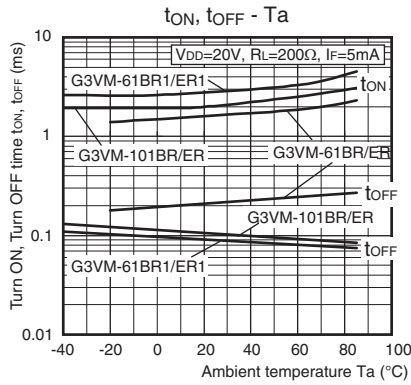


G3VM-31BR/31ER/61BR2/61ER2/101BR1/101ER1

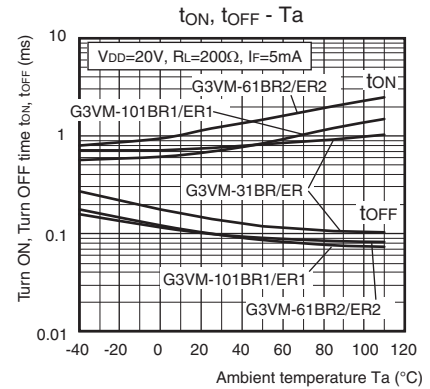


Current leakage vs. Ambient temperature

G3VM-21BR/21ER/41BR/41ER/61BR/61ER/61BR1/61ER1/101BR/101ER

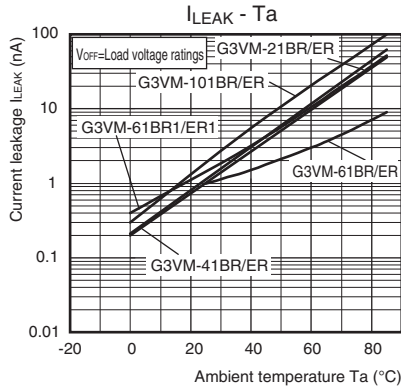

G3VM-31BR/31ER/61BR2/61ER2/101BR1/101ER1

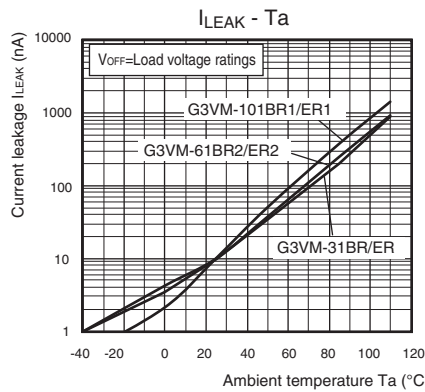


Appearance / Terminal Arrangement / Internal Connections

Appearance


DIP (Dual Inline Package)

DIP 6-pin

G3VM-21BR/ER, -31BR/ER, -41BR/ER, -61BR1/ER1, -61BR2/ER2, -101BR/ER, -101BR1/ER1

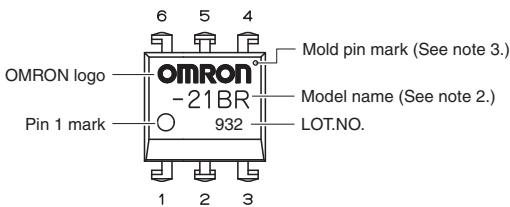


Special DIP 6-pin *
G3VM-61BR/ER

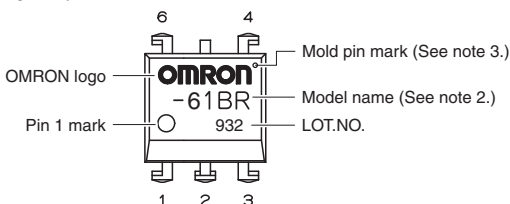


Terminal Arrangement/Internal Connections (Top View)

G3VM-21BR/ER, -31BR/ER, -41BR/ER, -61BR1/ER1, -61BR2/ER2, -101BR/ER, -101BR1/ER1



G3VM-61BR/ER



Note: 1. The actual product is marked differently from the image shown here.

Note: 2. "G3VM" does not appear in the model number on the Relay.

Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

* The external dimensions of the standard DIP 6-pin are the same, but the number of terminals is different.


■Dimensions

CAD Data marked products, 2D drawings and 3D CAD models are available.
For CAD information, please visit our website, which is noted on the last page.

(Unit: mm)



G3VM-21BR/31BR/41BR/61BR1/61BR2/
101BR/101BR1

G3VM-21ER/31ER/41ER/61ER1/61ER2/
101ER/101ER1




PCB Terminals

Weight: 0.4 g

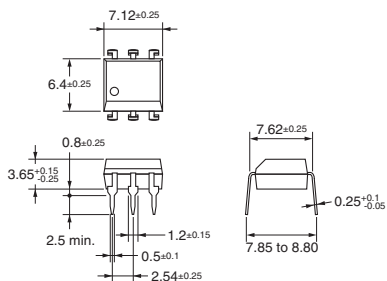


Surface-mounting Terminals

Weight: 0.4 g

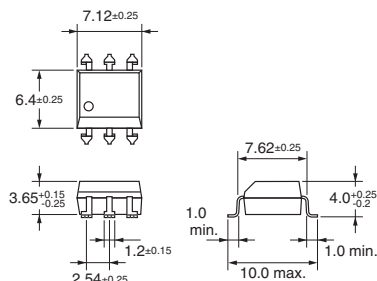


PCB Dimensions (BOTTOM VIEW)



Actual Mounting Pad Dimensions

(Recommended Value, Top View)




Note: The actual product is marked differently from the image shown here.

CAD Data



G3VM-61BR

G3VM-61ER




PCB Terminals

Weight: 0.4 g

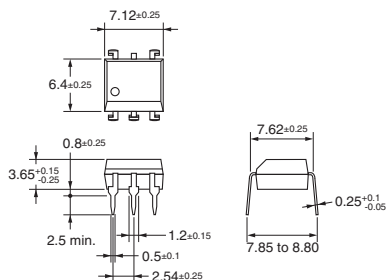


Surface-mounting Terminals

Weight: 0.4 g

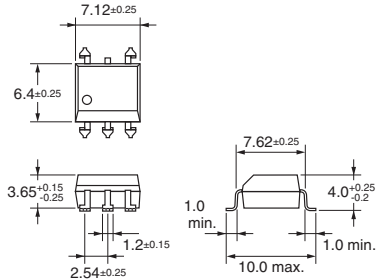


PCB Dimensions (BOTTOM VIEW)



Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Note: The actual product is marked differently from the image shown here.

CAD Data

■Approved Standards

UL recognized

| Approved Standards | Contact form | File No. |
|--------------------|--------------|----------|
| UL (recognized) | 1a (SPST-NO) | E80555 |

■Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* (www.fa.omron.co.jp/) for precautions that apply to all MOS FET Relays.

DIP

G3VM-□1BR□/□1ER□

Please check each region's Terms & Conditions by region website.

OMRON Corporation

Device & Module Solutions Company

Regional Contact

Americas

<https://components.omron.com/us>

Asia-Pacific

<https://components.omron.com/ap>

Korea

<https://components.omron.com/kr>

Europe

<https://components.omron.com/eu>

China

<https://components.omron.com.cn>

Japan

<https://components.omron.com/jp>