

FEATURES

- 12-Bit resolution, 400kHz throughput
- 8 Channels single-ended or 4 channels differential
- Miniature, 40-pin, ceramic DDIP
- Full scale input range from 100mV to 10V
- Three-state outputs
- No missing codes



INPUT/OUTPUT CONNECTIONS

| PIN | FUNCTION | PIN | FUNCTION |
|-----|--------------------|-----|----------------|
| 1 | CH0/CH0 HI | 40 | START CONVERT |
| 2 | CH1/CH1 HI | 39 | CA2 |
| 3 | CH2/CH2 HI | 38 | CA1 |
| 4 | CH3/CH3 HI | 37 | CA0 |
| 5 | CH7/CH3 LO | 36 | +5V SUPPLY |
| 6 | CH6/CH2 LO | 35 | DIGITAL GROUND |
| 7 | CH5/CH1 LO | 34 | ENABLE |
| 8 | CH4/CH0 LO | 33 | BIT 1 (MSB) |
| 9 | COMP BIN | 32 | BIT 2 |
| 10 | RGAIN LO | 31 | BIT 3 |
| 11 | RGAIN HI | 30 | BIT 4 |
| 12 | S/H OUT | 29 | BIT 5 |
| 13 | +10V REFERENCE OUT | 28 | BIT 6 |
| 14 | SIGNAL GROUND | 27 | BIT 7 |
| 15 | GAIN ADJUST | 26 | BIT 8 |
| 16 | OFFSET ADJUST | 25 | BIT 9 |
| 17 | BIPOLAR | 24 | BIT 10 |
| 18 | -15V SUPPLY | 23 | BIT 11 |
| 19 | ANALOG GROUND | 22 | BIT 12 (LSB) |
| 20 | +15V SUPPLY | 21 | EOC |

GENERAL DESCRIPTION

The HDAS-524 and HDAS-528 are complete data acquisition systems. Each contains an internal multiplexer, instrumentation amplifier, sample-hold, analog-to-digital converter and three-state outputs. Packaged in miniature, 40-pin, double-dip packages, the HDAS-524/528 have a low power dissipation of 2.6 Watts.


The HDAS-524 provides 4 differential inputs, and the HDAS-528 provides 8 single-ended inputs. An internal instrumentation amplifier is characterized for gains of 1, 2, 4, 8, 10 and 100. The gain range is selectable through a single external resistor.

HDAS-524/528 OPERATION

The HDAS devices accept either 8 single-ended or 4 differential input signals. Tie unused channels to SIGNAL GROUND, pin 14. Channel selection is accomplished using the multiplexer address pins as shown in Table 1. Obtain additional channels by connecting external multiplexers.

The acquisition time is the amount of time the multiplexer, instrumentation amplifier and sample-hold require to settle within a specified range of accuracy. The acquisition time can be measured by how long EOC is low before the rising edge of the START CONVERT pulse for continuous operation. Higher

Continued on page 3

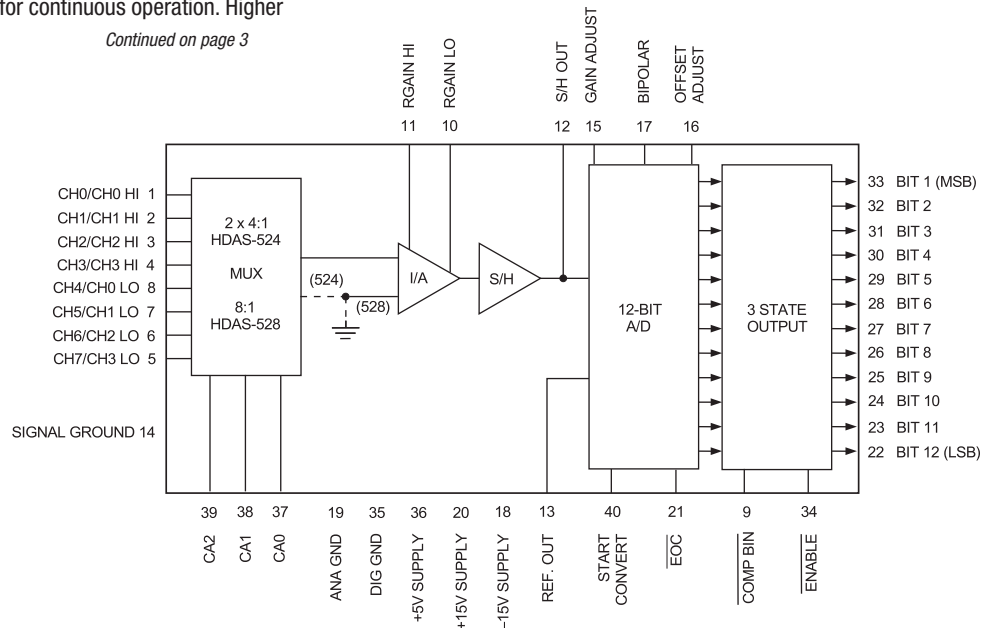

Typical topology is shown.

Figure 1. Functional Block Diagram

ABSOLUTE MAXIMUM RATINGS

| PARAMETERS | MIN. | TYP. | MAX. | UNITS |
|-----------------------------------|------|------|-----------------------|-------|
| +15V Supply, Pin 20 | 0 | — | +18 | Volts |
| -15V Supply, Pin 18 | 0 | — | -18 | Volts |
| +5V Supply, Pin 36 | -0.5 | — | +7 | Volts |
| Digital Inputs, Pins 9, 34, 37-40 | -0.3 | — | +V _{DD} +0.3 | Volts |
| Analog Inputs, Pins 1-8 | -14 | — | +14 | Volts |
| Lead Temperature (10 seconds) | — | — | 300 | °C |

FUNCTIONAL SPECIFICATIONS

(Apply over the operating temperature range with ±15V and +5V supplies unless otherwise specified.)

| ANALOG INPUTS | MIN. | TYP. | MAX. | UNITS |
|---|---|------------------|-------|--------|
| Number of Inputs | 4 differential inputs 8 single-ended inputs | | | |
| Input Voltage Ranges | 0 to +10V, ±10V 0 to +100mV, ±100mV | | | |
| Gain = 1 | 0 to +10V, ±10V | | | |
| Gain = 100 | 0 to +100mV, ±100mV | | | |
| I.A. Gain Ranges | 1, 2, 4, 8, 10, 100 | | | |
| Input Impedance | 10 ¹¹ | 10 ¹² | — | Ohms |
| CH On, CH Off | | | | |
| Input Capacitance | — | — | 12 | pF |
| (-524) CH On, CH Off | — | — | 25 | pF |
| (-528) CH On, CH Off | — | — | ±200 | pA |
| Input Bias Current | — | — | ±50 | pA |
| Input Offset Current | — | — | ±10 | mV |
| Input Offset Voltage | ±11 | — | — | Volts |
| Common Mode Voltage Range | 72 | 80 | — | dB |
| CMRR, G = 1, @10Hz, V_{cm} = 1Vp-p | — | — | 200 | μV |
| Voltage Noise (RMS) | — | — | 50 | μV |
| Gain = 1 | — | — | — | dB |
| Gain = 8 | -72 | — | — | Ohms |
| MUX Crosstalk @125kHz | — | 450 | 500 | Ohms |
| MUX ON Resistance | Doubles (max.) every 10°C above +70°C | | | |
| Bias Current Tempco | Doubles (max.) every 10°C above +70°C | | | |
| Offset Current Tempco | (±30ppm/°C x gain) ±20ppm/°C (max.) | | | |
| Offset Voltage Tempco | GAIN = $\frac{2k\Omega}{R_{GAIN}} + 1$ | | | |
| Input Gain Equation | | | | |
| DIGITAL INPUTS | | | | |
| Logic Levels | +2.0 | — | — | Volts |
| Logic 1 | — | — | +0.5 | Volts |
| Logic 0 | — | — | +5 | μA |
| Logic Loading | — | — | -600 | μA |
| Logic 1 | — | — | — | μA |
| Logic 0 | — | — | — | μA |
| OUTPUTS | | | | |
| Logic Levels | +2.4 | — | — | Volts |
| Logic 1 | — | — | +0.4 | Volts |
| Logic 0 | — | — | -160 | μA |
| Logic Loading | — | — | +4.8 | mA |
| Logic 1 | — | — | — | mA |
| Logic 0 | — | — | — | mA |
| Internal Reference | +9.9 | +10.0 | +10.1 | Volts |
| Voltage, +25°C | — | ±5 | ±35 | ppm/°C |
| Drift | — | — | 1.5 | mA |
| External Current | Straight binary/Offset binary Comp. binary/Comp. offset binary | | | |
| Output Coding | | | | |

Footnotes:

① Specifications valid at +25°C and over the temperature ranges of 0 to +70°C, -40 to 100°C or -55 to +125°C.

| PERFORMANCE | MIN. | TYP. | MAX. | UNITS |
|---|----------------------------------|--------|--------|---------|
| Resolution | 12 | — | — | Bits |
| Integral Nonlinearity, +25°C | — | — | ±0.75 | LSB |
| 0 to +70°C | — | — | ±0.75 | LSB |
| -55 to +125°C | — | — | ±1.5 | LSB |
| Differential Nonlinearity, +25°C | — | — | ±0.75 | LSB |
| 0 to +70°C | — | — | ±0.75 | LSB |
| -55 to +125°C | — | — | ±1 | LSB |
| F.S. Abs. Accuracy, +25°C | — | ±0.13 | ±0.3 | %FSR |
| 0 to +70°C | — | ±0.15 | ±0.5 | %FSR |
| -55 to +125°C | — | ±0.25 | ±0.78 | %FSR |
| Unipolar Zero Error, +25°C | — | ±0.074 | ±0.15 | %FSR |
| Unipolar Zero Tempco | — | ±15 | ±30 | ppm/°C |
| Bipolar Zero Error, +25°C | — | ±0.074 | ±0.15 | %FSR |
| Bipolar Zero Tempco | — | ±5 | ±10 | ppm/°C |
| Bipolar Offset Error, +25°C | — | ±0.1 | ±0.25 | %FSR |
| Bipolar Offset Tempco | — | ±20 | ±40 | ppm/°C |
| Gain Error, +25°C | — | ±0.1 | ±0.25 | % |
| Gain Tempco | — | ±20 | ±40 | ppm/°C |
| Harmonic Distortion (-FS) | — | — | — | dB |
| (DC to 5kHz, 10Vp-p) ① | -65 | -73 | — | |
| No Missing Codes | Over operating temperature range | | | |
| SIGNAL TIMING | | | | |
| Enable to Data Valid Delay | — | — | 10 | ns |
| MUX Address Set-up Time | 400 | — | — | ns |
| Start Convert Pulse Width | 50 | 100 | — | ns |
| Data Valid After | — | — | 20 | ns |
| EOC Signal Goes Low | — | — | 800 | ns |
| Conversion Time, +25°C | — | — | 850 | ns |
| 0 to +70°C | — | — | 880 | ns |
| -55 to +125°C | — | — | — | ns |
| Throughput Rates ① | 400 | — | — | kHz |
| Gain = 1 | 325 | — | — | kHz |
| Gain = 2 | 275 | — | — | kHz |
| Gain = 4 | 225 | — | — | kHz |
| Gain = 8 | 175 | — | — | kHz |
| Gain = 10 | 40 | — | — | kHz |
| Gain = 100 | — | — | — | kHz |
| S/H PERFORMANCE | | | | |
| Acquisition Time | — | 500 | 900 | ns |
| Full-Scale Step to ±0.01% | — | 400 | 750 | ns |
| Full-Scale Step to ±0.1% | -50 | -20 | 0 | ns |
| Aperture Delay | — | — | ±150 | ps |
| Aperture Uncertainty | ±70 | ±90 | — | V/μs |
| Slew Rate | — | — | — | ns |
| Hold Mode Settling Time | — | 100 | 200 | ns |
| To ±1mV | — | 75 | 150 | ns |
| To ±10mV | 80 | 88 | — | dB |
| Feedthrough Rejection | — | 0.1 | 100 | μV/μs |
| Droop Rate ① | | | | |
| POWER SUPPLIES | | | | |
| Range, +15V Supply | +14.25 | +15.0 | +15.75 | Volts |
| -15V Supply | -14.25 | -15.0 | -15.75 | Volts |
| +5V Supply | +4.75 | +5.0 | +5.25 | Volts |
| Current, +15V Supply | — | +78 | +90 | mA |
| -15V Supply | — | -72 | -82 | mA |
| +5V Supply | — | +75 | +95 | mA |
| Power Dissipation | — | 2.6 | 3 | Watts |
| Power Supply Rejection | — | — | ±0.05 | %FSR/%V |
| PHYSICAL/ENVIRONMENTAL | | | | |
| Oper. Temp. Range, Case | 0 | — | +70 | °C |
| -MC, -MC-C | -40 | — | +100 | °C |
| -ME, -ME-C | -55 | — | +125 | °C |
| -MM, -MM-C, 883, -C/883 | -65 | — | +150 | °C |
| Storage Temp. Range | | | | |
| Package Type | 40-pin ceramic DDIP | | | |
| Weight | 0.32 ounces (9 grams) | | | |

gains require the use of the R_{GAIN} resistor to increase the acquisition time. The gain is equal to 1 without an R_{GAIN} resistor. Table 2 refers to the appropriate R_{GAIN} resistors for various throughputs.

The HDAS devices enter the hold mode and are ready for conversion upon the start convert going high. The conversion is complete within a maximum of 800ns (+25°C). EOC returns low, the data is valid and sent to the three-state output buffers. The sample/hold is now ready to acquire new data.

TABLE 1. MUX CHANNEL ADDRESSING

| MUX ADDRESS PINS | | | CHANNEL | |
|------------------|-----------|-----------|---------|-----------------|
| 39 CA2 | 38 CA1 | 37 CA0 | | |
| 0 | 0 | 0 | 0 | |
| 0 | 0 | 1 | 1 | HDAS-524 |
| 0 | 1 | 0 | 2 | (2-BIT ADDRESS) |
| 0 | 1 | 1 | 3 | |
| 1 | 0 | 0 | 4 | |
| 1 | 0 | 1 | 5 | HDAS-528 |
| 1 | 1 | 0 | 6 | (3-BIT ADDRESS) |
| 1 | 1 | 1 | 7 | |

TABLE 2. INPUT RANGE PARAMETERS

| INPUT RANGE | GAIN | R_{GAIN} | THROUGHPUT |
|-------------|------|--------------|------------|
| 0 to +10V | 1 | OPEN | 400kHz |
| 0 to +5V | 2 | 2k Ω | 325kHz |
| 0 to +2.5V | 4 | 665 Ω | 275kHz |
| 0 to +1.25V | 8 | 287 Ω | 225kHz |
| 0 to +1V | 10 | 221 Ω | 175kHz |
| 0 to +100mV | 100 | 20 Ω | 40kHz |
| $\pm 10V$ | 1 | OPEN | 400kHz |
| $\pm 5V$ | 2 | 2k Ω | 325kHz |
| $\pm 2.5V$ | 4 | 665 Ω | 275kHz |
| $\pm 1.25V$ | 8 | 287 Ω | 225kHz |
| $\pm 1V$ | 10 | 221 Ω | 175kHz |
| $\pm 100mV$ | 100 | 20 Ω | 40kHz |

$$R_{GAIN} = \frac{2k\Omega}{(GAIN - 1)} \quad GAIN = \frac{2k\Omega}{R_{GAIN}} + 1$$

TABLE 3. ZERO AND GAIN ADJUST

| INPUT RANGE | ZERO ADJUST +1/2LSB | GAIN ADJUST +FS - 1 1/2LSB |
|-------------|------------------------|-------------------------------|
| 0 to +10V | +1.22mV | +9.9963V |
| $\pm 10V$ | +2.44mV | +9.9927V |

CALIBRATION PROCEDURE

1. Connect the converter per Figure 2 and Tables 2 and 3 for the appropriate input range. Apply a pulse of 100 nano-seconds (typical) to the START CONVERT input (pin 40) at a rate of 100kHz. This rate is chosen to reduce flicker if LED's are used on the outputs for calibration purposes.
2. Zero Adjustments
Apply a precision voltage reference source between the analog input and SIGNAL GROUND (pin 14). Adjust the output of the reference source per Table 3. For unipolar, adjust the zero trimming potentiometer so that the output code flickers equally between 0000 0000 0000 and 0000 0000 0001 with the COMP BIN (pin 9) tied high (straight binary) or between 1111 1111 1111 and 1111 1111 1110 with the COMP BIN (pin 9) tied low (complementary binary).
For bipolar operation, adjust the potentiometer such that the code flickers equally between 1000 0000 0000 and 1000 0000 0001 with COMP BIN (pin 9) tied high (offset binary) or between 0111 1111 1111 and 0111 1111 1110 with COMP BIN (pin 9) tied low (complementary offset binary).
3. Full-Scale Adjustment
Set the output of the voltage reference used in step 2 to the value shown in Table 3. Adjust the gain trimming potentiometer so that the output code flickers equally between 1111 1111 1110 and 1111 1111 1111 or 0000 0000 0001 and 0000 0000 0000 for complementary coding.
4. To confirm proper operation of the device, vary the precision reference voltage source to obtain the output coding listed in Table 4.

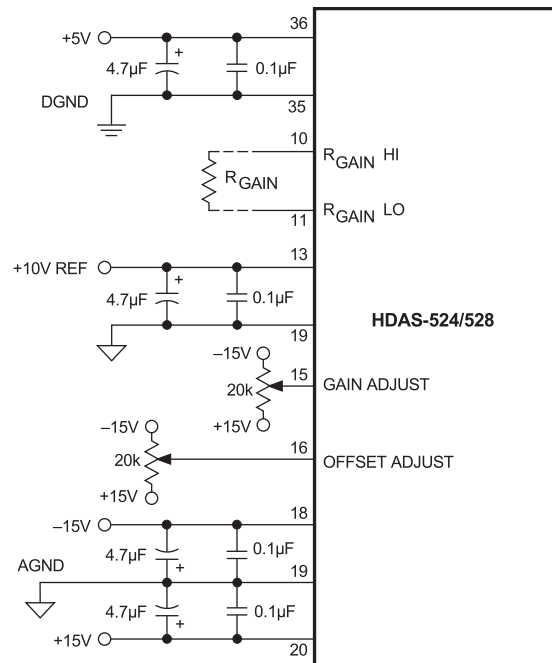


Figure 2. Typical Connection Diagram

Notes:

1. For unipolar operation, connect pin 12 to pin 17.
2. For bipolar operation, connect pin 13 to pin 17.
3. Position R_{GAIN} as close as possible to pins 10 and 11. Use RN55C, 1% resistors.
4. If gain and offset adjusts are not used, connect pin 15 to ground and leave pin 16 open.

TECHNICAL NOTES

- Rated performance requires using good high-frequency circuit board layout techniques. The analog and digital ground pins are not connected to each other internally. Avoid ground-related problems by connecting the analog, signal and digital grounds to one point, the ground plane beneath the converter. Due to the inductance and resistance of the power supply return paths, return the analog and digital grounds separately to the power supplies. This prevents contamination of the analog ground by noisy digital ground currents.
- Double-level multiplexing allows expanding the multiplexer channel capacity of the HDAS-528 from 8 single-ended channels to 128 single-ended channels or the HDAS-524 from 4 differential channels to 32 differential channels.
- Obtain straight binary/offset binary output coding by tying $\overline{\text{COMP BIN}}$ (pin 9) to +5V or leaving it open. The device has an internal pull-up resistor on this pin. To obtain complementary binary or complementary offset binary output coding, tie pin 9 to ground. The $\overline{\text{COMP BIN}}$ signal is compatible to CMOS/TTL logic levels for those users desiring logic control of this function.
- To enable the three-state outputs, connect $\overline{\text{ENABLE}}$ (pin 34) to a logic "0" (low). To disable, connect pin 34 to a logic "1" (high).


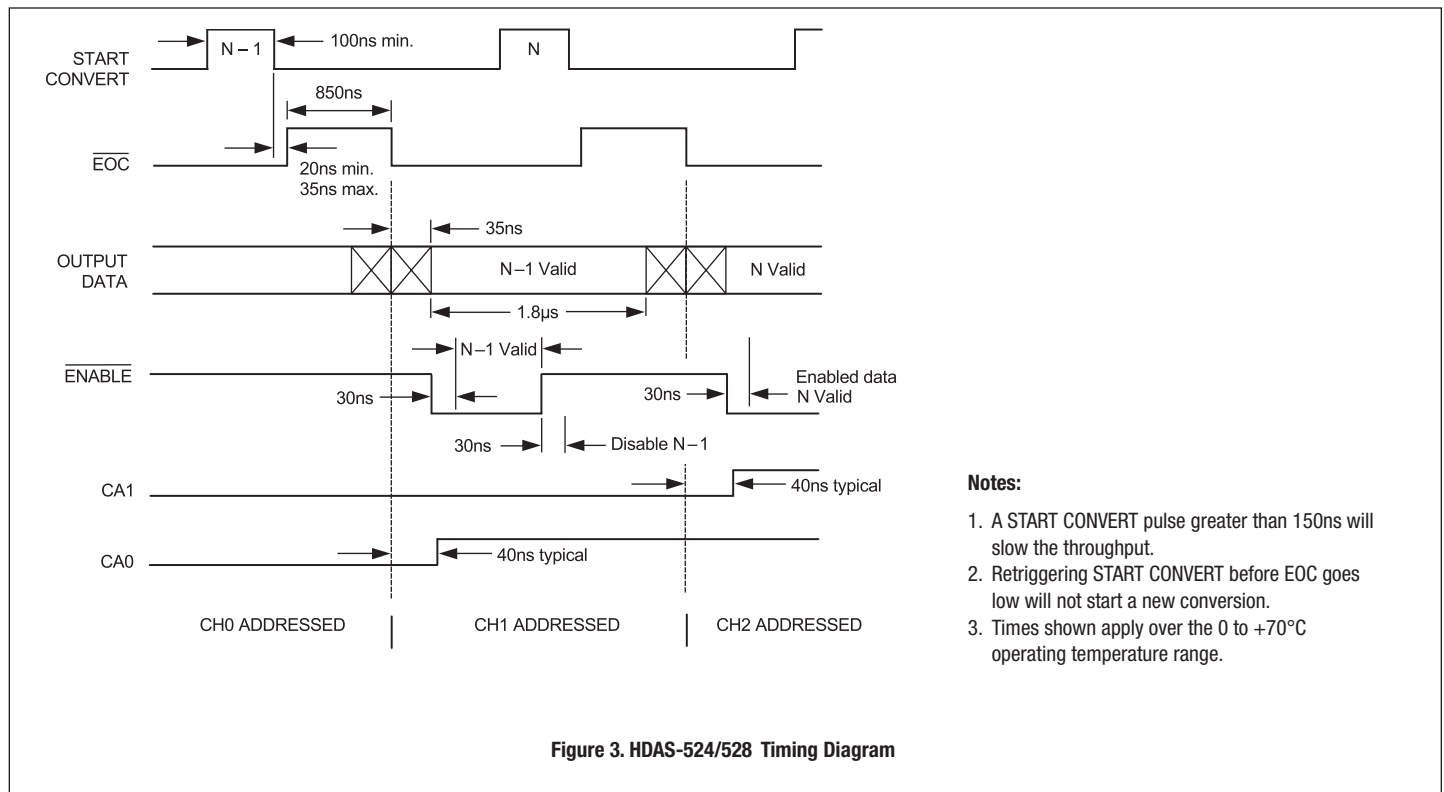


Table 4. Output Coding

| UNIPOLAR SCALE | INPUT RANGE 0 to +10V | STRAIGHT BINARY | | COMP. BINARY | | INPUT RANGE ±10V | BIPOLAR SCALE |
|----------------|--------------------------|-----------------|-----------|--------------|-----------|---------------------|---------------|
| | | MSB | LSB | MSB | LSB | | |
| +FS – 1LSB | +9.9976V | 1111 | 1111 1111 | 0000 | 0000 0000 | +9.9951V | +FS – 1LSB |
| +7/8FS | +8.7500V | 1110 | 0000 0000 | 0001 | 1111 1111 | +7.5000V | +3/4FS |
| +3/4FS | +7.5000V | 1100 | 0000 0000 | 0011 | 1111 1111 | +5.0000V | +1/2FS |
| +1/2FS | +5.0000V | 1000 | 0000 0000 | 0111 | 1111 1111 | 0.0000V | 0 |
| +1/4FS | +2.5000V | 0100 | 0000 0000 | 1011 | 1111 1111 | -5.0000V | -1/2FS |
| +1/8FS | +1.2500V | 0010 | 0000 0000 | 1101 | 1111 1111 | -7.5000V | -3/4FS |
| +1LSB | +0.0024V | 0000 | 0000 0001 | 1111 | 1111 1110 | -9.9951V | -FS + 1LSB |
| 0 | 0.0000V | 0000 | 0000 0000 | 1111 | 1111 1111 | -10.0000V | -FS |

OFFSET BINARY COMP. OFF. BINARY

Mechanical Dimensions
INCHES (mm)

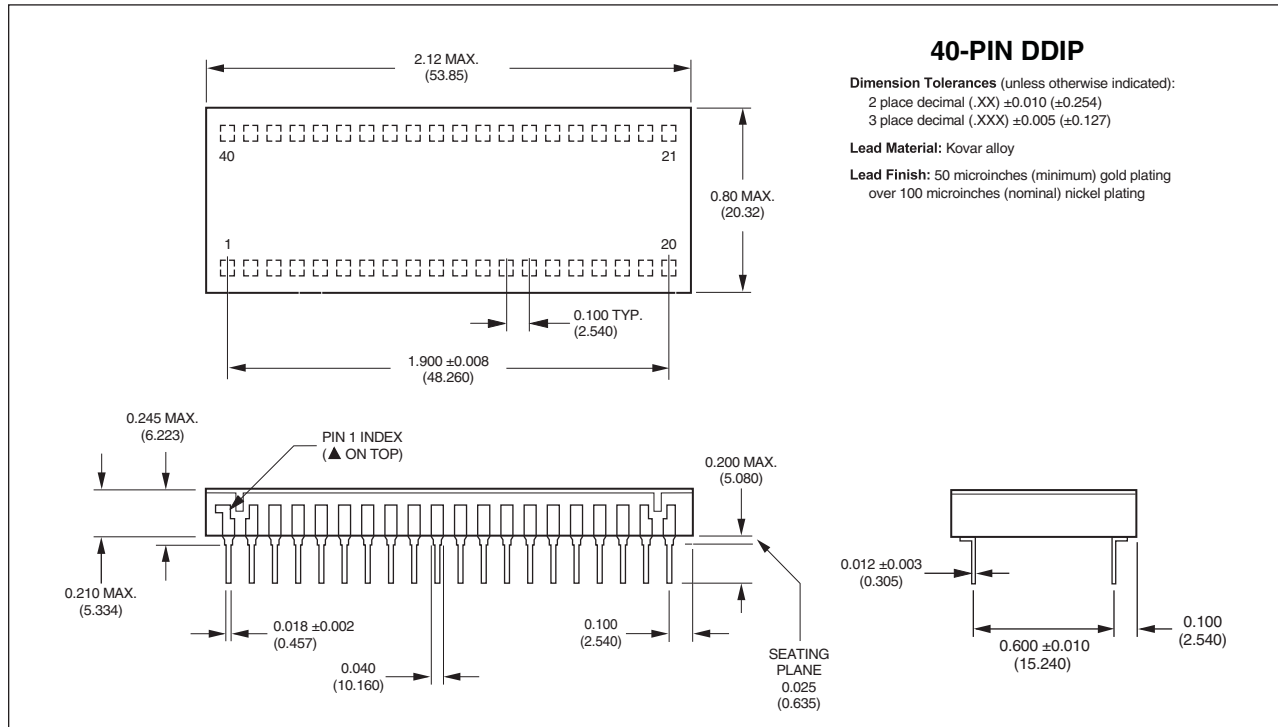

ORDERING INFORMATION

| Model No. | Input | Operating Temp. Range | RoHS Compliance |
|----------------|-------------|-----------------------|-----------------|
| HDAS-524MC | 4D Channels | 0 to +70°C | Non-RoHS |
| HDAS-524MC-C | 4D Channels | 0 to +70°C | RoHS |
| HDAS-524ME | 4D Channels | -40 to +100°C | Non-RoHS |
| HDAS-524ME-C | 4D Channels | -40 to +100°C | RoHS |
| HDAS-524MM | 4D Channels | -55 to +125°C | Non-RoHS |
| HDAS-524MM-C | 4D Channels | -55 to +125°C | RoHS |
| HDAS-524/883 | 4D Channels | -55 to +125°C | Non-RoHS |
| HDAS-524-C/883 | 4D Channels | -55 to +125°C | RoHS |
| HDAS-528MC | 8D Channels | 0 to +70°C | Non-RoHS |
| HDAS-528MC-C | 8D Channels | 0 to +70°C | RoHS |
| HDAS-528ME | 8D Channels | -40 to +100°C | Non-RoHS |
| HDAS-528ME-C | 8D Channels | -40 to +100°C | RoHS |
| HDAS-528MM | 8D Channels | -55 to +125°C | Non-RoHS |
| HDAS-528MM-C | 8D Channels | -55 to +125°C | RoHS |
| HDAS-528/883 | 8D Channels | -55 to +125°C | Non-RoHS |
| HDAS-528-C/883 | 9D Channels | -55 to +125°C | RoHS |

Receptacle for PC board mounting can be ordered through AMP Inc., Part #3-331272-8 (Component Lead Socket), 40 required.

Contact DATEL for MIL-STD-883 product specifications.

ISO 9001
REGISTERED

DATEL is a registered trademark of
Murata Power Solutions, Inc.
 11 Cabot Boulevard, Mansfield, MA 02048-1151 USA
 ITAR and ISO 9001/14001 REGISTERED

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

© 2012 Murata Power Solutions, Inc.

www.datel.com • e-mail: help@datel.com