

ADSL-Transformer WSL-A22.303

Specifications



Application
Generic

Features

Optimized magnetic shielding for low interference
High performance, high quality design
SMT and THT package available

Packaging

100 pcs./tray
7 trays/carton

Solderability

270 - 300°C


Isolation voltage

1650 VAC

Operation Temperature Range

-40°C to +85°C


Marking

 article-no.

Unit Weight

7g

Schematics & Mechanicals (mm)




WebLinks

Data Sheet



www.wickmann.com/products/WSL_A22303.pdf

Packaging

www.wickmann.com/pack



BLACK DOT IS PIN NO.1

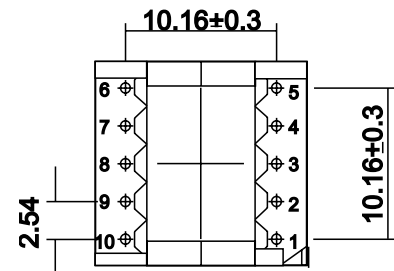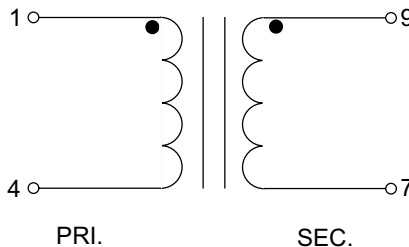

DC Resistance:	9,3 Ω (1-4) max. ±10% 11,5 Ω (9-7) max. ±10%
Open Circuit Inductance:	5,5mH (1-4) ±5% @ 10kHz, 100mVAC 5,5mH (9-7) ±5% @ 10kHz, 100mVAC
Total Harmonic Distortion (THD):	-

Order Information

Qty.	Order Number
	960 4 622303 9