




1		2		3		4		5		6		7		8	
REVISIONS															
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE													

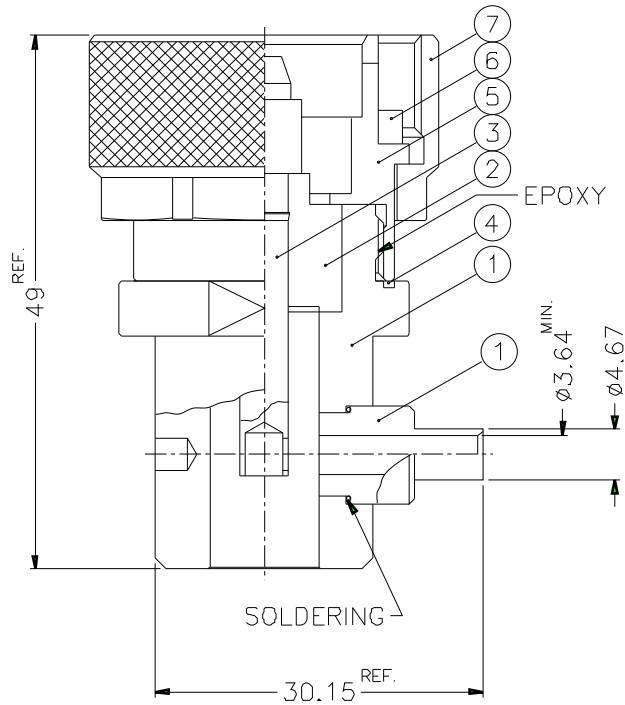

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)  
 1. BRASS PER QQ-B-626  
 2. SILVER PL. 120 MIN. THICK OVER COPPER STRIKE  
 3. SILVER PL. 200 MIN. THICK OVER COPPER STRIKE  
 4. TEFLON MIL-P-19468



1. CONTACT PIN TO SOLDER

9	GASKET	SILICONE	BLACK	1	GS-101/65XD18
8	COVER	NOTE 1	NOTE 2	1	7161142A1-13
7	SHELL	NOTE 1	NOTE 2	1	7161141A1-7
6	GASKET	SILICONE	RED	1	GS-25/205X35
5	CONTACT BODY	NOTE 1	NOTE 2	1	7161141A1-5
4	GASKET	SILICONE	RED	1	GS-24/22XD1
3	CONTACT PIN	NOTE 1	NOTE 3	1	7161142A1-3-3/8
2	INSULATOR	NOTE 4	NATURAL	1	7161142A1-2T-3/8
1	MAIN BODY	NOTE 1	NOTE 2	1	MB00AAA01A
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS			PART NO. 7161182A1-120STS-10-50	
UNLESS OTHERWISE SPECIFIED TOLERANCES			APPROVED	DATE
0.5-6	= ±0.2			10-11-01'
6-30	= ±0.4		CHECKED	DATE
30-120	= ±0.6			10-11-01'
120-315	= ±1		DRAWN	DATE
315-1000	= ±1.6			10-11-01'
1000-2000	= ±2.4		FILE NO.	

<b>Amphenol</b>	
TITLE 7/16 R/A SEMI-RIGID PLUG (FOR .141")	
DRAWING NO. KJ-7161182A1-120STS-.141-50	
ITEM NO.	

1		2		3		4		5		6		7		8	
---	--	---	--	---	--	---	--	---	--	---	--	---	--	---	--