

PRELIMINARY

Notice: This is not a final specification.
Some parametric limits are subject to change.


7-ELEMENT GRAPHIC EQUALIZER WITH MICROCOMPUTER INTERFACE

DESCRIPTION

The M62431FP is 2-channel 7-band graphic equalizer IC developed for home audio, car audio sets, etc. This IC can be control by serial data from microcomputer.

FEATURES


- Be able to operate with serial data from microcomputer
- Can be gaining control of 7-band ($\pm 10\text{dB}$ and 2dB steps)
- Power supply is single power supply or \pm power supplies
- Low noise V_{NO} (flat) = $5\mu\text{Vrms}$ (typ) <JIS-A>
- Low distortion THD = 0.005% (typ) <HPF400Hz, LPF30kHz>



RECOMMENDED OPERATING CONDITION

Supply voltage range..... AV_{DD} , $AV_{SS} = \pm 4.5$ to $\pm 7.0\text{V}$
(2 power supplies)
Or, $AV_{DD} = 9$ to 14V
(Single power supply $AV_{SS} = 0\text{V}$)
 $DV_{DD} = 4.5$ to 5.5V
(However, $DV_{DD} \leq AV_{DD}$)

Outline 56P6N-A
0.8mm pitch QFP
(14.0mmX10.0mmX2.8mm)

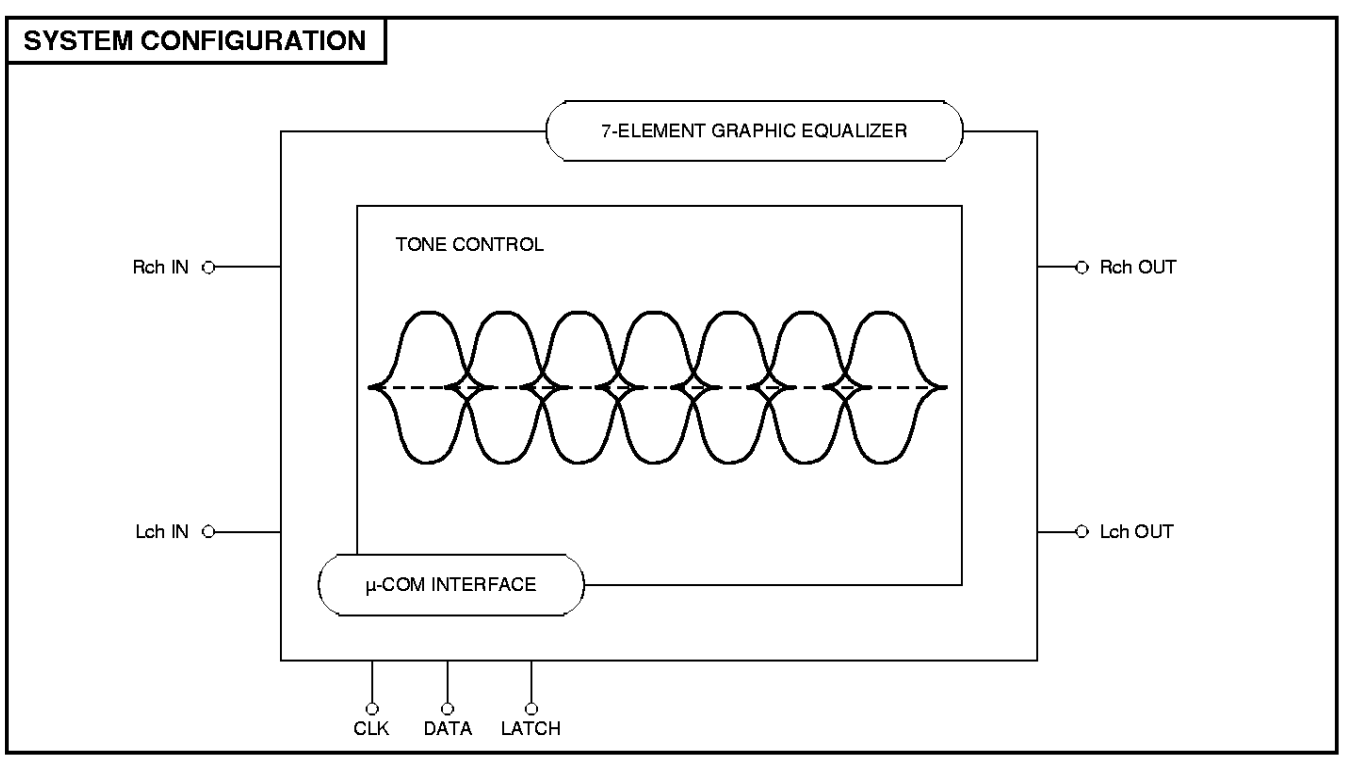


PRELIMINARY

Notice: This is not a final specification.
Some parametric limits are subject to change.

7-ELEMENT GRAPHIC EQUALIZER WITH MICROCOMPUTER INTERFACE


PIN CONFIGURATION (TOP VIEW)

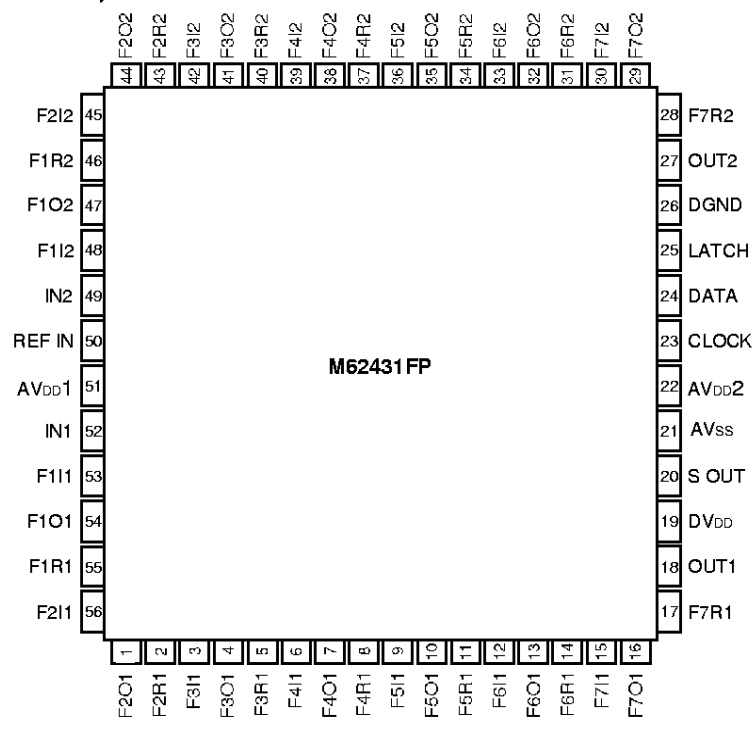

Outline 56P6N-A

NC:NO CONNECTION

IC INTERNAL BLOCK DIAGRAM

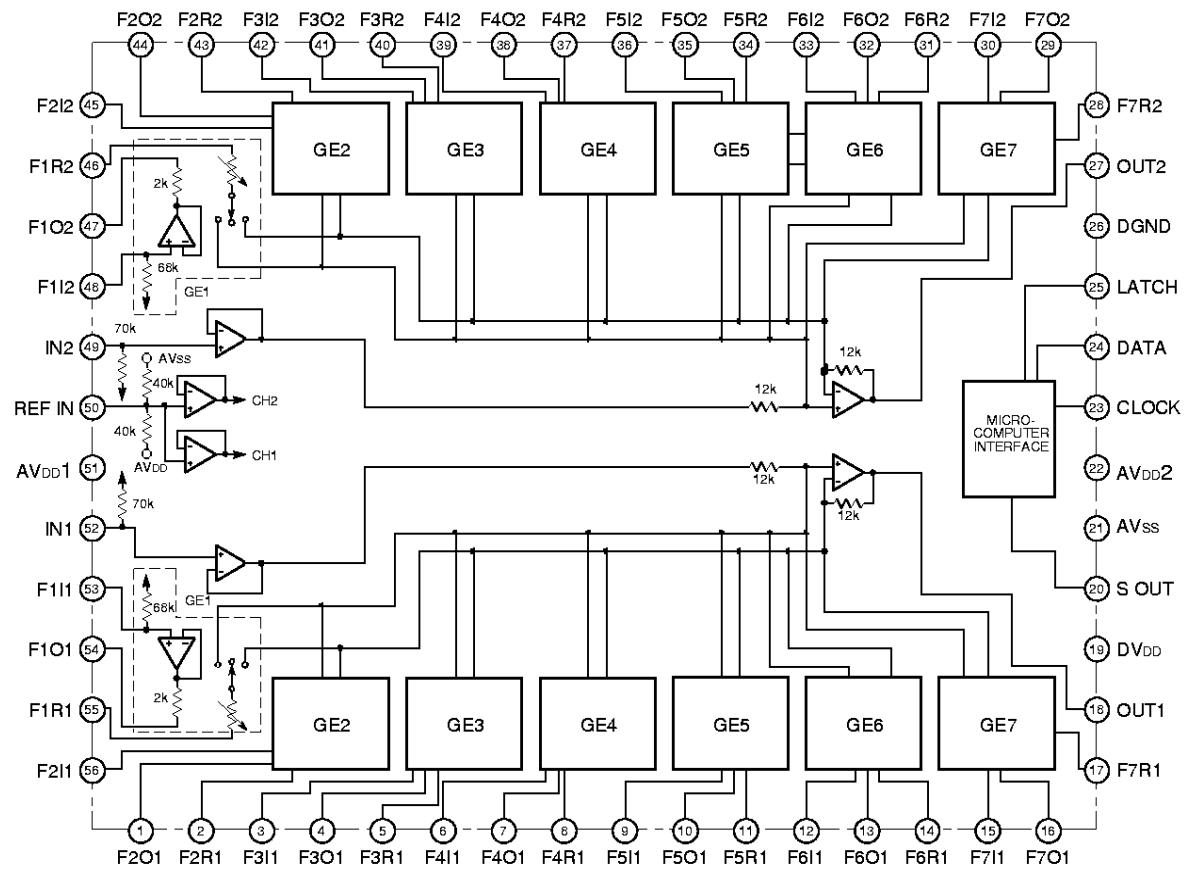

PRELIMINARY
 Notice: This is not a final specification.
 Some parametric limits are subject to change.

7-ELEMENT GRAPHIC EQUALIZER WITH MICROCOMPUTER INTERFACE

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Conditions	Ratings	Unit
AVDD, AVSS	Analog supply voltage		14.6 (single) ± 7.3 (\pm supply)	V
DVDD	Digital supply voltage		7.0	V
P _d	Power dissipation	T _a ≤ 25°C	1000	mW
K _θ	Thermal derating	T _a > 25°C Equipped with standard board (Note 2)	10.0	mW/°C
T _{opr}	Operating temperature		-20 to +60	°C
T _{stg}	Storage temperature		-40 to +125	°C

RECOMMENDED OPERATING CONDITION (T_a = 25 °C, unless otherwise noted)


Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
AVDD	Analog positive supply voltage	Note 1	4.5	6.0	7.0	V
AVSS	Analog negative supply voltage	Note 1	-4.5	-6.0	-7.0	V
DVDD	Digital supply voltage	DVDD ≤ AVDD	4.5	5.0	5.5	V
V _{IH}	Logic "H" level input voltage	DVDD = 5V	DVDD × 0.8	—	DVDD	V
V _{IL}	Logic "L" level input voltage	DVDD = 5V	0	—	DVDD × 0.2	V

Note 1. When the IC use \pm power supplies, the first, provide to AVDD the supply voltage, and then provide to AVSS. The DVDD voltage must not supply before the analog supply voltage provide.

2. Standard circuit board.

- board size : 70mm X 70mm
- board thickness : 1.6mm
- board material : Glass epoxy
- copper pattern
- copper thickness : 18 μ m
- copper size : 0.25mm (width) X 25mm (length/lead)

RELATIONSHIPS BETWEEN DATA AND CLOCK

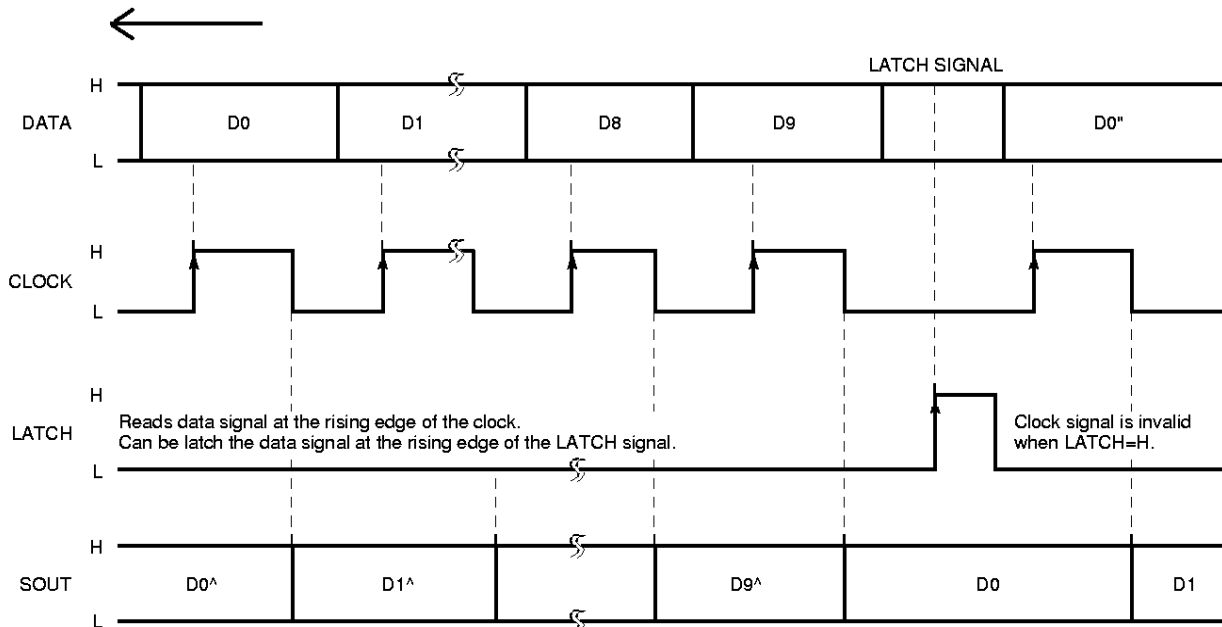


PRELIMINARY

Notice: This is not a final specification.
Some parametric limits are subject to change.

7-ELEMENT GRAPHIC EQUALIZER WITH MICROCOMPUTER INTERFACE

TIMINGS OF CLOCKS AND DATA

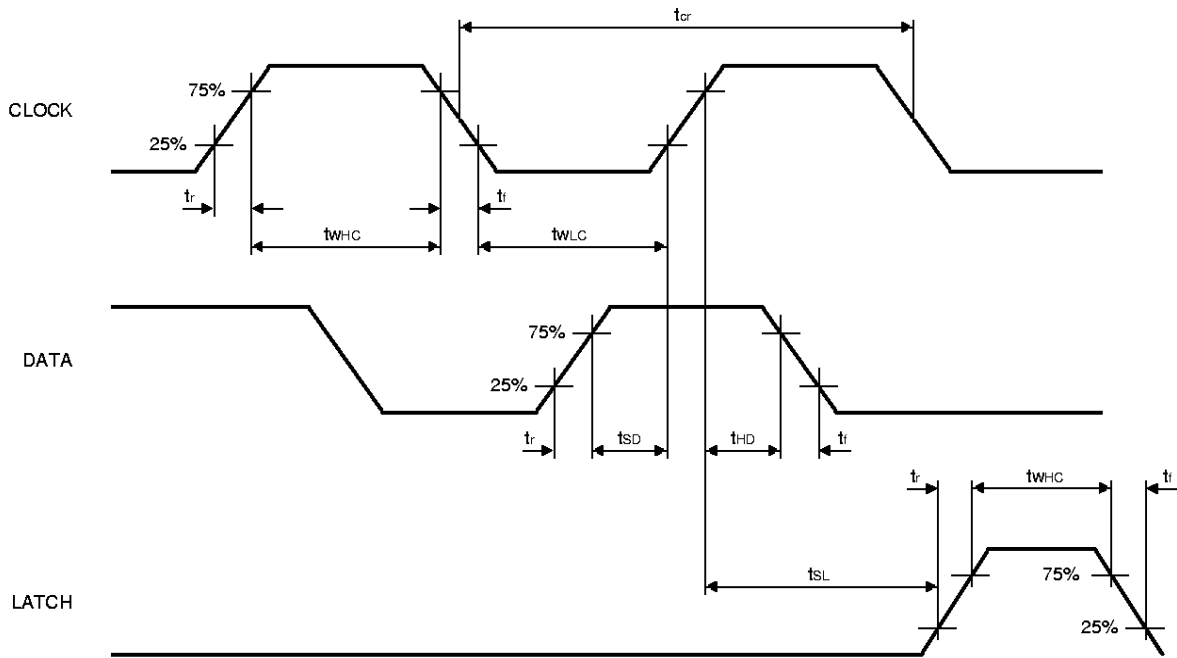

DEFINITION OF TIMING IN DIGITAL PART

Symbol	Parameter	Limits			Unit
		Min.	Typ.	Max.	
t_{cr}	CLOCK cycle time	4.0	-	-	μsec
t_{wHC}	CLOCK pulse width ("H" level)	1.6	-	-	μsec
t_{wLC}	CLOCK pulse width ("L" level)	1.6	-	-	μsec
t_r	Rising time of CLOCK, DATA, LATCH	-	-	0.4	μsec
t_f	Falling time of CLOCK, DATA, LATCH	-	-	0.4	μsec
t_{SD}	DATA setup time	0.8	-	-	μsec
t_{HD}	DATA hold time	0.8	-	-	μsec
t_{SL}	LATCH setup time	1.0	-	-	μsec
t_{wHL}	LATCH pulse width	1.6	-	-	μsec

PRELIMINARY

Notice: This is not a final specification.
Some parametric limits are subject to change.

7-ELEMENT GRAPHIC EQUALIZER WITH MICROCOMPUTER INTERFACE

DATA INPUT FORMAT

The 7-band tone control can be set by changing the Band setting of D8/D9.

(Initialize all data when power supply is turned on.)

← Input direction

D0	D1	D2	D3	D4	D5	D6	D7	D8	D9
Tone control setting 1				Tone control setting 2				Band setting	

(1) Tone control setting table (Gains)

(Settings except for the settings below are inhibited.)

Tone setting	D0/D4	D1/D5	D2/D6	D3/D7
0dB	0	0	0	0
+2dB	0	0	0	1
+4dB	0	0	1	0
+6dB	0	0	1	1
+8dB	0	1	0	0
+10dB	0	1	0	1
0dB	1	0	0	0
-2dB	1	0	0	1
-4dB	1	0	1	0
-6dB	1	0	1	1
-8dB	1	1	0	0
-10dB	1	1	0	1

(2) Band setting table

Setting 1	Setting 2	D8	D9
GE 1	GE 2	0	0
GE 3	GE 4	0	1
GE 5	GE 6	1	0
GE 7	—	1	1

ELECTRICAL CHARACTERISTICS


($T_a=25^\circ\text{C}$, $V_{DD}=6.0\text{V}$, $V_{SS}=-6.0\text{V}$, $V_{DB}=5.0\text{V}$, $f=1\text{kHz}$, unless otherwise noted. Tone control bass boost is set to 0dB.)

Symbol	Parameter	Test conditions	Limits			Unit	
			Min.	Typ.	Max.		
AlDD	Analog positive power circuit current	No signal provided	15	30	45	mA	
AlSS	Analog negative power circuit current	No signal provided	-45	-30	-15	mA	
DlDD	Digital power circuit current	No signal provided	0.05	0.3	1.2	mA	
Rin	Input resistance		35	70	120	k Ω	
VIM	Maximum input voltage	$R_L=10\text{k}\Omega$, THD=1%	3.0	3.5	—	Vrms	
Vodc	Output pin voltage		-0.3	0	0.3	V	
Gv	Transmission gain		-2.0	0	2.0	dB	
Vono	Output noise voltage	JIS-A filter No signal provided $R_g=10\text{k}\Omega$ FLAT	—	5.0	10.0	μVrms	
THD	Distortion	$V_o=0.5\text{Vrms}$, $R_L=10\text{k}\Omega$	—	0.005	0.05	%	
CT	Channel crosstalk		—	-100	-70	dB	
Gboost	Tone control voltage gain	$f=1\text{kHz}$, $V_o=1\text{Vrms}$	10dB	8.5	10	11.5	dB
Gcut			-10dB	-11.5	10	-8.5	dB
BALton	Channel balance	Each boost is +10, -10dB with $f=1\text{kHz}$, $V_o=1\text{Vrms}$	-1.5	0	+1.5	dB	

PRELIMINARY
 Notice: This is not a final specification.
 Some parametric limits are subject to change.

7-ELEMENT GRAPHIC EQUALIZER WITH MICROCOMPUTER INTERFACE

TYPICAL CHARACTERISTICS

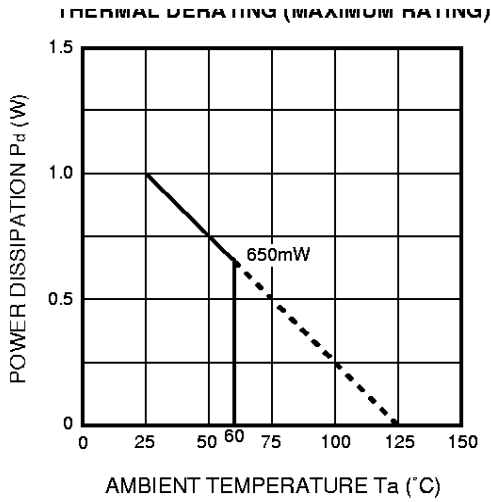

(Note 1) Standard board
 Size of printed circuit board
 70mm X 70mm
 Thickness of printed circuit board
 1.6mm
 Material of printed circuit board
 Glass epoxy
 Single-side Cu pattern
 Thickness of Cu
 18µm
 Size of Cu pattern
 0.25mm (Width) X 25mm (length)/lead

FUNCTION DESCRIPTION

(1) Tone control circuit block

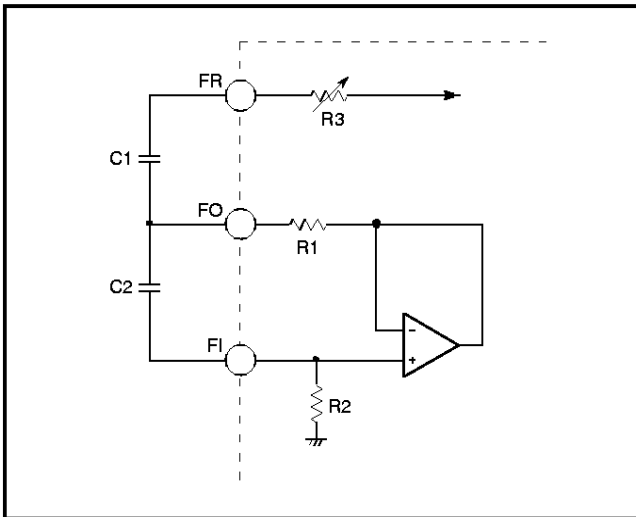


Fig.1 Resonance circuit

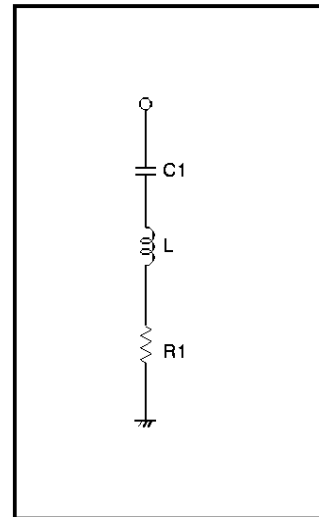


Fig.2 Equivalent circuit using L

Center frequency

$$f_0 = 1/2\pi \sqrt{C1 \cdot C2 \cdot R1 \cdot R2} \text{ [Hz]}$$

$$Q = \sqrt{C2 \cdot (R1 \cdot R2) / C1 \cdot (R1 + R3)^2}$$

(Example) In mid-band (f=1kHz)
 R1=2kΩ, R2=68kΩ
 C1=3900pF, C2=0.047µF

Figure 1 is equivalent to Figure 2. Part constants are converted by the below expression.


$$L = C2 \cdot R1 \cdot R2$$

PRELIMINARY

Notice: This is not a final specification.
Some parametric limits are subject to change.

7-ELEMENT GRAPHIC EQUALIZER WITH MICROCOMPUTER INTERFACE

APPLICATION EXAMPLE
(Single power supply used)

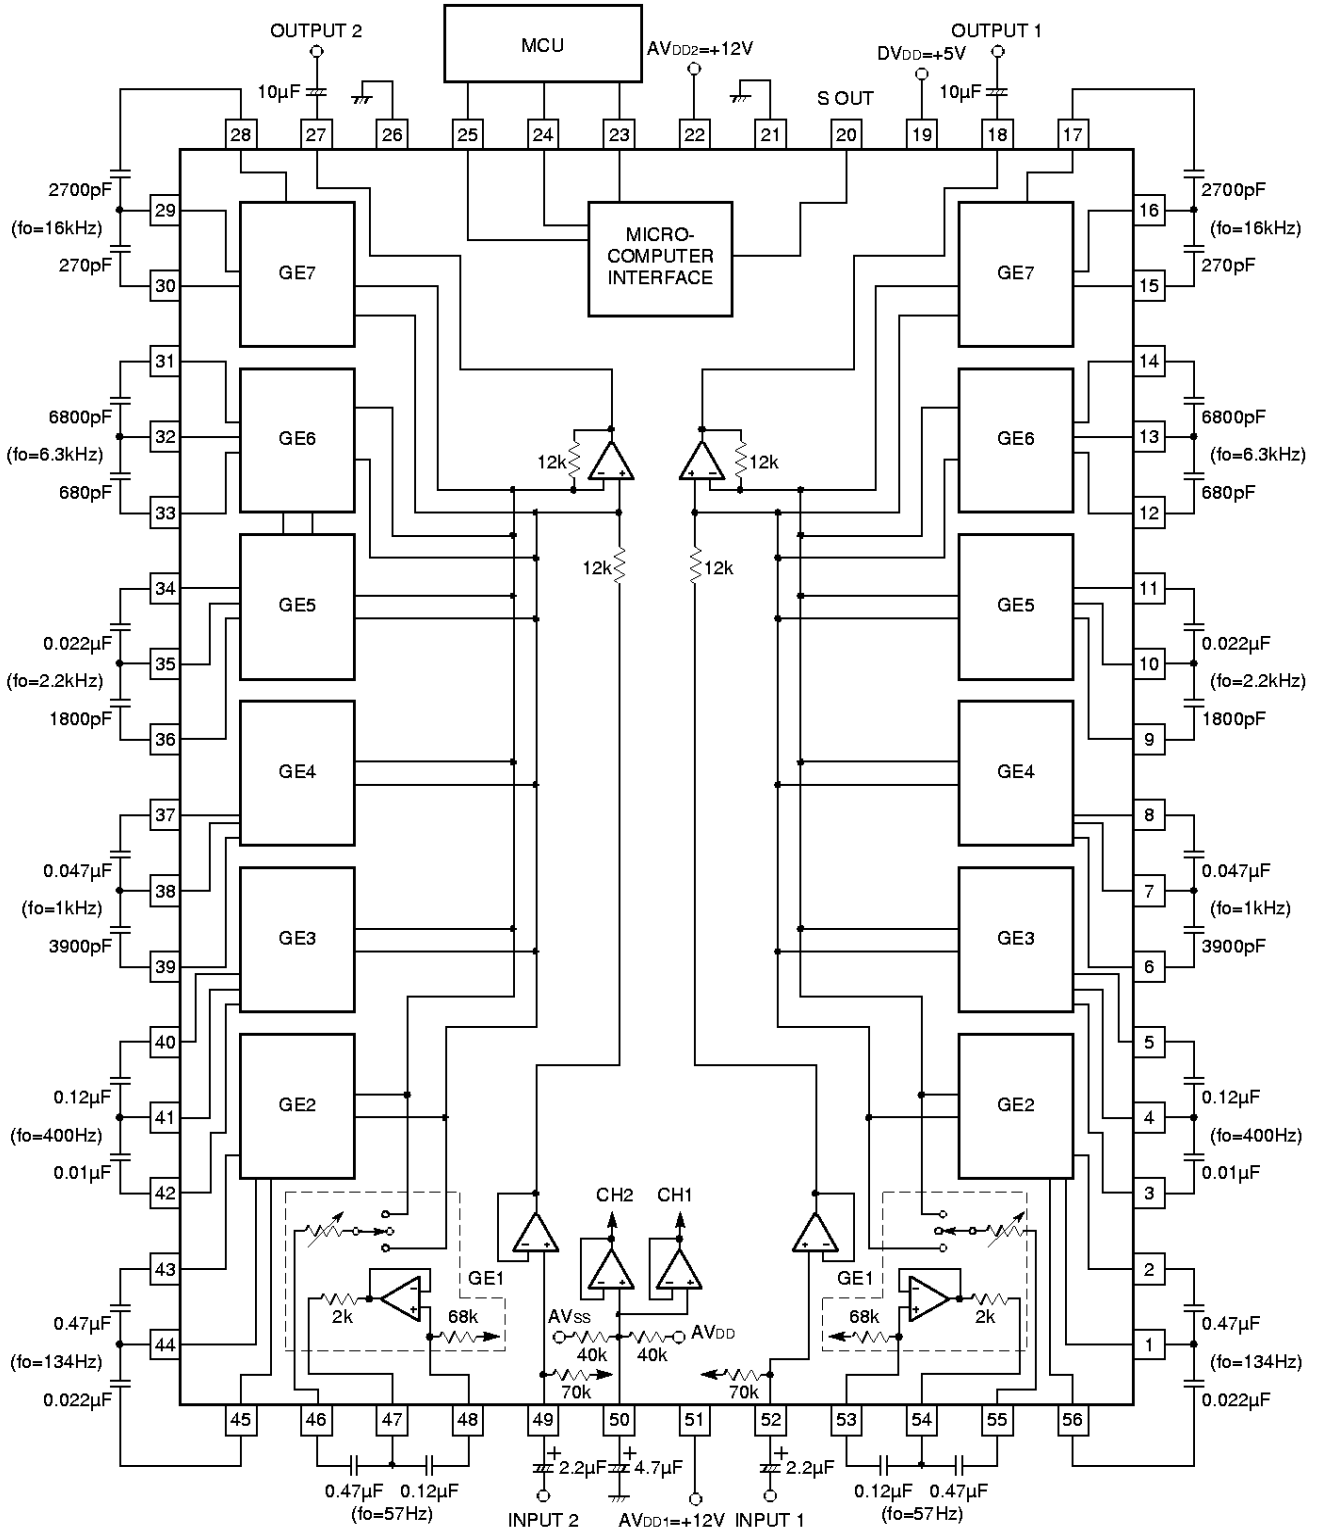

Units Resistance :Ω
Capacitance:F