



SANYO Semiconductors

## DATA SHEET

# LA3450

Monolithic Linear IC

## with Adjustment-Free VCO and Measure Against Adjacent Channel Interference PLL FM MPX Stereo Demodulator

### Overview

The LA3450 is a multifunctional, high-performance FM multiplex demodulator IC designed for high-grade FM stereo tuner use. The LA3450 features adjustment-free VCO, measure against adjacent channel interference, pilot canceler, low distortion (0.005%), and high S/N (101dB).

### Applications

- Home stereo, CD, AV-use PLL FM MPX stereo demodulator IC with adjustment-free VCO.

### Features

- Adjustment-free VCO : Eliminates the need to adjust freerunning frequency.
- Good temperature characteristics of VCO :  $\pm 0.1\%$  typ. for  $\pm 50^\circ\text{C}$  change.
- No antibirdie filter is required because a measure is taken against adjacent channel interference.
- Less carrier leak 19kHz : 53dB 38kHz : 50dB
- The on-chip cal-tone signal generator facilitates application of recording calibrator.
- Low distortion MONO 0.005% STEREO 0.015%
- High S/N 101dB typ. MONO IHF-A BPF
- High voltage gain FM : 10dB (gain variable)  
AM : 16dB (gain variable)
- Wide dynamic range Output level 3.3V typ. (THD = 1%, MONO)

### Functions

- PLL multiplex stereo demodulator.
- Adjustment-free VCO.
- Measure against adjacent channel interference.
- Pilot canceller.
- Cal-tone signal generator.
- AM/FM input, AM/FM selector.
- Post amplifier (gain variable type).
- VCO stop.
- Right/left independent adjustment of separation (single adjustment available).

■ Any and all SANYO Semiconductor Co.,Ltd. products described or contained herein are, with regard to "standard application" intended for the use as general electronics equipment (home appliances, AV equipment, communication device, office equipment, industrial equipment etc.). The products mentioned herein shall not be intended for use for any "special application" (medical equipment whose purpose is to sustain life, aerospace instrument, nuclear control device, burning appliances, transportation machine, traffic signal system, safety equipment, etc.) that shall require extremely high level of reliability and can directly threaten human lives in case of failure or malfunction of the product or may cause harm to human bodies, nor shall they grant any guarantee thereof. If you should intend to use our products for applications outside the standard applications of our customer, who is considering such use and/or outside the scope of our intended standard applications, please consult with us prior to the intended use. If there is no consultation or inquiry before the intended use, our customer shall be solely responsible for the use.

■ Specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

**SANYO Semiconductor Co., Ltd.**

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

# LA3450

## Specifications

### Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum Supply Voltage	$V_{CC \text{ max}}$		16	V
Lamp Drive Current	$I_L \text{ max}$		30	mA
Allowable Power Dissipation	$P_d \text{ max}$		680	mW
Operating Temperature	$T_{opg}$		-20 to +70	$^\circ\text{C}$
Storage Temperature	$T_{stg}$		-40 to +125	$^\circ\text{C}$

### Operating Conditions at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Recommended Supply Voltage	$V_{CC}$		13	V
Operating Voltage	$V_{CC \text{ op}}$		10 to 15	V
Recommended Input Signal Voltage	$V_i$		400	mV

### Electrical Characteristics at $T_a = 25^\circ\text{C}$ , $V_{CC} = 13\text{V}$ , Input : 400mV, $f = 1\text{kHz}$ , L+R = 90%, Pilot = 10%

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Quiescent Current	$I_{CCO}$	No input		29	39	mA
Input Resistance	$r_i$	FM, AM input common	14	20	26	$k\Omega$
Channel Separation	Sep	$f = 100\text{Hz}$		50		dB
		$f = 1\text{kHz}$	45	60		dB
		$f = 10\text{kHz}$		50		dB
Total Harmonic Distortion	THD	FM MONO		0.005	0.05	%
		FM MAIN		0.015	0.08	%
		AM 200mV input		0.02	0.08	%
Allowable Input Level	$V_{in \text{ max}}$	FM MONO, THD = 1%	800	1200		mV
		AM	400	600		mV
Output Voltage	$V_o$	FM MONO	770	1100	1500	mV
		AM 200mV input	770	1100	1500	mV
Signal-to-Noise Ratio	S/N	MONO IHF-A BPF	90	101		dB
Birdie Noise Rejection	BR	Spurious signal, $V_S = 100\text{mV}$ , $f_S = 115\text{kHz}$		40		dB
19kHz Carrier Leak	CL <sub>19</sub>	Canceler, de-emphasis		53		dB
38kHz Carrier Leak	CL <sub>38</sub>	De-emphasis		50		dB
Crosstalk	CT	AM → FM, AM input 200mV	70	80		dB
		FM → AM, FM input 400mV	70	80		dB
Channel Balance	CB	FM MONO		0	1	dB
Cal-tone OSC Frequency				400		Hz
AM/FM Select Voltage	$V_{AM-FM}$	AM → FM, voltage applied to pin26			0.5	V
		FM → AM, voltage applied to pin26	2.5			V
VCO Stop Voltage		Voltage applied to pin10	2.5			V
Lamp Lighting Level	$V_L$	PILOT LEVEL	4	7.5	13	mV
Lamp Hysteresis	hy			3.5		dB
Capture Range (Note 1)		PILOT 30mV		±1.2		%

Note 1 : The capture range is represented by the value in 19kHz equivalent.



2 : The low-pass filter used to measure electrical characteristics must have 19kHz attenuation of -90dB or more negative value of dB and 38kHz attenuation of -70dB or more negative value of dB.

3 : Be careful that the combination of pin 22 ⊕ and the others causes dielectric breakdown easily.




# LA3450

## Typical Value of Voltage on Each Pin and Pin Name

Pin No.	Typ. Value	Pin Name	Remarks
1	5.7V	Composite amplifier output	Output resistance 1k $\Omega$
2	-	OSC	 4.3V 2.3V f $\approx$ 456kHz
3	2.6V	Loop filter	
4	2.6V	Loop filter	
5	2.6V	PLL input	
6	2.6V	Pilot sync detection filter	
7	2.6V	Pilot sync detection filter	
8	2.6V	Pilot sync detection filter	For pilot cancel
9	2.6V	Pilot sync detection filter	For pilot cancel
10	-	VCO stop	Input resistance 120k $\Omega$
11	-	Pilot cancel	Triangular wave output, level follow-up
12	3.8V	Cal-tone control	Pin voltage is represented by voltage at ON state.
13	-	Stereo indicator	Open collector
14	0	GND	
15	-	Cal-tone OSC output	 2.8V 1.2V f $\approx$ 400Hz
16	5.7V	Cal-tone input	
17	5.7V	Pilot cancel input	
18	5.7V	Post amplifier output	L output
19	5.7V	Post amplifier input	L input, (-) input
20	5.7V	Post amplifier output	R output
21	5.7V	Post amplifier input	R input, (-) input
22	5.7V	Separation adjustment	
23	5.7V	AM input	Input resistance 20k $\Omega$
24	5.7V	FM input	Input resistance 20k $\Omega$
25	0	Signal GND	
26	-	AM/FM selection	Input resistance 120k $\Omega$
27	5.7V	Vref	Reference voltage
28	V <sub>CC</sub>	Power supply	

DISCONTINUED PRODUCT

Sample Application Circuit (1)

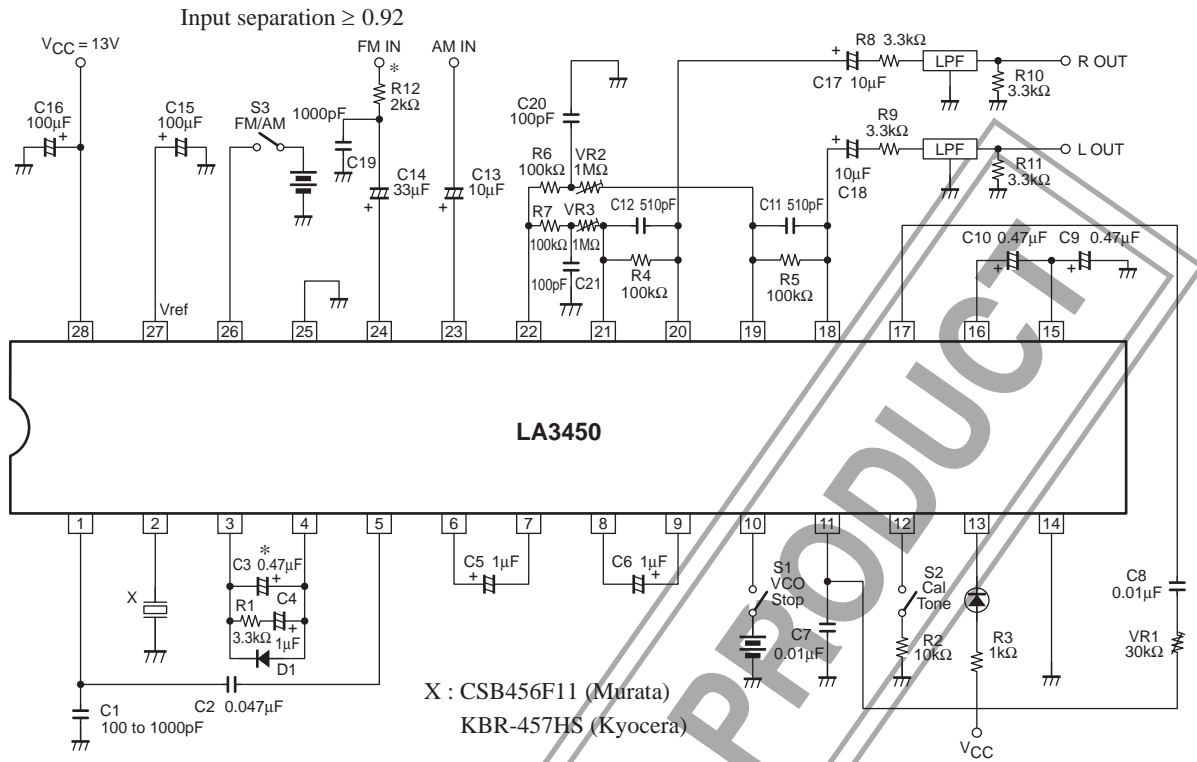


X : CSB456F11 (Murata)  
KBR-457HS (Kyocera)


\* : Input pilot level 20mV or greater : 0.47µF  
14mV or greater : 0.22µF  
8mV or greater : C3 = 0.1µF, R1 = 6.8kΩ, C4 = 0.47µF

\* : Input separation  $\frac{\text{sub signal}}{\text{main signal}} \geq 0.92$  (f = 1kHz)

How to Make Single Adjustment of Separation

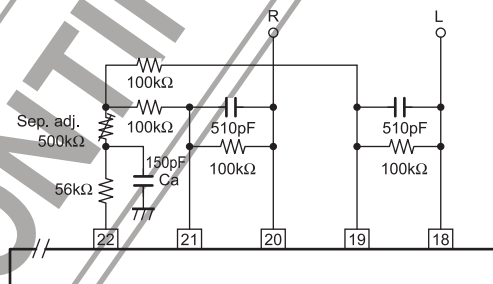


Sample Application Circuit (2)

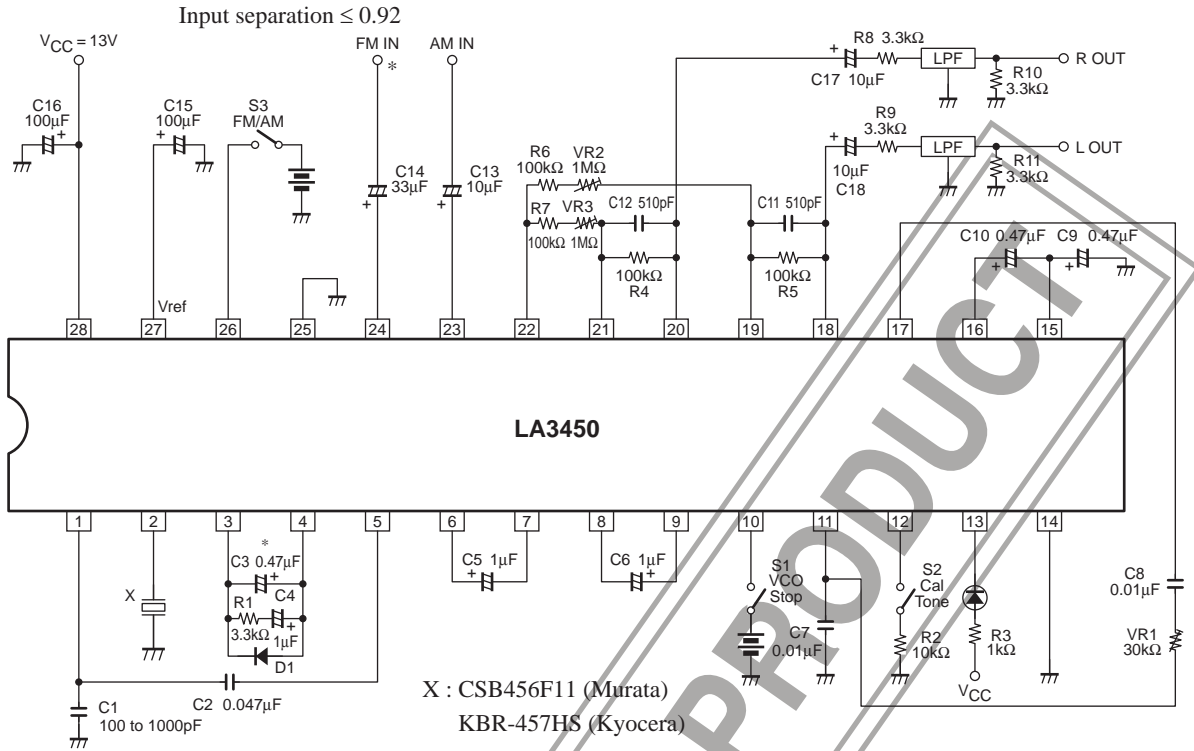


- X : CSB456F11 (Murata)  
KBR-457HS (Kyocera)
- \* : Input pilot level 20mV or greater : 0.47μF  
14mV or greater : 0.22μF  
8mV or greater : C3 = 0.1μF, R1 = 6.8kΩ, C4 = 0.47μF
- \* : Input separation  $\frac{\text{sub signal}}{\text{main signal}} \leq 0.92$  (f = 1kHz)

How to Make Single Adjustment of Separation

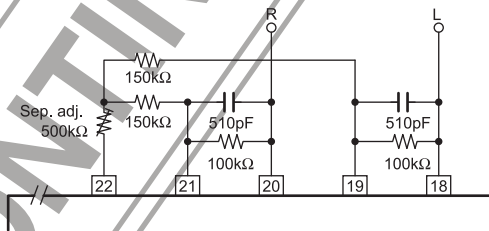

Sample Application Circuit (3)

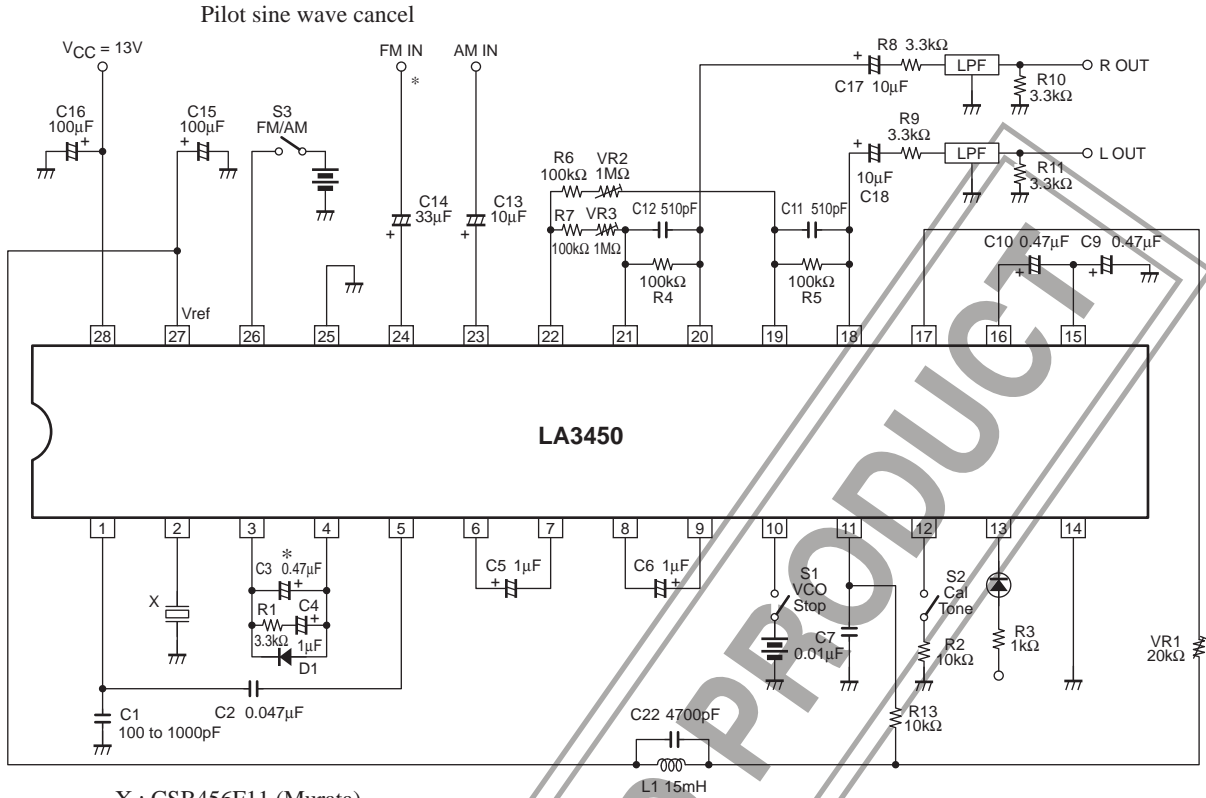

X : CSB456F11 (Murata)  
KBR-457HS (Kyocera)

\* : Input pilot level 20mV or greater : 0.47μF  
14mV or greater : 0.22μF  
8mV or greater : C3 = 0.1μF, R1 = 6.8kΩ, C4 = 0.47μF  
\* : Input separation  $\frac{\text{sub signal}}{\text{main signal}} \leq 0.92$  (f = 1kHz)

For the separation adjusting method when the input separation is more than 0.92, see Sample Application Circuit (2).

Note 1 : In this Sample Application Circuit, the DC voltage on pins 11, 17 is almost equal to that on pin 27 and no DC cut capacitor (C8 in Sample Application Circuit (1), (2)) is required.

Description of External Parts

Name	Symbol	Kind	Value	Remarks
Capacitor	C1	Ceramic	100 to 1000pF (Note1)	Improvement in stereo low-frequency distortion
	C2	Polyester film	0.047μF	DC cut
	C3	Electrolytic	0.1 to 0.47μF	Loop filter, Input pilot 8mV or greater : 0.1μF 14mV or greater : 0.22μF 20mV or greater : 0.47μF
	C4	Electrolytic	0.47μF to 1μF	Loop filter, Input pilot 8mV or greater : 0.47μF 14mV or greater : 1μF
	C5	Electrolytic	1μF	Sync detection filter
	C6	Electrolytic	1μF	Sync detection filter
	C7	Polyester film	0.01μF	For integration (generation of triangular wave)
	C8	Polyester film	0.01μF	DC cut
	C9	Electrolytic	0.47μF	For integration (generation of triangular wave)
	C10	Electrolytic	0.47μF	DC cut
	C11 to 12	Ceramic	510pF	De-emphasis capacitor, R5. C11 = 50μs (75μs) R4. C12 = 50μs (75μs)
	C13	Electrolytic	10μF	DC cut
	C14	Electrolytic	33μF	DC cut
	C15	Electrolytic	100μF	Filter, S/N improvement
	C16	Electrolytic	100μF	Power filter
C17 to 18	Electrolytic	10μF	DC cut	

Continued on next page.

# LA3450

Continued from preceding page.


Name	Symbol	Kind	Value	Remarks
Capacitor	C19	Ceramic	1000pF	LPF for sub signal attenuation
	C20 to 21	Ceramic	100pF	Improvement in separation at high frequencies (Note 2)
	C22	Ceramic	4700pF	19kHz tank circuit (generation of sine wave)
Resistor	R1	Carbon	3.3 to 6.8k $\Omega$	Loop filter, Input pilot 8mV or greater : 6.8k $\Omega$ 14mV or greater : 3.3k $\Omega$
	R2	Carbon	10k $\Omega$	Fixing of cal-tone OSC frequency
	R3	Carbon	1k $\Omega$	Limiting resistor
	R4 to 5	Carbon	100k $\Omega$	Post amplifier feedback resistor, de-emphasis resistor
	R6 to 7	Carbon	100k $\Omega$	For separation adjustment
	R8 to 9	Carbon	3.3k $\Omega$	LPF input resistor (Note 3)
	R10 to 11	Carbon	3.3k $\Omega$	LPF output resistor
	R12	Carbon	2k $\Omega$	LPF for sub signal attenuation
	R13	Carbon	10k $\Omega$	Generation of pilot cancel signal
Semifixed resistor	VR1	Carbon	30k $\Omega$	Pilot cancel adjustment
	VR2 to 3	Carbon	1M $\Omega$	Separation adjustment
Resonator	X	Ceramic		CSB456F11 (Murata), KBR-457HS (Kyocera)
Diode	D1	Silicon (Low leak)		Improvement in stereo start time after VCO stop release
Coil	L1		15mH	19kHz tank circuit (generation of sine wave)

Note 1 : C1 differs with set models. Capacitor used to phase the sub signal of the decoder with the reproduction sub signal in the PLL.

Note 2 : C20 to 21 are set to the optimum value according to each set mode.

Note 3 : The LPF input resistor value is 3.3k $\Omega$  or greater.

## Sample Printed Circuit Pattern

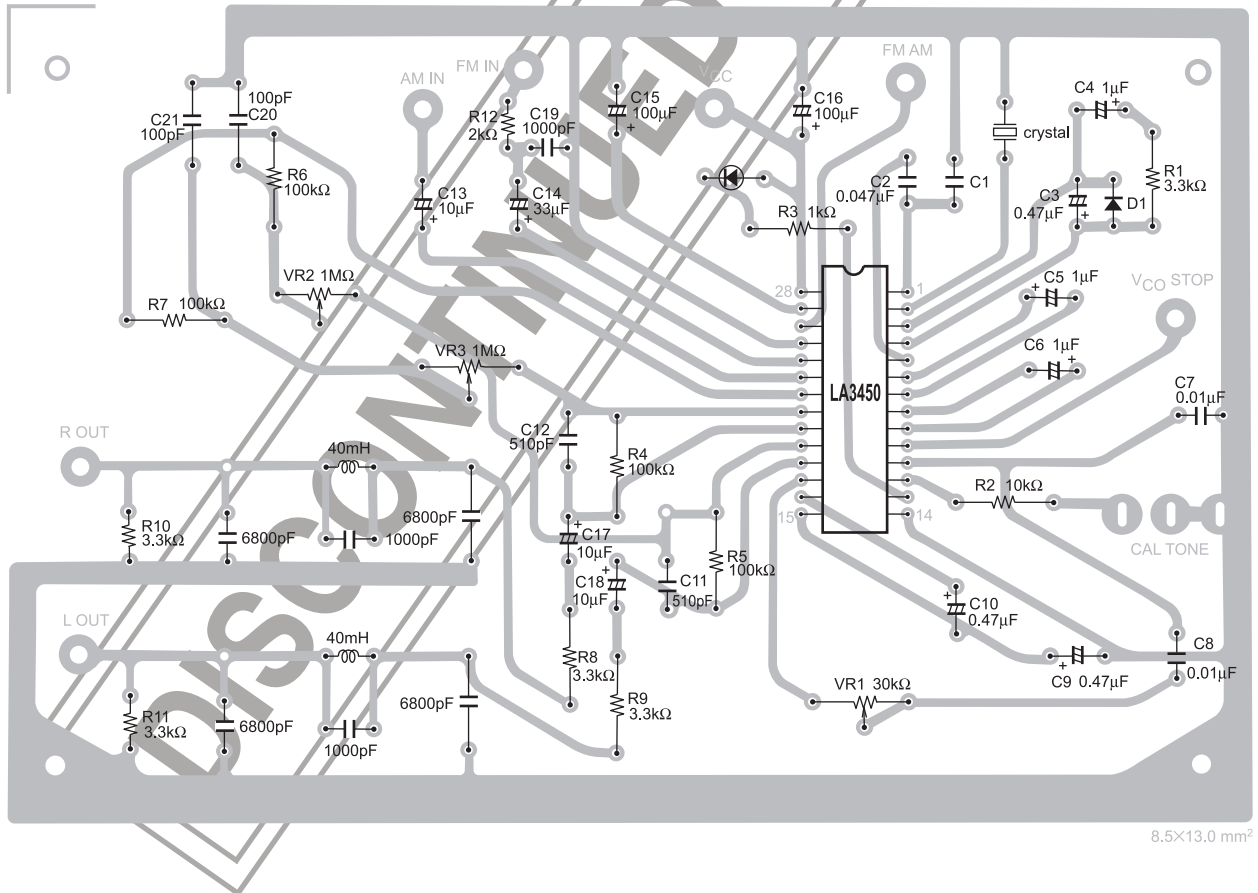

8.5x13.0 mm<sup>2</sup>

**Proper Cares in Applications**

1. Ceramic resonator

Shown below are ceramic resonators recommended for use in the LA3450 and their suppliers.

CSB456F11	Murata	Piezoelectric Division
		TEL : 0762-40-2381
KBR-457HS	Kyocera	Electronic Parts Division
		TEL : 075-592-3851

2. Loop filter constants

Loop filter constants (C3, C4, R1) connected to pins 3, 4 must be set to the optimum value according to an input pilot level. The recommended values are shown in Table 1.

Input Pilot Level	C3	C4	R1
20mV or greater	0.47 $\mu$ F	1 $\mu$ F	3.3k $\Omega$
14mV or greater	0.22 $\mu$ F	1 $\mu$ F	3.3k $\Omega$
8mV or greater	0.1 $\mu$ F	0.47 $\mu$ F	6.8k $\Omega$

Table 1. Input Pilot Level – Loop Filter Constants

Note : For example, when the loop filter constants are C3 = 0.22 $\mu$ F, C4 = 1 $\mu$ F, R1 = 3.3k $\Omega$ , stereo operation can be performed with an input pilot level of 14mV or greater, even with the temperature characteristics of the OSC circuit, the initial tolerance and secular charge of a ceramic resonator considered.

3. VCO stop method

VCO OSC can be stopped and the forced monaural mode is entered by applying a voltage of 2.5V or greater to pin 10. The maximum voltage to be applied to pin 10 is 16V regardless of the voltage on pin 28 (VCC pin). The relation between applied voltage and flow-in current is shown in Fig. 1.

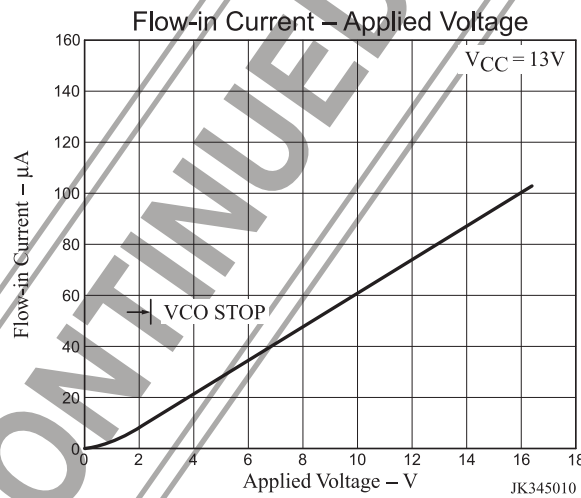


Fig. 1. Voltage Applied to pins 10, 26 – Flow-in Current

4. Forced monaural mode

Connecting pin 16 to GND through a resistor of 10k $\Omega$  causes the forced monaural mode to be entered.

5. AM/FM mode select method

The AM/FM mode can be selected by applying a voltage to pin 26. When the voltage on pin 26 is 0.5V or less, the FM mode is entered, and when 2.5V or greater, the AM mode is entered. In AM mode the VCO stops and the forced monaural mode is entered. The relation between voltage on pin 26 and flow-in current is as shown in Fig. 1.

6. Separation adjust method

The separation is adjusted by varying the gain of the main signal with VR2, VR3 as shown in the Sample Application Circuit. Sample Application Circuit (1) or (2) is used according to the attenuation of the input sub signal. When the attenuation ratio of the sub signal to the main signal is 0.92 or greater to 1, use Sample Application Circuit (1), and when 0.92 or less to 1, use Sample Application Circuit (2). Capacitors C20 and C21, which are used to improve the separation characteristic at high frequencies, must be set to the optimum values according to your model set.

7. Cal-tone

The OSC frequency can be set with R2, C9 in the Sample Application Circuit (refer to Fig. 2). The OSC level can be attenuated on connecting resistor Rx across pin 15 and pin 16 (refer to Fig. 3). When the S2 is turned on, the triangular wave generated on pin 15 is amplified by the post amplifier and output. The level at pins 18, 20 is approximately 4V (p-p) when the typical constants are used in the Sample Application Circuit and the output level becomes approximately  $4 \times 20 / (R_x + 20)$  V (p-p) by connecting Rx.

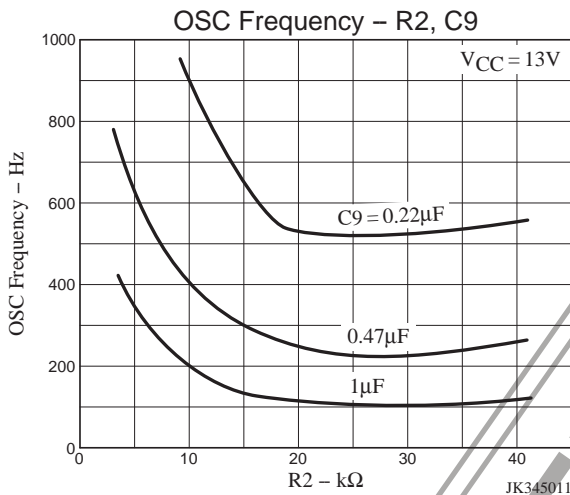


Fig.2. OSC Frequency - R2, C9





Fig. 3. OSC Level Variable

8. V<sub>O</sub> - I<sub>O</sub> characteristic at pin 27

Fig. 4 shows V<sub>O</sub> - I<sub>O</sub> characteristic at pin 27 (I<sub>O</sub> : Capable of being drawn to the outside)  
Maximum current : 3mA

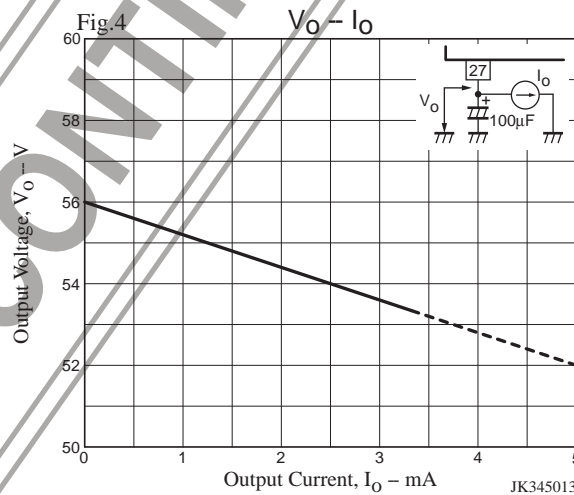

9. Feedback resistance of post amplifier and total gain, de-emphasis constants

Table 2 shows the feedback resistance of post amplifier and the total gain, de-emphasis constants.

R4 (R5)	Total gain	C12 (C11) 50µs	C12 (C11) 50µs
33kΩ	0dB	1500pF	2200pF
39kΩ	1.5dB	1200pF	2000pF
51kΩ	4dB	1000pF	1500pF
62kΩ	5.5dB	750pF	1200pF
82kΩ	8dB	620pF	910pF
100kΩ	10dB	510pF	750pF
130kΩ	12dB	390pF	560pF
150kΩ	13dB	330pF	510pF
180kΩ	15dB	270pF	390pF

Total gain : At monaural mode,  $R4 \cdot C12 = R5 \cdot C11 = 50\mu s, 75\mu s$

Table 2. Feedback resistance of post amplifier and of total gain, de-emphasis constants

10. Low-pass filter

Figs. 5, 6 show a sample circuit configuration and characteristic of the low-pass filter.

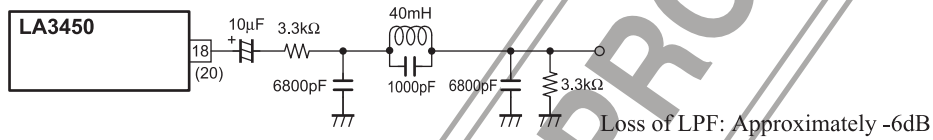


Fig. 5 Sample Circuit of LC Filter

























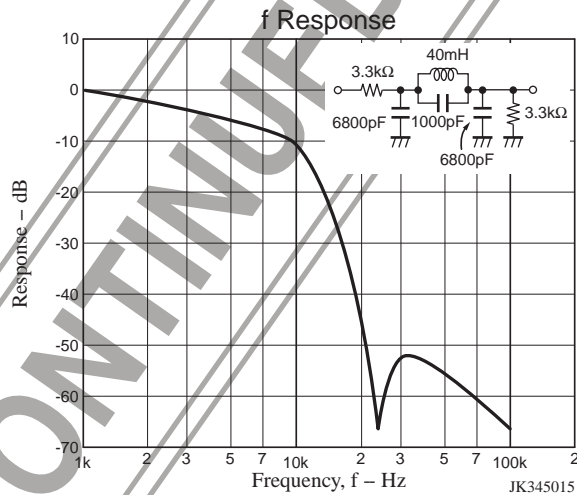









Fig. 6 f Response


Note : As the use of this low-pass filter makes the attenuation less at 19kHz, 38kHz, carrier leak at the LPF output causes the stereo distortion and separation characteristics to get worse than specified in the Electric Characteristics. For example, the stereo distortion becomes approximately 0.5% due to carrier leak.

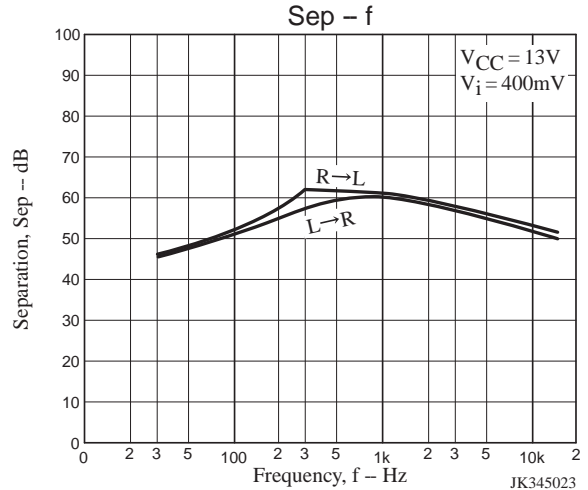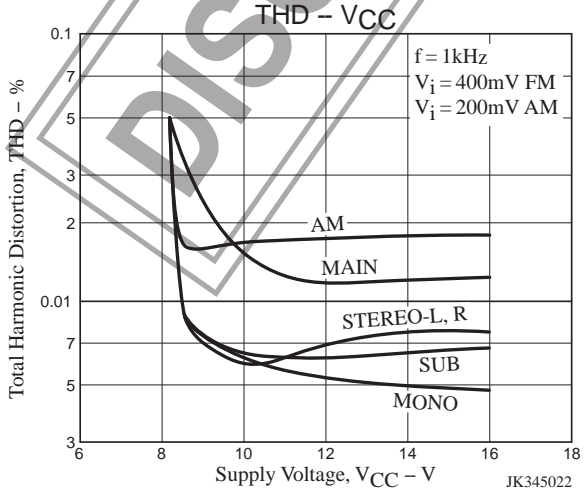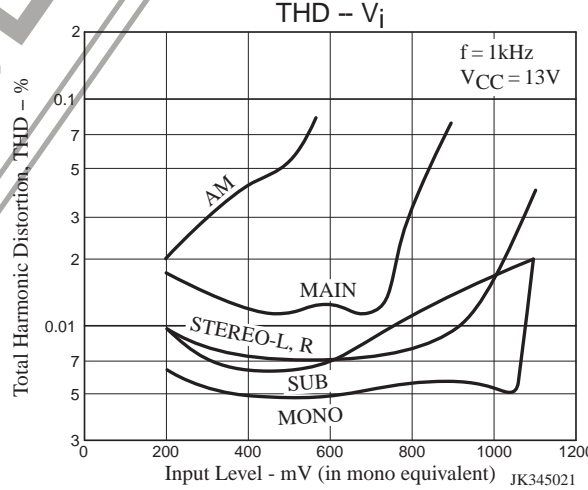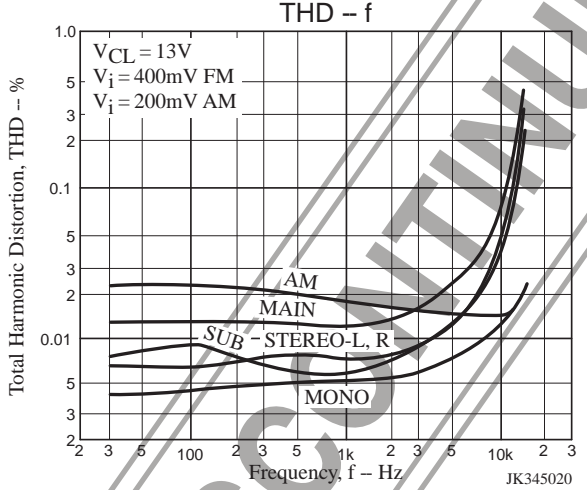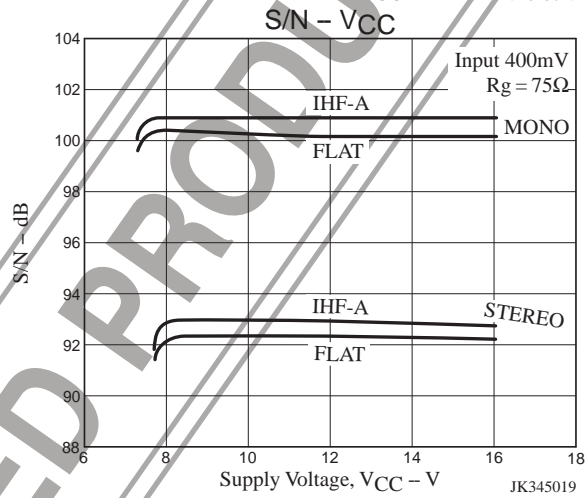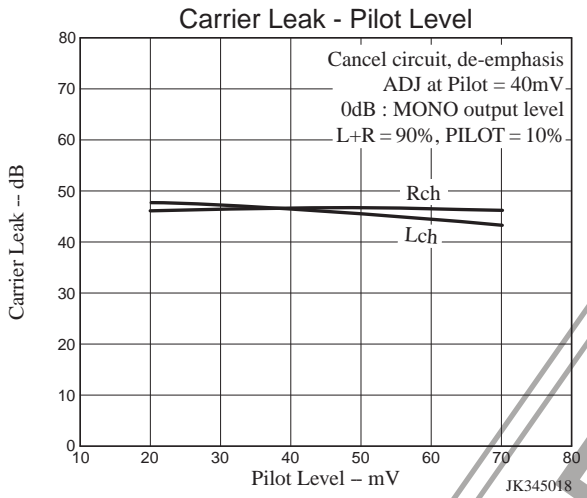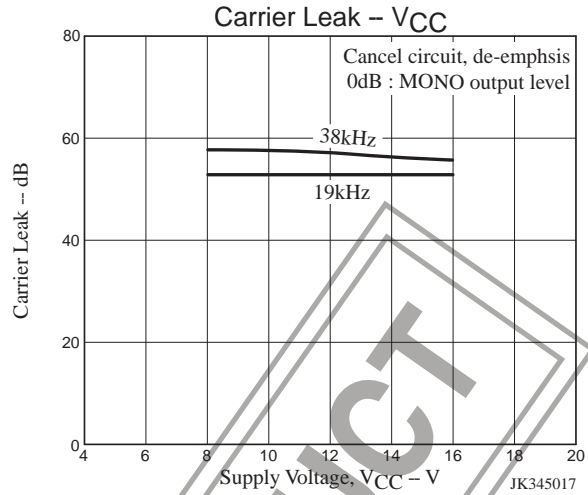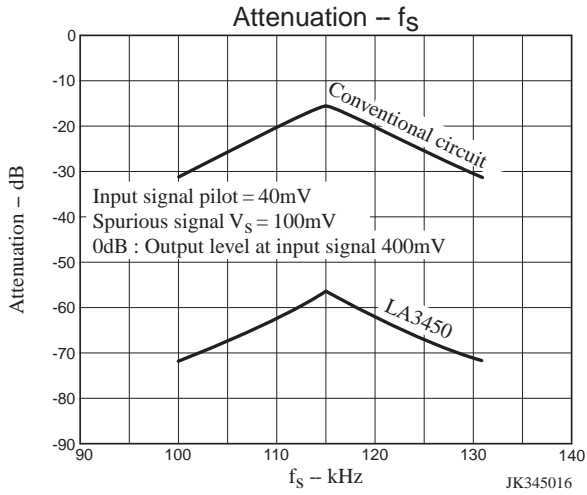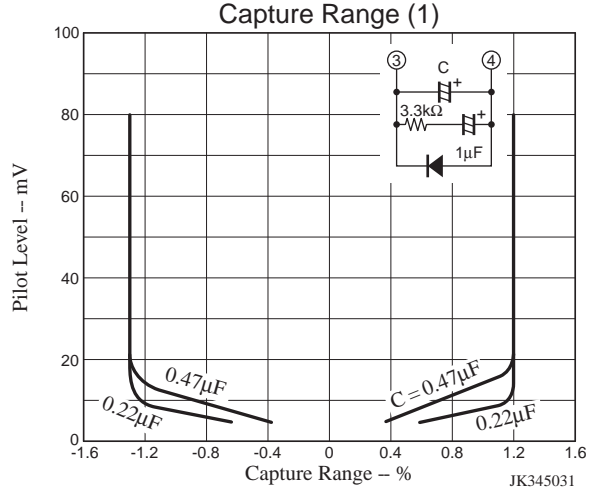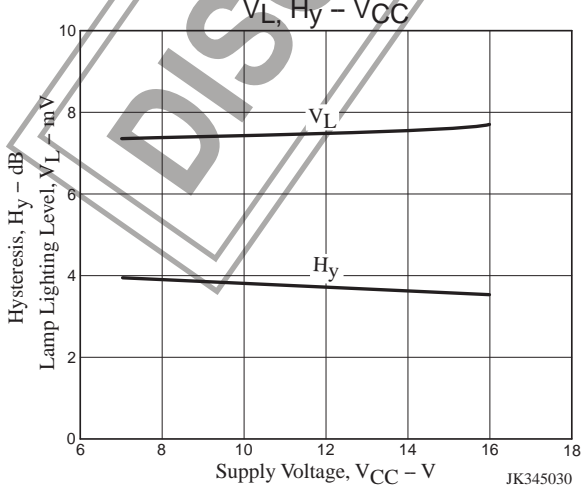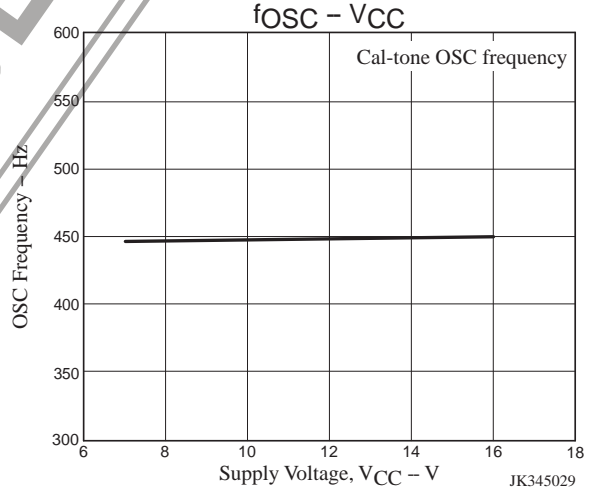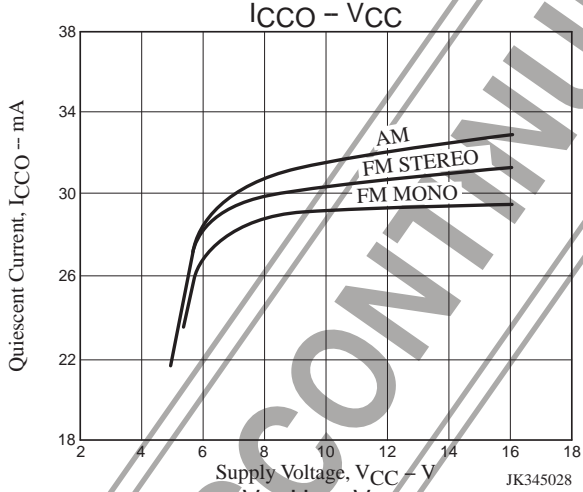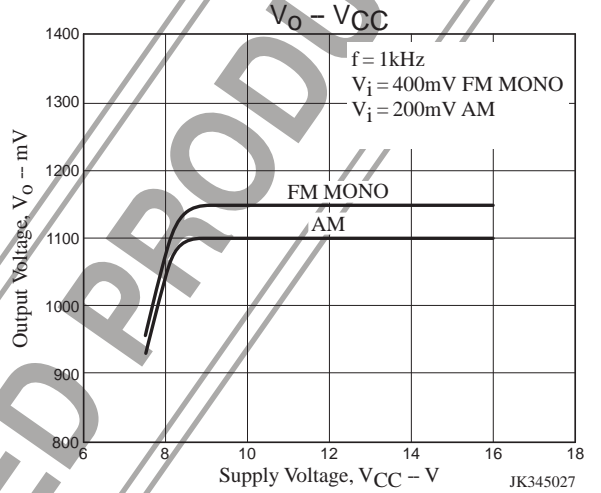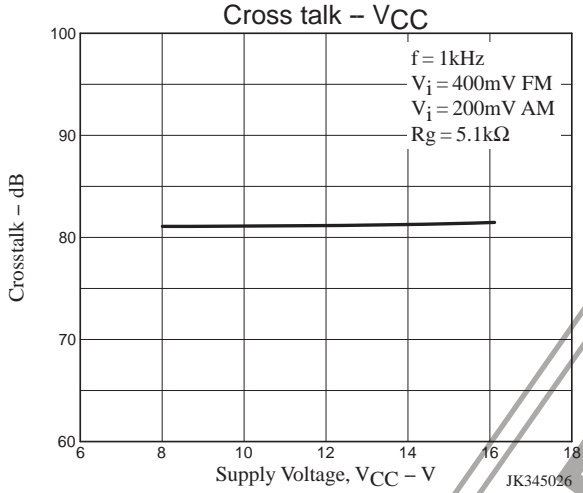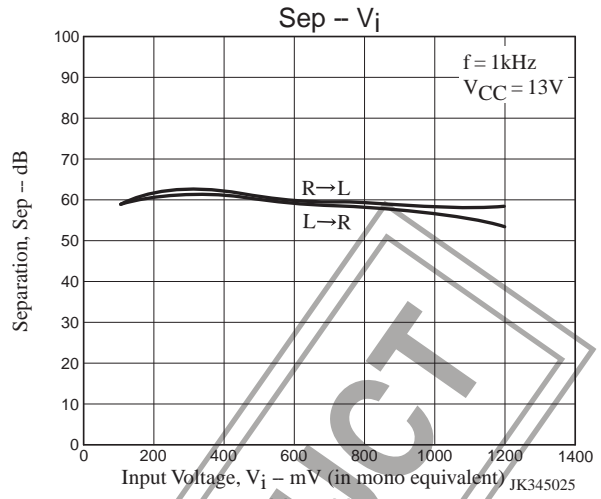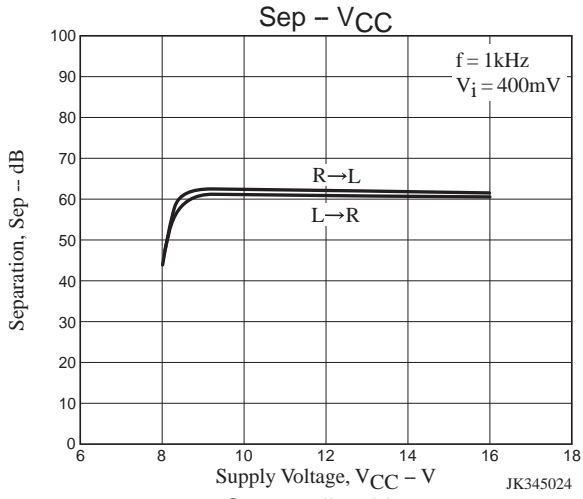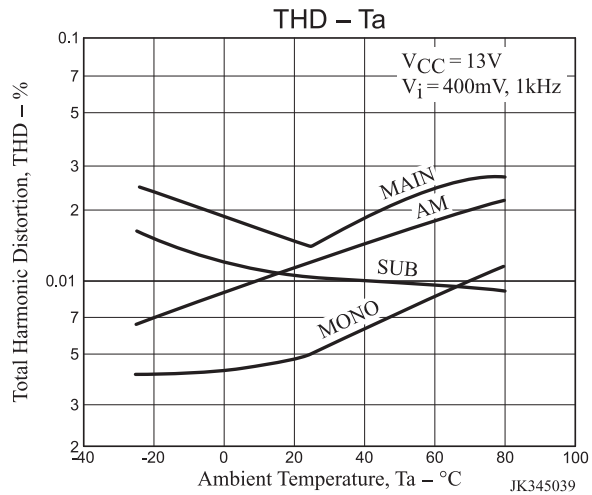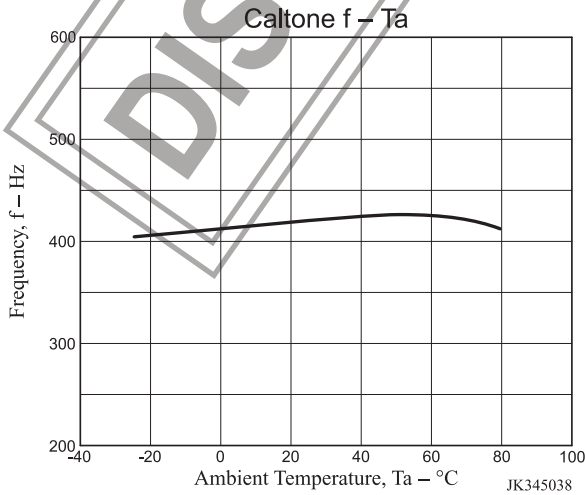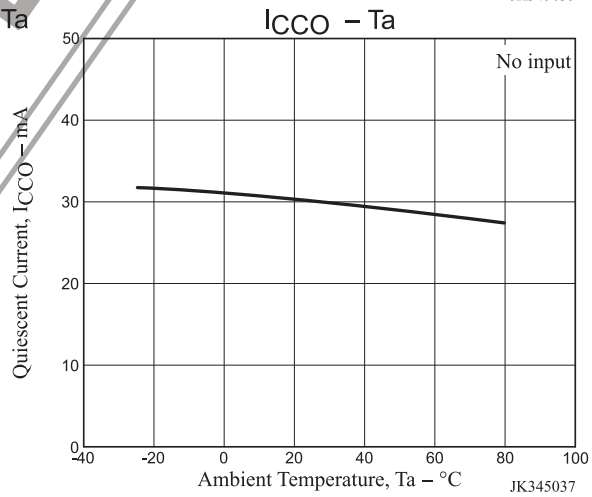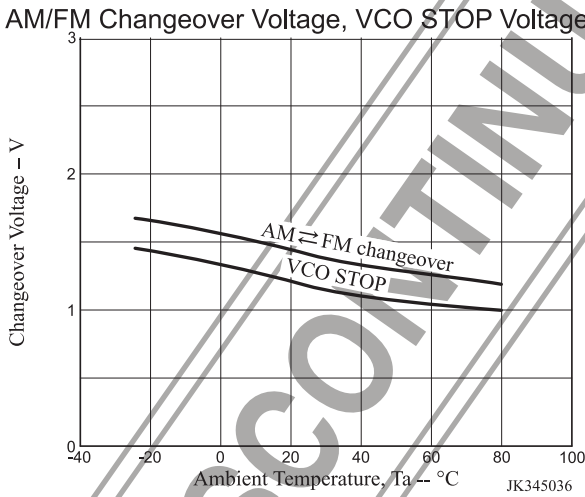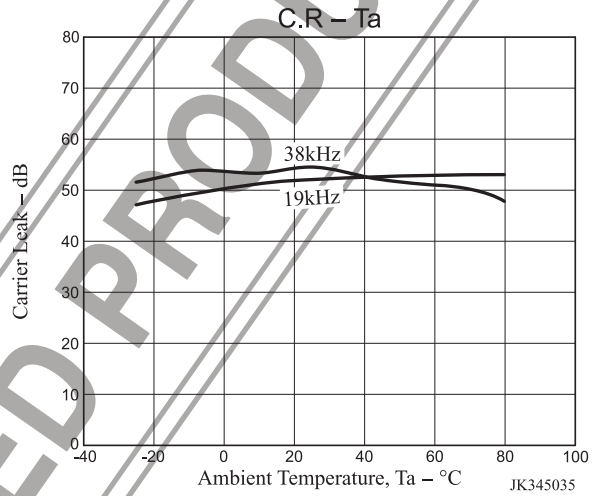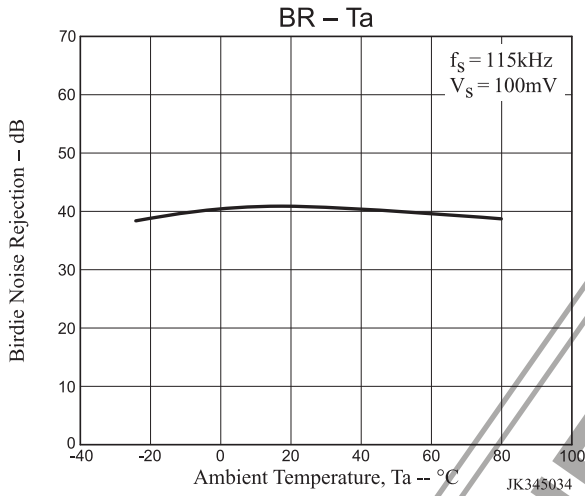

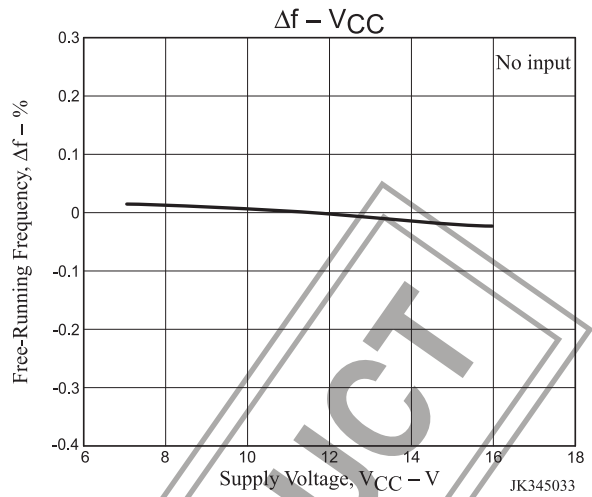

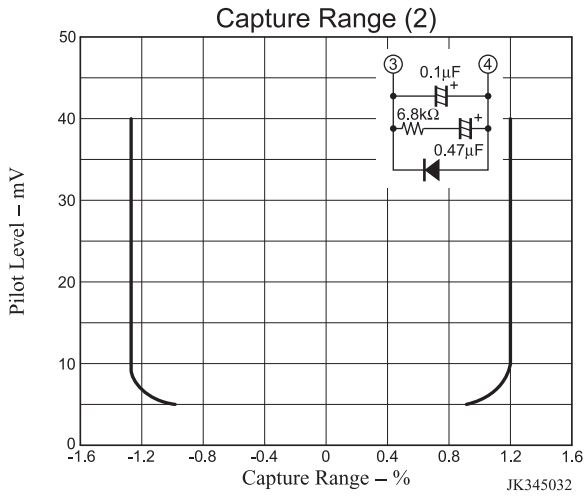

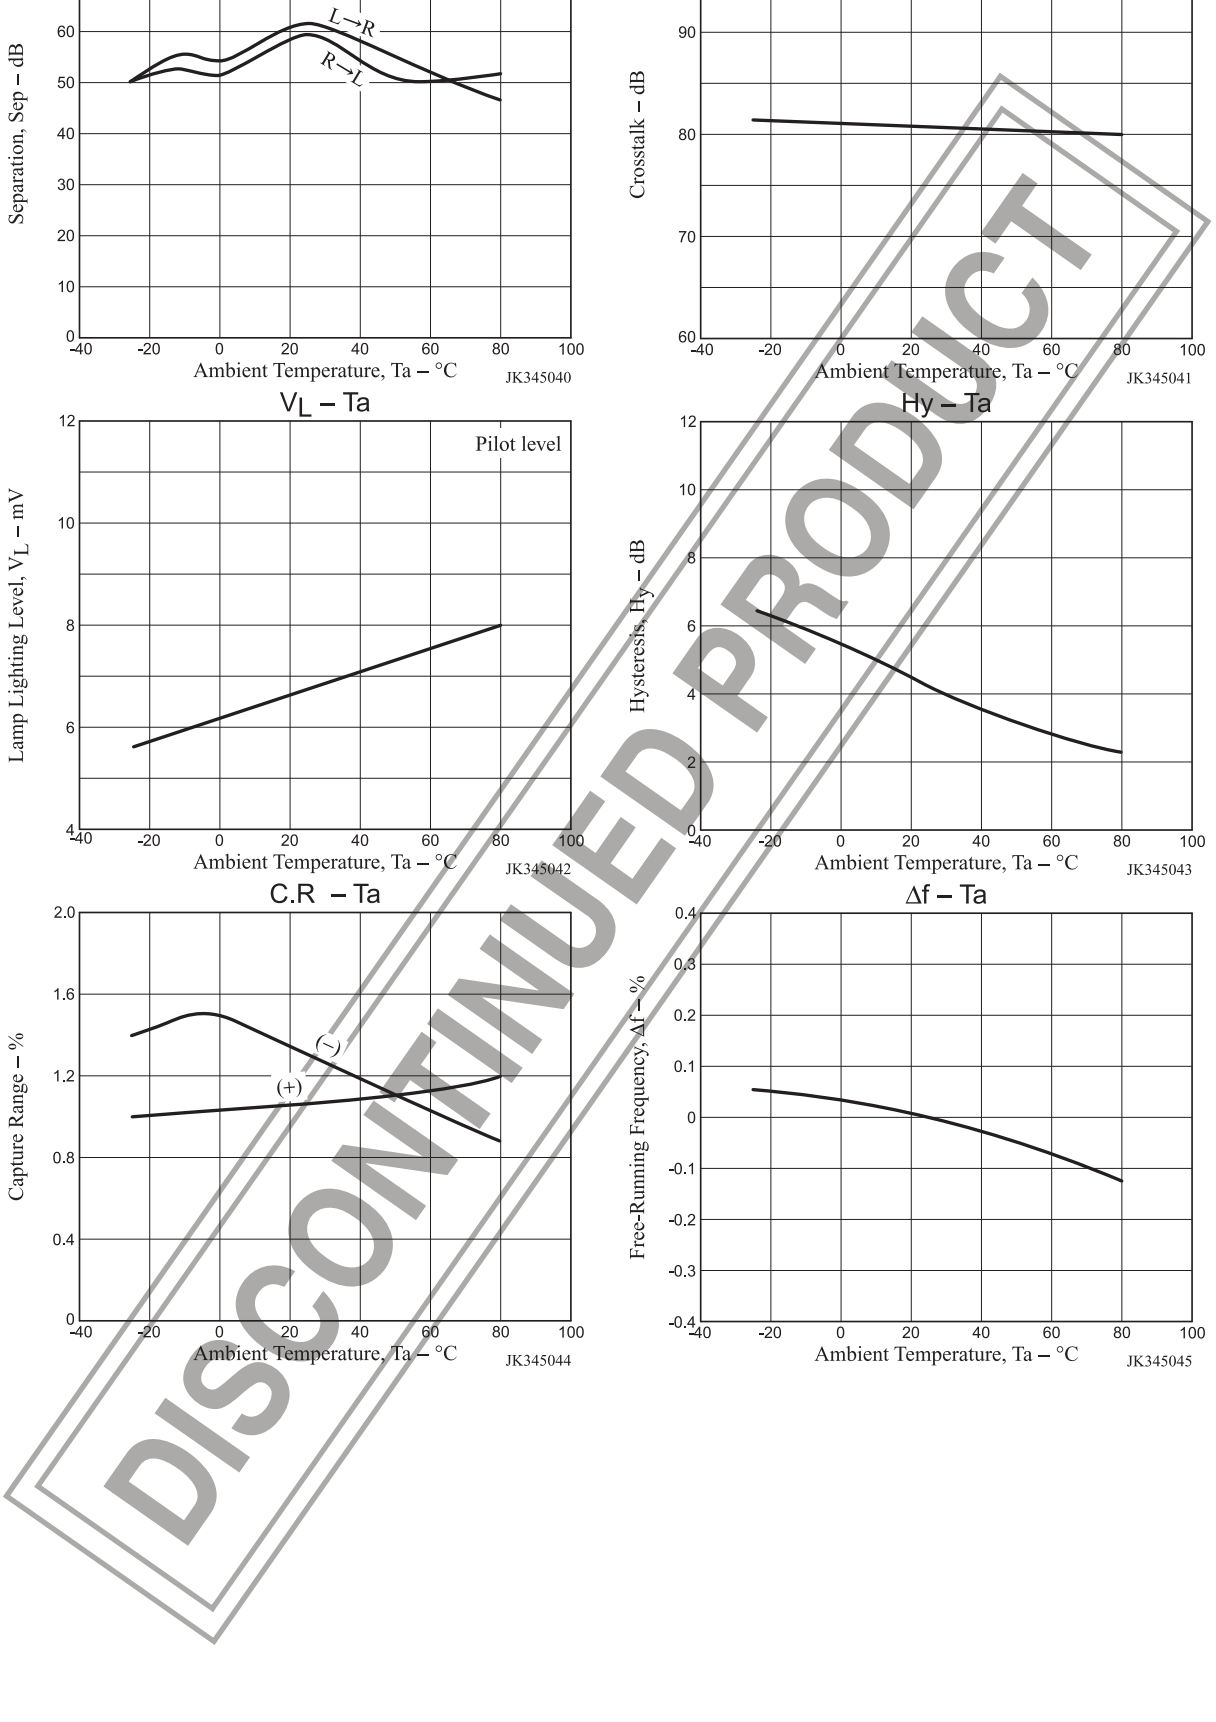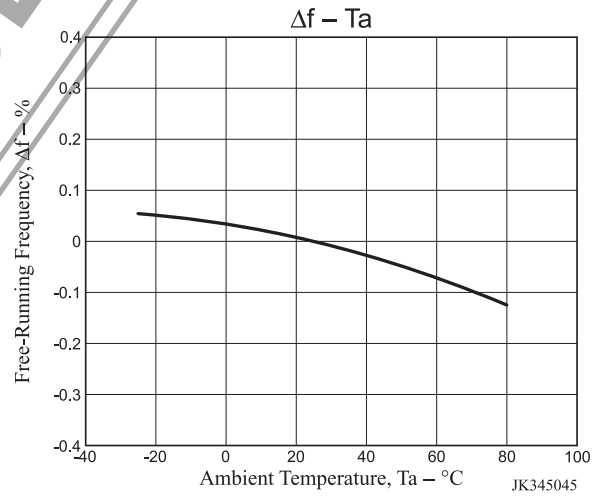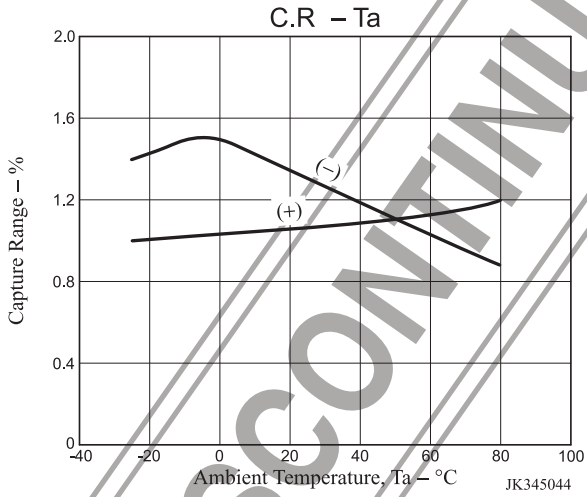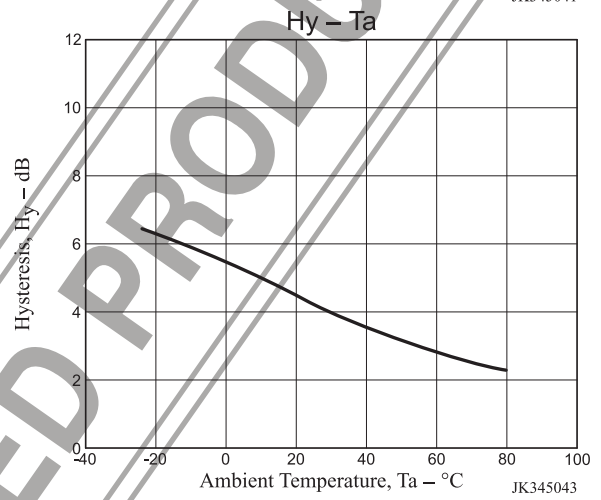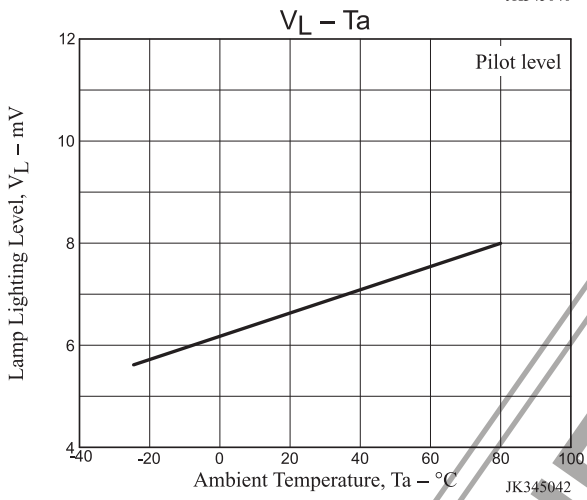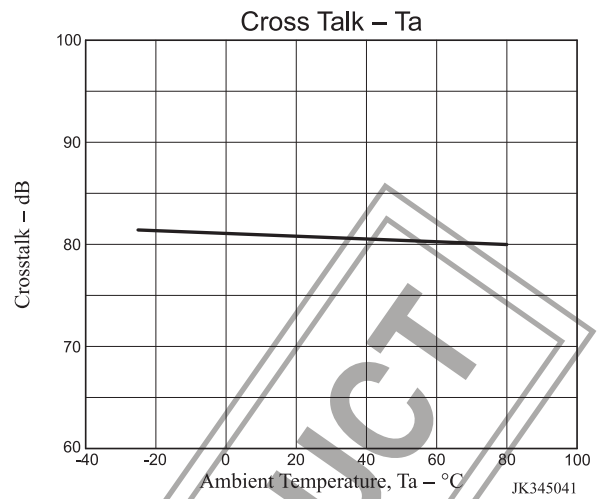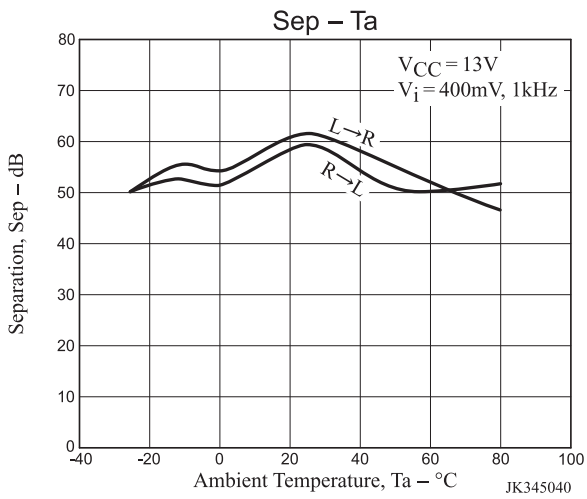

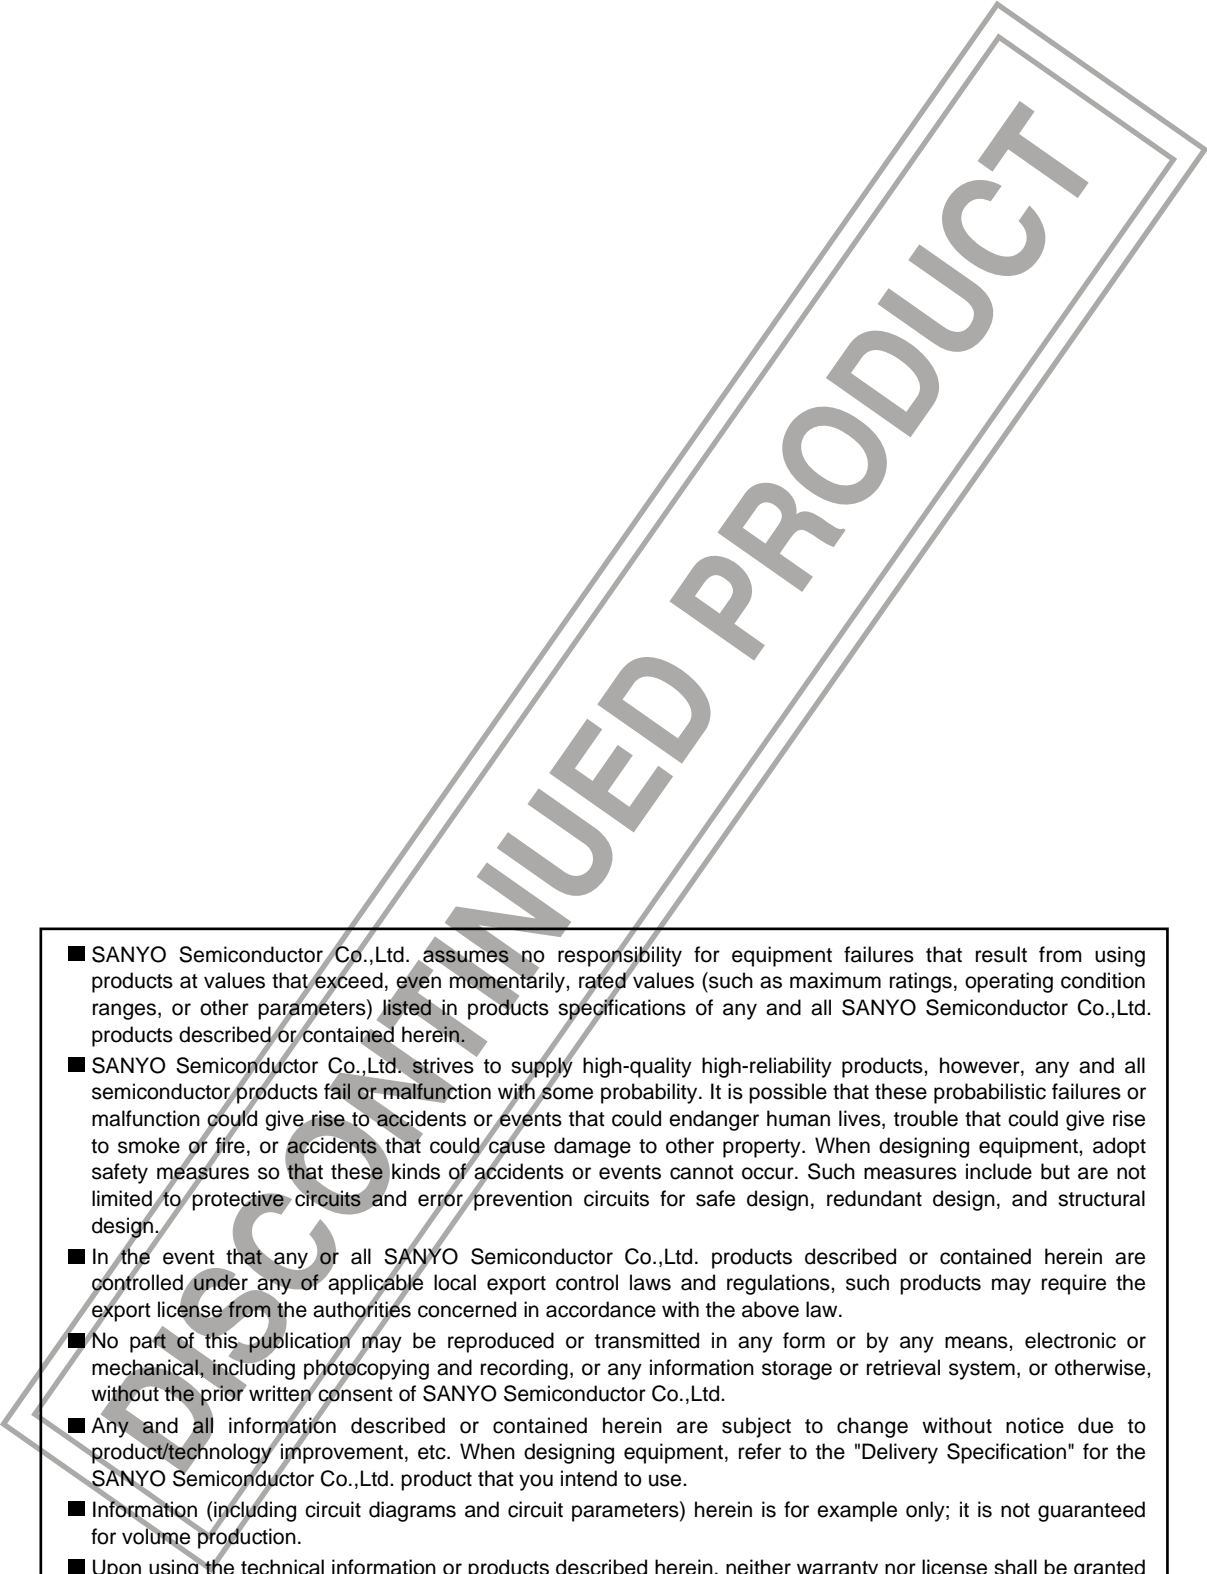- 
- SANYO Semiconductor Co.,Ltd. assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein.
  - SANYO Semiconductor Co.,Ltd. strives to supply high-quality high-reliability products, however, any and all semiconductor products fail or malfunction with some probability. It is possible that these probabilistic failures or malfunction could give rise to accidents or events that could endanger human lives, trouble that could give rise to smoke or fire, or accidents that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
  - In the event that any or all SANYO Semiconductor Co.,Ltd. products described or contained herein are controlled under any of applicable local export control laws and regulations, such products may require the export license from the authorities concerned in accordance with the above law.
  - No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written consent of SANYO Semiconductor Co.,Ltd.
  - Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor Co.,Ltd. product that you intend to use.
  - Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production.
  - Upon using the technical information or products described herein, neither warranty nor license shall be granted with regard to intellectual property rights or any other rights of SANYO Semiconductor Co.,Ltd. or any third party. SANYO Semiconductor Co.,Ltd. shall not be liable for any claim or suits with regard to a third party's intellectual property rights which has resulted from the use of the technical information and products mentioned above.

This catalog provides information as of July, 2008. Specifications and information herein are subject to change without notice.