



# Tip and Ring Common Mode Filters

40329

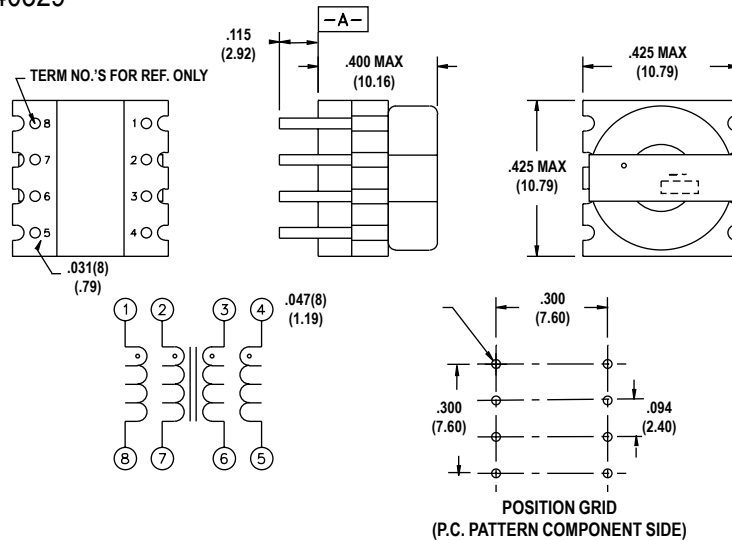

40330

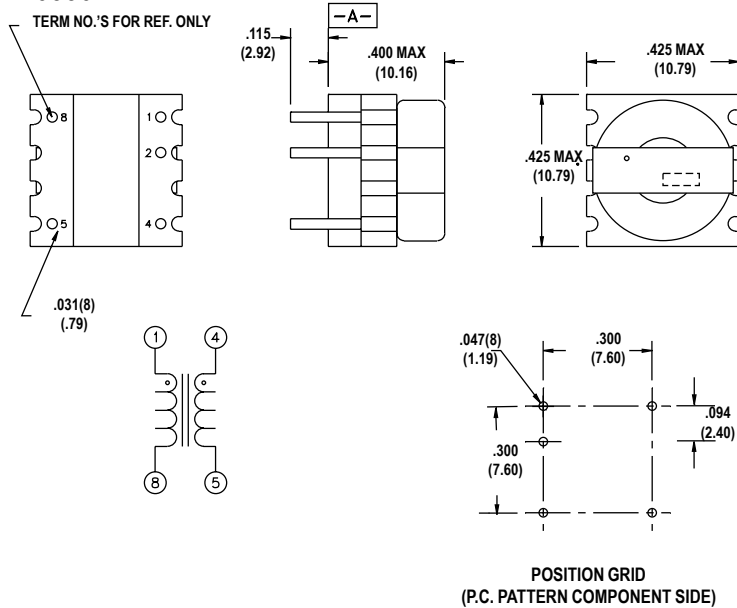

## Features

- Available in 2 wire or 4 wire versions
- Provides > 15dB attenuation of common mode noise over a frequency range of 3-300 MHz.
- Small footprint

## Applications

- Filters in Telecommunications equipment circuits
- Common mode chokes for DC/DC converters

## Environmental Specifications

- Operating temperature range:  
-40°C to +85°C
- Storage temperature range:  
-50°C to +125°C

## Packaging

- Parts are packaged 500 per box

Part Number	Inductance uH Min.	Rated Current mA	DCR (ohms max)	Dielectric (1,2 - 3,4)Vrms
40329	20	250	0.065	1500
40330	20	250	0.065	1500

## NOTES

- 1: Open circuit inductance test at 100KHz,  
Electrical specifications at 20°C