


DESCRIPTION

The 733 is a monolithic differential input, differential output, wideband video amplifier. It offers fixed gains of 10,100 or 400 without external components, and adjustable gains from 10 to 400 by the use of an external resistor. No external frequency compensation components are required for any gain option. Gain stability, wide bandwidth and low phase distortion are obtained through use of the classic series-shunt feedback from the emitter follower outputs to the inputs of the second stage. The emitter follower outputs provide low output impedance, and enable the device to drive capacitive loads. The 733 is intended for use as a high performance video and pulse amplifier in communications, magnetic memories, display and video recorder systems.


FEATURES

- 120MHz bandwidth
- 250kΩ input resistance
- Selectable gains of 10,100 and 400
- No frequency compensation required
- Mil std 883A,B,C available

PIN CONFIGURATION

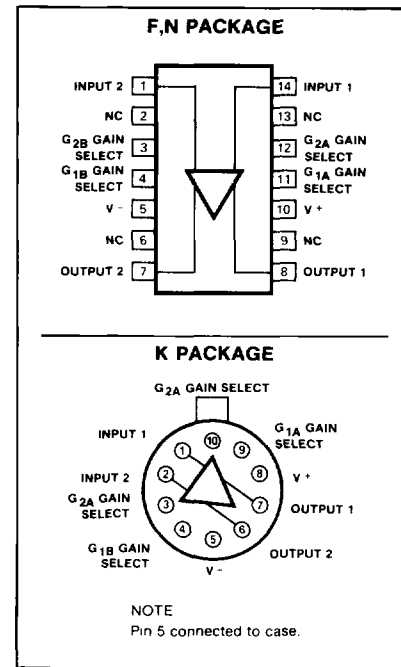

CIRCUIT SCHEMATIC

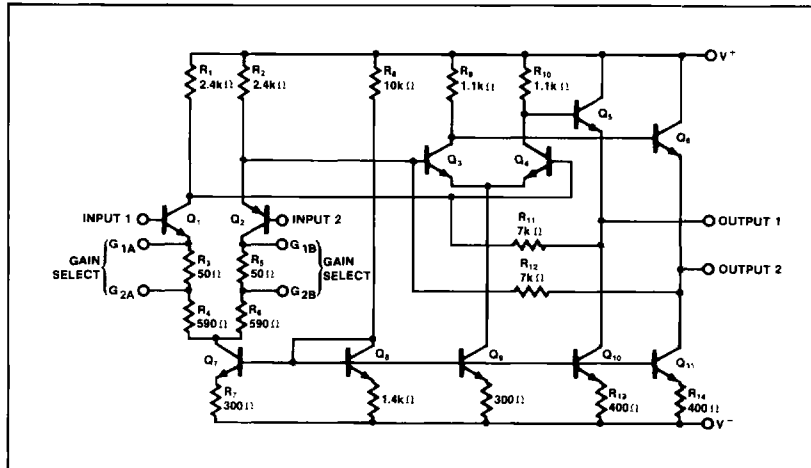


ABSOLUTE MAXIMUM RATINGS


PARAMETER	RATING	UNIT
Differential input Voltage	±5	V
Common mode input Voltage	±6	V
Vcc	±8	V
Output current	10	mA
Junction temperature	+150	°C
Storage temperature range	-65 to +150	°C
Operation temperature range		
μA733C	0 to +75	°C
μA733	-55 to +125	°C
P _D Power dissipation		
K package	500	mW
N, F package	670	mW

TYPICAL PERFORMANCE CHARACTERISTICS


PHASE SHIFT AS A FUNCTION OF FREQUENCY




PHASE SHIFT AS A FUNCTION OF FREQUENCY

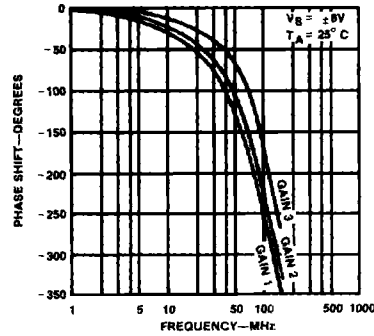


VOLTAGE GAIN AS A FUNCTION OF FREQUENCY

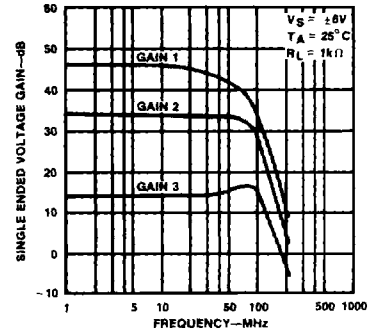


COMMON MODE REJECTION RATIO AS A FUNCTION OF FREQUENCY

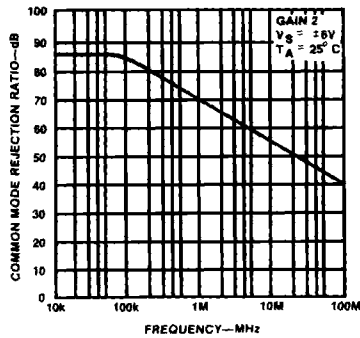


OUTPUT VOLTAGE SWING AS A FUNCTION OF FREQUENCY

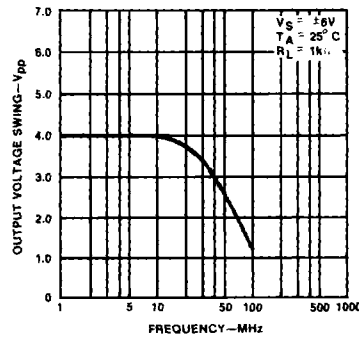


PULSE RESPONSE

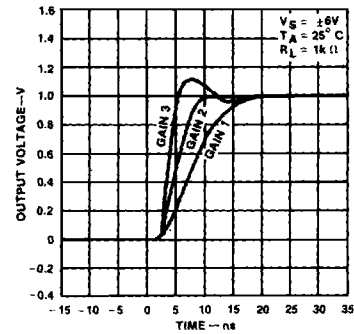


DIFFERENTIAL OVERDRIVE RECOVERY TIME



PULSE RESPONSE AS A FUNCTION OF SUPPLY VOLTAGE

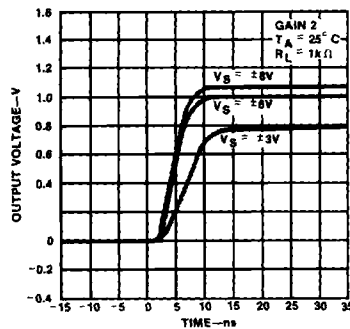


PULSE RESPONSE AS A FUNCTION OF TEMPERATURE

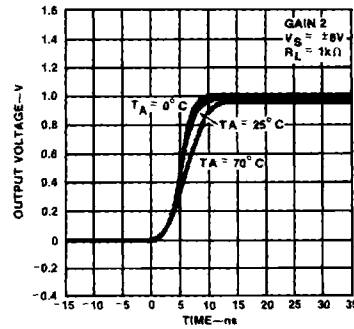


TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)


VOLTAGE GAIN AS A FUNCTION OF TEMPERATURE




GAIN vs FREQUENCY AS A FUNCTION OF TEMPERATURE

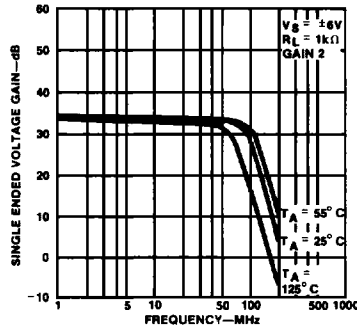


VOLTAGE GAIN AS A FUNCTION OF SUPPLY VOLTAGE

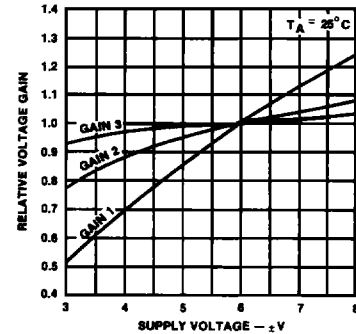

GAIN vs FREQUENCY AS A FUNCTION OF SUPPLY VOLTAGE

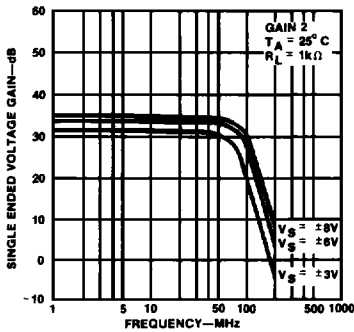


VOLTAGE GAIN ADJUST CIRCUIT

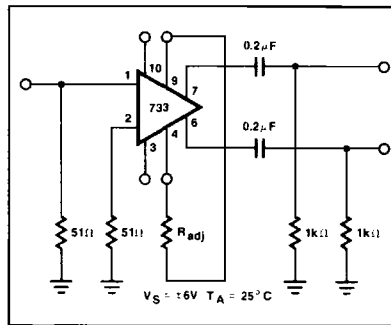


(Pin numbers apply to K Package)


VOLTAGE GAIN AS A FUNCTION OF R_{ADJ} (FIGURE 3)

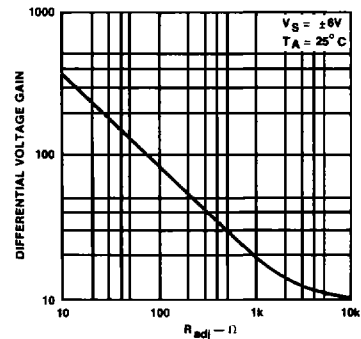


SUPPLY CURRENT AS A FUNCTION OF TEMPERATURE




SUPPLY CURRENT AS A FUNCTION OF SUPPLY VOLTAGE



OUTPUT VOLTAGE AND CURRENT SWING AS A FUNCTION OF SUPPLY VOLTAGE

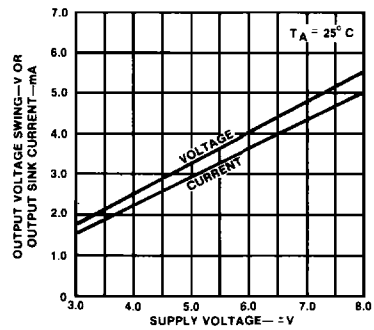

TYPICAL PERFORMANCE CHARACTERISTICS (Cont'd)

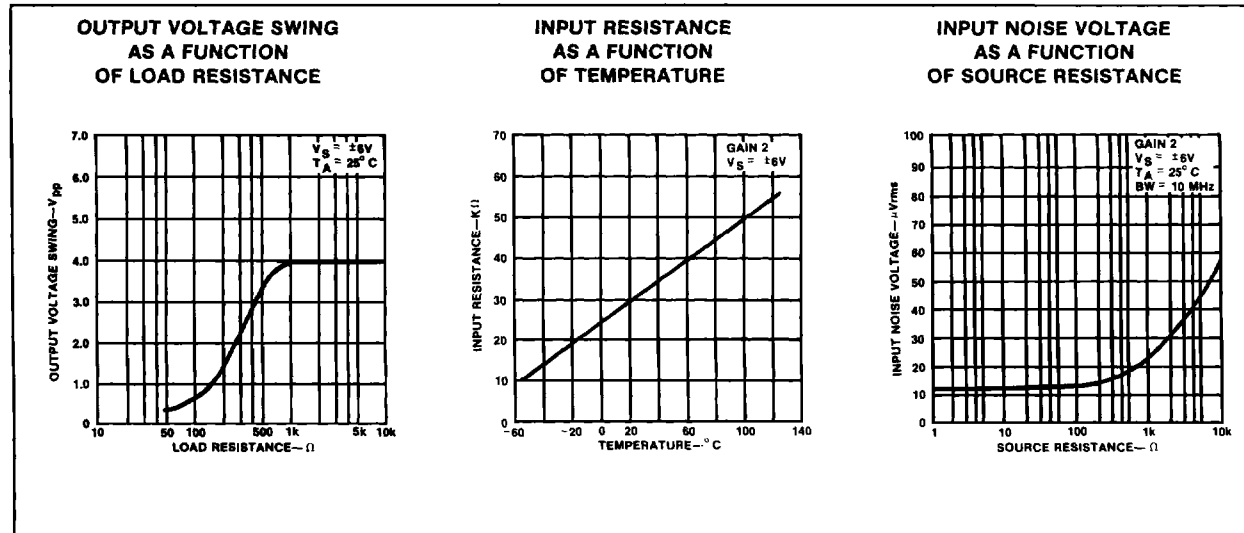

TEST CIRCUITS T_A = 25°C unless otherwise specified.

