


**UA31136****LINEAR INTEGRATED CIRCUIT****FM IF DETECTOR IC FOR
CORDLESS TELEPHONE****DESCRIPTION**

The UTC **UA31136** is a low operation voltage FM IF detector IC that includes an Oscillator, Mixer, Limiting Amplifier, Quadrature Detector and Noise Detector, it is suitable for cordless telephone.

FEATURES

- * Low operation voltage: $V_{CC} = 1.8 \sim 5.5V$
- * Excellent temperature characteristics
- * High sensitivity
12dB sensitivity: 11dB μ V EMF (Input 50 Ω)
- * High intercept point: 96dB μ V (Input 50 Ω)
- * Quadrature detector, both ceramic and coil discriminators are usable.
- * Built-in 2nd MIX
Operating frequency: 10 ~ 100MHz
- * Built-in noise detection circuit
- * RSSI function

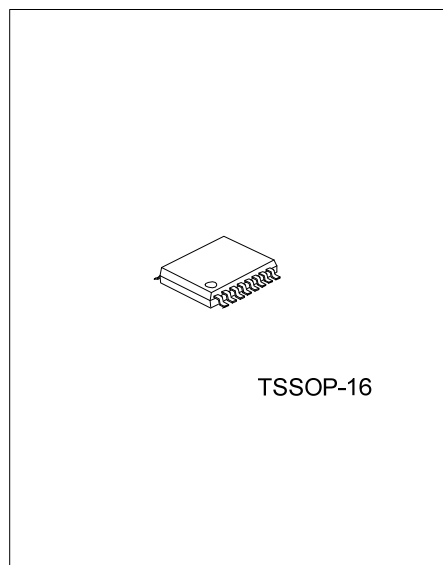

TSSOP-16

Lead-free: UA31136L







Halogen-free: UA31136G

ORDERING INFORMATION

Ordering Number			Package	Packing
Normal	Lead Free	Halogen Free		
UA31136-P16-R	UA31136L-P16-R	UA31136G-P16-R	TSSOP-16	Tape Reel
UA31136-P16-T	UA31136L-P16-T	UA31136G-P16-T	TSSOP-16	Tube

UA31136L-P16-R	(1)Packing Type (2)Package Type (3)Lead Plating	(1) R: Tape Reel, T: Tube (2) P16: TSSOP-16 (3) G: Halogen Free, L: Lead Free, Blank: Pb/Sn
----------------	---	--


■ PIN DESCRIPTION (The values of resistor and capacitor are typical.)

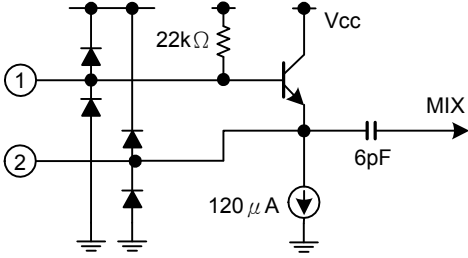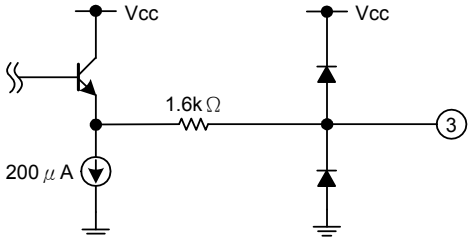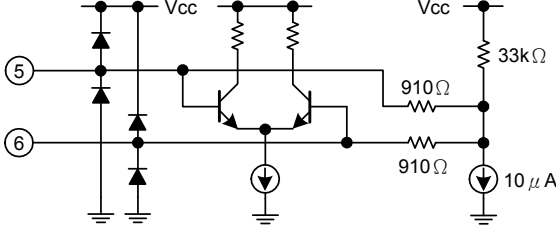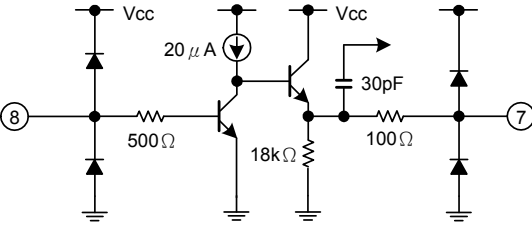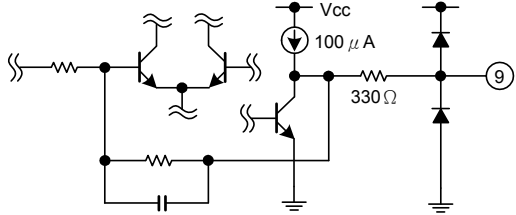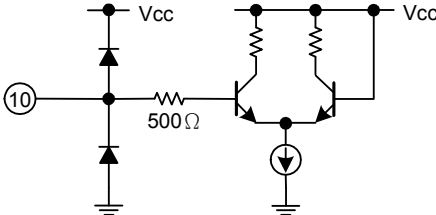PIN No.	PIN NAME	FUNCTION	INTERNAL EQUIVALENT CIRCUIT	VOLTAGE
1	OSC IN	Local oscillator input and output terminals. Colpitts oscillator is formed by internal emitter follower and external X' tal. And external injection is possible from pin 2 or pin 1.		1.98
2	OSC OUT			1.33
3	MIX OUT	MIX output terminal. Output impedance is around 1.8kΩ.		0.74
4	V _{CC}	Power supply		2.0
5	IF IN	2nd IF input and decoupling for bias. Input impedance is around 1.8kΩ.		1.67
6	DEC			1.67
7	FIL OUT	INVERTER AMP input and output terminals. BPF is composed of external capacitors and resistors. Connected internally to rectifier circuit by coupling capacitor.		0.67
8	FIL IN			0.65
9	AF OUT	Demodulate signal output terminal. Carrier leak is small as LPF is built-in. Output impedance is around 360Ω.		
10	QUAD	Phase shift signal input terminal of FM demodulator.		2.0

■ PIN DESCRIPTION (Cont.)

PIN No.	PIN NAME	FUNCTION	INTERNAL EQUIVALENT CIRCUIT	VOLTAGE
11	IF OUT	Output terminal of IF AMP.		1.14
12	RSSI	This terminal outputs DC level according to input signal level to IF AMP. Dynamic range is around 70dB.		
13	N-DET	The result of noise detection is output by comparing output voltage of N-REC terminal with internal reference. Hysteresis range is about 100mV and output is open collector.		
14	N-REC	After output of INVERTER AMP amplified around 20dB, noise signal is rectified by external capacitor.		
15	GND	GND terminal.		0.0
16	MIX IN	1st IF signal input terminal. Input impedance is around 4kΩ at 21.7MHz.		0.94

■ BLOCK DIAGRAM

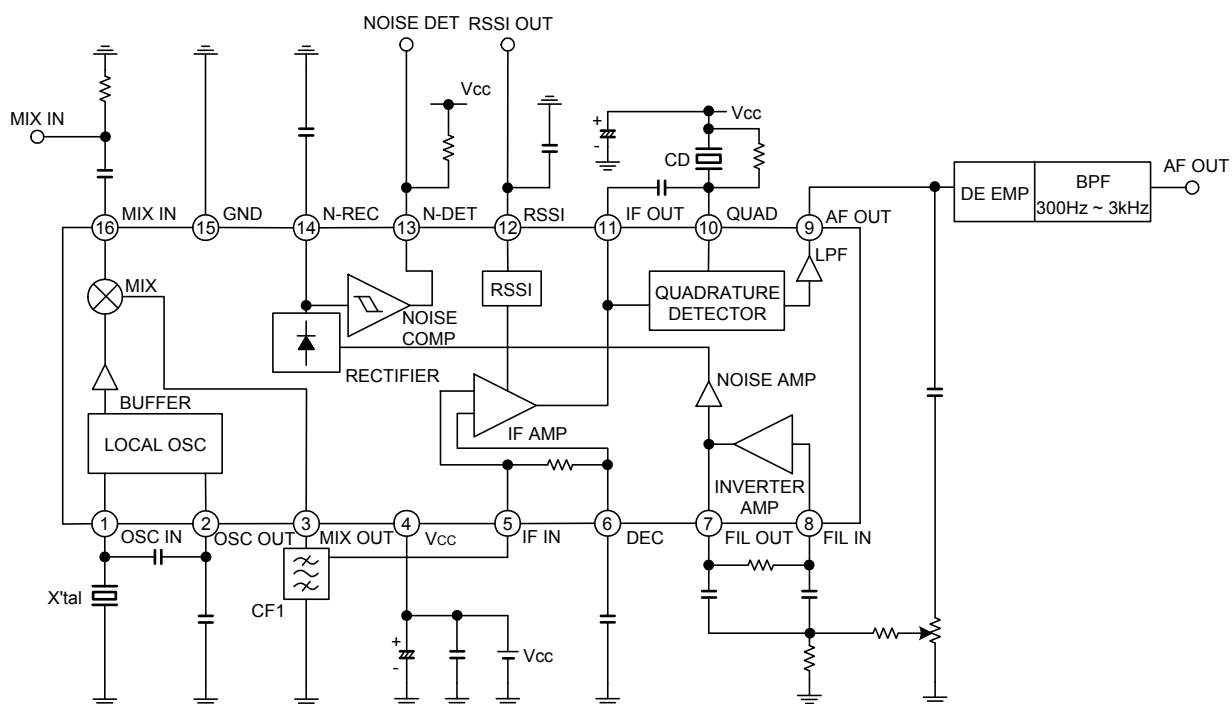

■ ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V _{CC}	7	V
Power Dissipation	P _D	560	mW
Junction Temperature	T _J	125	°C
Operating Temperature	T _{OPR}	-30 ~ +85	°C
Storage Temperature	T _{STG}	-50 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS

(V_{CC} = 2.0V, f_{IN (MIX)} = 21.7MHz, f_{IN (IF)} = 450kHz, Δf = ±1.5kHz, f_{MOD} = 1kHz, Ta = 25°C, unless otherwise specified.)

PARAMETER	SYMBOL	TEST CIRCUIT	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Supply Voltage	V _{CC}			1.8	2.0	5.5	V
Noise Detection Output Voltage	V _{NDET}	2	I _{SINK} = 0.2mA		0.1	0.5	V
Noise Detection Level	High	V _{TH}			0.5	0.7	V
	Low	V _{TL}		0.3	0.4		
RSSI Output Voltage	V _{RSSI 1}	2	V _{CC} = 3V	200	360	520	mV
	V _{RSSI 2}	2					
			V _{IN (IF)} = 30dBμV	1.4	2.0	2.6	V
			V _{IN (IF)} = 100dBμV				
Demodulation Output Level	V _{OD}	2	V _{IN (IF)} = 80dBμV	80	100	120	mV
Current Consumption	I _Q	1			3.2	4.6	mA
Noise Detection Output Leak Current	I _{O(LEAK)}		V _{NREC} = 0.6V, V _{NDET} = 2V		0	5	μA
IF AMP. Input Resistance	R _{IN (IF)}			1.2	1.8	2.4	kΩ
Mixer Output Resistance	R _{O (MIX)}			1.2	1.8	2.4	kΩ
Mixer Input Impedance	R _{IN (MIX)}				5.5		kΩ
	C _{IN (MIX)}				2.8		pF
SN Ratio	SN	2	V _{IN (IF)} = 80dBμV	43	65		dB
Rejection Ratio	RR	2	V _{IN (IF)} = 80dBμV, AM = 30%		40		dB
Mixer Conversion Gain	G _{VC}	2	Measured via ceramic filter. V _{IN (MIX)} = 46dBμV	15	18	21	dB
Mixer Intercept Point	P _{IM}		Input 50Ω		96		dBμV
12dB Sensitivity	12dB SN				11		dBμV

Note: All AC levels are indicated by open lever (EMF).

FUNCTION DESCRIPTION

1. Local oscillator external injection method

Figure 1 and Figure 2 show external injection from pin 2 or pin 1 is possible. In both case, the level at PIN 2 is between 95dB μ V and 100dB μ V. When Local oscillator injected from PIN 1, then the input frequency is increased, the level on pin 2 may not be sufficient, causing a decrease in sensitivity. In such a case, add resistor R₅₁. A built-in BUFFER amp. minimizes leakage from the mixer.




Figure 1

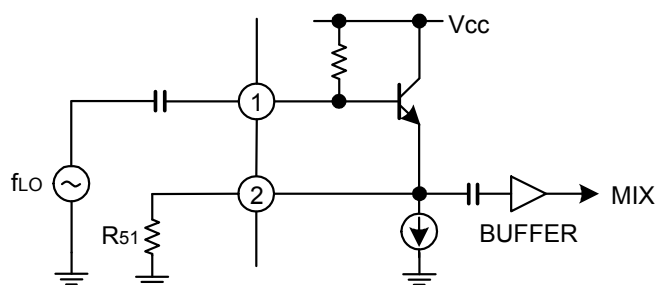


Figure 2

2. Overtone oscillation

The basic configuration of the local oscillation circuit using overtone oscillation is showed as Fig 3. The C₅₁ and L₁ tuning circuits prevent crystal fundamental oscillation. Therefore, set C₅₁ and L₁ to inductive at the fundamental frequency and capacitive at the overtone frequency.

Since the level at pin 2 may decrease and the sensitivity may fall at high frequency as with external injection, adjust the oscillation level using R₅₁.

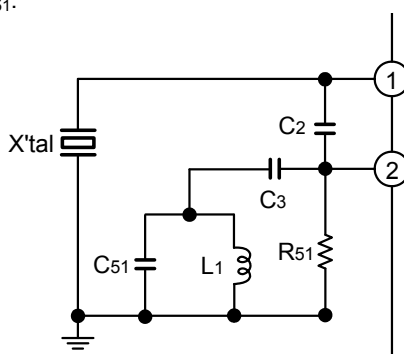


Figure 3

3. Detection circuit

Detection stage is quadrature method. Both ceramic and coil discriminator are suitable. The case of using coil is shown in Figure 4, in this case, L1 and C101 composing a phase shifter, demodulation output V_{OD} is about 80mVrms. V_{OD} will be increased as raising damping resistance R6. Center frequency f₀ and demodulation output depends largely on phase shifter and C₇. For C₇ and C₁₀₁ use a capacitor with good temperature characteristics.

Detector is ceramic discriminator on reference application.

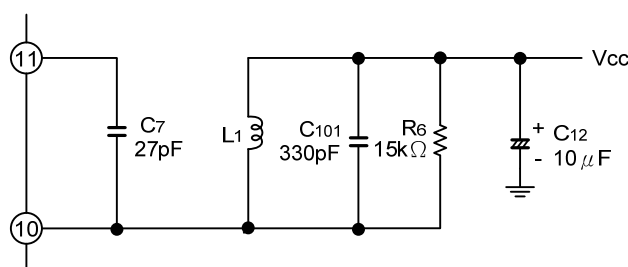


Figure 4

L1: 5114-JPS-010
(SUMIDA)

■ FUNCTION DISCRIPTION(Cont.)

4. INVERTER AMP usage

Figure 5 shows the INVERTER AMP can be used to form a band pass filter.

Set constants as in equations (1) ~ (3). However, because a low pass filter and a high pass filter are built in, it is recommended that center frequency f_0 be about 30kHz.

$$(1) f_0 = \frac{1}{2\pi\sqrt{R_3(R_4/R_5)C^2}}$$

$$(2) G_V = R_3 / 2R_4$$

$$(3) Q^2 = \frac{R_3}{4(R_4/R_5)}$$

at $R_4 \gg R_p$

Example $R_3 = 150k\Omega$, $R_4 = 330k\Omega$,

$R_5 = 3.3k\Omega$, $R_p = 20k\Omega$ (VR)

$C = 220pF$ provide;

$f_0 \approx 31kHz$, $G_V \approx -13dB$

$Q \approx 12$

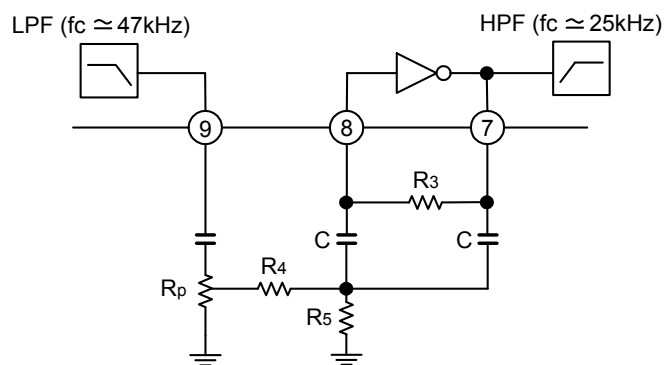


Figure 5

LINEAR INTEGRATED CIRCUIT

The schematic diagram of the UA31136 IC is divided into two main sections. The top section shows the basic pin connections for the UTC UA31136 IC. The bottom section shows a more detailed circuit diagram with various components like capacitors, resistors, and a switch SW1, along with measurement points for V_{TH} , V_{DET} , V_{RSSI} , and V_V .

Top Section: Basic Pin Connections

- Top Pins (Left to Right):** MIX IN (16), GND (15), N-REC (14), N-DET (13), RSSI (12), IF OUT (11), QUAD (10), AF OUT (9).
- Bottom Pins (Left to Right):** OSC IN (1), OSC OUT (2), MIX OUT (3), Vcc (4), IF IN (5), DEC (6), FIL OUT (7), FIL IN (8).
- Components:**
 - Capacitors: $0.01 \mu F$ on pins 16, 15, 14, 12, 11, 10, 1, 2, 4, 5, 6, 7, 8.
 - Capacitors: $0.1 \mu F$ on pins 4, 5, 6, 7, 8.
 - Current source: I_q connected to pin 4.


Bottom Section: Detailed Circuit Diagram

- Inputs:**
 - MIX IN (16): Connected to a 21.7MHz signal source through a 51Ω resistor and a 1000pF capacitor.
 - OSC IN (1): Connected to a 21.25MHz signal source through a 39pF capacitor.
 - IF IN (5): Connected to a 450kHz signal source through a 51Ω resistor.
- Outputs and Measurement Points:**
 - V_{TH} - H and V_{TH} - L: Measured across the 1000pF capacitor at MIX IN.
 - V_{DET}: Measured at pin 13 (N-DET).
 - V_{RSSI} - 1 and V_{RSSI} - 2: Measured at pin 12 (RSSI).
 - V_V: Measured at pin 8 (FIL IN).
- Internal Components and Connections:**
 - Capacitors: $0.1 \mu F$ on pins 14, 13, 12, 11, 10, 7, 8; $0.01 \mu F$ on pins 4, 5, 6, 7, 8; $10 \mu F$ on pin 14; $91pF$ on pin 11; $1.5k\Omega$ on pin 9; $150k\Omega$ on pin 7; $220pF$ on pin 7; $10k\Omega$ on pin 8; $5.6k\Omega$ on pin 8.
 - Resistors: 51Ω on pin 16; $1000pF$ on pin 14; $1.5k\Omega$ on pin 9; $150k\Omega$ on pin 7; $220pF$ on pin 7; $10k\Omega$ on pin 8; $5.6k\Omega$ on pin 8.
 - Switch SW1: Connected to pin 5 (IF IN) and pin 4 (Vcc).
 - CFU450G: Connected to pin 5 (IF IN) and pin 4 (Vcc).
 - DE EMP + BPF: Connected to pin 9 (AF OUT) and pin 8 (FIL IN).





Legend:

- SW1 : Gvc Measurement → a
- Others → b



■ TYPICAL APPLICATION CIRCUIT

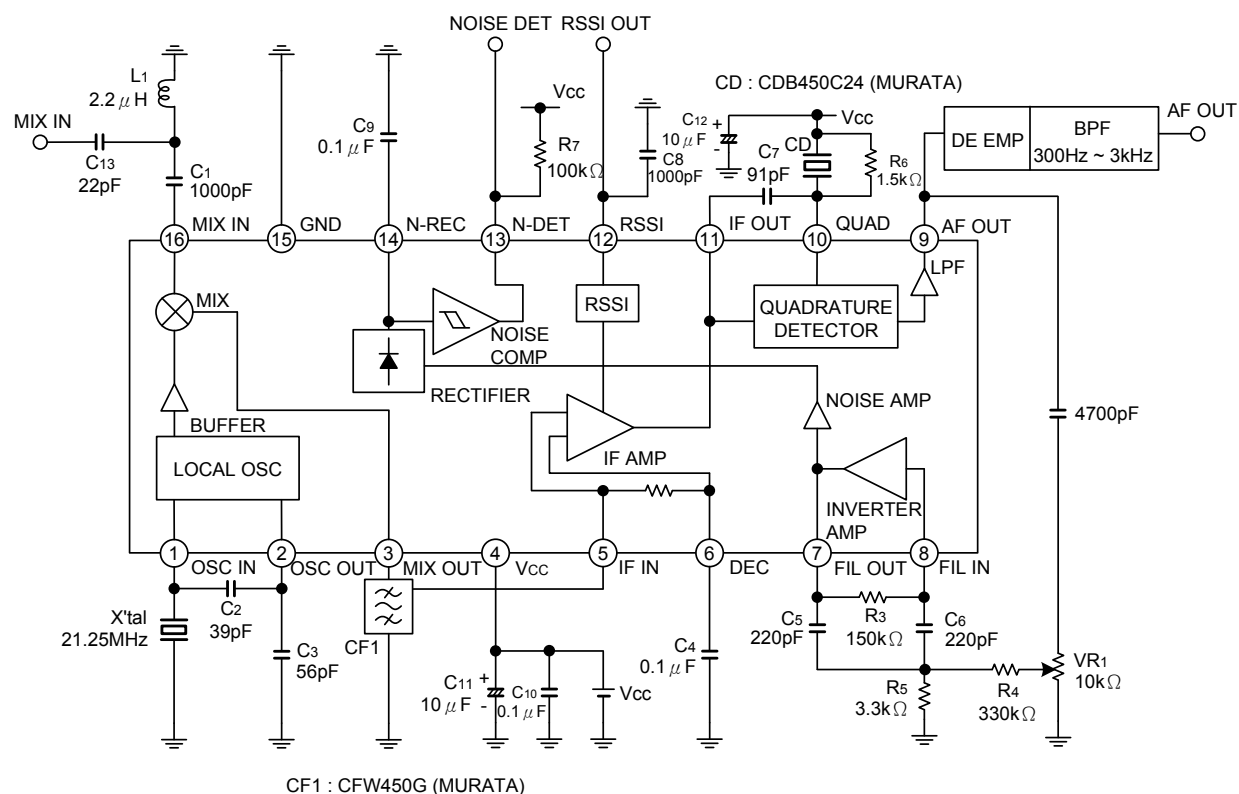

TYPICAL CHARACTERISTICS

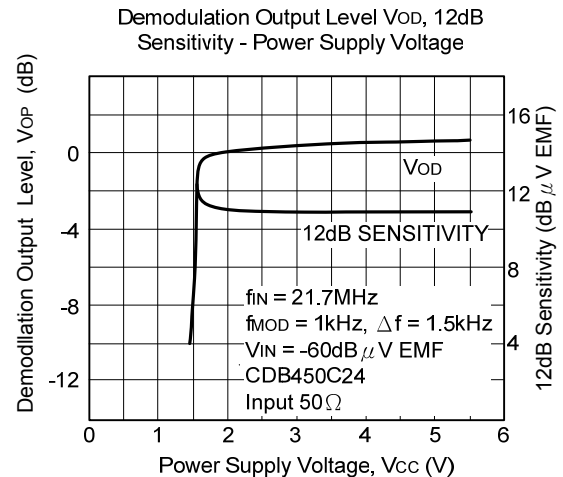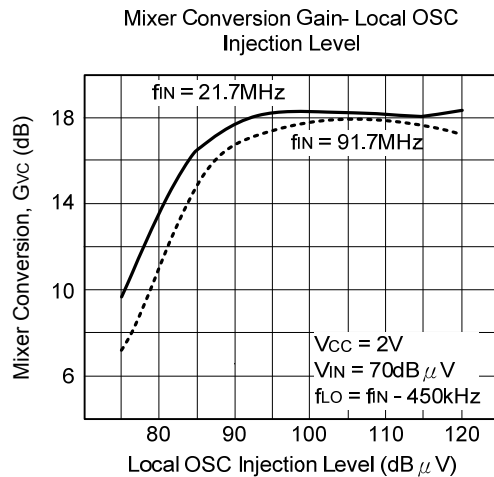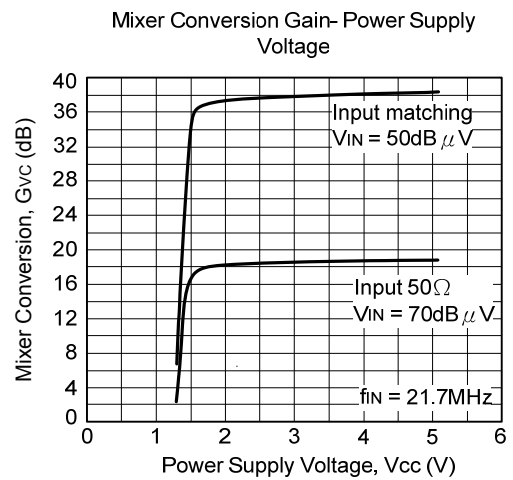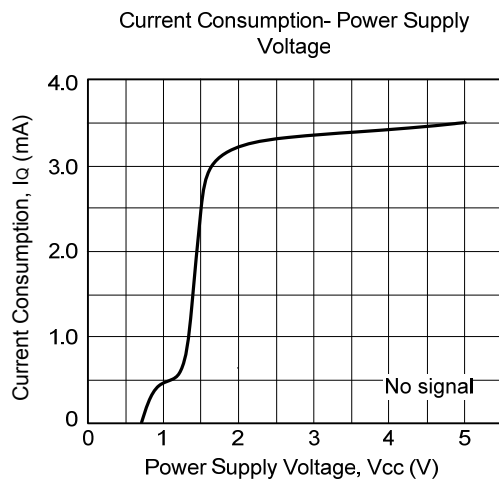


IN COIL DISCRIMINATER USED

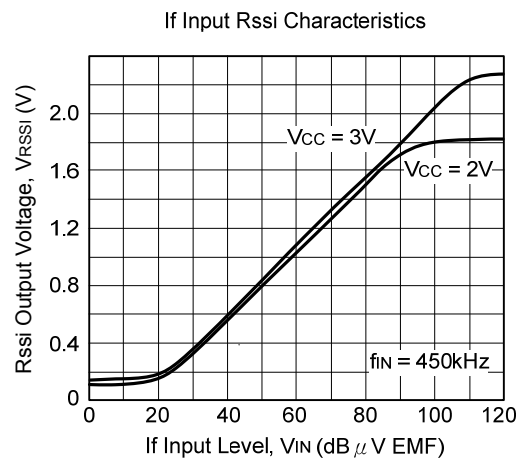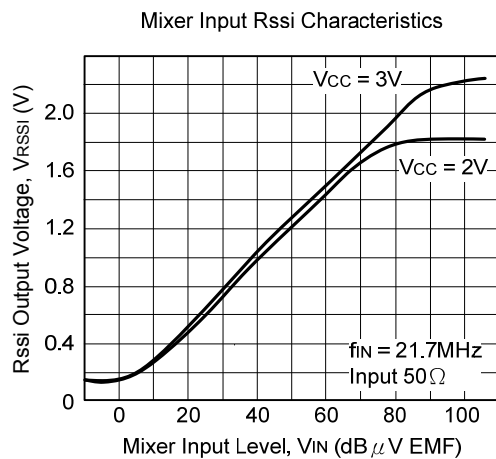


■ IN COIL DISCRIMINATER USED (Cont.)

Noise Detection Characteristics

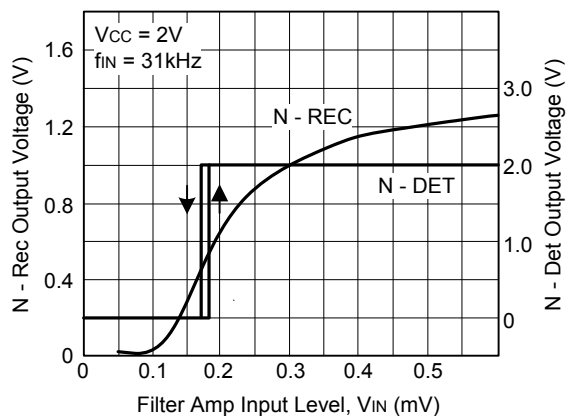

Noise Detection Frequency Characteristics

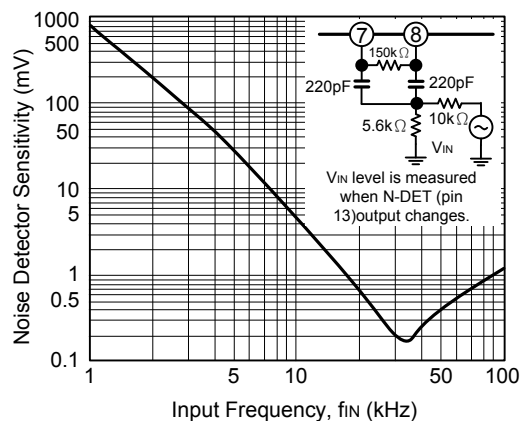

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.