

SILICON N CHANNEL JUNCTION TYPE
FIELD EFFECT TRANSISTOR


2SK881

FM TUNER APPLICATIONS.
VHF BAND AMPLIFIER APPLICATIONS.

- Low Noise Figure : $NF=2.5\text{dB}$ (Typ.) ($f=100\text{MHz}$)
- High Forward Transfer Admittance
: $|y_{fs}|=9\text{mS}$ (Typ.)

MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Gate-Drain Voltage	V_{GDO}	-18	V
Gate Current	I_G	10	mA
Drain Power Dissipation	P_D	100	mW
Junction Temperature	T_j	125	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55~125	$^\circ\text{C}$

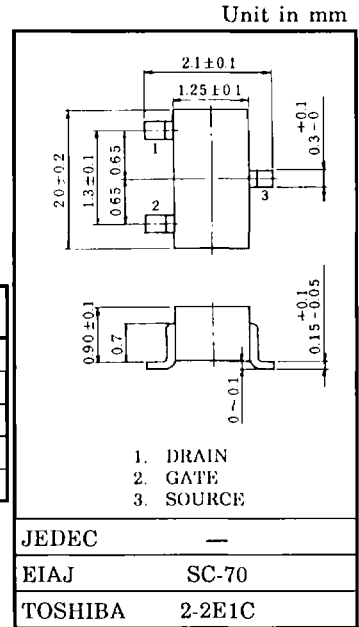


ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)


Weight : 0.006g

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gate Leakage Current	I_{GSS}	$V_{GS} = -0.5\text{V}, V_{DS} = 0$	—	—	-10	nA
Gate-Drain Breakdown Voltage	$V_{(BR)GDO}$	$I_G = -10\mu\text{A}$	-18	—	—	V
Drain Current	I_{DSS} (Note)	$V_{GS} = 0, V_{DS} = 10\text{V}$	1.0	—	10	mA
Gate-Source Cut-off Voltage	$V_{GS(OFF)}$	$V_{DS} = 10\text{V}, I_D = 1\mu\text{A}$	-0.4	—	-4.0	V
Forward Transfer Admittance	$ y_{fs} $	$V_{GS} = 0, V_{DS} = 10\text{V}, f = 1\text{kHz}$	—	9	—	mS
Input Capacitance	C_{iss}	$V_{DS} = 10\text{V}, V_{GS} = 0, f = 1\text{MHz}$	—	6.0	—	pF
Reverse Transfer Capacitance	C_{rss}	$V_{DS} = 10\text{V}, V_{GS} = 0, f = 1\text{MHz}$	—	—	0.15	pF
Power Gain	G_{ps}	$V_{DD} = 10\text{V}, f = 100\text{MHz}$ (Fig.1)	10	18	—	dB
Noise Figure	NF	$V_{DD} = 10\text{V}, f = 100\text{MHz}$ (Fig.1)	—	2.5	3.5	dB

Note : I_{DSS} Classification O : 1.0~3.0, Y : 2.5~6.0, GR : 5.0~10.0

Marking



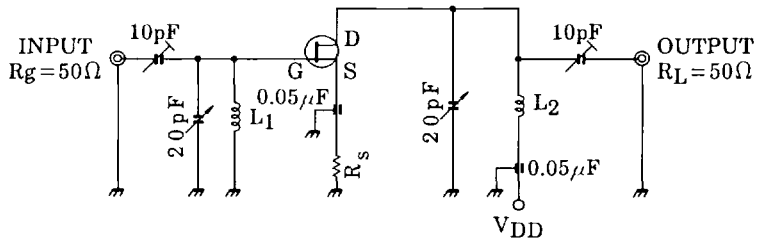

L₁ : 0.8mmϕ Ag PLATED Cu WIRE, 3. TURNS, 10mm ID, 10mm LENGTH.
 L₂ : 0.8mmϕ Ag PLATED Cu WIRE, 3.5 TURNS, 10mm ID, 10mm LENGTH.

Fig.1 100MHz Gps, NF TEST CIRCUIT

2SK881 is measured at each group by changing R_S.

GROUP	R _S (Ω)
2SK881-O	0
2SK881-Y	18Ω ± 5%
2SK881-GR	100Ω ± 5%

