

6

5

4




3

2

1

APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	03/31/05	
A		REDRAWN	9/23/11	
B		REDRAWN	12/06/11	

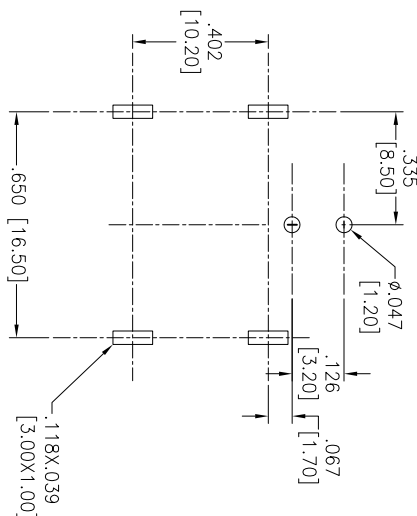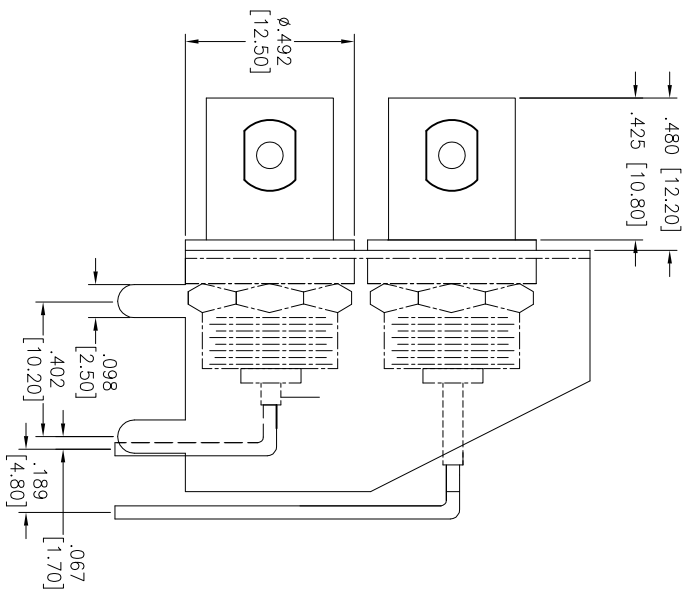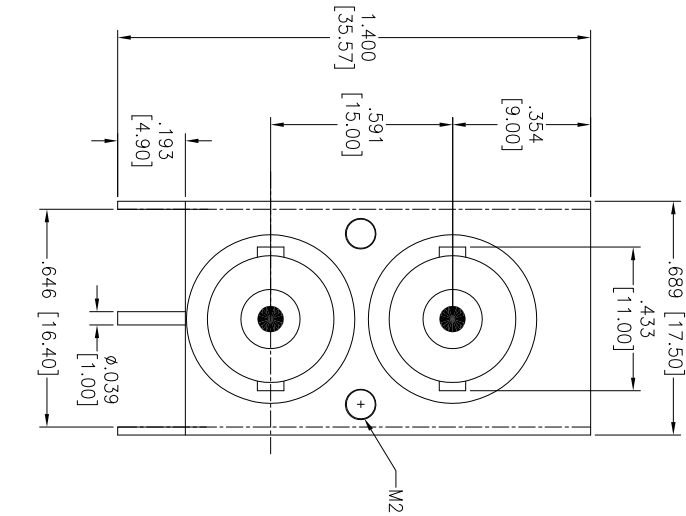

DESCRIPTION	MATERIAL	FINISH	QTY
NUT	STEEL	NICKEL	2
WASHER	STEEL	NICKEL	2
INSULATOR	PLACTIC	NONE	2
BODY	ZINC	NICKEL	2
INSULATOR	TELFON	NONE	2
BRACKET	FE	NICKEL	1
CENTER CONTACT	BRASS	GOLD	2
DESCRIPTION	MATERIAL	FINISH	QTY

SPECIFICATIONS:

Electrical:
 Nominal Impedance: 75 ohms
 Frequency range: 0-2 GHz
 Voltage range: 500 VRMS max.
 Insulator Resistance: 5000 Mohms min. @ 500VDC
 Dielectric Strength: 1500 VRMS For 1 min.
 Environmental:
 Lead free, ROHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 .X ±.10 Ø.X ±.10
 .XX ±.020 Ø.XXX ±.015
 .XXX ±.015 Ø.XXXX ±.010

APPROVALS	DATE
DRAWN	SLS
CHECKED	
APPROVED	

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **BNC FEMALE ISOLATED GROUND**

BULKHEAD, 75 OHM

SIZE	PART NO.	REV.
X	RF1-28A-T-00-75	B

REF: S00054T SCALE: NTS SHEET 1 OF 1

A

B

C

D

A

B

C

D

6

5

4

3

2

1