

MTCA-085-02-S-DV-SMT-K-TR

MTCA SERIES

(0.75 mm) .030"

MICRO TCA CONNECTOR

SPECIFICATIONS

For complete specifications see www.samtec.com?MTCA

Insulator Material:

LCP

Terminal Material:

Brass Alloy

Plating:

Au or Sn over

50 μ" (1.27 μm) Ni

Operating Temp Range:

-55 °C to +125 °C

RECOGNITIONS


For complete scope of recognitions see www.samtec.com/quality



FILE NO. E111594


Mates with:
(1.60 mm) .062" thick cards

APPLICATION

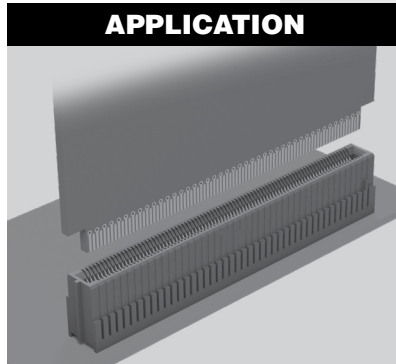

Contacts on
(0.75 mm)
.030" pitch



Supports hot plugging
and high-speed
serial connections

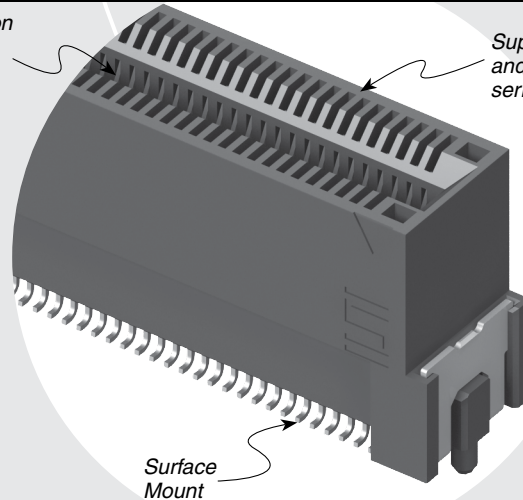

Surface
Mount

ALSO AVAILABLE (MOQ Required)

- Additional positions

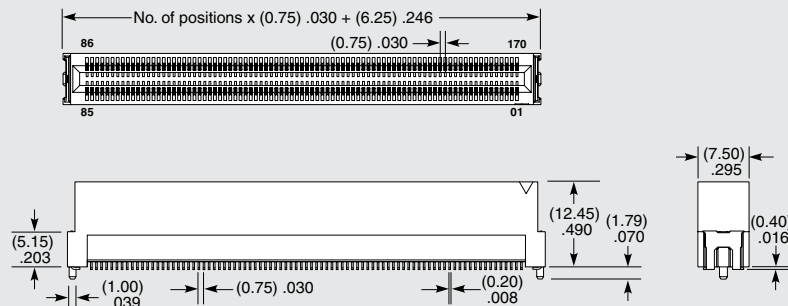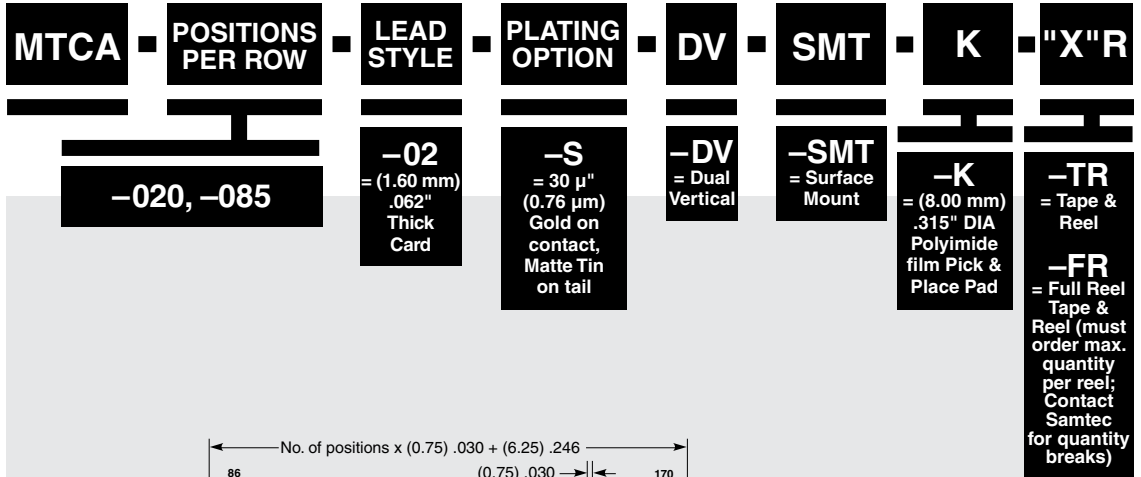

Note:
Some lengths, styles and options are non-standard, non-returnable.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec:](#)

[MTCA-085-02-S-DV-SMT-K-TR](#) [MTCA-020-02-S-DV-SMT-K-TR](#)