

TL592, TL592A DIFFERENTIAL VIDEO AMPLIFIERS

D2668, NOVEMBER 1983—REVISED MAY 1988

- 8-Pin Version of NE592 . . . Saves Printed Circuit Board Space
- Adjustable Gain to 400
- No Frequency Compensation Required
- Adjustable Passband

DEVICE TYPE	TEMPERATURE RANGE	A _{VD} RANGE (GAIN OPTION 1)
TL592	0°C to 70°C	250–600
TL592A	0°C to 70°C	400–600

description

This device is a monolithic two-stage video amplifier with differential inputs and differential outputs.


Internal series-shunt feedback provides wide bandwidth, low phase distortion, and excellent gain stability. Emitter-follower outputs enable the device to drive capacitive loads. All stages are current-source biased to obtain high common-mode and supply-voltage rejection ratios.

Fixed differential amplification of nominally 400 may be selected without external components, or amplification may be adjusted from 0 to approximately 400 by the use of a single external resistor connected between the gain adjustment pins A and B. No external frequency-compensating components are required for any gain option.


The device is particularly useful in magnetic-tape or disc-file systems using phase or NRZ encoding and in high-speed thin-film or plated-wire memories. Other applications include general-purpose video and pulse amplifiers where wide bandwidth, low phase shift, and excellent gain stability are required.

The TL592 and TL592A are characterized for operation from 0°C to 70°C.

D OR P PACKAGE
(TOP VIEW)



symbol

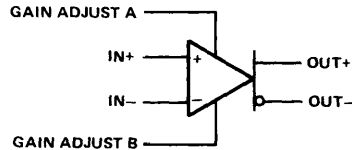

4

Special Functions

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

TEXAS
INSTRUMENTS


POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

Copyright © 1983, Texas Instruments Incorporated

4-143

TL592, TL592A DIFFERENTIAL VIDEO AMPLIFIERS

schematic

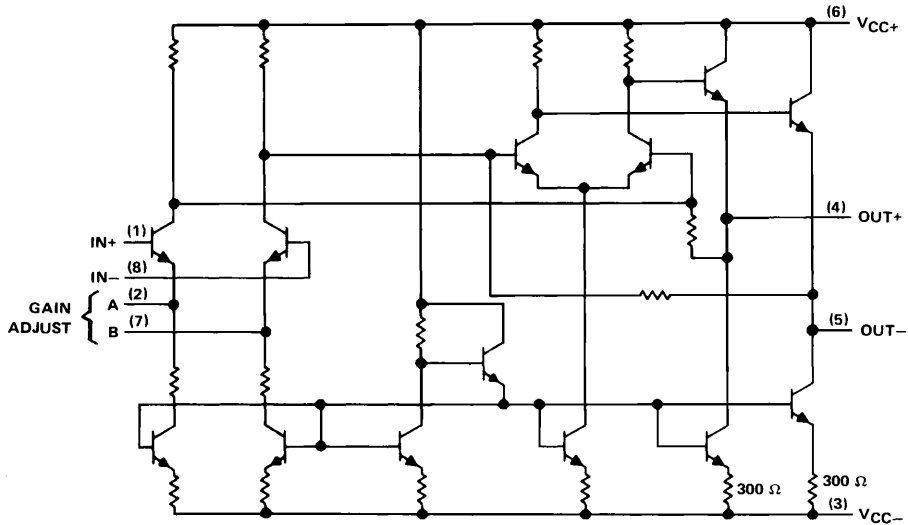

absolute maximum ratings over operating free-air temperature (unless otherwise noted)

Supply voltage, V_{CC+} (see Note 1)	8 V
Supply voltage, V_{CC-} (see Note 1)	-8 V
Differential input voltage	± 5 V
Voltage range, any input	V_{CC+} to V_{CC-}
Output current	10 mA
Continuous total power dissipation at 70°C	500 mW
Operating free-air temperature range	0°C to 70°C
Storage temperature range	-65°C to 150°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C

NOTE 1: All voltage values except differential input voltages are with respect to the midpoint between V_{CC+} and V_{CC-} .

recommended operating conditions

	MIN	NOM	MAX	UNIT
Supply voltage, V_{CC+}	3	6	8	V
Supply voltage, V_{CC-}	-3	-6	-8	V
Operating free-air temperature, T_A	0		70	°C

electrical characteristics at specified free-air temperature, $V_{CC+} = 6\text{ V}$, $V_{CC-} = -6\text{ V}$, $R_L = 2\text{ k}\Omega$ (unless otherwise noted)

PARAMETER	TEST FIGURE	TEST CONDITIONS	GAIN OPTION†	TL592			TL592A			UNIT
				MIN	TYP	MAX	MIN	TYP	MAX	
AVD	1	$V_{OPP} = 3\text{ V}$, $R_L = 2\text{ k}\Omega$ 0°C to 70°C	1	250	400	600	400	440	600	V/V
BW	2	$V_{OPP} = 1\text{ V}$ 25°C	1	250	400	600	400	440	600	MHz
I_{IO}		$V_{IC} = 0$ 0°C to 70°C	1 or 2		0.4	5		0.4	5	μA
I_{IB}		$V_{IC} = 0$ 0°C to 70°C	1 or 2		9	30		10	30	μA
V_{ICR}		25°C to 70°C	1 or 2	± 1			± 1			V
V_{OC}		25°C to 70°C	1 or 2	± 1			± 1			V
V_{OO}		$R_L = \infty$ 25°C	2	2.4	2.9	3.4	2.4	2.9	3.4	V
V_{OPP}		$V_{ID} = 0$, $R_L = \infty$ 0°C to 70°C	2	0.35	0.75		0.35	0.75		V
z_i		25°C	1	3	4	1.5	3	4	1.5	V
		0°C to 70°C	1	2.8			2.8			V
		$R_L = 2\text{ k}\Omega$ 0°C to 70°C	1		4			3.6		k Ω
		$V_{OD} = 1\text{ V}$, $f = 1\text{ kHz to } 10\text{ MHz}$	1		3.6			3.3		k Ω
		$f = 100\text{ kHz}$			60	86		60	86	dB
		$f = 5\text{ MHz}$			60	60		60	60	dB
		$f = 100\text{ kHz}$			50	60		50	60	dB
		$f = 5\text{ MHz}$			60	60		60	60	dB
		$\Delta V_{CC+} = \pm 0.5\text{ V}$, $\Delta V_{CC-} = \pm 0.5\text{ V}$	1	50	70		50	70		dB
		0°C to 70°C	1	50	50		50	50		dB
		$BW = 1\text{ kHz to } 10\text{ MHz}$ 25°C	1 or 2		12			12		μV
		$\Delta V_O = 1\text{ V}$ 25°C	2		7.5			7.5		ns
		$\Delta V_O = 1\text{ V}$ 25°C	2		10.5			10.5		ns
		No load, No signal	1, 2, or 3	3	4		3	4		mA
		25°C	1 or 2		18	24		19	24	mA
		0°C to 70°C	1 or 2		27			27		mA

†The gain option is selected as follows:

Gain Option 1 . . . Gain adjust pin A is connected to pin B.

Gain Option 2 . . . Gain adjust pins A and B are open.

4 Special Functions

TL592, TL592A
DIFFERENTIAL VIDEO AMPLIFIERS

PARAMETER MEASUREMENT INFORMATION

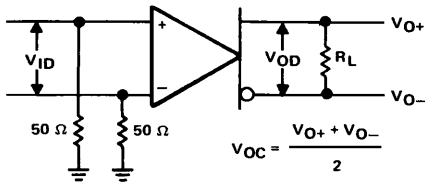


FIGURE 1

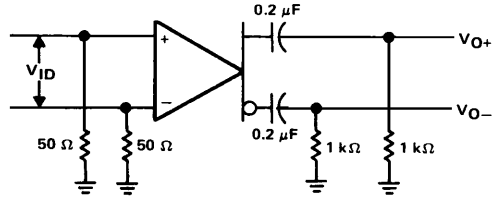


FIGURE 2

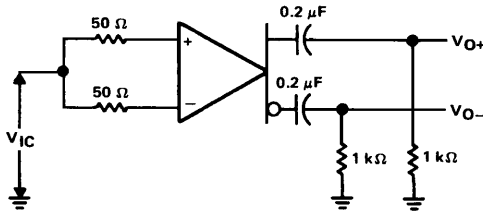


FIGURE 3

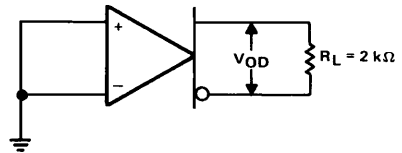


FIGURE 4

4

Special Functions