

PHASE SHIFTER





1930-1990 GHz

MODEL SQ0003**GENERAL INFORMATION**

KDI's new ceramic surface mount analog-phase shifter provides 0-120 degree phase shift minimum over the 1930-1990 MHz frequency band.

The maximum insertion loss and VSWR of the unit is 2.8 dB; the maximum VSWR is 1.7. Phase flatness is specified at ± 9 degrees maximum, and the insertion loss change verses phase shift is well within ± 0.5 dB. The 0-10VDC input control voltage has a corresponding output phase shift that is very repeatable and consistent unit to unit, supporting high rate production without the need for individual unit to unit compensation. The surface mount package (*Surfpac*) is suitable for pick and place and re-flow solder systems.

The unit measures 1.00 x .077 x 0.25 inches, in a ceramic package with a 10^{-6} ATM CC/SEC He maximum leak rate with stress relief contact leads.

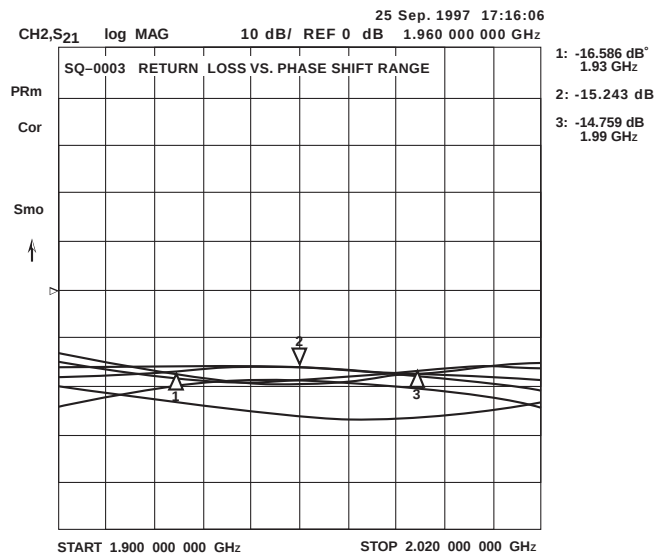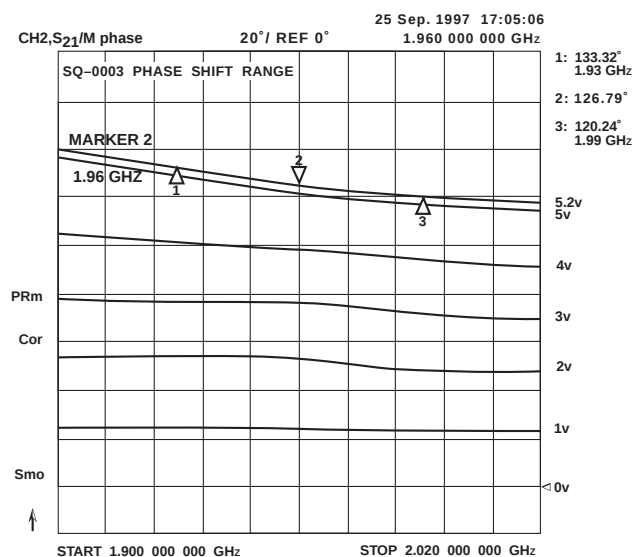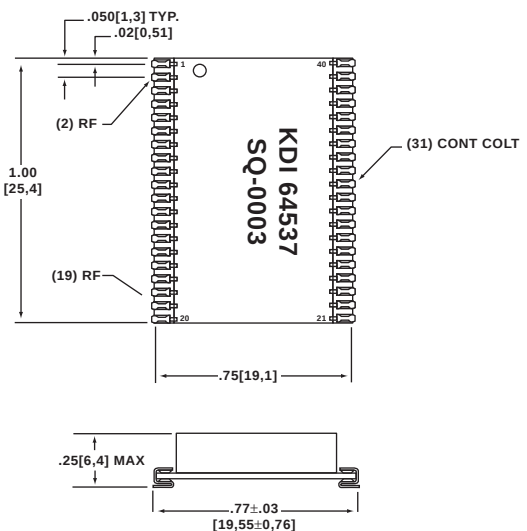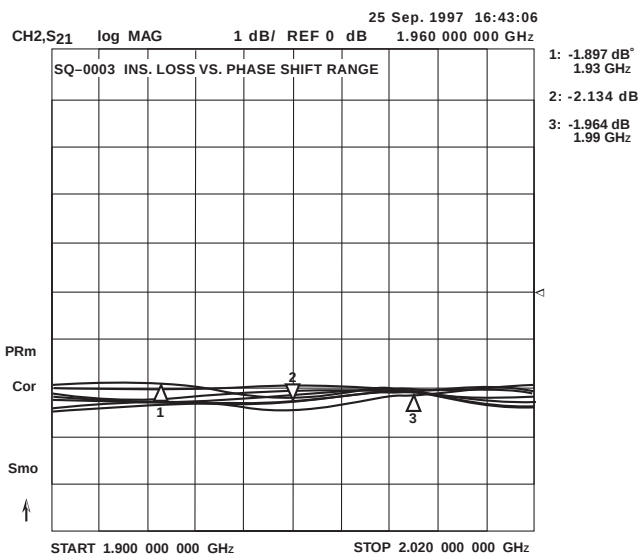

KEY: Inches[Millimeters] .XX ±.03 .XXX ±.010 [.X ±0.8 .XX ±0.25]

**KDI INTEGRATED PRODUCTS**

60 South Jefferson Road, Whippany, NJ 07981

Tel: 973-887-8100 • Fax: 973-884-0445

email: sales@mcekd-integrated.com

See us on the web @ www.mcekd-integrated.com

