REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

- FERRULE CRIMPING TOOLS P/N
  227-944(M22520/5-01)
  227-1221-19B
  (M22520/5-19B) HEX: 5.41 L=10.16
- INNER CONTACT CRIMPING TOOL P/N
  413 SP 00 ADJUST TO 5
- STRIPPING TOOL FOR L910/34
  SP 456 00
- PACKAGING IN BAG WITH COMMERCIAL PART NUMBER AND DATE CODE
- CONNECTOR ACCORDING TO NFC 93-570, UTEC 93-570



RECOMMENDED
CABLE STRIPPING DIM'S



RECOMMENDED
MOUNTING HOLE

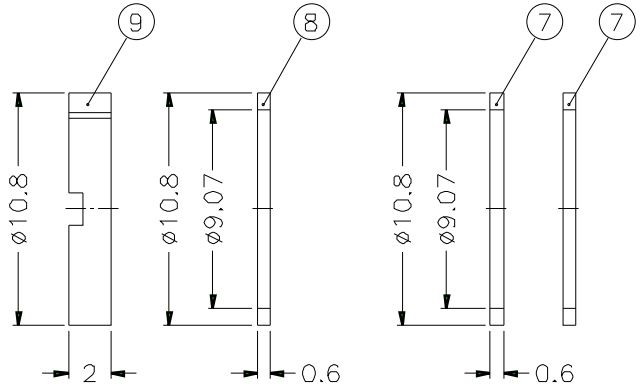

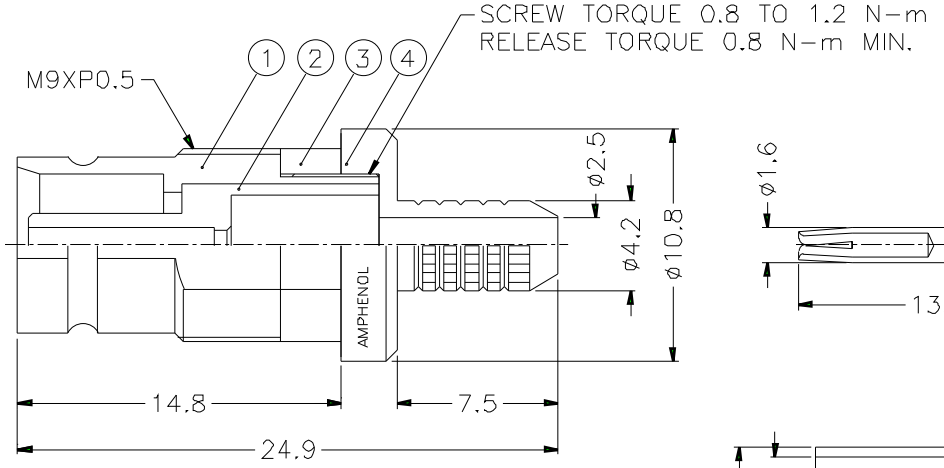

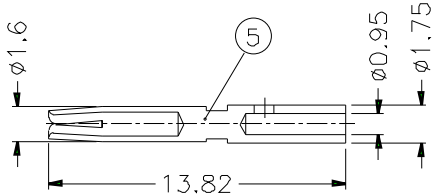

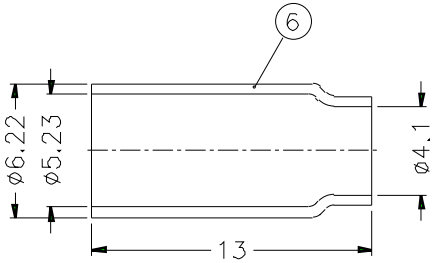

PANEL THICKNESS:
1. 1.2mm(GROUNDED OR ISOLATED)
2. 3mm(ONLY GROUNDED, WITHOUT WASHERS ⑦ AND ⑧)

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
9	NUT	BRASS	NICKEL	1	
8	WASHER	BRASS	NICKEL	1	
7	ISOLATING WASHER	EPOXY GLASS -FR4 TYPE	NATURAL	2	
6	FERRULE	COPPER	NICKEL	1	
5	CONTACT PIN	BECU	GOLD	1	
4	BARREL	BRASS	NICKEL	1	
3	RING	PSU,20% G.F.	GREEN	1	
2	INSULATOR	TEFLON	NATURAL	1	
1	BODY	BRASS	NICKEL	1	

DIMENSIONS ARE IN MILLIMETERS

SCALE 3/1 ISSUE A

PART NO. 156 931 44

APPROVED DATE 10-11-01'

CHECKED DATE 10-11-01'

DRAWN DATE 10-11-01'

FILE NO.

Amphenol

TITLE 1.6/5.6 75Ω BULKHEAD MOUNT JACK (FOR L910/34 CABLE)

DRAWING NO.

ITEM NO.