
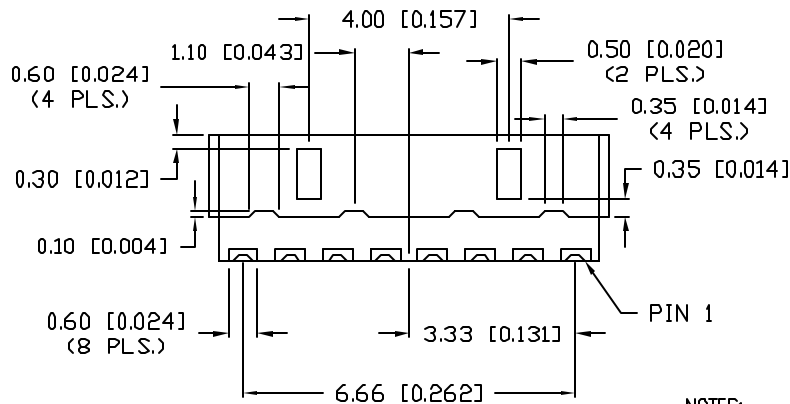


RECOMMENDED SOLDERPAD LAYOUT

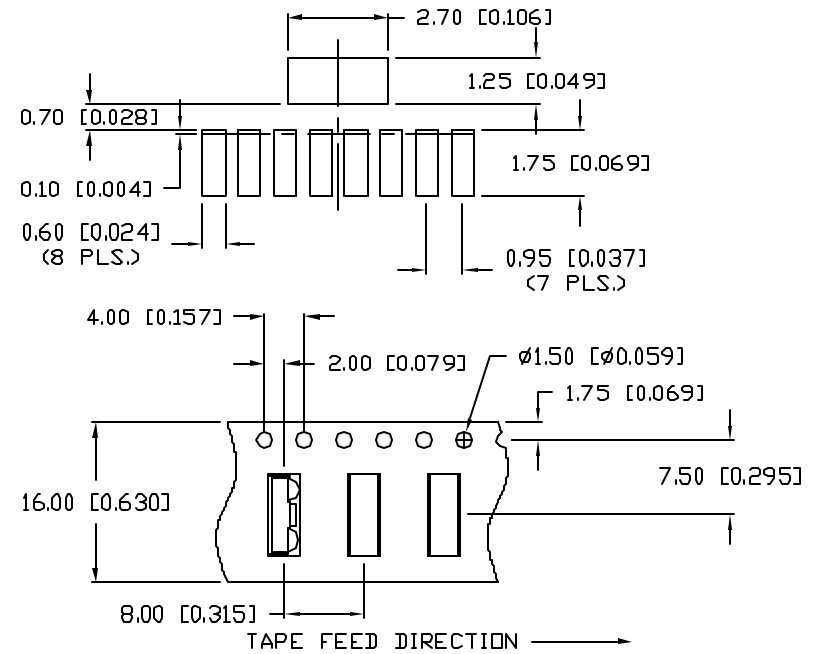

NOTES:

- 2,500 PIECES PER REEL.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.038), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN=+0.00 DECIMAL PRECISION MAX.=+0.00 DECIMAL PRECISION

UNCONTROLLED DOCUMENT

REV.

PART NUMBER

OED-IRDA8235

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC, THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

INFRARED DATA TRANSCEIVER MODULE.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

DRAWN BY:

GT

CHECKED BY:

APPROVED BY:

DATE: 8.16.01

PAGE: 1 OF 3

SCALE: N/A

PIN DESCRIPTIONS

PIN	SYMBOL	FUNCTION	DESCRIPTION	I/O	ACTIVE
1	GND	GROUND	CONNECT SYSTEM TO GROUND		
2	NC	NO CONNECT			
3	VCC	SUPPLY VOLTAGE	SUPPLY VOLTAGE FROM 2.0~5.5 VOLTS*		
4	AGND	ANALOG GROUND	CONNECT TO A "QUIET" GROUND.		
5	SD	SHUT DOWN	MUST BE DRIVEN EITHER HIGH OR LOW.**		
6	RXD	RECEIVER DATA OUTPUT	OUTPUT IS LOW PULSE WHEN LIGHT PULSE SEEN.**	0	LOW
7	TXD	TRANSMITTER DATA INPUT	HIGH LOGIC ACTIVATE IrED****	1	HIGH
8	VLEDA	IrED SUPPLY VOLTAGE	IrED SUPPLY VOLTAGE: 2.0~Vcc+4 VOLTS.*****		

- * RECEIVES POWER SUPPLY FROM 2.0~5.5 VOLTS. THIS PIN PROVIDES POWER FOR THE RECEIVER AND TRANSMITTER DRIVE SECTION. POWER NOISE IN THE 100KHz TO 2MHz RANGE MUST HAVE A dv/dt OF LESS THAN 50mV/uS IN RECEIVE MODE.
- ** ASSERTING THIS PIN ABOVE 1.4V CAUSES THE DEVICE TO SHUT DOWN, DISABLING TRANSMITTER AND TRISTATING THE RECEIVER OUTPUT; HOWEVER, IT MUST BE DRIVEN ABOVE Vdd-0.7V FOR SHUTDOWN CURRENT CONSUMPTION TO BE LESS 1uA. POWER UP RECEIVER LATENCY (TIME TO COME TO FULL SENSITIVITY) IS < 100uS. ENABLING THIS PIN WILL ALSO CLOCK THE TXI INPUT INTO THE TX POWER MODE CONTROL D FLIP FLOP.
- *** NORMALLY HIGH GOES LOW FOR DURATION OF RECEIVE PULSE. OUTPUT IS A CMOS DRIVER PROVIDING RAIL TO RAIL OPERATION. RXD MAY GO LOW CONTINUOUSLY IF THE DC AMBIENT EXCEEDS INPUT CAPACITY. DURING SHUTDOWN RXD OUTPUT TRI-STATES WITH A WEAK (500K) PULL UP.
- **** ASSERTING THIS PIN ABOVE 1.4V TURNS ON TRANSMITTER. THIS INPUT IS GATED BY THE SHUTDOWN FUNCTION AND AC COUPLED. MAXIMUM TRANSMIT PULSE WIDTH IS ~50uS. INPUT HAS 500K PULL DOWN WHICH IS ACTIVE EVEN DURING SHUTDOWN.
- ***** VLEDA=9.0V MAX IN STANDBY MODE.

LIMITS OF SAFE OPERATION TA=25°C

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
SUPPLY VOLTAGE	Vcc	ALL STATES	-0.5		7	V
STEADY CURRENT	IrED (DC)				100	mA
PEAK PULSE CURRENT*	IrED (PK)				400	mA
IrED SUPPLY VOLTAGE	VLEDA	SD=0, TXD=Vcc	-0.5		Vcc+4	V
	VLEDA	Vcc=0~7V, TXD=0	-0.5		9	V
RECEIVER DATA OUTPUT	RXD	ALL STATES	-0.5		Vcc+0.5	V
TRANSMITTER DATA INPUT	TXD	ALL STATES	-0.5		Vcc+0.5	V
SHUT DOWN	SD	ALL STATES	-0.5		Vcc+0.5	V
OPERATING TEMP.	Tamb		-25°C TO +85°C			°C
STORAGE TEMP.	Tstg		-40°C TO +85°C			°C

* T<50uS, Ton<20%

ELECTRO-OPTICAL CHARACTERISTICS TA=25°C


PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
TRANSCIEVER						
SUPPLY VOLTAGE	Vcc	ALL MODES	2.0		5.5	V
RECEIVE CURRENT	Icc(Rx)	Vcc=2~5.5v		145		uA
TRANSMIT CURRENT	Icc(Tx)	Vcc=5V		12		mA
SHUT DOWN CURRENT	I _{sd}	SD=Vcc=2~5.5V		0.01	1	uA
XMIT. RECEIVER LATENCY	T _{rl}			50	100	uA
SETTING TIME	T _{pdn}			100	150	uS
RECEIVER						
MINIMUM DETECTION THRESHOLD IRRADIANCE	E _e	SIR MODE, Vcc=5V			4	uW/cm ²
	E _e	SIR MODE, Vcc=3V			10	uW/m ²
MAXIMUM DETECTION THRESHOLD IRRADIANCE	E _e	SIR MODE, Vcc=5V		500		uW/cm ²
	E _e	SIR MODE, Vcc=3V		1000		uW/cm ²
LOGIC LOW RECEIVER INPUT IRRADIANCE	E _e				0.4	uW/cm ²
OUTPUT VOLTAGE ACTIVE	V _{ol}	Vcc=5V, I _{ol} =8mA		.22		V
	V _{ol}	Vcc=2V, I _{ol} =2mA		.17		V
OUTPUT VOLTAGE NON ACTIVE	V _{oh}	Vcc=5V, I _{ol} =8mA		4.6		V
	V _{oh}	Vcc=2V, I _{ol} =2mA		1.7		V
RXD SHORT CIRCUIT		Vcc=5V, RXD=0, RXD=Vcc		40		mA
		Vcc=2V, RXD=0, RXD=Vcc		8		mA
RISE/FALL TIME-RXD	T _r /T _f (RXD)	Vcc=5V, C=15pF		30		nS
	T _r /T _f (RXD)	Vcc=2V, C=15pF		63		nS
TRANSMITTER						
IrED OPERATING CURRENT	IrED	LOW POWER MODE Vcc=2~5.0V		30	45	mA
LOGIC LOW TRANSMITTER INPUT VOLTAGE	V _{il}		0		0.8	V
LOGIC HIGH TRANSMITTER INPUT VOLTAGE	V _{ih}		2.0		Vcc+ 5.0	V
OUTPUT RADIANT INTENSITY	I _e	Vcc=5.0V TXC LOGIC LOW		50	500	mW/sr
	I _e				0.04	mW/sr
VIEWING ANGLE	θ		30		2x theta	
PEAK WAVELENGTH			850	870	900	nm
OPTICAL RISE/FALL TIME	T _r /T _f			200	600	ns
OPTICAL OVERSHOOT					25	%

REV. PART NUMBER
OED-IRDA8235

INFRARED DATA TRANSCIEVER MODULE.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



DRAWN BY: CT
CHECKED BY:
APPROVED BY:

290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DATE: 8.16.01
PAGE: 2 OF 3
SCALE: N/A