

DOUBLE BALANCED MIXER

MODEL SMD-C6000

ULTRA WIDE BANDWIDTH


1 - 6000 MHz

SPECIFICATIONS:

Operating Frequency:		Conversion Loss (dB): (Typ/Max)	8.5 / 10.0
LO / RF:	1 - 6000 MHz	LO Power:	+10 dBm (Nom)
IF:	DC - 700 MHz	Input IP3 (dBm):	+15 (Typ)
Isolation (dB):	(Typ/Min)	1 dB Compression Point:	+3 dBm (Typ)
LO/RF	25/15	Impedance:	50 Ohms (Nom)
LO/IF	18/12	Operating Temperature Range:	-40°C to +75°C
RF/IF	15/12		



MECHANICAL OUTLINE: 133

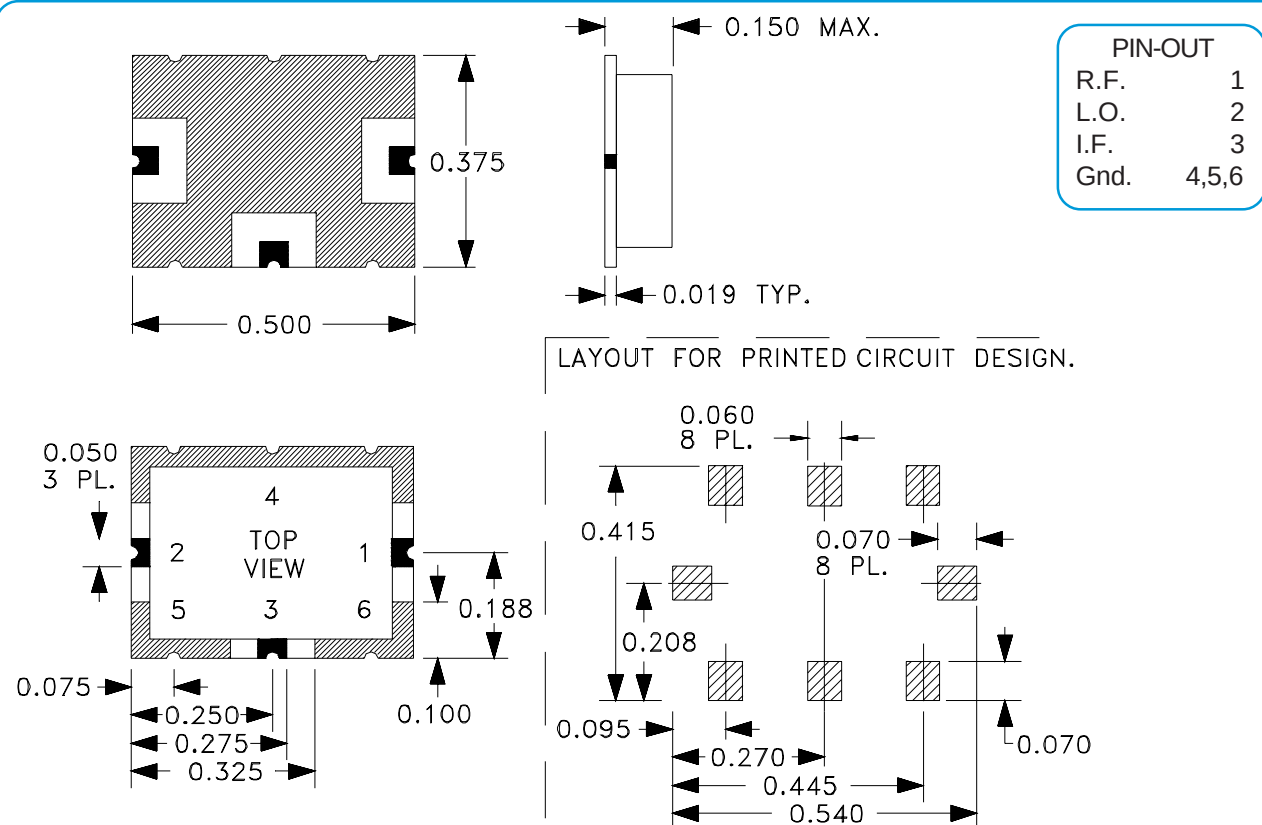

DOUBLE BALANCED MIXER

MODEL SMD-C6000

ULTRA WIDE BANDWIDTH

1 - 6000 MHz

PERFORMANCE PLOTS

