
TOLERANCES
DIMENSION

X. = ± 1 mm
 X.X = ± 0.38 (0.015)
 X.XX = ± 0.25 (0.010)
 X.XXX = ± 0.15 (0.006)

ANGLE
 $\pm 3^\circ$

THROUGH HOLE
 BOTH SIDE OF PCB

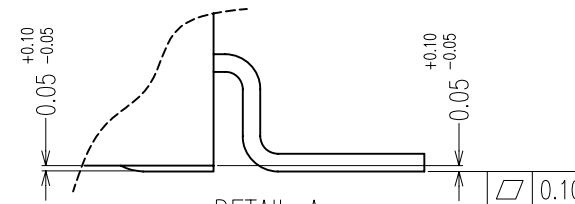

DETAIL A
 (NOT TO SCALE)

SPECIFICATIONS:

MATERIALS:-

HOUSING : Hi-TEMP. PLASTIC (UL 94V-0). BLACK.

TERMINAL : COPPER ALLOY

(t=0.20mm, SIGNAL TERMINAL)

(t=0.15mm, BATTERY TERMINAL)

SHELL : STAINLESS STEEL, (T=0.30mm.)

FINISH:-

TERMINAL: GOLD PLATED OVERALL

SHELL: NICKEL PLATED

ELECTRICAL:-

1. CURRENT RATING : 0.5 A MAX.

2. DIELECTRIC WITHSTANDING VOLTAGE : 250V AC R.M.S.
 FOR ONE MINUTE.

3. INSULATION RESISTANCE : 1000 M Ω MIN. AT 250V DC.

4. OPERATING TEMPERATURE : -40°C TO $+85^\circ\text{C}$.

NOTES: ALL DIMENSIONS AND NOTES

MARKED \times ARE CRITICAL AND

MUST BE CHECKED IN ACCORDANCE

WITH QUALITY DOC. Q1-02A

Allan	1	01.08.06	-
NAME	ISS.	DATE	C/NOTE
APPROVED: <i>Paul</i>			
CHECKED:			
DRAWN: Allan			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

HARWIN USA
 TEL: 603 893 5376
 FAX: 603 893 5396
 mis@harwin.com

HARWIN Europe (UK)
 TEL: 023 9231 4545
 FAX: 023 9231 4590
 mis@harwin.co.uk

HARWIN Asia
 TEL: +65 6 779 4909
 FAX: +65 6 779 3868
 mis@harwin.com.sg

THIS DRAWING AND ANY
 INFORMATION OR DESCRIPTIVE
 MATTER SET OUT HEREON ARE
 CONFIDENTIAL AND COPYRIGHT
 PROPERTY OF THE HARWIN
 GROUP AND MUST NOT BE
 DISCLOSED, LOANED, COPIED
 OR USED FOR MANUFACTURING,
 TENDERING OR FOR ANY
 OTHER PURPOSE WITHOUT
 THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ± 1 mm
 X.X = ± 0.25 mm
 X.XX = ± 0.10 mm
 X.XXX = ± 0.01 mm

ANGLES = $\pm 5^\circ$
 UNLESS STATED

MATERIAL:

SEE NOTES

FINISH:

SEE NOTES

S/AREA:

mm²

TITLE:

22 PIN CELLULAR CONNECTOR

DRAWING NUMBER:

M710-9352205

SHT
 1
 OF
 1