

**AE-X3A2XX Series
SINEWAVE HF VCXO**

Rev. C


Description

The **AE-X3A2XX Series** of voltage controlled crystal oscillators (VCXO) provides high frequency with Sine-Wave output. The device does not use any frequency multiplication, providing exceptionally low Phase Noise and Jitter. It's packaged in a miniature, FR-4 based 17x14 mm SMD package

Applications and Features

- Fiber Channel; 10 GbE; Infiniband; Network Processors; SONET/SDH
- High Reliability – NEL HALT/HASS qualified for crystal oscillator start-up conditions
- Extremely Low Phase Noise and Jitter
- No Multiplication
- Absolute Pull Range (APR) to $\pm 1,000$ ppm
- RoHS compliant
- SONET ± 20 ppm overall free-run stability available
- High Shock Resistance, to 1000g

Creating a Part Number

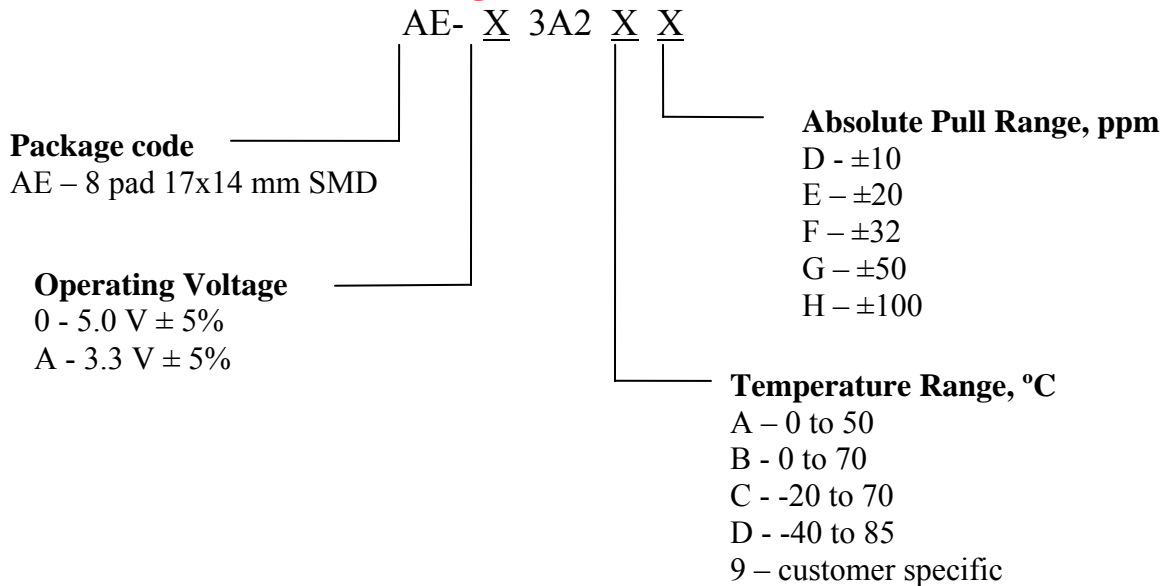


**FREQUENCY
CONTROLS, INC.**

357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591
FAX 262/763-2881

AE-X3A2XX Series

Rev. C

Drawing Specification

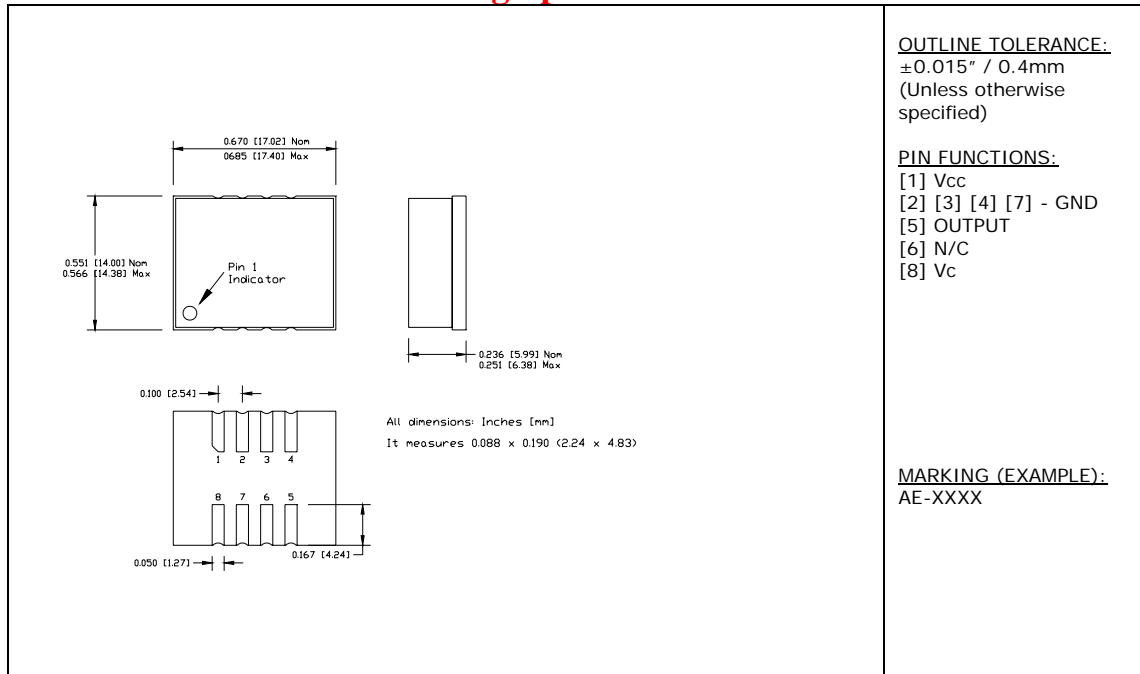

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Operating Temperature Range	To	-40 to +85	°C
Storage Temperature Range	Tst	-50 to +90	°C
Supply Voltage	Vcc	-0.5 to 5.5	V
Control Voltage	Vc	-0.5 to 5.5	V
Enable/Disable Voltage	Ven/dis	0 to Vcc	V



**FREQUENCY
CONTROLS, INC.**

357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591
FAX 262/763-2881

Email: nelsales@nelfc.com www.nelfc.com

AE-X3A2XX Series

Rev. C

Electrical Parameters

Parameter		Symb	Conditions, Note	MIN	TYP	MAX	Unit
Nominal Frequency		Fo	See Note below	80		125	MHz
Supply Voltage		Vcc	Code 0 Code A	4.75 3.135	5.0 3.3	5.25 3.465	V
Supply current		Icc	No load, Vcc=3.3V 100MHz		60	160	mA
Output Logic Type					Sine		
Load			Internally AC coupled	45	50	55	Ohm
Harmonic		Ph				-25	dBc
Sub-Harmonics				None			
Output Power		Po	Into 50 ohm, 5V 3.3V	7 5	10 7		dBm
Jitter	Integrated, RMS	J	Integrated from Phase Noise, 12 KHz to 20 MHz RMS		0.1	0.15	ps
			100Hz to 80KHz,RMS			0.5	ps
			50 KHz to 80 MHz		0.2		ps
	Wavecrest characterized		Random period,		2.5		ps
			Accumul., pk-to-pk		17		ps
			Determin.		0		ps
Phase Noise		£(Δf)	100 MHz, 3.3V APR 32 ppm or less	@ 10 Hz @100 Hz @1 KHz @10KHz @100KHz @>1MHz	-85 -115 -145 -170 -172 -175	-80 -110 -140 -168 -170 -172	dBc/Hz
Frequency Stability, usually not specified – unless necessary, APR is specified to incorporate stability		ΔF/F	Overall, including initial calibration, temperature, aging 10 years, shock and vibration @Vc=Vcc/2; APR 50 ppm, or less	±20	±30		ppm
Control Voltage Range		Vc		0V		Vcc	V
Setability		Vcs	Vc to set the F at Fo; T, Vcc, load – nominal, as shipped	0.4 Vcc	0.5 Vcc	0.6 Vcc	V
Absolute Pull Range		APR	Over all conditions, see <u>part # creation</u>	10, 20, 32, 50, 100			ppm
Input impedance		Zin	@ Fmod < 100 KHz	50			KOhm
Modulation Bandwidth			At Vc = Vcc/2, -3dB	20			KHz



FREQUENCY
CONTROLS, INC.

357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591
FAX 262/763-2881

Email: nelsales@nelc.com www.nelc.com


AE-X3A2XX Series

Rev. C

Environmental and Mechanical Characteristics

Operating temp. range	see part # table
Mechanical Shock	Per MIL-STD-202, Method 213, Cond. A
Thermal Shock	Per MIL-STD-883, Method 1011, Cond. A
Vibration	Per MIL-STD-883, Method 2007, Cond. A
Hermetic Seal	Leak rate less than 5×10^{-8} atm.cc/s of helium, crystal only.
Soldering conditions	See MAX reflow profile below

MAX Reflow Profile

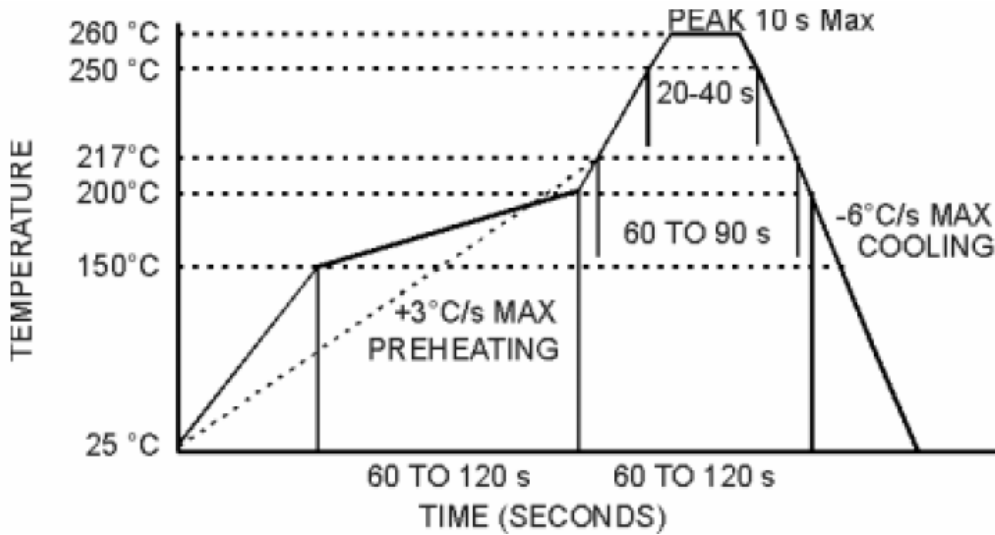

**FREQUENCY
CONTROLS, INC.**

357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591
FAX 262/763-2881

Email: nelsales@nelfc.com www.nelfc.com