

RL78/L1C

R01DS0192EJ0100

RENESAS MCU

Rev. 1.00

Nov 18, 2013

Integrated LCD controller/driver, 12-bit resolution A/D Converter, USB 2.0 controller (function), True Low Power Platform (as low as 112.5 μ A/MHz, and 0.68 μ A for RTC + LVD), 1.6 V to 3.6 V operation, 64 to 256 Kbyte Flash, 33 DMIPS at 24 MHz, for All LCD Based Applications

1. OUTLINE

1.1 Features

Ultra-Low Power Technology

- 1.6 V to 3.6 V operation from a single supply
- Stop (RAM retained): 0.25 μ A, (LVD enabled): 0.31 μ A
- Halt (RTC + LVD): 0.68 μ A
- Supports snooze
- Operating: 112.5 μ A/MHz

16-bit RL78 CPU Core

- Delivers 33 DMIPS at maximum operating frequency of 24 MHz
- Instruction Execution: 86% of instructions can be executed in 1 to 2 clock cycles
- CISC Architecture (Harvard) with 3-stage pipeline
- Multiply Signed & Unsigned: 16 \times 16 to 32-bit result in 1 clock cycle
- MAC: 16 \times 16 to 32-bit result in 2 clock cycles
- 16-bit barrel shifter for shift & rotate in 1 clock cycle
- 1-wire on-chip debug function

Code Flash Memory

- Density: 64 to 256 KB
- Block size: 1 KB
- On-chip single voltage flash memory with protection from block erase/writing
- Self-programming with secure boot swap function and flash shield window function

Data Flash Memory

- Data Flash with background operation
- Data flash size: 8 KB
- Erase Cycles: 1 Million (typ.)
- Erase/programming voltage: 1.8 V to 3.6 V

RAM

- 8 KB to 16 KB size options
- Supports operands or instructions
- Back-up retention in all modes

High-speed On-chip Oscillator

- 24 MHz with \pm 1% accuracy over voltage (1.8 V to 3.6 V) and temperature (-20°C to +85°C)
- Pre-configured settings: 48 MHz, 24 MHz, 16 MHz, 12 MHz, 8 MHz, 6 MHz, 4 MHz, 3 MHz, 2 MHz, 1 MHz (TYP.)
- 48 MHz for USB, 48 MHz for timer KB2

Reset and Supply Management

- Power-on reset (POR) monitor/generator
- Low voltage detection (LVD) with 12 setting options (Interrupt and/or reset function)

LCD Controller/Driver

- Up to 56 seg \times 4 com or 52 seg \times 8 com
- Supports capacitor split method, internal voltage boost method and resistance division method
- Supports waveform types A and B
- Supports LCD contrast adjustment (18 steps)
- Supports LCD blinking

USB

- Complying with USB 2.0
- Corresponding to full-speed transfer (12Mbps) and low-speed (1.5Mbps)
- Complying with Battery Charging Specification Revision 1.2
- Supports USB function controller

Data Transfer Controller (DTC)

- 33 sources & 24 different settings
- Transfer data: 8 bits/16 bits
- Normal mode and repeat mode

Event Link Controller (ELC)

- Reduce interrupt intervention
- Link 31 events to specified peripheral function

Multiple Communication Interfaces

- Up to 4 \times I²C master
- Up to 1 \times I²C multi-master
- Up to 4 \times CSI (7-, 8-bit)
- Up to 4 \times UART (7-, 8-, 9-bit)
- Up to 1 \times LIN

Extended-Function Timers

- Multi-function 16-bit timer TAU: Up to 8 channels (remote control output available)
- Multi-function 16-bit timer KB2: 3 channels
- High accuracy real-time clock (RTC): 1 channel (full calendar and alarm function with watch correction function)
- 12-bit interval timer: 1 channel
- 15 kHz watchdog timer: 1 channel (window function)

Rich Analog

- ADC: Up to 13 channels, 8/12-bit resolution, 3.375 μ s minimum conversion time
- Supports 1.6 V
- D/A converter: 2 channels, 8-bit resolution
- 2 \times window comparators, with ELC connection
- Internal voltage reference (1.45 V)
- On-chip temperature sensor

Safety Features (IEC or UL 60730 compliance)

- Flash memory CRC calculation
- RAM parity error check
- RAM write protection
- SFR write protection
- Illegal memory access detection
- Clock stop/ frequency detection
- ADC self-test
- I/O port read back function (echo)

General Purpose I/O

- High-current (up to 20 mA per pin)
- Open-Drain, Internal Pull-up support

Operating Ambient Temperature

- T_A: -40 to +85 °C (A: Consumer applications)
- T_A: -40 to +105 °C (G: Industrial applications)

Package Type and Pin Count

- 80-pin plastic LQFP (12 \times 12 mm, 0.5 mm pitch)
- 100-pin plastic LQFP (14 \times 14 mm, 0.5 mm pitch)

○ ROM, RAM capacities

Products with USB

| Flash ROM | Data Flash | RAM | RL78/L1C | |
|-----------|------------|------------|----------|----------|
| | | | 80 pins | 100 pins |
| 256 KB | 8 KB | 16 KB Note | R5F110MJ | R5F110PJ |
| 192 KB | 8 KB | 16 KB Note | R5F110MH | R5F110PH |
| 128 KB | 8 KB | 12 KB | R5F110MG | R5F110PG |
| 96 KB | 8 KB | 10 KB | R5F110MF | R5F110PF |
| 64 KB | 8 KB | 8 KB | R5F110ME | R5F110PE |

Products without USB

| Flash ROM | Data Flash | RAM | RL78/L1C | |
|-----------|------------|------------|----------|----------|
| | | | 80 pins | 100 pins |
| 256 KB | 8 KB | 16 KB Note | R5F111MJ | R5F111PJ |
| 192 KB | 8 KB | 16 KB Note | R5F111MH | R5F111PH |
| 128 KB | 8 KB | 12 KB | R5F111MG | R5F111PG |
| 96 KB | 8 KB | 10 KB | R5F111MF | R5F111PF |
| 64 KB | 8 KB | 8 KB | R5F111ME | R5F111PE |

Note This is about 15 KB when the self-programming function and data flash function are used.

1.2 Ordering Information


Products with USB

| Pin Count | Package | Fields of Application | Orderable Part Number |
|-----------|--|-----------------------|--|
| 80 pins | 80-pin plastic LQFP (fine pitch) (12 × 12) | A | R5F110MEAFB, R5F110MFAFB, R5F110MGAFB, R5F110MHAFB, R5F110MJAFB |
| | | G | R5F110MEGFB, R5F110MFGFB, R5F110MGGFB, R5F110MHGFB, R5F110MJGFB |
| 100 pins | 100-pin plastic LQFP (fine pitch) (14 × 14) | A | R5F110PEAFB, R5F110PFAFB, R5F110PGAFB, R5F110PHAFB, R5F110PJAFB |
| | | G | R5F110PEGFB, R5F110PFGFB, R5F110PGGFB, R5F110PHGFB, R5F110PJGFB |

Products without USB

| Pin Count | Package | Fields of Application | Orderable Part Number |
|-----------|--|-----------------------|--|
| 80 pins | 80-pin plastic LQFP (fine pitch) (12 × 12) | A | R5F111MEAFB, R5F111MFAFB, R5F111MGAFB, R5F111MHAFB, R5F111MJAFB |
| | | G | R5F111MEGFB, R5F111MFGFB, R5F111MGGFB, R5F111MHGFB, R5F111MJGFB |
| 100 pins | 100-pin plastic LQFP (fine pitch) (14 × 14) | A | R5F111PEAFB, R5F111PFAFB, R5F111PGAFB, R5F111PHAFB, R5F111PJAFB |
| | | G | R5F111PEGFB, R5F111PFGFB, R5F111PGGFB, R5F111PHGFB, R5F111PJGFB |

Figure 1 - 1 Part Number, Memory Size, and Package of RL78/L1C

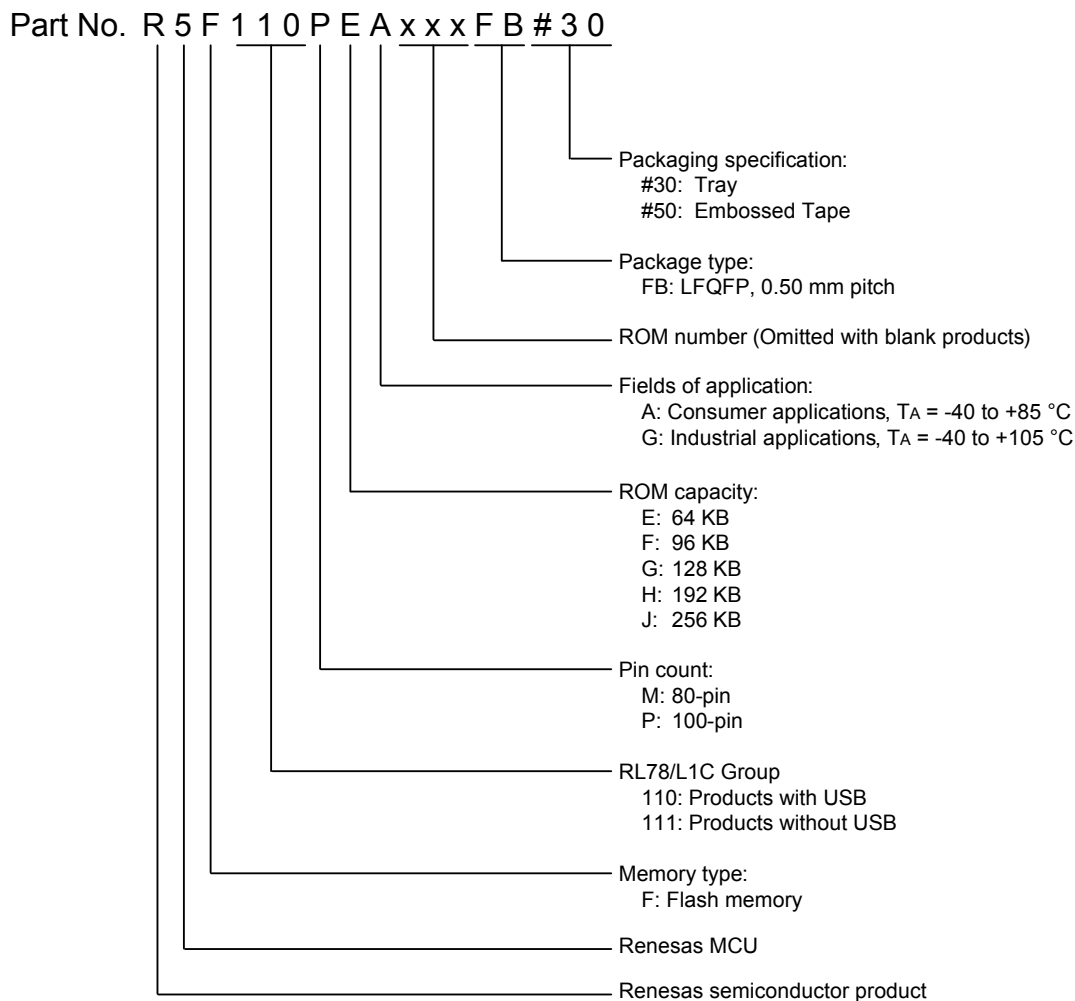


Caution Orderable part numbers are current as of when this manual was published.
Please make sure to refer to the relevant product page on the Renesas website for the latest part numbers.

1.3 Pin Configuration (Top View)

1.3.1 80-pin products (with USB)

- 80-pin plastic LQFP (12 × 12 mm, 0.5 mm pitch)

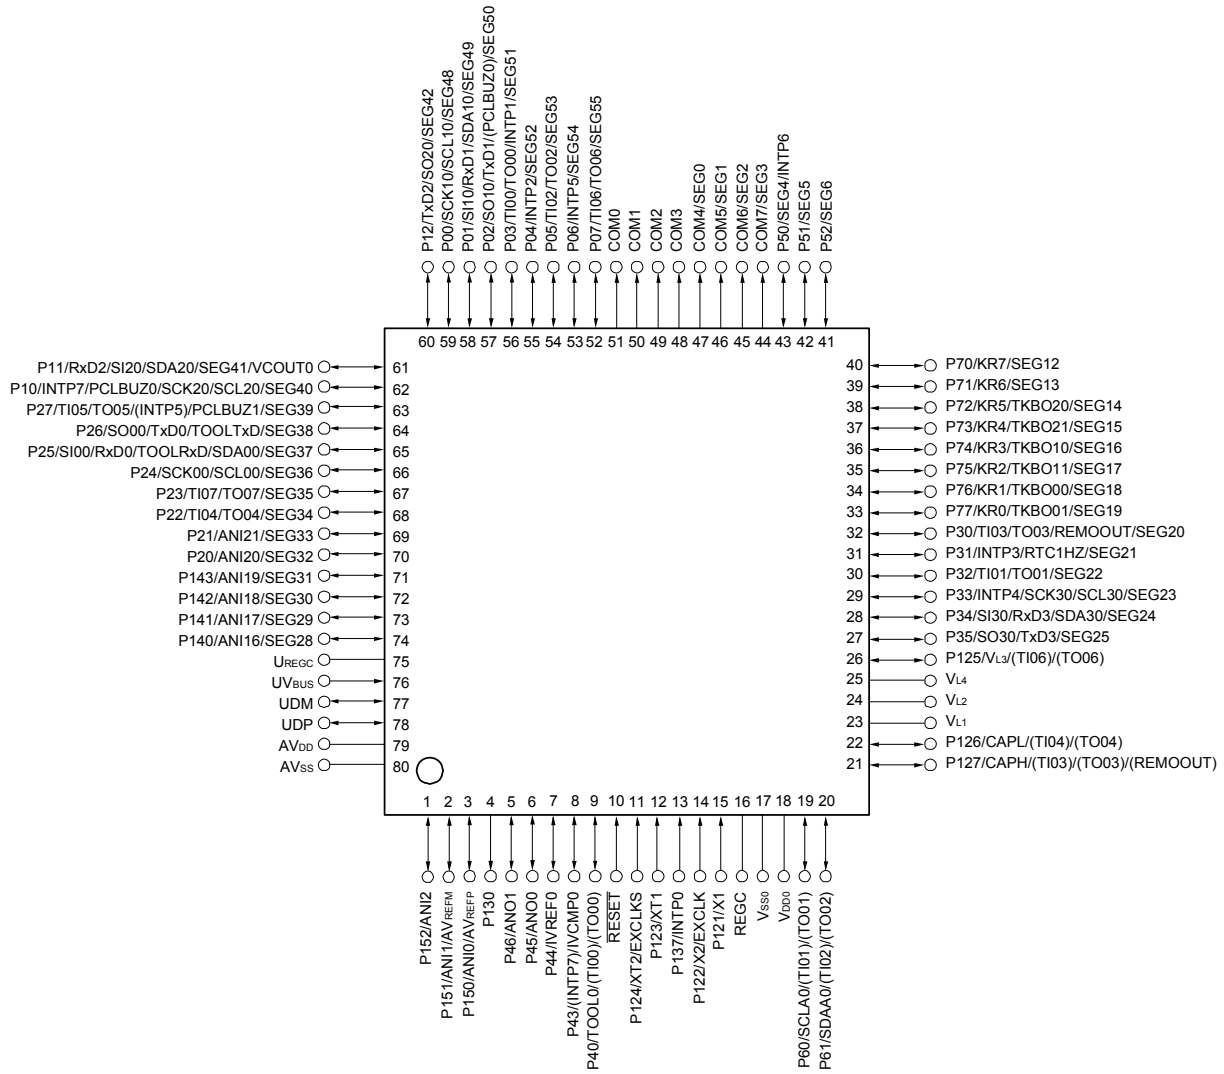

Caution 1. Connect the REGC pin to Vss pin via a capacitor (0.47 to 1 μF).


Caution 2. Connect the UREGC pin to Vss pin via a capacitor (0.33 μF).

Remark 1. For pin identification, see 1.4 Pin Identification.

Remark 2. Functions in parentheses in the above figure can be assigned via settings in the peripheral I/O redirection register (PIOR).

1.3.2 80-pin products (without USB)

- 80-pin plastic LFQFP (fine pitch) (12 × 12 mm, 0.5 mm pitch)

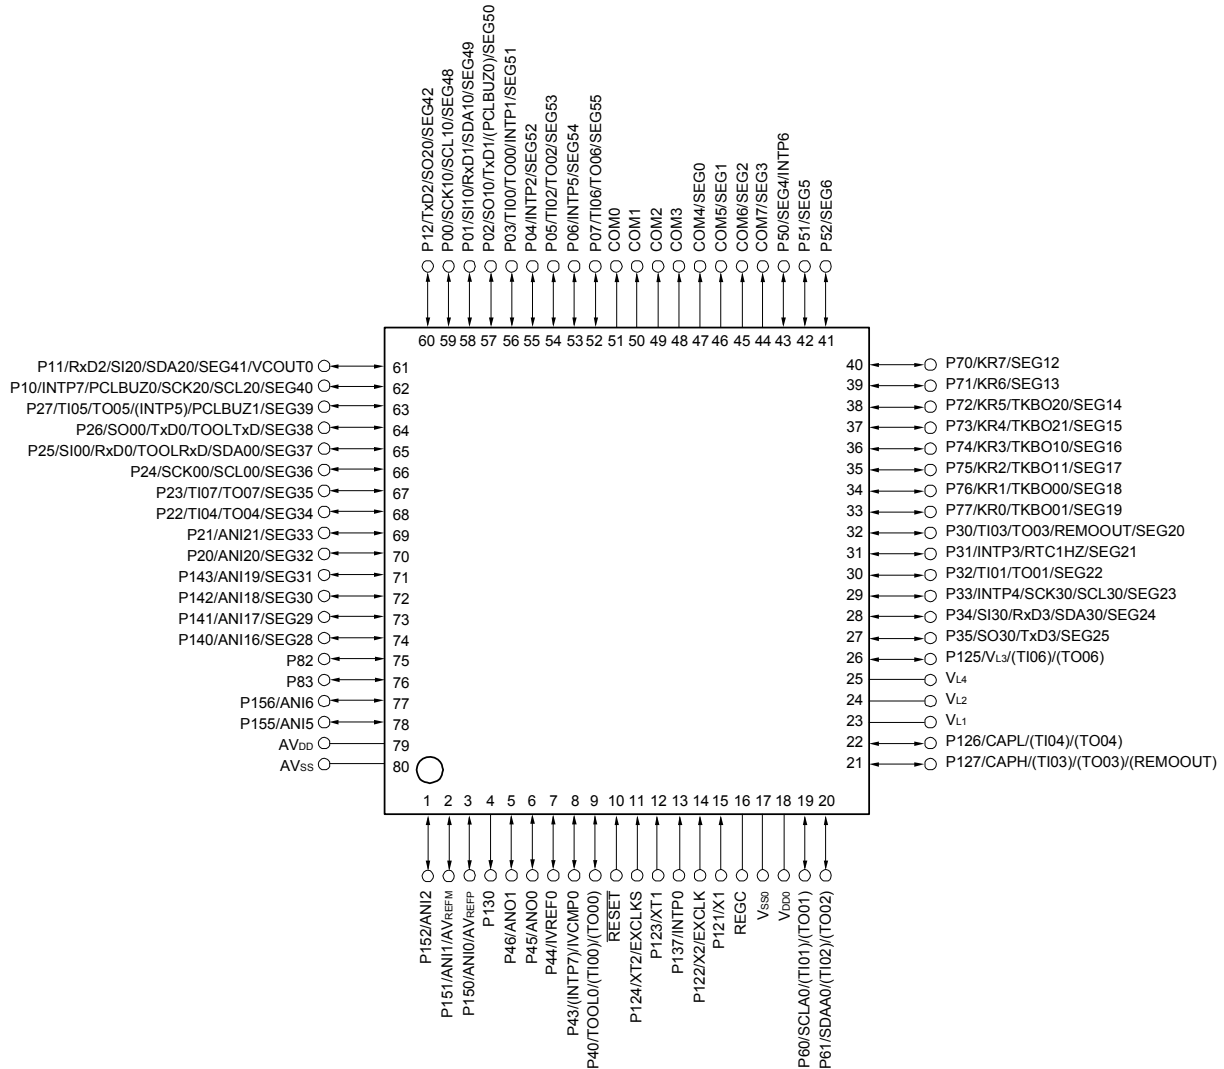


Caution Connect the REGC pin to Vss pin via a capacitor (0.47 to 1 μF).

Remark 1. For pin identification, see 1.4 Pin Identification.

Remark 2. Functions in parentheses in the above figure can be assigned via settings in the peripheral I/O redirection register (PIOR).

1.3.3 100-pin products (with USB)

- 100-pin plastic LFQFP (fine pitch) (14 × 14 mm, 0.5 mm pitch)

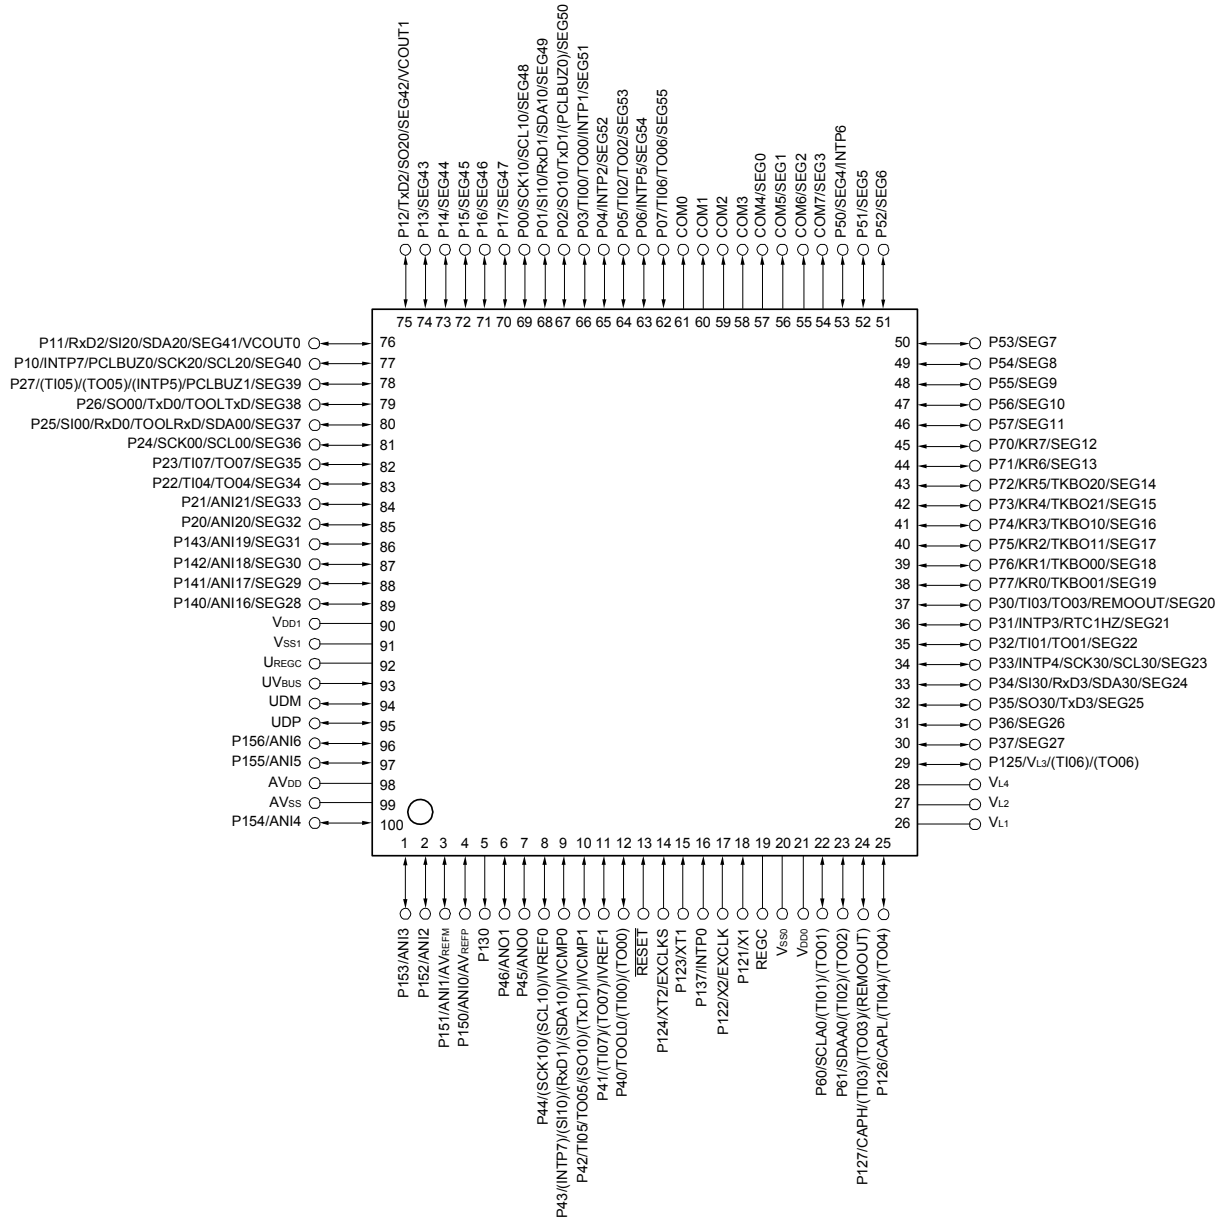

Caution 1. Connect the REGC pin to Vss pin via a capacitor (0.47 to 1 μF).


Caution 2. Connect the UREGC pin to Vss pin via a capacitor (0.33 μF).

Remark 1. For pin identification, see 1.4 Pin Identification.

Remark 2. Functions in parentheses in the above figure can be assigned via settings in the peripheral I/O redirection register (PIOR).

1.3.4 100-pin products (without USB)

- 100-pin plastic LFQFP (fine pitch) (14 × 14 mm, 0.5 mm pitch)

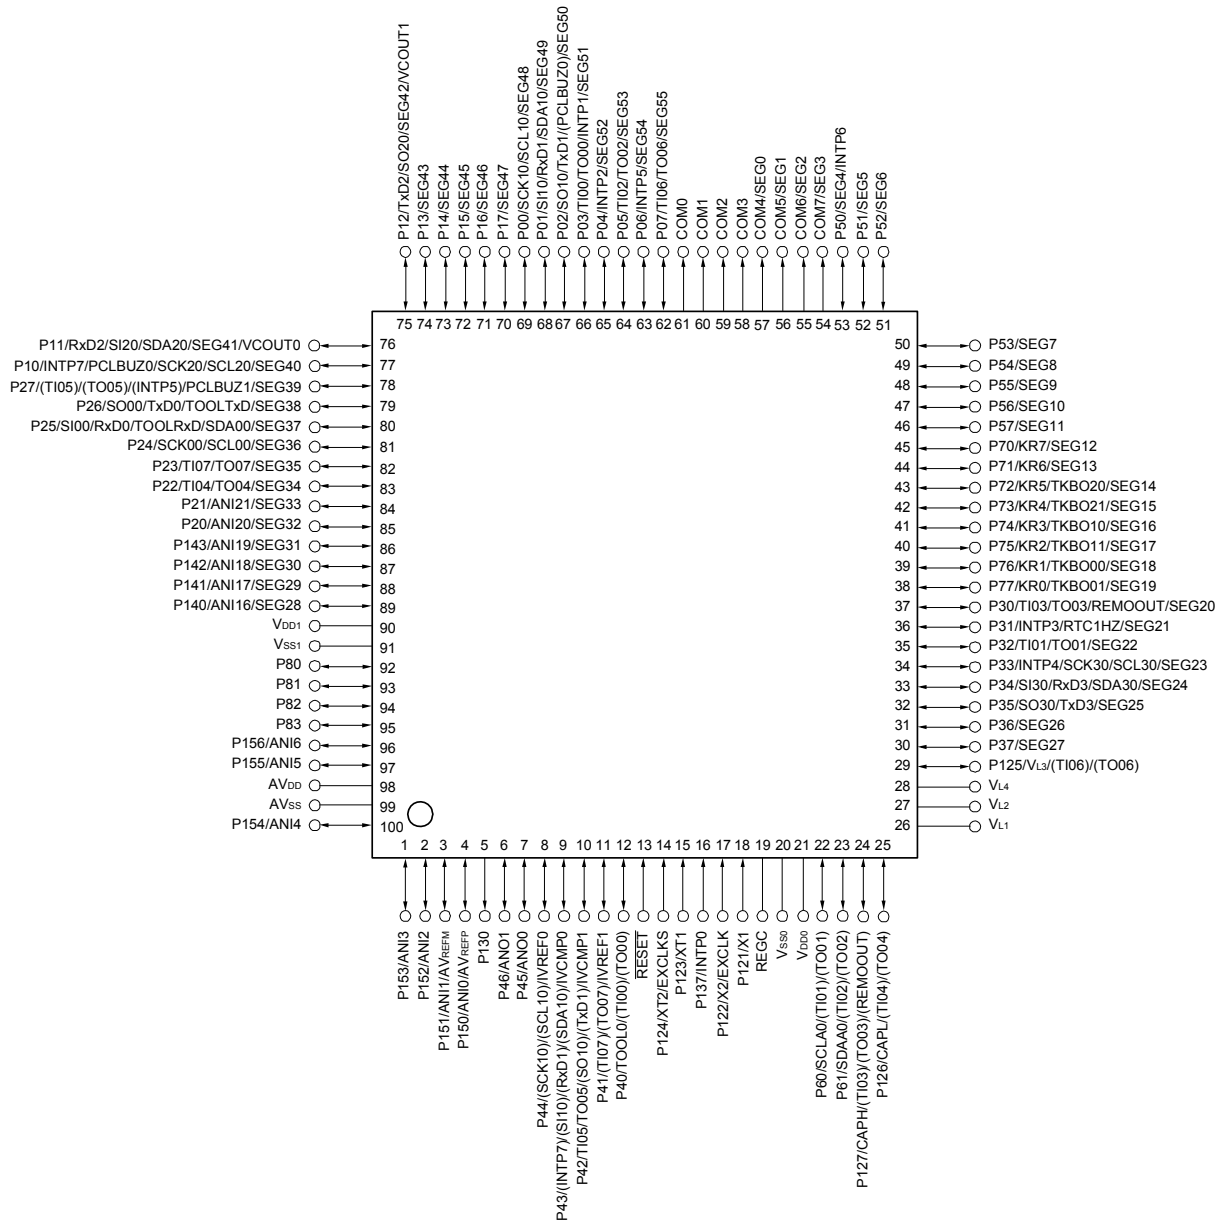

Caution Connect the REGC pin to Vss pin via a capacitor (0.47 to 1 μF).

Remark 1. For pin identification, see 1.4 Pin Identification.


Remark 2. Functions in parentheses in the above figure can be assigned via settings in the peripheral I/O redirection register (PIOR).

1.4 Pin Identification


| | | | |
|-------------------------------|---|----------------------------|---|
| ANI0 to ANI6, | : Analog Input | SCL00, SCL10, SCL20, SCL30 | : Serial Clock Output |
| ANI16 to ANI21 | | SDAA0, SDA00, SDA10, | : Serial Data Input/Output |
| ANO0, ANO1 | : Analog Output | SDA20, SDA30 | |
| AVDD | : Analog Power Supply | SEG0 to SEG55 | : LCD Segment Output |
| AVREFM | : Analog Reference Voltage Minus | SI00, SI10, SI20, SI30 | : Serial Data Input |
| AVREFP | : Analog Reference Voltage Plus | SO00, SO10, SO20, SO30 | : Serial Data Output |
| AVSS | : Analog Ground | TI00 to TI07 | : Timer Input |
| CAPH, CAPL | : Capacitor for LCD | TO00 to TO07 | : Timer Output |
| COM0 to COM7 | : LCD Common Output | TKBO00, TKBO01, TKBO10, | |
| EXCLK | : External Clock Input (Main System Clock) | TKBO11, TKBO20, TKBO21 | |
| EXCLKS | : External Clock Input (Subsystem Clock) | TOOL0 | : Data Input/Output for Tool |
| INTP0 to INTP7 | : External Interrupt Input | TOOLRxD, TOOLTxD | : Data Input/Output for External Device |
| IVCMP0, IVCMP1 | : Comparator Input | UDM, UDP | : USB Input/Output |
| IVREF0, IVREF1 | : Comparator Reference Input | UREGC | : USB Regulator Capacitance |
| KR0 to KR7 | : Key Return | UVBUS | : USB Input/USB Power Supply |
| P00 to P07 | : Port 0 | TxD0 to TxD3 | : Transmit Data |
| P10 to P17 | : Port 1 | VCOUT0, VCOUT1 | : Comparator Output |
| P20 to P27 | : Port 2 | VDD0, VDD1 | : Power Supply |
| P30 to P37 | : Port 3 | VL1 to VL4 | : LCD Power Supply |
| P40 to P46 | : Port 4 | VSS0, VSS1 | : Ground |
| P50 to P57 | : Port 5 | X1, X2 | : Crystal Oscillator (Main System Clock) |
| P60 to P62 | : Port 6 | XT1, XT2 | : Crystal Oscillator (Subsystem Clock) |
| P70 to P77 | : Port 7 | | |
| P80 to P83 | : Port 8 | | |
| P121 to P127 | : Port 12 | | |
| P130, P137 | : Port 13 | | |
| P140 to P143 | : Port 14 | | |
| P150 to P156 | : Port 15 | | |
| PCLBUZ0, PCLBUZ1 | : Programmable Clock Output/ Buzzer Output | | |
| REGC | : Regulator Capacitance | | |
| REMOOUT | : Remote Control Output | | |
| $\overline{\text{RESET}}$ | : Reset | | |
| RTC1HZ | : Real-time Clock Correction Clock (1 Hz) Output | | |
| RxD0 to RxD3 | : Receive Data | | |
| SCK00, SCK10, SCK20, SCK30 | : Serial Clock Input/Output | | |
| SCLA0 | : Serial Clock Input/Output | | |

1.5 Block Diagram


1.5.1 80-pin products (with USB)

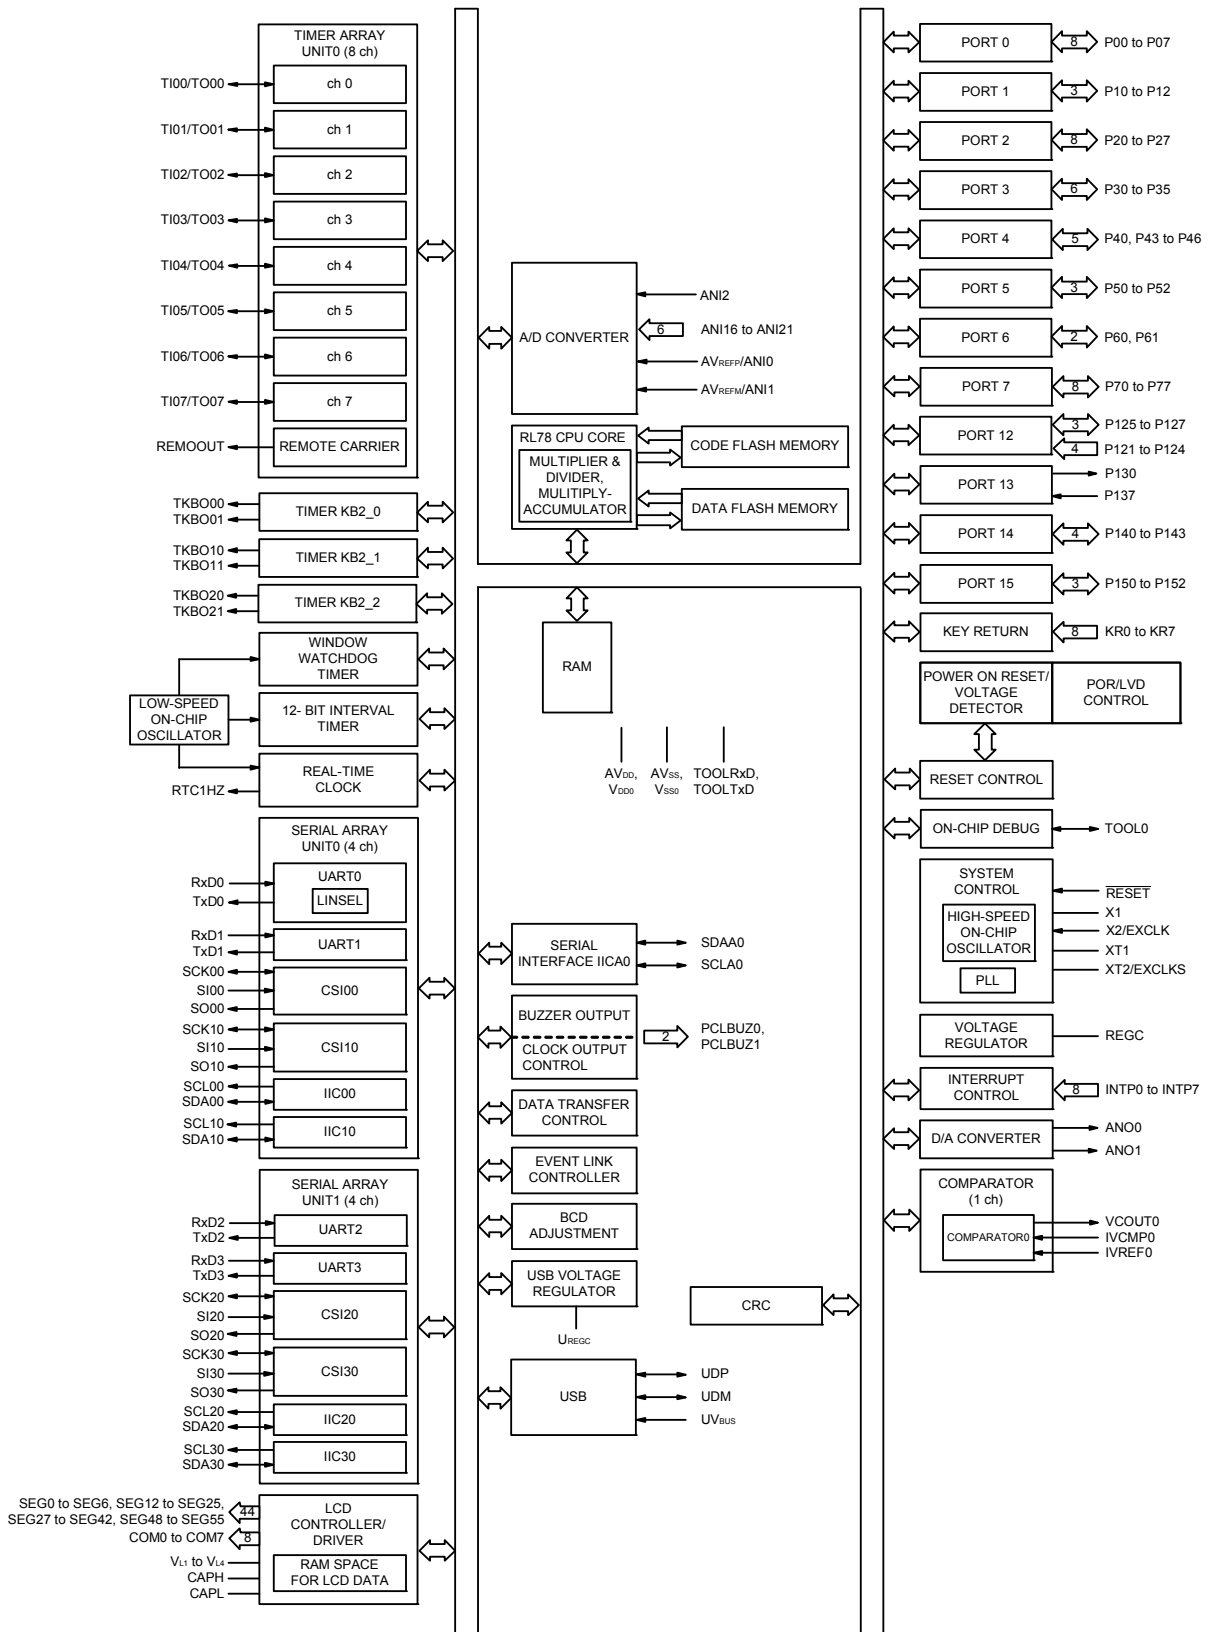


1.5.2 80-pin products (without USB)

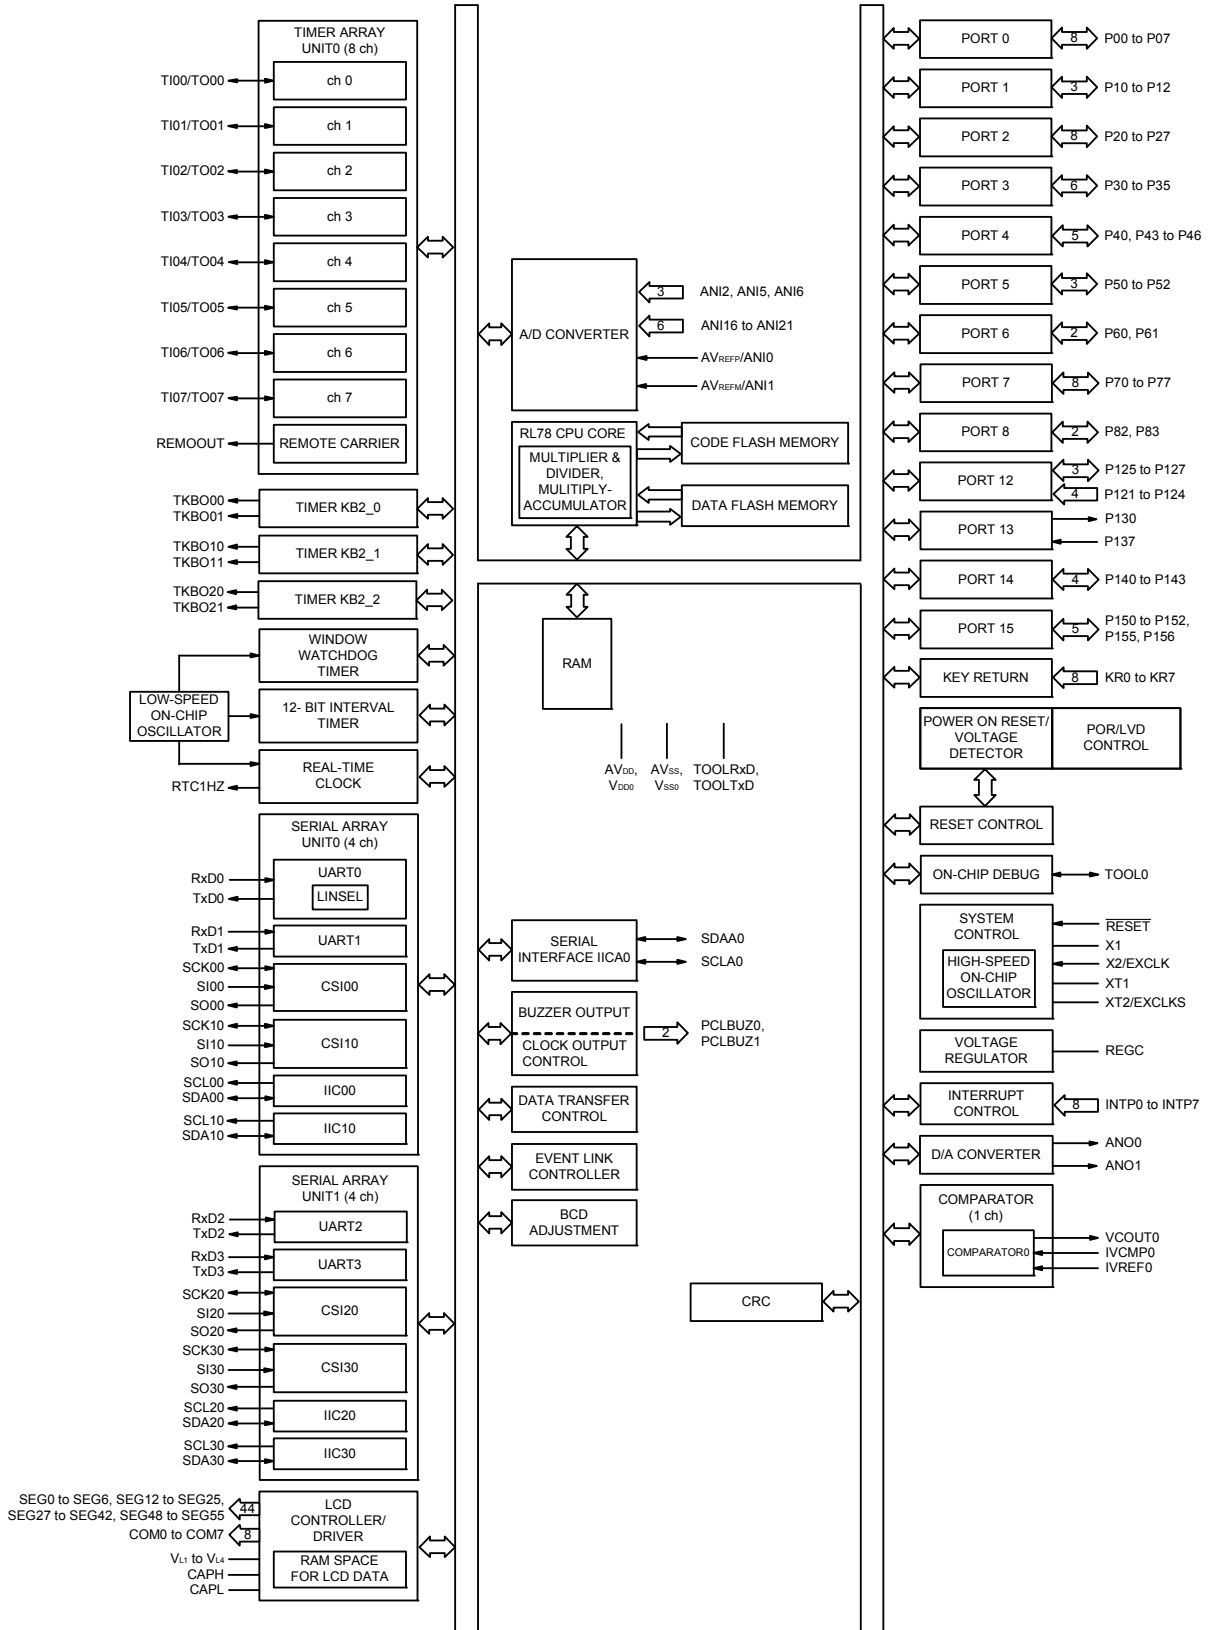

1.5.3 100-pin products (with USB)

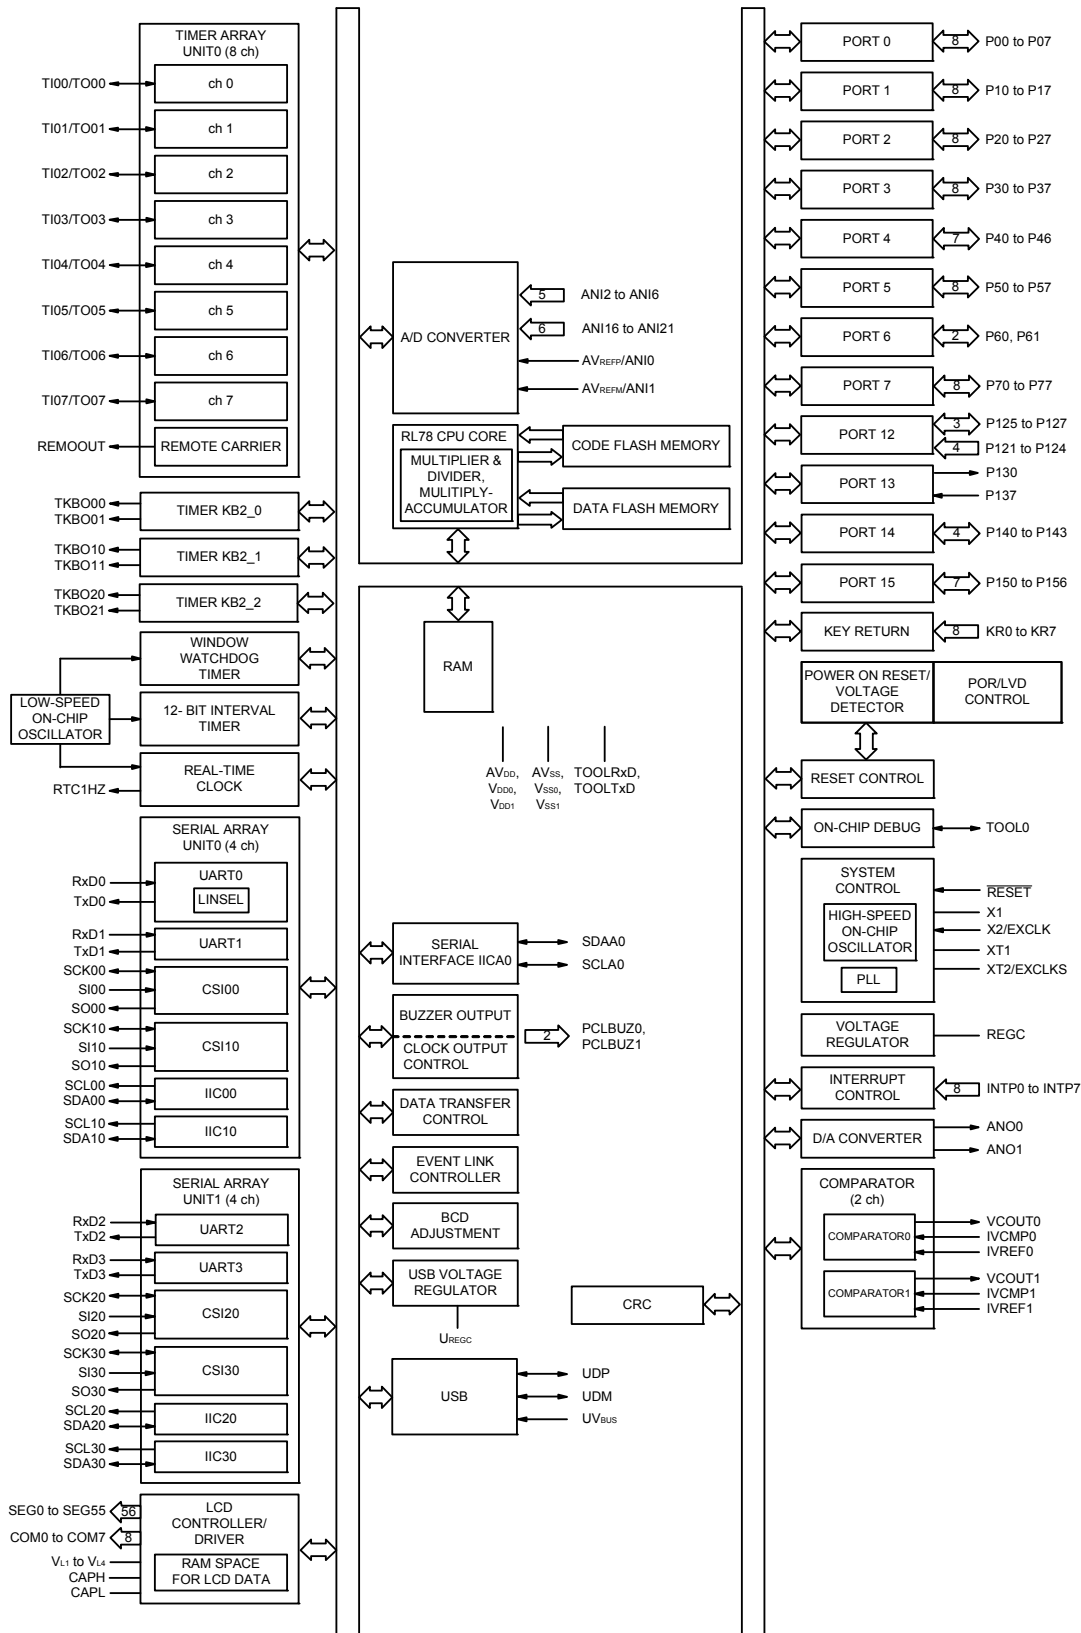

1.5.4 100-pin products (without USB)

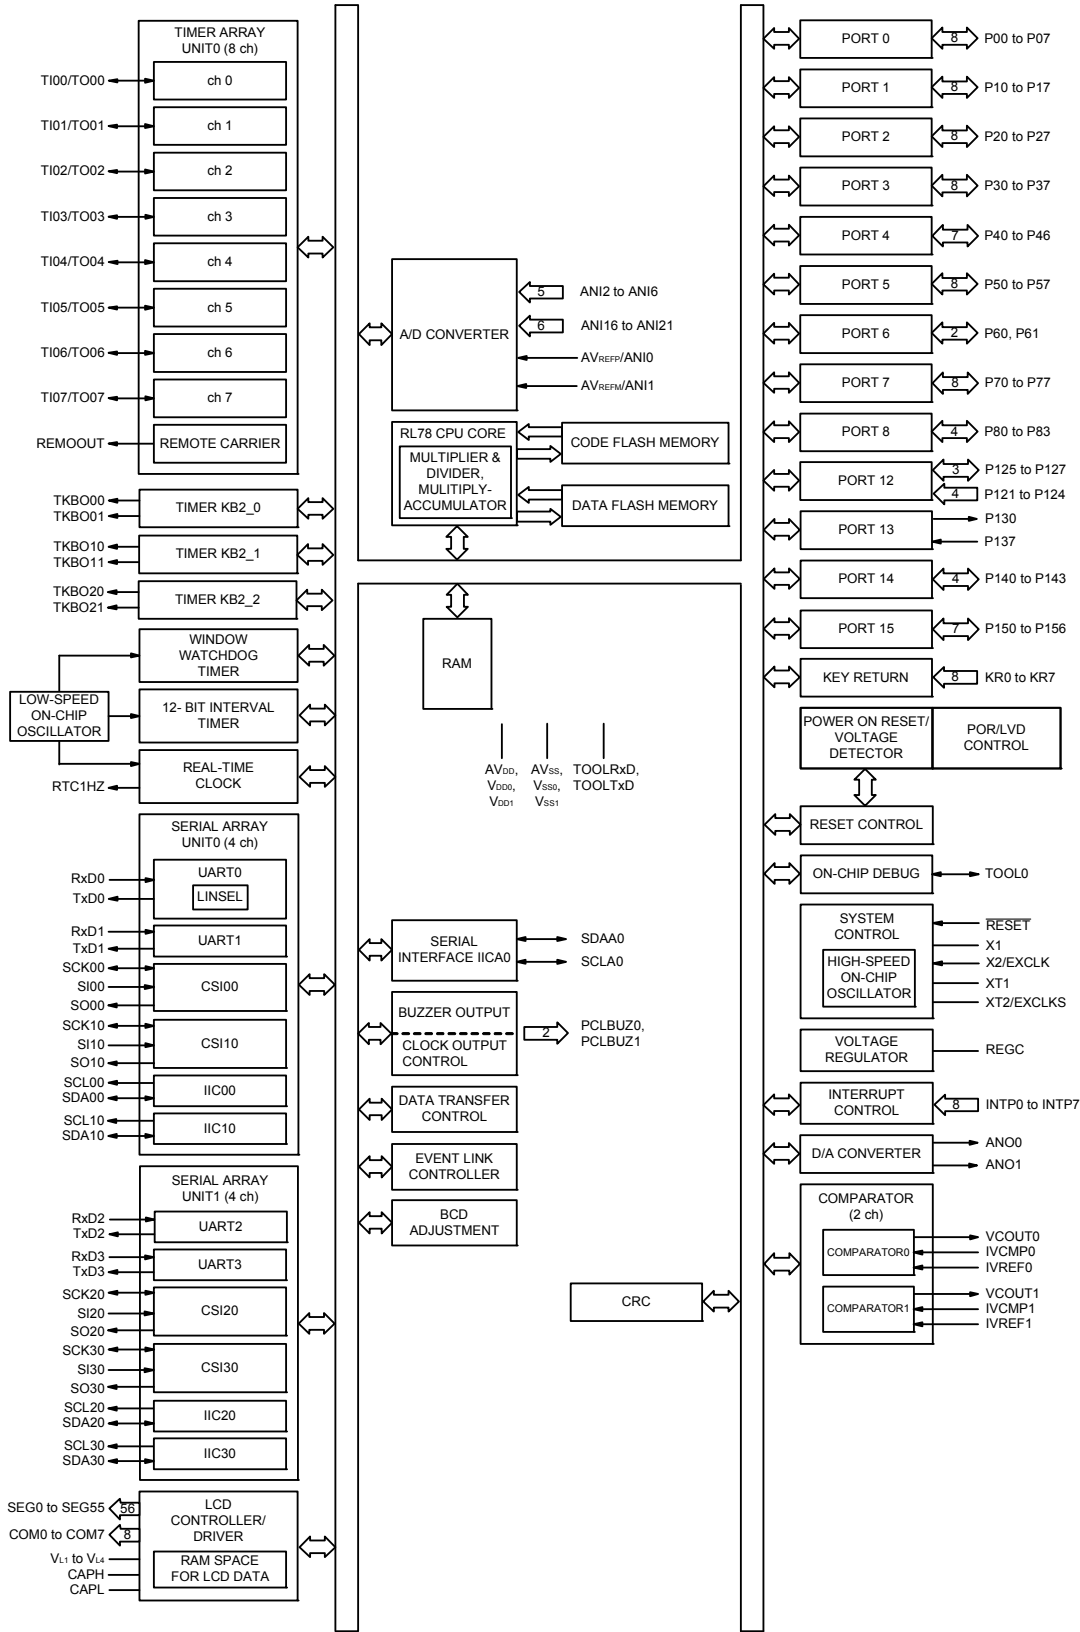

1.6 Outline of Functions

[80-pin, 100-pin products (with USB)]

(1/2)

| Item | | 80-pin | 100-pin |
|------------------------------------|-------------------------------------|--|---------------------------|
| | | R5F110Mx (x = E to H, J) | R5F110Px (x = E to H, J) |
| Code flash memory (KB) | | 64 to 256 | 64 to 256 |
| Data flash memory (KB) | | 8 | 8 |
| RAM (KB) | | 8 to 16 ^{Note 1} | 8 to 16 ^{Note 1} |
| Memory space | | 1 MB | |
| Main system clock | High-speed system clock | X1 (crystal/ceramic) oscillation, external main system clock input (EXCLK) 1 to 20 MHz: V _{DD} = 2.7 to 3.6 V, 1 to 8 MHz: V _{DD} = 1.8 to 2.7 V, 1 to 4 MHz: V _{DD} = 1.6 to 1.8 V | |
| | High-speed on-chip oscillator clock | HS (high-speed main) operation mode: 1 to 24 MHz (V _{DD} = 2.7 to 3.6 V), HS (high-speed main) operation mode: 1 to 16 MHz (V _{DD} = 2.4 to 3.6 V), LS (low-speed main) operation mode: 1 to 8 MHz (V _{DD} = 1.8 to 3.6 V), LV (low-voltage main) operation mode: 1 to 4 MHz (V _{DD} = 1.6 to 3.6 V) | |
| | PLL clock | 6, 12, 24 MHz ^{Note 2} : V _{DD} = 2.4 to 3.6 V | |
| Subsystem clock | | XT1 (crystal) oscillation, external subsystem clock input (EXCLKS) 32.768 kHz (TYP.): V _{DD} = 1.6 to 3.6 V | |
| Low-speed on-chip oscillator clock | | 15 kHz (TYP.): V _{DD} = 1.6 to 3.6 V | |
| General-purpose register | | 8 bits × 32 registers (8 bits × 8 registers × 4 banks) | |
| Minimum instruction execution time | | 0.04167 μs (High-speed on-chip oscillator clock: f _{HOCO} = f _{IH} = 24 MHz operation) | |
| | | 0.04167 μs (PLL clock: f _{PLL} = 48 MHz/f _{IH} = 24 MHz ^{Note 2} operation) | |
| | | 0.05 μs (High-speed system clock: f _{MX} = 20 MHz operation) | |
| | | 30.5 μs (Subsystem clock: f _{SUB} = 32.768 kHz operation) | |
| Instruction set | | <ul style="list-style-type: none"> • Data transfer (8/16 bits) • Adder and subtractor/logical operation (8/16 bits) • Multiplication (8 bits × 8 bits, 16 bits × 16 bits), Division (16 bits ÷ 16 bits, 32 bits ÷ 32 bits) • Multiplication and Accumulation (16 bits × 16 bits + 32 bits) • Rotate, barrel shift, and bit manipulation (Set, reset, test, and Boolean operation), etc. | |
| I/O port | Total | 59 | 77 |
| | CMOS I/O | 51 | 69 |
| | CMOS input | 5 | 5 |
| | CMOS output | 1 | 1 |
| | N-ch open-drain I/O (6 V tolerance) | 2 | 2 |
| Timer | 16-bit timer TAU | 8 channels (with 1 channel remote control output function) (Timer outputs: 8, PWM outputs: 7 ^{Note 3}) | |
| | 16-bit timer KB2 | 3 channels (PWM outputs: 6) | |
| | Watchdog timer | 1 channel | |
| | 12-bit interval timer | 1 channel | |
| | High accuracy real-time clock | 1 channel | |
| | RTC output | 1 1 Hz (subsystem clock: f _{SUB} = 32.768 kHz) | |

Note 1. In the case of the 16 KB, this is about 15 KB when the self-programming function and data flash function are used.

Note 2. In the PLL clock 48 MHz operation, the system clock is 2/4/8 dividing ratio.

Note 3. The number of outputs varies, depending on the setting of channels in use and the number of the master.

(2/2)

| Item | 80-pin | | 100-pin | | |
|-----------------------------------|--|---------------------------|---|---------------------------|--|
| | R5F110Mx (x = E to H, J) | | R5F110Px (x = E to H, J) | | |
| Clock output/buzzer output | 2 | | 2 | | |
| | <ul style="list-style-type: none"> • 2.44 kHz, 4.88 kHz, 9.76 kHz, 1.25 MHz, 2.5 MHz, 5 MHz, 10 MHz (Main system clock: $f_{MAIN} = 20$ MHz operation) • 256 Hz, 512 Hz, 1.024 kHz, 2.048 kHz, 4.096 kHz, 8.192 kHz, 16.384 kHz, 32.768 kHz (Subsystem clock: $f_{SUB} = 32.768$ kHz operation) | | | | |
| 8/12-bit resolution A/D converter | 9 channels | | 13 channels | | |
| D/A converter | 2 channels | | 2 channels | | |
| Comparator | 1 channel | | 2 channels | | |
| Serial interface | <ul style="list-style-type: none"> • CSI: 1 channel/UART (UART supporting LIN-bus): 1 channel/simplified I²C: 1 channel • CSI: 1 channel/UART: 1 channel/simplified I²C: 1 channel • CSI: 1 channel/UART: 1 channel/simplified I²C: 1 channel • CSI: 1 channel/UART: 1 channel/simplified I²C: 1 channel | | | | |
| | I ² C bus | 1 channel | | 1 channel | |
| USB | Function | 1 channel | | | |
| LCD controller/driver | Internal voltage boosting method, capacitor split method, and external resistance division method are switchable. | | | | |
| | Segment signal output | 44 (40) ^{Note 1} | | 56 (52) ^{Note 1} | |
| | Common signal output | 4 (8) ^{Note 1} | | | |
| Data transfer controller (DTC) | 32 sources | | 33 sources | | |
| Event link controller (ELC) | Event input: 30, Event trigger output: 22 | | Event input: 31, Event trigger output: 22 | | |
| Vectored interrupt sources | Internal | 36 | | 37 | |
| | External | 9 | | 9 | |
| Key interrupt | 8 | | 8 | | |
| Reset | <ul style="list-style-type: none"> • Reset by \overline{RESET} pin • Internal reset by watchdog timer • Internal reset by power-on-reset • Internal reset by voltage detector • Internal reset by illegal instruction execution ^{Note 2} • Internal reset by RAM parity error • Internal reset by illegal-memory access | | | | |
| Power-on-reset circuit | <ul style="list-style-type: none"> • Power-on-reset: 1.51 ± 0.03 V • Power-down-reset: 1.50 ± 0.03 V | | | | |
| Voltage detector | <ul style="list-style-type: none"> • Rising edge: 1.67 V to 3.13 V (12 stages) • Falling edge: 1.63 V to 3.06 V (12 stages) | | | | |
| On-chip debug function | Provided | | | | |
| Power supply voltage | $V_{DD} = 1.6$ to 3.6 V | | | | |
| Operating ambient temperature | $T_A = -40$ to $+85$ °C (A: Consumer applications), $T_A = -40$ to $+105$ °C (G: Industrial applications) | | | | |

Note 1. The number in parentheses indicates the number of signal outputs when 8 coms are used.

Note 2. The illegal instruction is generated when instruction code FFH is executed.

Reset by the illegal instruction execution not is issued by emulation with the in-circuit emulator or on-chip debug emulator.

[80-pin, 100-pin products (without USB)]**(1/2)**

| Item | | 80-pin | 100-pin |
|------------------------------------|-------------------------------------|--|--------------------------|
| | | R5F111Mx (x = E to H, J) | R5F111Px (x = E to H, J) |
| Code flash memory (KB) | | 64 to 256 | 64 to 256 |
| Data flash memory (KB) | | 8 | 8 |
| RAM (KB) | | 8 to 16 Note 1 | 8 to 16 Note 1 |
| Memory space | | 1 MB | |
| Main system clock | High-speed system clock | X1 (crystal/ceramic) oscillation, external main system clock input (EXCLK) 1 to 20 MHz: $V_{DD} = 2.7$ to 3.6 V, 1 to 8 MHz: $V_{DD} = 1.8$ to 2.7 V, 1 to 4 MHz: $V_{DD} = 1.6$ to 1.8 V | |
| | High-speed on-chip oscillator clock | HS (high-speed main) operation mode: 1 to 24 MHz ($V_{DD} = 2.7$ to 3.6 V), HS (high-speed main) operation mode: 1 to 16 MHz ($V_{DD} = 2.4$ to 3.6 V), LS (low-speed main) operation mode: 1 to 8 MHz ($V_{DD} = 1.8$ to 3.6 V), LV (low-voltage main) operation mode: 1 to 4 MHz ($V_{DD} = 1.6$ to 3.6 V) | |
| Subsystem clock | | XT1 (crystal) oscillation, external subsystem clock input (EXCLKS) 32.768 kHz (TYP.): $V_{DD} = 1.6$ to 3.6 V | |
| Low-speed on-chip oscillator clock | | 15 kHz (TYP.): $V_{DD} = 1.6$ to 3.6 V | |
| General-purpose register | | 8 bits \times 32 registers (8 bits \times 8 registers \times 4 banks) | |
| Minimum instruction execution time | | 0.04167 μ s (High-speed on-chip oscillator clock: $f_{HOCO} = f_{IH} = 24$ MHz operation) | |
| | | 0.05 μ s (High-speed system clock: $f_{MX} = 20$ MHz operation) | |
| | | 30.5 μ s (Subsystem clock: $f_{SUB} = 32.768$ kHz operation) | |
| Instruction set | | <ul style="list-style-type: none"> • Data transfer (8/16 bits) • Adder and subtractor/logical operation (8/16 bits) • Multiplication (8 bits \times 8 bits, 16 bits \times 16 bits), Division (16 bits \div 16 bits, 32 bits \div 32 bits) • Multiplication and Accumulation (16 bits \times 16 bits + 32 bits) • Rotate, barrel shift, and bit manipulation (Set, reset, test, and Boolean operation), etc. | |
| I/O port | Total | 63 | 81 |
| | CMOS I/O | 55 | 73 |
| | CMOS input | 5 | 5 |
| | CMOS output | 1 | 1 |
| | N-ch open-drain I/O (6 V tolerance) | 2 | 2 |
| Timer | 16-bit timer TAU | 8 channels (with 1 channel remote control output function) (Timer outputs: 8, PWM outputs: 7 Note 2) | |
| | 16-bit timer KB2 | 3 channels (PWM outputs: 6) | |
| | Watchdog timer | 1 channel | |
| | 12-bit interval timer | 1 channel | |
| | High accuracy real-time clock | 1 channel | |
| | RTC output | 1 1 Hz (subsystem clock: $f_{SUB} = 32.768$ kHz) | |

Note 1. In the case of the 16 KB, this is about 15 KB when the self-programming function and data flash function are used.

Note 2. The number of outputs varies, depending on the setting of channels in use and the number of the master.

(2/2)

| Item | 80-pin | 100-pin |
|-----------------------------------|---|---|
| | R5F111Mx (x = E to H, J) | R5F111Px (x = E to H, J) |
| Clock output/buzzer output | 2 | 2 |
| | <ul style="list-style-type: none"> • 2.44 kHz, 4.88 kHz, 9.76 kHz, 1.25 MHz, 2.5 MHz, 5 MHz, 10 MHz (Main system clock: $f_{MAIN} = 20$ MHz operation) • 256 Hz, 512 Hz, 1.024 kHz, 2.048 kHz, 4.096 kHz, 8.192 kHz, 16.384 kHz, 32.768 kHz (Subsystem clock: $f_{SUB} = 32.768$ kHz operation) | |
| 8/12-bit resolution A/D converter | 11 channels | 13 channels |
| D/A converter | 2 channels | 2 channels |
| Comparator | 1 channel | 2 channels |
| Serial interface | <ul style="list-style-type: none"> • CSI: 1 channel/UART (UART supporting LIN-bus): 1 channel/simplified I²C: 1 channel • CSI: 1 channel/UART: 1 channel/simplified I²C: 1 channel • CSI: 1 channel/UART: 1 channel/simplified I²C: 1 channel • CSI: 1 channel/UART: 1 channel/simplified I²C: 1 channel | |
| I ² C bus | 1 channel | 1 channel |
| LCD controller/driver | Internal voltage boosting method, capacitor split method, and external resistance division method are switchable. | |
| Segment signal output | 44 (40) Note 1 | 56 (52) Note 1 |
| Common signal output | 4 (8) Note 1 | |
| Data transfer controller (DTC) | 30 sources | 31 sources |
| Event link controller (ELC) | Event input: 30, Event trigger output: 22 | Event input: 31, Event trigger output: 22 |
| Vectored interrupt sources | Internal | 32 |
| | External | 9 |
| Key interrupt | 8 | 8 |
| Reset | <ul style="list-style-type: none"> • Reset by \overline{RESET} pin • Internal reset by watchdog timer • Internal reset by power-on-reset • Internal reset by voltage detector • Internal reset by illegal instruction execution Note 2 • Internal reset by RAM parity error • Internal reset by illegal-memory access | |
| Power-on-reset circuit | <ul style="list-style-type: none"> • Power-on-reset: 1.51 ± 0.03 V • Power-down-reset: 1.50 ± 0.03 V | |
| Voltage detector | <ul style="list-style-type: none"> • Rising edge: 1.67 V to 3.13 V (12 stages) • Falling edge: 1.63 V to 3.06 V (12 stages) | |
| On-chip debug function | Provided | |
| Power supply voltage | $V_{DD} = 1.6$ to 3.6 V | |
| Operating ambient temperature | $T_A = -40$ to $+85$ °C (A: Consumer applications), $T_A = -40$ to $+105$ °C (G: Industrial applications) | |

Note 1. The number in parentheses indicates the number of signal outputs when 8 coms are used.

Note 2. The illegal instruction is generated when instruction code FFH is executed.

Reset by the illegal instruction execution not is issued by emulation with the in-circuit emulator or on-chip debug emulator.

2. ELECTRICAL SPECIFICATIONS (A: TA = -40 to +85 °C)

This chapter describes the electrical specifications for the products A: Consumer applications (TA = -40 to +85 °C) and G: Industrial applications (when used in the range of TA = -40 to +85 °C).

Caution 1. The RL78 microcontroller has an on-chip debug function, which is provided for development and evaluation. Do not use the on-chip debug function in products designated for mass production, because the guaranteed number of rewritable times of the flash memory may be exceeded when this function is used, and product reliability therefore cannot be guaranteed. Renesas Electronics is not liable for problems occurring when the on-chip debug function is used.

Caution 2. The pins mounted depend on the product. Refer to 1.3.1 80-pin products (with USB) to 1.3.4 100-pin products (without USB).

2.1 Absolute Maximum Ratings

Absolute Maximum Ratings (TA = 25°C)

(1/3)

| Parameter | Symbols | Conditions | Ratings | Unit |
|-------------------------|----------------------|---|---|------|
| Supply voltage | V _{DD} | | -0.5 to + 6.5 | V |
| | UV _{BUS} | | -0.5 to + 6.5 | V |
| | AV _{DD} | AV _{DD} ≤ V _{DD} | -0.5 to + 4.6 | V |
| REGC pin input voltage | V _I REGC | REGC | -0.3 to + 2.8 and -0.3 to V _{DD} + 0.3 Note 1 | V |
| UREGC pin input voltage | V _I UREGC | UREGC | -0.3 to UV _{BUS} + 0.3 Note 2 | V |
| Input voltage | V _{I1} | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P70 to P77, P80 to P83, P125 to P127, P137, P140 to P143, EXCLK, EXCLKS, RESET | -0.3 to V _{DD} + 0.3 Note 3 | V |
| | V _{I2} | P60, P61 (N-ch open-drain) | -0.3 to + 6.5 | V |
| | V _{I3} | UDP, UDM | -0.3 to + 6.5 | V |
| | V _{I4} | P150 to P156 | -0.3 to AV _{DD} + 0.3 Note 4 | V |
| Output voltage | V _{O1} | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P60, P61, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | -0.3 to V _{DD} + 0.3 Note 3 | V |
| | V _{O2} | P130, P150 to P156 | -0.3 to AV _{DD} + 0.3 Note 3 | V |
| | V _{O3} | UDP, UDM | -0.3 to + 3.8 | V |
| Analog input voltage | V _{A1} | ANI16 to ANI21 | -0.3 to V _{DD} + 0.3 and AV _{REF(+)} + 0.3 Notes 3, 5 | V |
| | V _{A2} | ANI0 to ANI6 | -0.3 to AV _{DD} + 0.3 and AV _{REF(+)} + 0.3 Notes 3, 5 | V |

Note 1. Connect the REGC pin to V_{SS} via a capacitor (0.47 to 1 μF). This value regulates the absolute maximum rating of the REGC pin. Do not use this pin with voltage applied to it.

Note 2. Connect the UREGC pin to V_{SS} via a capacitor (0.33 μF). This value regulates the absolute maximum rating of the UREGC pin. Do not use this pin with voltage applied to it.

Note 3. Must be 6.5 V or lower.

Note 4. Must be 4.6 V or lower.

Note 5. Do not exceed AV_{REF(+)} + 0.3 V in case of A/D conversion target pin.

Caution Product quality may suffer if the absolute maximum rating is exceeded even momentarily for any parameter. That is, the absolute maximum ratings are rated values at which the product is on the verge of suffering physical damage, and therefore the product must be used under conditions that ensure that the absolute maximum ratings are not exceeded.

Remark 1. Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.

Remark 2. AV_{REF(+)}: + side reference voltage of the A/D converter.

Remark 3. V_{SS}: Reference voltage

Absolute Maximum Ratings (TA = 25°C)**(2/3)**

| Parameter | Symbols | Conditions | Ratings | Unit | |
|----------------------------------|---------|---|--|---|---|
| LCD voltage | VL11 | VL1 input voltage <small>Note 1</small> | -0.3 to +2.8 | V | |
| | VL12 | VL2 input voltage <small>Note 1</small> | -0.3 to +6.5 | V | |
| | VL13 | VL3 input voltage <small>Note 1</small> | -0.3 to +6.5 | V | |
| | VL14 | VL4 input voltage <small>Note 1</small> | -0.3 to +6.5 | V | |
| | VL15 | CAPL, CAPH input voltage <small>Note 1</small> | -0.3 to +6.5 | V | |
| | VLO1 | VL1 output voltage | -0.3 to +2.8 | V | |
| | VLO2 | VL2 output voltage | -0.3 to +6.5 | V | |
| | VLO3 | VL3 output voltage | -0.3 to +6.5 | V | |
| | VLO4 | VL4 output voltage | -0.3 to +6.5 | V | |
| | VLO5 | CAPL, CAPH output voltage | -0.3 to +6.5 | V | |
| | VLO6 | COM0 to COM7 SEG0 to SEG55 output voltage | External resistance division method | -0.3 to V _{DD} + 0.3 <small>Note 2</small> | V |
| | | | Capacitor split method | -0.3 to V _{DD} + 0.3 <small>Note 2</small> | V |
| Internal voltage boosting method | | | -0.3 to VL14 + 0.3 <small>Note 2</small> | V | |

Note 1. This value only indicates the absolute maximum ratings when applying voltage to the VL1, VL2, VL3, and VL4 pins; it does not mean that applying voltage to these pins is recommended. When using the internal voltage boosting method or capacitance split method, connect these pins to V_{SS} via a capacitor (0.47 ± 30%) and connect a capacitor (0.47 ± 30%) between the CAPL and CAPH pins.

Note 2. Must be 6.5 V or lower.

Caution Product quality may suffer if the absolute maximum rating is exceeded even momentarily for any parameter. That is, the absolute maximum ratings are rated values at which the product is on the verge of suffering physical damage, and therefore the product must be used under conditions that ensure that the absolute maximum ratings are not exceeded.

Absolute Maximum Ratings (TA = 25°C)**(3/3)**

| Parameter | Symbols | Conditions | | Ratings | Unit |
|-------------------------------|---------|----------------------------------|--|-------------|------|
| Output current, high | IOH1 | Per pin | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | -40 | mA |
| | | Total of all pins | P40 to P46 | -70 | mA |
| | | -170 mA | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P50 to P57, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | -100 | mA |
| | IOH2 | Per pin | P130, P150 to P156 | -0.1 | mA |
| | | Total of all pins | | -0.8 | mA |
| | IOH3 | Per pin | UDP, UDM | -3 | mA |
| Output current, low | IOL1 | Per pin | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P60, P61, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | 40 | mA |
| | | Total of all pins | P40 to P46 | 70 | mA |
| | | 170 mA | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P50 to P57, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | 100 | mA |
| | IOL2 | Per pin | P130, P150 to P156 | 0.4 | mA |
| | | Total of all pins | | 3.2 | mA |
| | IOL3 | Per pin | UDP, UDM | 3 | mA |
| Operating ambient temperature | TA | In normal operation mode | | -40 to +85 | °C |
| | | In flash memory programming mode | | | |
| Storage temperature | Tstg | | | -65 to +150 | °C |

Caution Product quality may suffer if the absolute maximum rating is exceeded even momentarily for any parameter. That is, the absolute maximum ratings are rated values at which the product is on the verge of suffering physical damage, and therefore the product must be used under conditions that ensure that the absolute maximum ratings are not exceeded.

Remark Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.

2.2 Oscillator Characteristics

2.2.1 X1 and XT1 oscillator characteristics

(TA = -40 to +85 °C, 1.6 V ≤ V_{DD} ≤ 3.6 V, V_{SS} = 0 V)

| Parameter | Resonator | Conditions | MIN. | TYP. | MAX. | Unit |
|---|-------------------------------------|---------------------------------|------|--------|------|------|
| X1 clock oscillation frequency (fx) Note | Ceramic resonator/crystal resonator | 2.7 V ≤ V _{DD} ≤ 3.6 V | 1.0 | | 20.0 | MHz |
| | | 2.4 V ≤ V _{DD} < 2.7 V | 1.0 | | 16.0 | |
| | | 1.8 V ≤ V _{DD} < 2.4 V | 1.0 | | 8.0 | |
| | | 1.6 V ≤ V _{DD} < 1.8 V | 1.0 | | 4.0 | |
| XT1 clock oscillation frequency (fxT) Note | Crystal resonator | | 32 | 32.768 | 35 | kHz |

Note Indicates only permissible oscillator frequency ranges. Refer to **AC Characteristics** for instruction execution time. Request evaluation by the manufacturer of the oscillator circuit mounted on a board to check the oscillator characteristics.

Caution Since the CPU is started by the high-speed on-chip oscillator clock after a reset release, check the X1 clock oscillation stabilization time using the oscillation stabilization time counter status register (OSTC) by the user. Determine the oscillation stabilization time of the OSTC register and the oscillation stabilization time select register (OSTS) after sufficiently evaluating the oscillation stabilization time with the resonator to be used.

Remark When using the X1 and XT1 oscillator, refer to **5.4 System Clock Oscillator in the RL78/L1C User's Manual Hardware**.

2.2.2 On-chip oscillator characteristics

(TA = -40 to +85 °C, 1.6 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Oscillators | Parameters | Conditions | | MIN. | TYP. | MAX. | Unit |
|--|------------|--------------|---------------------|------|------|------|------|
| High-speed on-chip oscillator clock frequency Notes 1, 2 | fHOCO | | | 1 | | 48 | MHz |
| High-speed on-chip oscillator clock frequency accuracy | | -20 to +85°C | 1.8 V ≤ VDD ≤ 3.6 V | -1.0 | | +1.0 | % |
| | | | 1.6 V ≤ VDD ≤ 1.8 V | -5.0 | | +5.0 | % |
| | | -40 to -20°C | 1.8 V ≤ VDD < 3.6 V | -1.5 | | +1.5 | % |
| | | | 1.6 V ≤ VDD ≤ 1.8 V | -5.5 | | +5.5 | % |
| Low-speed on-chip oscillator clock frequency | fIL | | | | 15 | | kHz |
| Low-speed on-chip oscillator clock frequency accuracy | | | | -15 | | +15 | % |

Note 1. High-speed on-chip oscillator frequency is selected with bits 0 to 4 of the option byte (000C2H) and bits 0 to 2 of the HOCODIV register.

Note 2. This only indicates the oscillator characteristics. Refer to **AC Characteristics** for instruction execution time.

2.2.3 PLL oscillator characteristics

(TA = -40 to +85 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Oscillators | Parameters | Conditions | MIN. | TYP. | MAX. | Unit |
|---------------------------|------------|-------------------------|------|-------|-------|------|
| PLL input frequency Note | fPLLIN | High-speed system clock | 6.00 | | 16.00 | MHz |
| PLL output frequency Note | fPLL | | | 48.00 | | MHz |

Note Indicates only oscillator characteristics. Refer to **AC Characteristics** for instruction execution time.

2.3 DC Characteristics

2.3.1 Pin characteristics

(TA = -40 to +85 °C, 1.6 V ≤ AVDD = VDD ≤ 3.6 V, VSS = 0 V)

| Items | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|--|-------------------|---|---------------------|------|----------------------------|------|
| Output current, high ^{Note 1} | IOH1 | Per pin for P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | | | -10.0 ^{Note 2} | mA |
| | | Total of P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P70 to P77, P80 to P83, P125 to P127, P140 to P143 (When duty = 70% ^{Note 3}) | 2.7 V ≤ VDD ≤ 3.6 V | | -15.0 | mA |
| | | | 1.8 V ≤ VDD < 2.7 V | | -7.0 | mA |
| | | | 1.6 V ≤ VDD < 1.8 V | | -3 | mA |
| | IOH2 | Per pin for P130, P150 to P156 | 1.6 V ≤ VDD ≤ 3.6 V | | -0.1 ^{Note 2} | mA |
| | Total of all pins | 1.6 V ≤ VDD ≤ 3.6 V | | -0.8 | mA | |

Note 1. Value of current at which the device operation is guaranteed even if the current flows from the VDD pin to an output pin.

Note 2. However, do not exceed the total current value.

Note 3. Specification under conditions where the duty factor is 70%.

The output current value that has changed the duty ratio can be calculated with the following expression (when changing the duty factor from 70% to n%).

- Total output current of pins = $(I_{OH} \times 0.7)/(n \times 0.01)$

<Example> Where n = 50% and IOH = -10.0 mA

$$\text{Total output current of pins} = (-10.0 \times 0.7)/(50 \times 0.01) = -14.0 \text{ mA}$$

However, the current that is allowed to flow into one pin does not vary depending on the duty factor. A current higher than the absolute maximum rating must not flow into one pin.

Caution P00 to P02, P10 to P12, P24 to P26, P33 to P35, and P42 to P44 do not output high level in N-ch open-drain mode.

Remark Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.

(TA = -40 to +85 °C, 1.6 V ≤ AVDD = VDD ≤ 3.6 V, VSS = 0 V)

| Items | Symbol | Conditions | MIN. | TYP. | MAX. | Unit | |
|---|---|--|---|---------------------------------|----------------|----------------|----|
| Output current, I _{OL} Note 1 | I _{OL1} | Per pin for P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P60, P61, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | | | 20.0 Note 2 | mA | |
| | | | Per pin for P60 and P61 | | | 15.0 Note 2 | mA |
| | | | Total of P40 to P46 (When duty = 70% Note 3) | 2.7 V ≤ V _{DD} ≤ 3.6 V | | 15.0 | mA |
| | | 1.8 V ≤ V _{DD} < 2.7 V | | | 9.0 | mA | |
| | | 1.6 V ≤ V _{DD} < 1.8 V | | | 4.5 | mA | |
| | | Total of P00 to P07, P10 to P17, P20 to P27, P30 to P37, P50 to P57, P60, P61, P70 to P77, P80 to P83, P125 to P127, P140 to P143 (When duty = 70% Note 3) | 2.7 V ≤ V _{DD} ≤ 3.6 V | | 35.0 | mA | |
| | | | 1.8 V ≤ V _{DD} < 2.7 V | | 20.0 | mA | |
| | 1.6 V ≤ V _{DD} < 1.8 V | | | 10.0 | mA | | |
| | Total of all pins (When duty = 70% Note 3) | | | | 50.0 | mA | |
| | I _{OL2} | Per pin for P130, P150 to P156 | | | | 0.4 Note 2 | mA |
| Total of all pins | | | 1.6 V ≤ V _{DD} ≤ 3.6 V | | | 3.2 | mA |

Note 1. Value of current at which the device operation is guaranteed even if the current flows from an output pin to the V_{SS} pin.

Note 2. However, do not exceed the total current value.

Note 3. Specification under conditions where the duty factor is 70%.

The output current value that has changed the duty ratio can be calculated with the following expression (when changing the duty factor from 70% to n%).

• Total output current of pins = (I_{OL} × 0.7)/(n × 0.01)

<Example> Where n = 50% and I_{OL} = 10.0 mA

$$\text{Total output current of pins} = (10.0 \times 0.7)/(50 \times 0.01) = 14.0 \text{ mA}$$

However, the current that is allowed to flow into one pin does not vary depending on the duty factor. A current higher than the absolute maximum rating must not flow into one pin.

Remark Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.

(TA = -40 to +85 °C, 1.6 V ≤ AVDD = VDD ≤ 3.6 V, VSS = 0 V)

| Items | Symbol | Conditions | MIN. | TYP. | MAX. | Unit | |
|---------------------|------------------|--|---|----------------------|------|----------------------|---|
| Input voltage, high | V _{IH1} | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | Normal input buffer | 0.8 V _{DD} | | V _{DD} | V |
| | V _{IH2} | P00, P01, P10, P11, P24, P25, P33, P34, P43, P44 | TTL input buffer 3.3 V ≤ V _{DD} ≤ 3.6 V | 2.0 | | V _{DD} | V |
| | | | TTL input buffer 1.6 V ≤ V _{DD} < 3.3 V | 1.50 | | V _{DD} | V |
| | V _{IH3} | P150 to P156 | | 0.7 AV _{DD} | | AV _{DD} | V |
| | V _{IH4} | P60, P61 | | 0.7 V _{DD} | | 6.0 | V |
| | V _{IH5} | P121 to P124, P137, EXCLK, EXCLKS, $\overline{\text{RESET}}$ | | 0.8 V _{DD} | | V _{DD} | V |
| Input voltage, low | V _{IL1} | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | Normal input buffer | 0 | | 0.2 V _{DD} | V |
| | V _{IL2} | P00, P01, P10, P11, P24, P25, P33, P34, P43, P44 | TTL input buffer 3.3 V ≤ V _{DD} ≤ 3.6 V | 0 | | 0.5 | V |
| | | | TTL input buffer 1.6 V ≤ V _{DD} < 3.3 V | 0 | | 0.32 | V |
| | V _{IL3} | P150 to P156 | | 0 | | 0.3 AV _{DD} | V |
| | V _{IL4} | P60, P61 | | 0 | | 0.3 V _{DD} | V |
| | V _{IL5} | P121 to P124, P137, EXCLK, EXCLKS, $\overline{\text{RESET}}$ | | 0 | | 0.2 V _{DD} | V |

Caution The maximum value of V_{IH} of pins P00 to P02, P10 to P12, P24 to P26, P33 to P35, and P42 to P44 is V_{DD}, even in the N-ch open-drain mode.

Remark Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.

(TA = -40 to +85 °C, 1.6 V ≤ AVDD = VDD ≤ 3.6 V, VSS = 0 V)

| Items | Symbol | Conditions | MIN. | TYP. | MAX. | Unit | |
|----------------------|--------|--|--|------------|------|------|---|
| Output voltage, high | VOH1 | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | 2.7 V ≤ VDD ≤ 3.6 V, IOH1 = -2.0 mA | VDD - 0.6 | | | V |
| | | | 1.8 V ≤ VDD ≤ 3.6 V, IOH1 = -1.5 mA | VDD - 0.5 | | | V |
| | | | 1.6 V ≤ VDD < 3.6 V, IOH1 = -1.0 mA | VDD - 0.5 | | | V |
| | VOH2 | P130, P150 to P156 | 1.6 V ≤ VDD ≤ 3.6 V, IOH2 = -100 μA | AVDD - 0.5 | | | V |
| Output voltage, low | VOL1 | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | 2.7 V ≤ VDD ≤ 3.6 V, IOL1 = 3.0 mA | | | 0.6 | V |
| | | | 2.7 V ≤ VDD ≤ 3.6 V, IOL1 = 1.5 mA | | | 0.4 | V |
| | | | 1.8 V ≤ VDD ≤ 3.6 V, IOL1 = 0.6 mA | | | 0.4 | V |
| | | | 1.6 V ≤ VDD < 1.8 V, IOL1 = 0.3 mA | | | 0.4 | V |
| | VOL2 | P130, P150 to P156 | 1.6 V ≤ VDD ≤ 3.6 V, IOL2 = 400 μA | | | 0.4 | V |
| | VOL3 | P60, P61 | 2.7 V ≤ VDD ≤ 3.6 V, IOL3 = 3.0 mA | | | 0.4 | V |
| | | | 1.8 V ≤ VDD ≤ 3.6 V, IOL3 = 2.0 mA | | | 0.4 | V |
| | | | 1.6 V ≤ VDD ≤ 1.8 V, IOL3 = 1.0 mA | | | 0.4 | V |

Caution P00 to P02, P10 to P12, P24 to P26, P33 to P35, and P42 to P44 do not output high level in N-ch open-drain mode.

Remark Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.

(TA = -40 to +85 °C, 1.6 V ≤ AVDD = VDD ≤ 3.6 V, VSS = 0 V)

| Items | Symbol | Conditions | MIN. | TYP. | MAX. | Unit | | |
|-----------------------------|--------------|---|----------|---------------------------------------|------|------|-----|----|
| Input leakage current, high | LIH1 | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P60, P61, P70 to P77, P80 to P83, P125 to P127, P137, P140 to P143, $\overline{\text{RESET}}$ | Vi = VDD | | | 1 | μA | |
| | LIH2 | P20, P21, P140 to P143 | Vi = VDD | | | 1 | μA | |
| | LIH3 | P121 to P124 (X1, X2, EXCLK, XT1, XT2, EXCLKS) | Vi = VDD | In input port or external clock input | | | 1 | μA |
| | | | | In resonator connection | | | 10 | μA |
| LIH4 | P150 to P156 | Vi = AVDD | | | 1 | μA | | |
| Input leakage current, low | LI11 | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P60, P61, P70 to P77, P80 to P83, P125 to P127, P137, P140 to P143, $\overline{\text{RESET}}$ | Vi = VSS | | | -1 | μA | |
| | LI12 | P20, P21, P140 to P143 | Vi = VSS | | | -1 | μA | |
| | LI13 | P121 to P124 (X1, X2, EXCLK, XT1, XT2, EXCLKS) | Vi = VSS | In input port or external clock input | | | -1 | μA |
| | | | | In resonator connection | | | -10 | μA |
| LI14 | P150 to P156 | Vi = AVSS | | | -1 | μA | | |
| On-chip pull-up resistance | Ru1 | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P50 to P57, P70 to P77, P140 to P143, P125 to P127 | Vi = VSS | 2.4 V ≤ VDD ≤ 3.6 V | 10 | 20 | 100 | kΩ |
| | | | | 1.6 V ≤ VDD ≤ 2.4 V | 10 | 30 | 100 | |
| | Ru2 | P40 to P46, P80 to P83 | Vi = VSS | | 10 | 20 | 100 | kΩ |

Remark Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.

2.3.2 Supply current characteristics

(TA = -40 to +85 °C, 1.6 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

(1/2)

| Parameter | Symbol | Conditions | | | | MIN. | TYP. | MAX. | Unit | | |
|--|---|--|--|--|---|---|----------------------|------|------|----|-----|
| Supply current ^{Note 1} | IDD1 | Operating mode | HS (high-speed main) mode ^{Note 5} | fHOCO = 48 MHz ^{Note 3} , fIH = 24 MHz ^{Note 3} | Basic operation | VDD = 3.6 V | | 2.2 | 2.8 | mA | |
| | | | | | | VDD = 3.0 V | | 2.2 | 2.8 | | |
| | | | | Normal operation | VDD = 3.6 V | | 4.4 | 8.5 | | | |
| | | | | | VDD = 3.0 V | | 4.4 | 8.5 | | | |
| | | | | Basic operation | VDD = 3.6 V | | 2.0 | 2.6 | | | |
| | | | | | VDD = 3.0 V | | 2.0 | 2.6 | | | |
| | | | Normal operation | VDD = 3.6 V | | 4.2 | 6.8 | | | | |
| | | | | VDD = 3.0 V | | 4.2 | 6.8 | | | | |
| | | | Normal operation | VDD = 3.6 V | | 3.1 | 4.9 | | | | |
| | | | | VDD = 3.0 V | | 3.1 | 4.9 | | | | |
| | | | LS (low-speed main) mode ^{Note 5} | fHOCO = 8 MHz ^{Note 3} , fIH = 8 MHz ^{Note 3} | Normal operation | VDD = 3.0 V | | 1.4 | 2.2 | mA | |
| | | | | | | VDD = 2.0 V | | 1.4 | 2.2 | | |
| | | LV (low-voltage main) mode ^{Note 5} | fHOCO = 4 MHz ^{Note 3} , fIH = 4 MHz ^{Note 3} | Normal operation | VDD = 3.0 V | | 1.3 | 1.8 | mA | | |
| | | | | | VDD = 2.0 V | | 1.3 | 1.8 | | | |
| | | HS (high-speed main) mode ^{Note 5} | | Normal operation | fMX = 20 MHz ^{Note 2} , VDD = 3.6 V | Square wave input | | 3.5 | 5.5 | mA | |
| | | | | | | Resonator connection | | 3.6 | 5.7 | | |
| | | | | | Normal operation | fMX = 20 MHz ^{Note 2} , VDD = 3.0 V | Square wave input | | 3.5 | | 5.5 |
| | | | | | | | Resonator connection | | 3.6 | | 5.7 |
| | | | | | Normal operation | fMX = 16 MHz ^{Note 2} , VDD = 3.6 V | Square wave input | | 2.9 | | 4.5 |
| | | | | | | | Resonator connection | | 3.1 | | 4.6 |
| | | | | Normal operation | fMX = 16 MHz ^{Note 2} , VDD = 3.0 V | Square wave input | | 2.9 | 4.5 | | |
| | | | | | | Resonator connection | | 3.1 | 4.6 | | |
| | | | | Normal operation | fMX = 10 MHz ^{Note 2} , VDD = 3.6 V | Square wave input | | 2.1 | 3.2 | | |
| | | | | | | Resonator connection | | 2.2 | 3.2 | | |
| Normal operation | fMX = 10 MHz ^{Note 2} , VDD = 3.0 V | | | Square wave input | | 2.1 | 3.2 | | | | |
| | | | | Resonator connection | | 2.2 | 3.2 | | | | |
| LS (low-speed main) mode ^{Note 5} | fMX = 8 MHz ^{Note 2} , VDD = 3.6 V | Normal operation | Square wave input | | 1.2 | 2.0 | mA | | | | |
| | | | Resonator connection | | 1.3 | 2.0 | | | | | |
| | | Normal operation | fMX = 8 MHz ^{Note 2} , VDD = 3.0 V | Square wave input | | 1.2 | | 2.1 | | | |
| | | | | Resonator connection | | 1.3 | | 2.2 | | | |
| HS (High-speed main) mode (PLL operation) | fPLL = 48 MHz, fCLK = 24 MHz ^{Note 2} | Normal operation | VDD = 3.6 V | | 4.7 | 7.5 | mA | | | | |
| | | | VDD = 3.0 V | | 4.7 | 7.5 | | | | | |
| | | Normal operation | fPLL = 48 MHz, fCLK = 12 MHz ^{Note 2} | VDD = 3.6 V | | 3.1 | | 5.1 | | | |
| | | | | VDD = 3.0 V | | 3.1 | | 5.1 | | | |
| | | Normal operation | fPLL = 48 MHz, fCLK = 6 MHz ^{Note 2} | VDD = 3.6 V | | 2.3 | | 3.9 | | | |
| | | | | VDD = 3.0 V | | 2.3 | | 3.9 | | | |
| Subsystem clock operation | fSUB = 32.768 kHz ^{Note 4} TA = -40°C | Normal operation | Square wave input | | 4.6 | 6.9 | μA | | | | |
| | | | Resonator connection | | 4.7 | 6.9 | | | | | |
| | | Normal operation | fSUB = 32.768 kHz ^{Note 4} TA = +25°C | Square wave input | | 4.9 | | 7.0 | | | |
| | | | | Resonator connection | | 5.0 | | 7.2 | | | |
| | | Normal operation | fSUB = 32.768 kHz ^{Note 4} TA = +50°C | Square wave input | | 5.2 | | 7.6 | | | |
| | | | | Resonator connection | | 5.2 | | 7.7 | | | |
| | | Normal operation | fSUB = 32.768 kHz ^{Note 4} TA = +70°C | Square wave input | | 5.5 | | 9.3 | | | |
| | | | | Resonator connection | | 5.6 | | 9.4 | | | |
| | | Normal operation | fSUB = 32.768 kHz ^{Note 4} TA = +85°C | Square wave input | | 6.2 | | 13.3 | | | |
| | | | | Resonator connection | | 6.2 | | 13.4 | | | |

(Notes and Remarks are listed on the next page.)

- Note 1.** Total current flowing into V_{DD}, including the input leakage current flowing when the level of the input pin is fixed to V_{DD}, or V_{SS}. The values below the MAX. column include the peripheral operation current. However, not including the current flowing into the LCD controller/driver, A/D converter, D/A converter, comparator, LVD circuit, USB 2.0 function module, I/O port, and on-chip pull-up/pull-down resistors and the current flowing during data flash rewrite.
- Note 2.** When high-speed on-chip oscillator and subsystem clock are stopped.
- Note 3.** When high-speed system clock and subsystem clock are stopped.
- Note 4.** When high-speed on-chip oscillator and high-speed system clock are stopped. When AMPHS1 = 1 (Ultra-low power consumption oscillation). However, not including the current flowing into the high accuracy RTC, 12-bit interval timer, and watchdog timer.
- Note 5.** Relationship between operation voltage width, operation frequency of CPU and operation mode is as below.
- | | |
|----------------------------|---|
| HS (high-speed main) mode: | 2.7 V ≤ V _{DD} ≤ 3.6 V@1 MHz to 24 MHz |
| | 2.4 V ≤ V _{DD} ≤ 3.6 V@1 MHz to 16 MHz |
| LS (low-speed main) mode: | 1.8 V ≤ V _{DD} ≤ 3.6 V@1 MHz to 8 MHz |
| LV (low-voltage main) mode | 1.6 V ≤ V _{DD} ≤ 3.6 V@1 MHz to 4 MHz |
- Remark 1.** f_{MX}: High-speed system clock frequency (X1 clock oscillation frequency or external main system clock frequency)
- Remark 2.** f_{HOCO}: High-speed on-chip oscillator clock frequency (48 MHz max.)
- Remark 3.** f_{IH}: Main system clock source frequency when the high-speed on-chip oscillator clock divided 1, 2, 4, or 8, or the PLL clock divided by 2, 4, or 8 is selected (24 MHz max.)
- Remark 4.** f_{SUB}: Subsystem clock frequency (XT1 clock oscillation frequency)
- Remark 5.** Except subsystem clock operation, temperature condition of the TYP. value is TA = 25°C

(TA = -40 to +85 °C, 1.6 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

(2/2)

| Parameter | Symbol | Conditions | | MIN. | TYP. | MAX. | Unit | | | | |
|--------------------------|----------------|---------------------------|--|---|---|---|----------------------|------|------|------|-----|
| Supply current Note 1 | IDD2 Note 2 | HALT mode | HS (high-speed main) mode Note 7 | fHOCO = 48 MHz Note 4, fIH = 24 MHz Note 4 | VDD = 3.6 V | | 0.77 | 2.70 | mA | | |
| | | | | | VDD = 3.0 V | | 0.77 | 2.70 | | | |
| | | | | fHOCO = 24 MHz Note 4, fIH = 24 MHz Note 4 | VDD = 3.6 V | | 0.55 | 1.91 | | | |
| | | | | | VDD = 3.0 V | | 0.55 | 1.90 | | | |
| | | | | fHOCO = 16 MHz Note 4, fIH = 16 MHz Note 4 | VDD = 3.6 V | | 0.48 | 1.41 | | | |
| | | | | | VDD = 3.0 V | | 0.47 | 1.41 | | | |
| | | | | LS (low-speed main) mode Note 7 | fHOCO = 8 MHz Note 4, fIH = 8 MHz Note 4 | VDD = 3.0 V | | 300 | 770 | μA | |
| | | | | | | VDD = 2.0 V | | 300 | 770 | | |
| | | | | | LV (low-voltage main) mode Note 7 | fHOCO = 4 MHz Note 4, fIH = 4 MHz Note 4 | VDD = 3.0 V | | 440 | 770 | μA |
| | | | | | | | VDD = 2.0 V | | 440 | 770 | |
| | | | | | HS (high-speed main) mode Note 7 | fMX = 20 MHz Note 3, VDD = 3.6 V | Square wave input | | 0.35 | 1.63 | mA |
| | | | | Resonator connection | | | | 0.51 | 1.68 | | |
| | | | fMX = 20 MHz Note 3, VDD = 3.0 V | Square wave input | | | | 0.34 | 1.63 | | |
| | | | | Resonator connection | | | | 0.51 | 1.68 | | |
| | | | fMX = 16 MHz Note 3, VDD = 3.6 V | Square wave input | | | | 0.30 | 1.22 | | |
| | | | | Resonator connection | | | | 0.45 | 1.39 | | |
| | | | | | | fMX = 16 MHz Note 3, VDD = 3.0 V | Square wave input | | 0.29 | 1.20 | μA |
| | | | | | | | Resonator connection | | 0.45 | 1.38 | |
| | | | | | | fMX = 10 MHz Note 3, VDD = 3.6 V | Square wave input | | 0.23 | 0.82 | |
| | | | | | | | Resonator connection | | 0.30 | 0.90 | |
| | | | | | | fMX = 10 MHz Note 3, VDD = 3.0 V | Square wave input | | 0.22 | 0.81 | |
| | | | | | | | Resonator connection | | 0.30 | 0.89 | |
| | | | | LS (low-speed main) mode Note 7 | fMX = 8 MHz Note 3, VDD = 3.0 V | Square wave input | | 120 | 510 | μA | |
| | | | | | | Resonator connection | | 170 | 560 | | |
| | | | | | | fMX = 8 MHz Note 3, VDD = 2.0 V | Square wave input | | 130 | | 520 |
| | | | | | | | Resonator connection | | 170 | | 570 |
| | | | | HS (High-speed main) mode (PLL operation) | fMX = 48 MHz, fCLK = 24 MHz Note 3 | VDD = 3.6 V | | 0.99 | 2.89 | mA | |
| | | VDD = 3.0 V | | | | 0.99 | 2.88 | | | | |
| | | | fMX = 48 MHz, fCLK = 12 MHz Note 3 | | VDD = 3.6 V | | 0.89 | 2.48 | | | |
| | | | | | VDD = 3.0 V | | 0.89 | 2.47 | | | |
| | | Subsystem clock operation | fsUB = 32.768 kHz Note 5 TA = -40°C | Square wave input | | 0.32 | 0.61 | μA | | | |
| | | | | Resonator connection | | 0.51 | 0.80 | | | | |
| | | | | fsUB = 32.768 kHz Note 5 TA = +25°C | Square wave input | | 0.41 | | 0.74 | | |
| | | | | | Resonator connection | | 0.62 | | 0.91 | | |
| | | | | fsUB = 32.768 kHz Note 5 TA = +50°C | Square wave input | | 0.52 | | 2.30 | | |
| | | | | | Resonator connection | | 0.75 | | 2.49 | | |
| | | | | fsUB = 32.768 kHz Note 5 TA = +70°C | Square wave input | | 0.82 | | 4.03 | | |
| | | | | | Resonator connection | | 1.08 | | 4.22 | | |
| | | | | fsUB = 32.768 kHz Note 5 TA = +85°C | Square wave input | | 1.38 | | 8.04 | | |
| | | | | | Resonator connection | | 1.62 | | 8.23 | | |
| | IDD3 Note 6 | STOP mode Note 8 | TA = -40°C | | | 0.18 | 0.52 | μA | | | |
| | | | TA = +25°C | | | 0.25 | 0.52 | | | | |
| | | | TA = +50°C | | | 0.34 | 2.21 | | | | |
| | | | TA = +70°C | | | 0.64 | 3.94 | | | | |
| | | | TA = +85°C | | | 1.18 | 7.95 | | | | |

(Notes and Remarks are listed on the next page.)

- Note 1.** Total current flowing into V_{DD}, including the input leakage current flowing when the level of the input pin is fixed to V_{DD} or V_{SS}. The values below the MAX. column include the peripheral operation current. However, not including the current flowing into the LCD controller/driver, A/D converter, D/A converter, comparator, LVD circuit, USB 2.0 function module, I/O port, and on-chip pull-up/pull-down resistors and the current flowing during data flash rewrite.
- Note 2.** During HALT instruction execution by flash memory.
- Note 3.** When high-speed on-chip oscillator and subsystem clock are stopped.
- Note 4.** When high-speed system clock and subsystem clock are stopped.
- Note 5.** When high-speed on-chip oscillator and high-speed system clock are stopped. When RTCLPC = 1 and setting ultra-low current consumption (AMPHS1 = 1). The current flowing into the high accuracy RTC is included. However, not including the current flowing into the 12-bit interval timer and watchdog timer.
- Note 6.** Not including the current flowing into the high accuracy RTC, 12-bit interval timer, and watchdog timer.
- Note 7.** Relationship between operation voltage width, operation frequency of CPU and operation mode is as below.
- | | |
|-----------------------------|---|
| HS (high-speed main) mode: | 2.7 V ≤ V _{DD} ≤ 3.6 V@1 MHz to 24 MHz |
| | 2.4 V ≤ V _{DD} ≤ 3.6 V@1 MHz to 16 MHz |
| LS (low-speed main) mode: | 1.8 V ≤ V _{DD} ≤ 3.6 V@1 MHz to 8 MHz |
| LV (low-voltage main) mode: | 1.6 V ≤ V _{DD} ≤ 3.6 V@1 MHz to 4 MHz |
- Note 8.** Regarding the value for current to operate the subsystem clock in STOP mode, refer to that in HALT mode.
- Remark 1.** f_{MX}: High-speed system clock frequency (X1 clock oscillation frequency or external main system clock frequency)
- Remark 2.** f_{HOCO}: High-speed on-chip oscillator clock frequency (48 MHz max.)
- Remark 3.** f_{IH}: Main system clock source frequency when the high-speed on-chip oscillator clock divided 1, 2, 4, or 8, or the PLL clock divided by 2, 4, or 8 is selected (24 MHz max.)
- Remark 4.** f_{SUB}: Subsystem clock frequency (XT1 clock oscillation frequency)
- Remark 5.** Except subsystem clock operation, temperature condition of the TYP. value is TA = 25°C

(TA = -40 to +85 °C, 1.6 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | | | | MIN. | TYP. | MAX. | Unit |
|--|--|---|---|--|-----------------------------|-----------------------------|------|-------|------|
| Low-speed on-chip oscillator operating current | IFIL Note 1 | | | | | | 0.20 | | μA |
| High-accuracy RTC operating current | IRTC Notes 1, 3 | | | | | | 0.02 | | μA |
| 12-bit interval timer operating current | ITMKA Notes 1, 2, 4 | | | | | | 0.02 | | μA |
| Watchdog timer operating current | IWDT Notes 1, 4 | fIL = 15 kHz | | | | | 0.22 | | μA |
| A/D converter operating current | IADC Notes 6, 7 | AVDD = 3.0 V, when conversion at maximum speed | | | | | 422 | 720 | μA |
| AVREF (+) current | IAVREF Note 8 | AVDD = 3.0 V, ADREFP1 = 0, ADREFP0 = 0 Note 7 | | | | | 14.0 | 25.0 | μA |
| | | AVREFF = 3.0 V, ADREFP1 = 0, ADREFP0 = 1 Note 10 | | | | | 14.0 | 25.0 | |
| | | ADREFP1 = 1, ADREFP0 = 0 Note 1 | | | | | 14.0 | 25.0 | |
| A/D converter reference voltage current | IADREF Notes 1, 9 | VDD = 3.0 V | | | | | 75.0 | | μA |
| Temperature sensor operating current | ITMPS Note 1 | | | | | | 78 | | μA |
| D/A converter operating current | IDAC Notes 1, 11 | Per D/A converter channel | | | | | 0.53 | 1.5 | mA |
| Comparator operating current | ICMP Notes 1, 12 | VDD = 3.6 V, Regulator output voltage = 2.1 V | Window mode | | | 12.5 | | μA | |
| | | | Comparator high-speed mode | | | 4.5 | | μA | |
| | | | Comparator low-speed mode | | | 1.2 | | μA | |
| | | VDD = 3.6 V, Regulator output voltage = 1.8 V | Window mode | | | 7.05 | | μA | |
| | | | Comparator high-speed mode | | | 2.2 | | μA | |
| | | | Comparator low-speed mode | | | 0.9 | | μA | |
| LVD operating current | ILVI Notes 1, 13 | | | | | | 0.06 | | μA |
| Self-programming operating current | IFSP Notes 1, 14 | | | | | | 2.50 | 12.20 | mA |
| BGO operating current | IBGO Notes 1, 15 | | | | | | 1.68 | 12.20 | mA |
| SNOOZE operating current | ISNOZ Note 1 | ADC operation | The mode is performed Note 16 | | | | 0.34 | 1.10 | mA |
| | | | The A/D conversion operations are performed, Low voltage mode, AVREFF = VDD = 3.0 V | | | | 0.53 | 2.04 | |
| | | CSI/UART operation | | | | 0.70 | 1.54 | mA | |
| LCD operating current | ILCD1 Notes 17, 18 | External resistance division method | fLCD = fSUB | 1/3 bias | VDD = 3.6 V, LV4 = 3.6 V | | 0.14 | | μA |
| | | | LCD clock = 128 Hz | 4-time slice | | | | | |
| | | | ILCD2 Note 17 | Internal voltage boosting method | | | | | |
| LCD clock = 128 Hz | 4-time slice | | | | | | | | |
| ILCD3 Note 17 | Capacitor split method | fLCD = fSUB | | | 1/3 bias | VDD = 3.0 V, LV4 = 3.0 V | | 0.12 | |
| | | LCD clock = 128 Hz | 4-time slice | | | | | | |
| | | USB current Note 19 | IUSB Note 20 | Operating current during USB communication | | | | | |
| IUSB Note 21 | Operating current in the USB suspended state | | | | | 0.04 | | mA | |

(Notes and Remarks are listed on the next page.)

- Note 1.** Current flowing to VDD.
- Note 2.** When high speed on-chip oscillator and high-speed system clock are stopped.
- Note 3.** Current flowing only to the high accuracy real-time clock (excluding the operating current of the low-speed on-chip oscillator and the XT1 oscillator). The supply current of the RL78 microcontrollers is the sum of the values of either IDD1 or IDD2, and IRTC, when the high accuracy real-time clock operates in operation mode or HALT mode. When the low-speed on-chip oscillator is selected, IFIL should be added. IDD2 subsystem clock operation includes the operational current of the high accuracy real-time clock.
- Note 4.** Current flowing only to the 12-bit interval timer (excluding the operating current of the low-speed on-chip oscillator and the XT1 oscillator). The supply current of the RL78 microcontrollers is the sum of the values of either IDD1 or IDD2, and ITMKA, when the 12-bit interval timer operates in operation mode or HALT mode. When the low-speed on-chip oscillator is selected, IFIL should be added. IDD2 subsystem clock operation includes the operational current of the 12-bit interval timer.
- Note 5.** Current flowing only to the watchdog timer (including the operating current of the low-speed on-chip oscillator). The current value of the RL78 microcontrollers is the sum of IDD1, IDD2 or IDD3 and IWDT when the watchdog timer operates in STOP mode.
- Note 6.** Current flowing only to the A/D converter. The supply current of the RL78 microcontrollers is the sum of IDD1 or IDD2 and IADC, IAVREF, IADREF when the A/D converter operates in an operation mode or the HALT mode.
- Note 7.** Current flowing to the AVDD.
- Note 8.** Current flowing from the reference voltage source of A/D converter.
- Note 9.** Operation current flowing to the internal reference voltage.
- Note 10.** Current flowing to the AVREFP.
- Note 11.** Current flowing only to the D/A converter. The current value of the RL78 microcontrollers is the sum of IDD1 or IDD2 and IDA when the D/A converter operates in an operation mode or the HALT mode.
- Note 12.** Current flowing only to the comparator circuit. The current value of the RL78 microcontrollers is the sum of IDD1, IDD2 or IDD3 and ICMP when the comparator circuit operates in the Operating, HALT or STOP mode.
- Note 13.** Current flowing only to the LVD circuit. The current value of the RL78 microcontrollers is the sum of IDD1, IDD2 or IDD3 and ILVI when the LVD circuit operates in the Operating, HALT or STOP mode.
- Note 14.** Current flowing only during self-programming.
- Note 15.** Current flowing only during data flash rewrite.
- Note 16.** For shift time to the SNOOZE mode, see **23.3.3 SNOOZE mode in the RL78/L1C User's Manual Hardware.**
- Note 17.** Current flowing only to the LCD controller/driver (VDD pin). The current value of the RL78 microcontrollers is the sum of the LCD operating current (ILCD1, ILCD2 or ILCD3) to the supply current (IDD1, or IDD2) when the LCD controller/driver operates in an operation mode or HALT mode. Not including the current that flows through the LCD panel.
- Note 18.** Not including the current that flows through the external divider resistor divider resistor.
- Note 19.** Current flowing to the UVBUS.
- Note 20.** Including the operating current when fPLL = 48 MHz.
- Note 21.** Including the current supplied from the pull-up resistor of the UDP pin to the pull-down resistor of the host device, in addition to the current consumed by this MCU during the suspended state.

- Remark 1.** fIL: Low-speed on-chip oscillator clock frequency
- Remark 2.** fSUB: Subsystem clock frequency (XT1 clock oscillation frequency)
- Remark 3.** fCLK: CPU/peripheral hardware clock frequency
- Remark 4.** Temperature condition of the TYP. value is TA = 25°C

2.4 AC Characteristics

2.4.1 Basic operation

(TA = -40 to +85 °C, 1.6 V ≤ AVDD = VDD ≤ 3.6 V, VSS = 0 V)

(1/2)

| Items | Symbol | Conditions | | MIN. | TYP. | MAX. | Unit | | |
|--|---------------------|---|----------------------------------|---------------------|---------------------|------|------|------|----|
| Instruction cycle (minimum instruction execution time) | Tcy | Main system clock (fMAIN) operation | HS (high-speed main) mode | 2.7 V ≤ VDD ≤ 3.6 V | 0.0417 | | 1 | μs | |
| | | | | 2.4 V ≤ VDD < 2.7 V | 0.0625 | | 1 | μs | |
| | | | LS (low-speed main) mode | 1.8 V ≤ VDD ≤ 3.6 V | 0.125 | | 1 | μs | |
| | | | LV (low-voltage main) mode | 1.6 V ≤ VDD ≤ 3.6 V | 0.25 | | 1 | μs | |
| | | | Subsystem clock (fSUB) operation | | 1.8 V ≤ VDD ≤ 3.6 V | 28.5 | 30.5 | 31.3 | μs |
| | | In the self- programming mode | HS (high-speed main) mode | 2.7 V ≤ VDD ≤ 3.6 V | 0.0417 | | 1 | μs | |
| | | | | 2.4 V ≤ VDD < 2.7 V | 0.0625 | | 1 | μs | |
| | | | LS (low-speed main) mode | 1.8 V ≤ VDD ≤ 3.6 V | 0.125 | | 1 | μs | |
| LV (low-voltage main) mode | 1.8 V ≤ VDD ≤ 3.6 V | | 0.25 | | 1 | μs | | | |
| External main system clock frequency | fEX | 2.7 V ≤ VDD ≤ 3.6 V | | 1.0 | | 20.0 | MHz | | |
| | | 2.4 V ≤ VDD < 2.7 V | | 1.0 | | 16.0 | MHz | | |
| | | 1.8 V ≤ VDD < 2.4 V | | 1.0 | | 8.0 | MHz | | |
| | | 1.6 V ≤ VDD < 1.8 V | | 1.0 | | 4.0 | MHz | | |
| | fEXT | | | 32 | | 35 | kHz | | |
| External main system clock input high-level width, low-level width | texH, texL | 2.7 V ≤ VDD ≤ 3.6 V | | 24 | | | ns | | |
| | | 2.4 V ≤ VDD < 2.7 V | | 30 | | | ns | | |
| | | 1.8 V ≤ VDD < 2.4 V | | 60 | | | ns | | |
| | | 1.6 V ≤ VDD < 1.8 V | | 120 | | | ns | | |
| | texHS, texLS | | | 13.7 | | | μs | | |
| T100 to T107 input high-level width, low-level width | tTIH, tTIL | | | 1/fMCK + 10 | | | ns | | |

Remark fMCK: Timer array unit operation clock frequency
(Operation clock to be set by the CKSmn bit of timer mode register mn (TMRmn). m: Unit number (m = 0),
n: Channel number (n = 0 to 7))


(TA = -40 to +85 °C, 1.6 V ≤ AVDD = VDD ≤ 3.6 V, VSS = 0 V)

(2/2)


| Items | Symbol | Conditions | | MIN. | TYP. | MAX. | Unit |
|---|---------------------------------------|---------------------------------|---------------------------------|------|------|------|------------------|
| TO00 to TO07, TKBO00, TKBO01, TKBO10, TKBO11, TKBO20, TKBO21 output frequency | f _{ro} | HS (high-speed main) mode | 2.7 V ≤ V _{DD} ≤ 3.6 V | | | 8 | MHz |
| | | | 2.4 V ≤ V _{DD} < 2.7 V | | | 8 | MHz |
| | | LS (low-speed main) mode | 1.8 V ≤ V _{DD} ≤ 3.6 V | | | 4 | MHz |
| | | LV (low-voltage main) mode | 1.6 V ≤ V _{DD} ≤ 3.6 V | | | 2 | MHz |
| PCLBUZ0, PCLBUZ1 output frequency | f _{PCL} | HS (high-speed main) mode | 2.7 V ≤ V _{DD} ≤ 3.6 V | | | 8 | MHz |
| | | | 2.4 V ≤ V _{DD} < 2.7 V | | | 8 | MHz |
| | | LS (low-speed main) mode | 1.8 V ≤ V _{DD} ≤ 3.6 V | | | 4 | MHz |
| | | LV (low-voltage main) mode | 1.8 V ≤ V _{DD} ≤ 3.6 V | | | 2 | MHz |
| Interrupt input high-level width, low-level width | t _{INTH} , t _{INTL} | INTP0 to INTP7 | 1.6 V ≤ V _{DD} ≤ 3.6 V | 1 | | | μs |
| Key interrupt input low-level width | t _{KR} | 1.8 V ≤ V _{DD} ≤ 3.6 V | | 250 | | | ns |
| | | 1.6 V ≤ V _{DD} < 1.8 V | | 1 | | | μs |
| TMKB2 forced output stop input high-level width | t _{HR} | INTP0 to INTP7 | f _{CLK} > 16 MHz | 125 | | | ns |
| | | | f _{CLK} ≤ 16 MHz | 2 | | | f _{CLK} |
| $\overline{\text{RESET}}$ low-level width | t _{RSL} | | | 10 | | | μs |

Minimum Instruction Execution Time during Main System Clock Operation


T_{CY} vs V_{DD} (HS (high-speed main) mode)

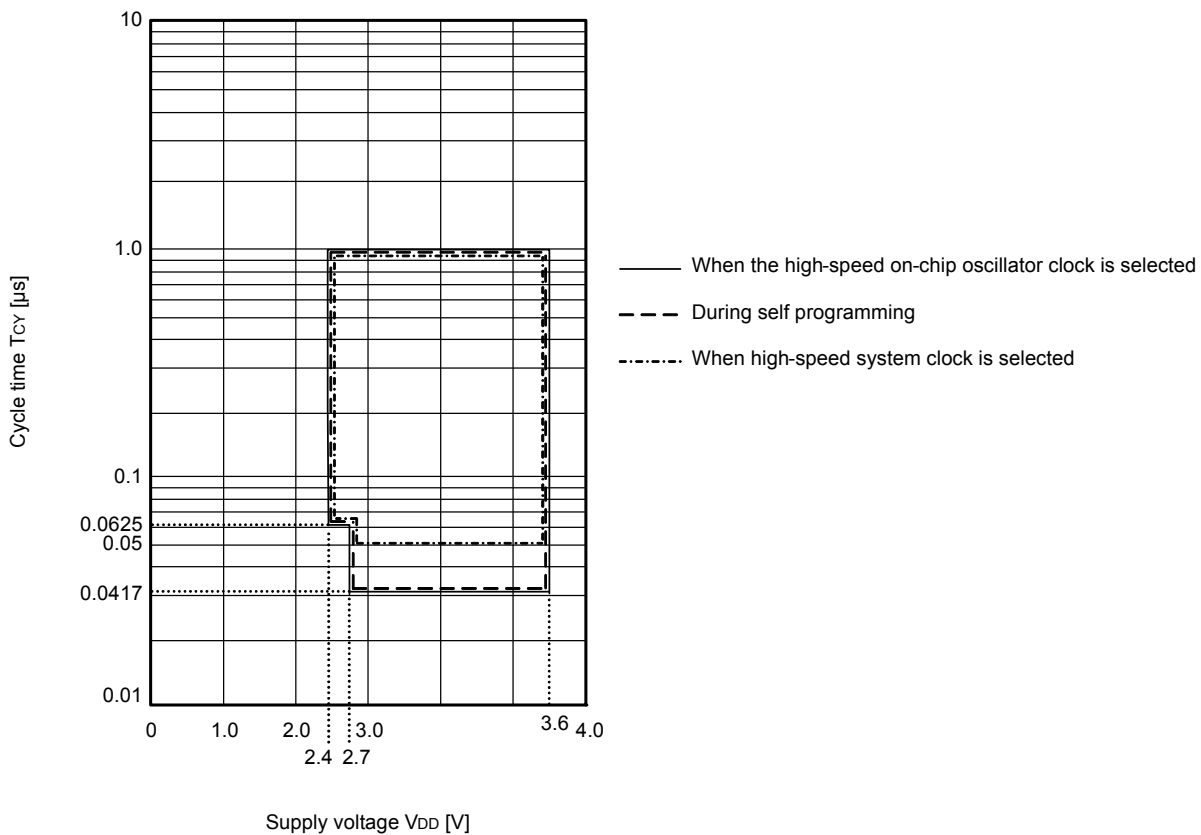


Tcy vs VDD (LS (low-speed main) mode)

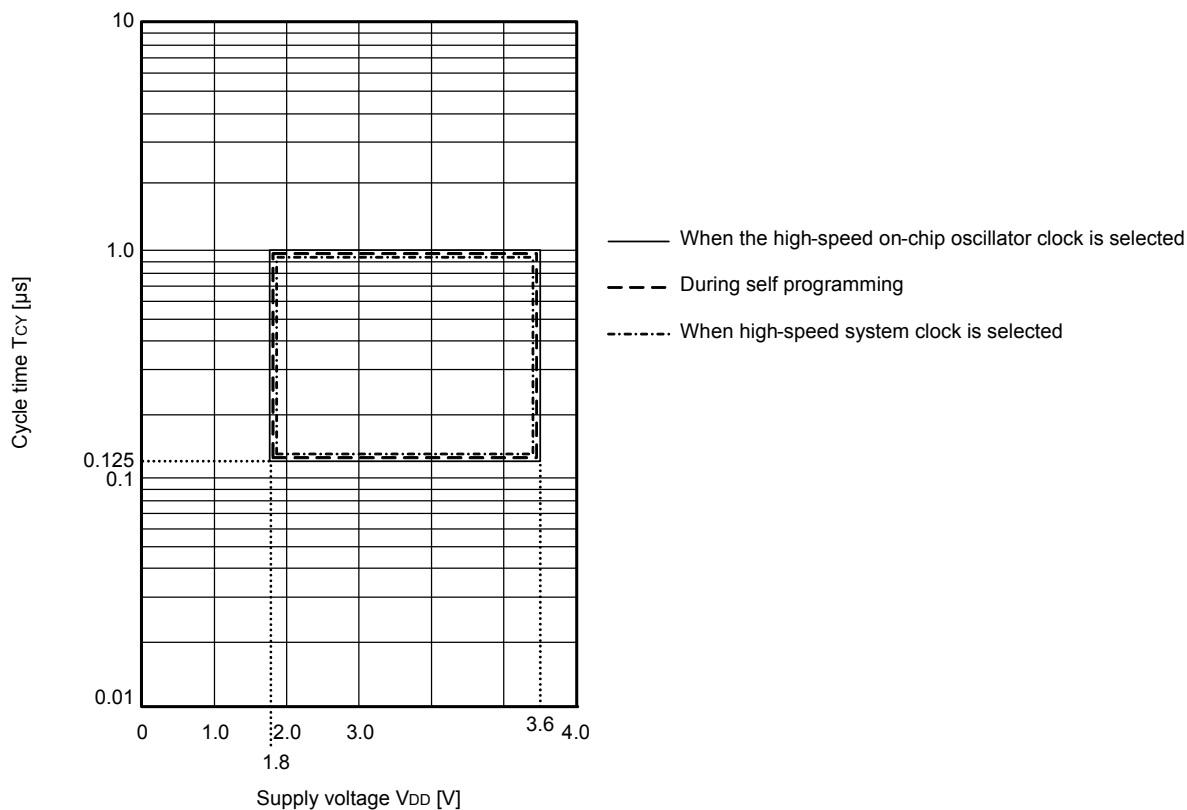


Tcy vs VDD (LV (low-voltage main) mode)

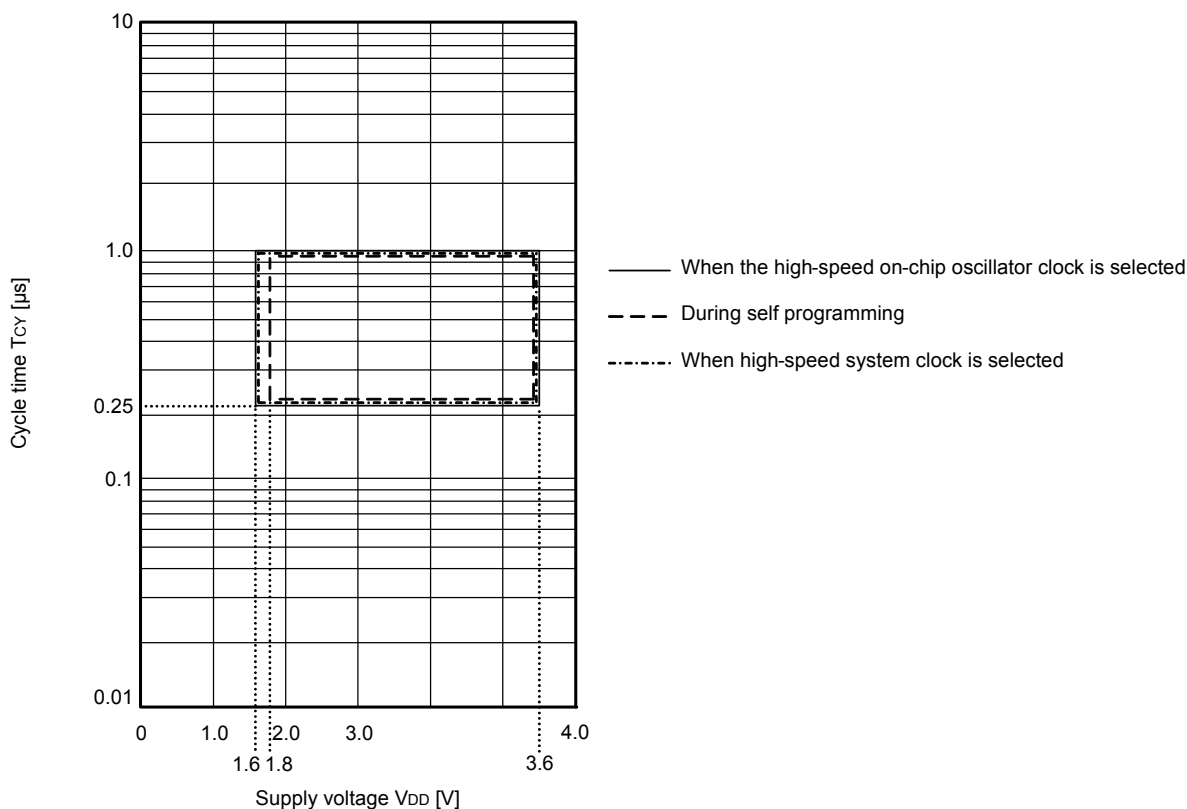



AC Timing Test Points




External System Clock Timing

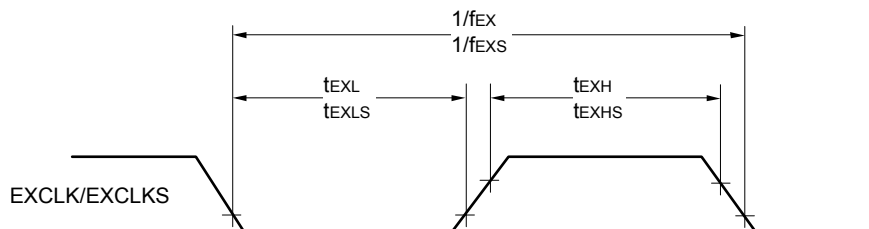


TI/TO Timing

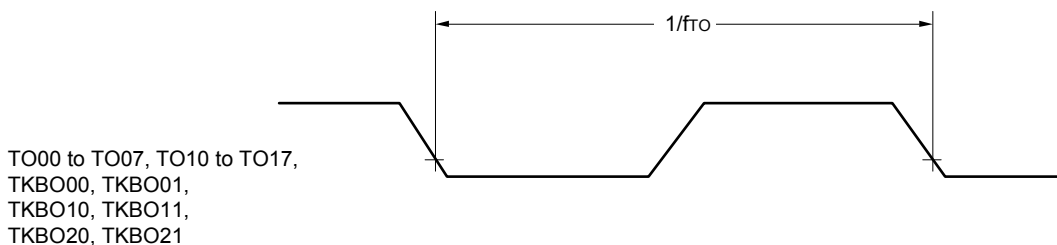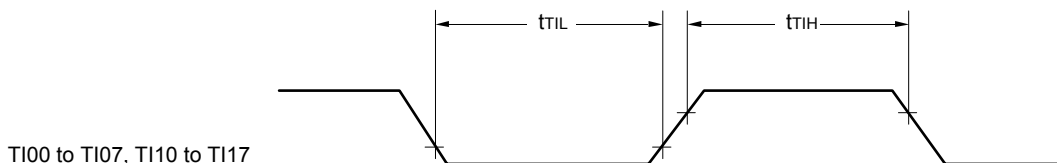


Interrupt Request Input Timing

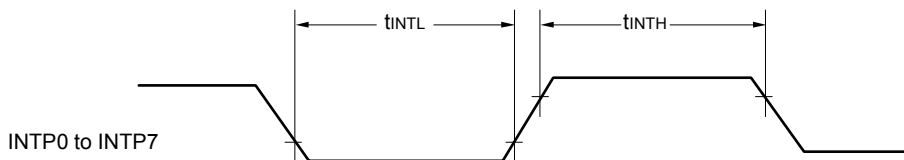


Key Interrupt Input Timing

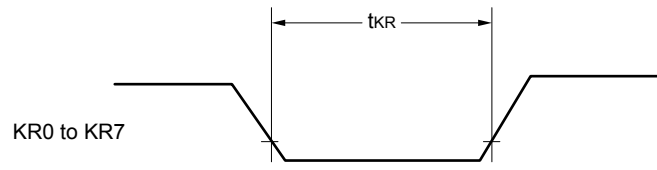

Timer KB2 Input Timing

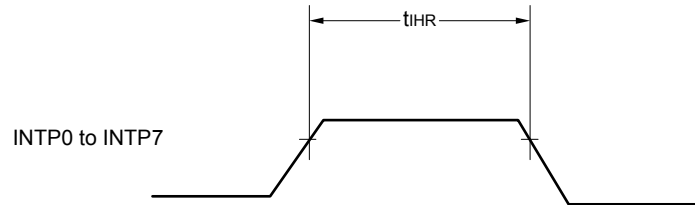


$\overline{\text{RESET}}$ Input Timing

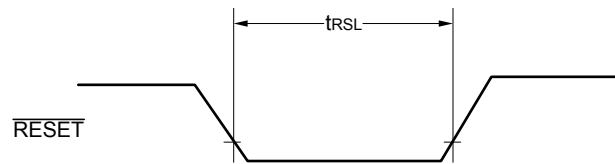

2.5 Peripheral Functions Characteristics

AC Timing Test Points



2.5.1 Serial array unit

(1) During communication at same potential (UART mode)

(TA = -40 to +85 °C, 1.6 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | LS (low-speed main) Mode | | LV (low-voltage main) Mode | | Unit |
|-------------------------|--------|--|---------------------------|---------------|--------------------------|---------------|----------------------------|--------|------|
| | | | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | |
| Transfer rate Note 1 | | 2.7 V ≤ VDD ≤ 3.6 V | | fMCK/6 Note 2 | | fMCK/6 | | fMCK/6 | bps |
| | | Theoretical value of the maximum transfer rate fMCK = fCLK Note 3 | | 4.0 | | 1.3 | | 0.6 | Mbps |
| | | 2.4 V ≤ VDD ≤ 3.6 V | | fMCK/6 Note 2 | | fMCK/6 | | fMCK/6 | bps |
| | | Theoretical value of the maximum transfer rate fMCK = fCLK Note 3 | | 2.6 | | 1.3 | | 0.6 | Mbps |
| | | 1.8 V ≤ VDD ≤ 3.6 V | | — | | fMCK/6 Note 2 | | fMCK/6 | bps |
| | | Theoretical value of the maximum transfer rate fMCK = fCLK Note 3 | | — | | 1.3 | | 0.6 | Mbps |
| 1.6 V ≤ VDD ≤ 3.6 V | | | | — | | — | fMCK/6 | bps | |
| | | Theoretical value of the maximum transfer rate fMCK = fCLK Note 3 | | — | | — | 0.6 | Mbps | |

Note 1. Transfer rate in the SNOOZE mode is 4800 bps only.

Note 2. The following conditions are required for low voltage interface.

2.4 V ≤ VDD < 2.7 V: MAX. 2.6 Mbps

1.8 V ≤ VDD < 2.4 V: MAX. 1.3 Mbps

1.6 V ≤ VDD < 1.8 V: MAX. 0.6 Mbps

Note 3. The maximum operating frequencies of the CPU/peripheral hardware clock (fCLK) are:

HS (high-speed main) mode: 24 MHz (2.7 V ≤ VDD ≤ 3.6 V)


16 MHz (2.4 V ≤ VDD ≤ 3.6 V)

LS (low-speed main) mode: 8 MHz (1.8 V ≤ VDD ≤ 3.6 V)


LV (low-voltage main) mode: 4 MHz (1.6 V ≤ VDD ≤ 3.6 V)

Caution Select the normal input buffer for the RxDq pin and the normal output mode for the TxDq pin by using port input mode register g (PIMg) and port output mode register g (POMg).

UART mode connection diagram (during communication at same potential)

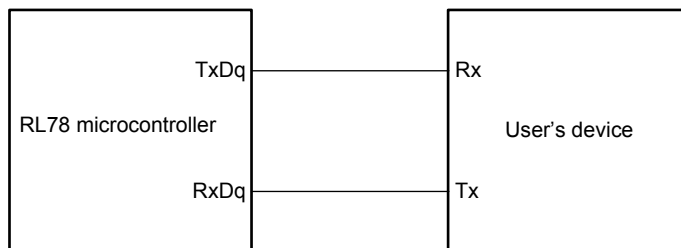

UART mode bit width (during communication at same potential) (reference)

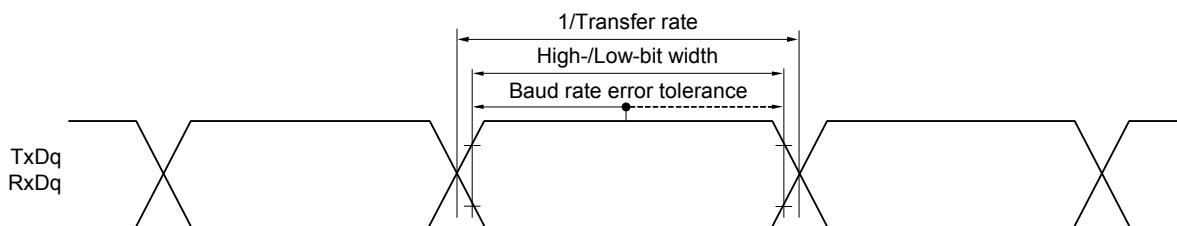

Remark 1. q: UART number (q = 0 to 3), g: PIM and POM number (g = 0 to 3)

Remark 2. f_{MCk}: Serial array unit operation clock frequency

(Operation clock to be set by the CKSmn bit of serial mode register mn (SMRmn). m: Unit number, n: Channel number (mn = 00 to 03, 10 to 13))

(2) During communication at same potential (CSI mode) (master mode, SCKp... internal clock output, corresponding CSI00 only)**(TA = -40 to +85 °C, 2.7 V ≤ V_{DD} ≤ 3.6 V, V_{SS} = 0 V)**

| Parameter | Symbol | Conditions | | HS (high-speed main) Mode | | LS (low-speed main) Mode | | LV (low-voltage main) Mode | | Unit |
|--|-------------------|--|---------------------------------|---------------------------|------|--------------------------|------|----------------------------|------|------|
| | | | | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | |
| SCKp cycle time | t _{KCY1} | t _{KCY1} ≥ f _{CLK/2} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 167 | | 250 | | 500 | | ns |
| SCKp high-/low-level width | t _{KL1} | 2.7 V ≤ V _{DD} ≤ 3.6 V | | t _{KCY1/2} - 10 | | t _{KCY1/2} - 50 | | t _{KCY1/2} - 50 | | ns |
| Slp setup time (to SCKp↑) Note 1 | t _{SIK1} | 2.7 V ≤ V _{DD} ≤ 3.6 V | | 33 | | 110 | | 110 | | ns |
| Slp hold time (from SCKp↑) Note 2 | t _{KS11} | 2.7 V ≤ V _{DD} ≤ 3.6 V | | 10 | | 10 | | 10 | | ns |
| Delay time from SCKp↓ to SOp output Note 3 | t _{KSO1} | C = 20 pF Note 4 | | | 10 | | 10 | | 10 | ns |

Note 1. When DAP_{mn} = 0 and CKP_{mn} = 0, or DAP_{mn} = 1 and CKP_{mn} = 1. The Slp setup time becomes “to SCKp↓” when DAP_{mn} = 0 and CKP_{mn} = 1, or DAP_{mn} = 1 and CKP_{mn} = 0.

Note 2. When DAP_{mn} = 0 and CKP_{mn} = 0, or DAP_{mn} = 1 and CKP_{mn} = 1. The Slp hold time becomes “from SCKp↓” when DAP_{mn} = 0 and CKP_{mn} = 1, or DAP_{mn} = 1 and CKP_{mn} = 0.

Note 3. When DAP_{mn} = 0 and CKP_{mn} = 0, or DAP_{mn} = 1 and CKP_{mn} = 1. The delay time to SOp output becomes “from SCKp↑” when DAP_{mn} = 0 and CKP_{mn} = 1, or DAP_{mn} = 1 and CKP_{mn} = 0.

Note 4. C is the load capacitance of the SCKp and SOp output lines.

Caution Select the normal input buffer for the Slp pin and the normal output mode for the SOp pin and SCKp pin by using port input mode register g (PIMg) and port output mode register g (POMg).

Remark 1. p: CSI number (p = 00), m: Unit number (m = 0), n: Channel number (n = 0), g: PIM number (g = 2)

Remark 2. f_{MCK}: Serial array unit operation clock frequency
(Operation clock to be set by the CKS_{mn} bit of serial mode register mn (SMR_{mn}). m: Unit number, n: Channel number (mn = 00))

(3) During communication at same potential (CSI mode) (master mode, SCKp... internal clock output)
(TA = -40 to +85 °C, 1.6 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | | HS (high-speed main) Mode | | LS (low-speed main) Mode | | LV (low-voltage main) Mode | | Unit |
|--|---------------|---------------------|---------------------|---------------------------|------|--------------------------|------|----------------------------|------|------|
| | | | | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | |
| SCKp cycle time | tkCY1 | tkCY1 ≥ fCLK/4 | 2.7 V ≤ VDD ≤ 3.6 V | 167 | | 500 | | 1000 | | ns |
| | | | 2.4 V ≤ VDD ≤ 3.6 V | 250 | | 500 | | 1000 | | ns |
| | | | 1.8 V ≤ VDD ≤ 3.6 V | — | | 500 | | 1000 | | ns |
| | | | 1.6 V ≤ VDD ≤ 3.6 V | — | | — | | 1000 | | ns |
| SCKp high-/low-level width | tkH1, tkL1 | 2.7 V ≤ VDD ≤ 3.6 V | 2.7 V ≤ VDD ≤ 3.6 V | tkCY1/2 - 18 | | tkCY1/2 - 50 | | tkCY1/2 - 50 | | ns |
| | | | 2.4 V ≤ VDD ≤ 3.6 V | tkCY1/2 - 38 | | tkCY1/2 - 50 | | tkCY1/2 - 50 | | ns |
| | | | 1.8 V ≤ VDD ≤ 3.6 V | — | | tkCY1/2 - 50 | | tkCY1/2 - 50 | | ns |
| | | | 1.6 V ≤ VDD ≤ 3.6 V | — | | — | | tkCY1/2 - 100 | | ns |
| Slp setup time (to SCKp↑) Note 1 | tsIK1 | 2.7 V ≤ VDD ≤ 3.6 V | 2.7 V ≤ VDD ≤ 3.6 V | 44 | | 110 | | 110 | | ns |
| | | | 2.4 V ≤ VDD ≤ 3.6 V | 75 | | 110 | | 110 | | ns |
| | | | 1.8 V ≤ VDD ≤ 3.6 V | — | | 110 | | 110 | | ns |
| | | | 1.6 V ≤ VDD ≤ 3.6 V | — | | — | | 220 | | ns |
| Slp hold time (from SCKp↑) Note 2 | tkSI1 | 2.4 V ≤ VDD ≤ 3.6 V | 2.4 V ≤ VDD ≤ 3.6 V | 19 | | 19 | | 19 | | ns |
| | | | 1.8 V ≤ VDD ≤ 3.6 V | — | | 19 | | 19 | | ns |
| | | | 1.6 V ≤ VDD ≤ 3.6 V | — | | — | | 19 | | ns |
| Delay time from SCKp↓ to SOp output Note 3 | tkSO1 | C = 30 pF Note 4 | 2.7 V ≤ VDD ≤ 3.6 V | | 25 | 50 | | 50 | ns | |
| | | | 2.4 V ≤ VDD ≤ 3.6 V | | 25 | 50 | | 50 | ns | |
| | | | 1.8 V ≤ VDD ≤ 3.6 V | | — | 50 | | 50 | ns | |
| | | | 1.6 V ≤ VDD ≤ 3.6 V | | — | — | | 50 | ns | |

Note 1. When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1. The Slp setup time becomes “to SCKp↓” when DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.

Note 2. When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1. The Slp hold time becomes “from SCKp↓” when DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.

Note 3. When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1. The delay time to SOp output becomes “from SCKp↑” when DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.

Note 4. C is the load capacitance of the SCKp and SOp output lines.

Caution Select the normal input buffer for the Slp pin and the normal output mode for the SOp pin and SCKp pin by using port input mode register g (PIMg) and port output mode register g (POMg).

Remark 1. p: CSI number (p = 00, 10, 20, 30), m: Unit number (m = 0, 1), n: Channel number (n = 0 to 3), g: PIM number (g = 0 to 3)

Remark 2. fMCK: Serial array unit operation clock frequency (Operation clock to be set by the CKSmn bit of serial mode register mn (SMRmn). m: Unit number, n: Channel number (mn = 00 to 03, 10 to 13))

(4) During communication at same potential (CSI mode) (slave mode, SCKp... external clock input)
(TA = -40 to +85 °C, 1.6 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | | HS (high-speed main) Mode | | LS (low-speed main) Mode | | LV (low-voltage main) Mode | | Unit |
|---|------------|---------------------|---------------------|---------------------------|-------------|--------------------------|-----------------|----------------------------|--------------|------|
| | | | | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | |
| SCKp cycle time Note 5 | tkCY2 | 2.7 V ≤ VDD < 3.6 V | fMCK > 16 MHz | 8/fMCK | — | — | — | — | ns | |
| | | | fMCK ≤ 16 MHz | 6/fMCK | — | 6/fMCK | 6/fMCK | ns | | |
| | | 2.4 V ≤ VDD < 3.6 V | | 6/fMCK and 500 | — | 6/fMCK and 500 | 6/fMCK and 500 | ns | | |
| | | 1.8 V ≤ VDD < 3.6 V | | — | — | 6/fMCK and 750 | 6/fMCK and 750 | ns | | |
| | | 1.6 V ≤ VDD < 3.6 V | | — | — | — | 6/fMCK and 1500 | ns | | |
| SCKp high-/low-level width | tkH2, tkL2 | 2.7 V ≤ VDD ≤ 3.6 V | | tkCY2/2 - 8 | — | tkCY2/2 - 8 | — | tkCY2/2 - 8 | ns | |
| | | 1.8 V ≤ VDD ≤ 3.6 V | | — | — | tkCY2/2 - 18 | — | tkCY2/2 - 18 | ns | |
| | | 1.6 V ≤ VDD ≤ 3.6 V | | — | — | — | — | tkCY1/2 - 66 | ns | |
| Slp setup time (to SCKp↓) Note 1 | tsIK2 | 2.7 V ≤ VDD ≤ 3.6 V | | 1/fMCK + 20 | — | 1/fMCK + 30 | — | 1/fMCK + 30 | ns | |
| | | 2.4 V ≤ VDD ≤ 3.6 V | | 1/fMCK + 30 | — | 1/fMCK + 30 | — | 1/fMCK + 30 | ns | |
| | | 1.8 V ≤ VDD < 3.6 V | | — | — | 1/fMCK + 30 | — | 1/fMCK + 30 | ns | |
| | | 1.6 V ≤ VDD < 3.6 V | | — | — | — | — | 1/fMCK + 40 | ns | |
| Slp hold time (from SCKp↓) Note 2 | tkSI2 | 2.4 V ≤ VDD < 3.6 V | | 1/fMCK + 31 | — | 1/fMCK + 31 | — | 1/fMCK + 31 | ns | |
| | | 1.8 V ≤ VDD < 3.6 V | | — | — | 1/fMCK + 31 | — | 1/fMCK + 31 | ns | |
| | | 1.6 V ≤ VDD < 3.6 V | | — | — | — | — | 1/fMCK + 250 | ns | |
| Delay time from SCKp↓ to SOp output Note 3 | tkSO2 | C = 30 pF Note 4 | 2.7 V ≤ VDD ≤ 3.6 V | — | 2/fMCK + 44 | — | 2/fMCK + 110 | — | 2/fMCK + 110 | ns |
| | | | 2.4 V ≤ VDD < 3.6 V | — | 2/fMCK + 75 | — | 2/fMCK + 110 | — | 2/fMCK + 110 | ns |
| | | | 1.8 V ≤ VDD < 3.6 V | — | — | — | 2/fMCK + 110 | — | 2/fMCK + 110 | ns |
| | | | 1.6 V ≤ VDD < 3.6 V | — | — | — | — | — | 2/fMCK + 220 | ns |

Note 1. When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1. The Slp setup time becomes “to SCKp↓” when DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.

Note 2. When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1. The Slp hold time becomes “from SCKp↓” when DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.

Note 3. When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1. The delay time to SOp output becomes “from SCKp↑” when DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.


Note 4. C is the load capacitance of the SOp output lines.

Note 5. The maximum transfer rate when using the SNOOZE mode is 1 Mbps.

Caution Select the normal input buffer for the Slp pin and the normal output mode for the SOp pin by using port input mode register g (PIMg) and port output mode register g (POMg).

Remark 1. p: CSI number (p = 00, 10, 20, 30), m: Unit number (m = 0, 1), n: Channel number (n = 0 to 3), g: PIM number (g = 0 to 3)


Remark 2. fMCK: Serial array unit operation clock frequency
 (Operation clock to be set by the CKSmn bit of serial mode register mn (SMRmn). m: Unit number, n: Channel number (mn = 00 to 03, 10 to 13))

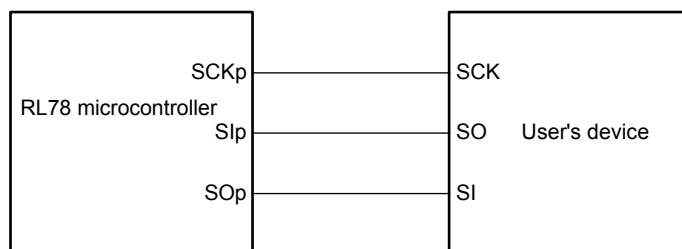CSI mode connection diagram (during communication at same potential)


Remark 1. p: CSI number (p = 00, 10, 20, 30)

Remark 2. m: Unit number, n: Channel number (mn = 00 to 03, 10 to 13)

**CSI mode serial transfer timing (during communication at same potential)
(When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1.)**

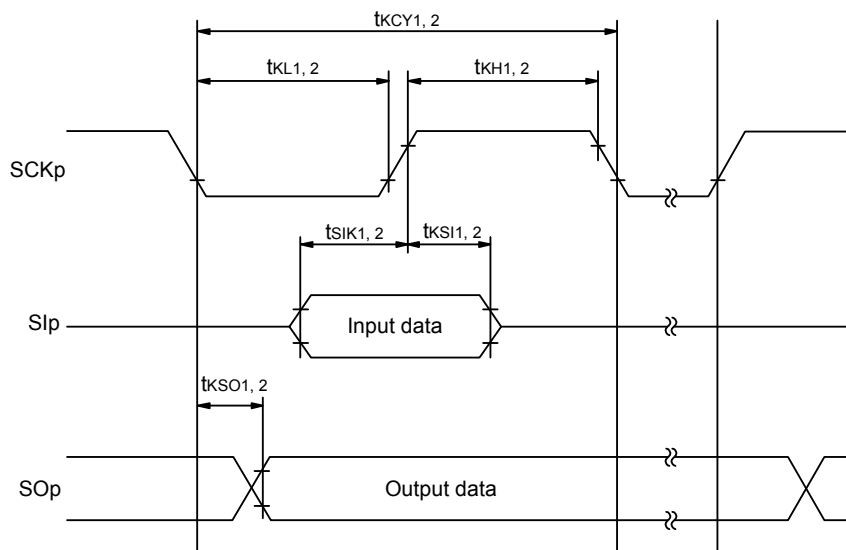

**CSI mode serial transfer timing (during communication at same potential)
(When DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.)**

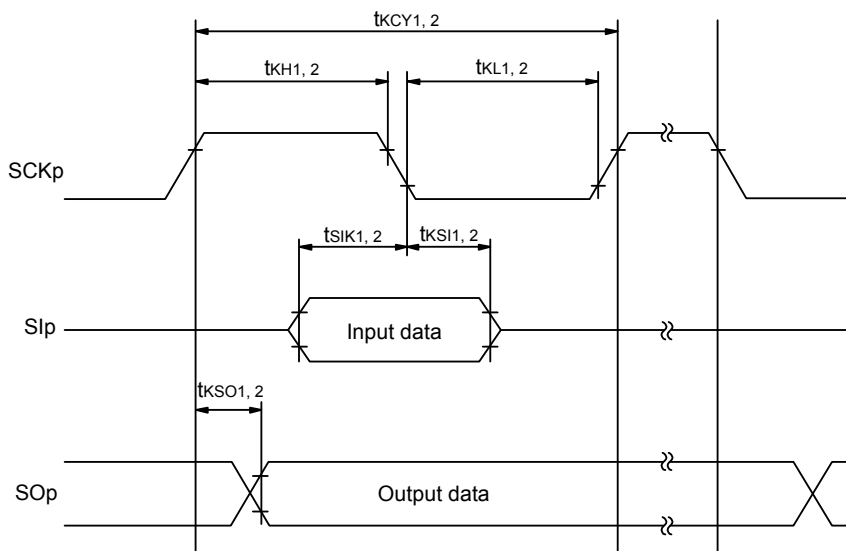

Remark 1. p: CSI number (p = 00, 10, 20, 30)


Remark 2. m: Unit number, n: Channel number (mn = 00 to 03, 10 to 13)

(5) During communication at same potential (simplified I²C mode)**(TA = -40 to +85 °C, 1.6 V ≤ V_{DD} ≤ 3.6 V, V_{SS} = 0 V)**


| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | LS (low-speed main) Mode | | LV (low-voltage main) Mode | | Unit |
|-------------------------------|----------------------|---|------------------------------------|----------------|------------------------------------|---------------|------------------------------------|---------------|------|
| | | | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | |
| SCLr clock frequency | f _{SCL} | 2.7 V ≤ V _{DD} ≤ 3.6 V, C _b = 50 pF, R _b = 2.7 kΩ | | 1000 Note 1 | | 400 Note 1 | | 400 Note 1 | kHz |
| | | 1.8 V ≤ V _{DD} ≤ 3.6 V, C _b = 100 pF, R _b = 3 kΩ | | 400 Note 1 | | 400 Note 1 | | 400 Note 1 | kHz |
| | | 1.8 V ≤ V _{DD} < 2.7 V, C _b = 100 pF, R _b = 5 kΩ | | 300 Note 1 | | 300 Note 1 | | 300 Note 1 | kHz |
| | | 1.6 V ≤ V _{DD} < 1.8 V, C _b = 100 pF, R _b = 5 kΩ | | — | | — | | 250 | kHz |
| Hold time when SCLr = "L" | t _{LOW} | 2.7 V ≤ V _{DD} ≤ 3.6 V, C _b = 50 pF, R _b = 2.7 kΩ | 475 | | 1150 | | 1150 | | ns |
| | | 1.8 V ≤ V _{DD} ≤ 3.6 V, C _b = 100 pF, R _b = 3 kΩ | 1150 | | 1150 | | 1150 | | ns |
| | | 1.8 V ≤ V _{DD} < 2.7 V, C _b = 100 pF, R _b = 5 kΩ | 1550 | | 1550 | | 1550 | | ns |
| | | 1.6 V ≤ V _{DD} < 1.8 V, C _b = 100 pF, R _b = 5 kΩ | — | | — | | 1850 | | ns |
| Hold time when SCLr = "H" | t _{HIGH} | 2.7 V ≤ V _{DD} ≤ 3.6 V, C _b = 50 pF, R _b = 2.7 kΩ | 475 | | 1150 | | 1150 | | ns |
| | | 1.8 V ≤ V _{DD} ≤ 3.6 V, C _b = 100 pF, R _b = 3 kΩ | 1150 | | 1150 | | 1150 | | ns |
| | | 1.8 V ≤ V _{DD} < 2.7 V, C _b = 100 pF, R _b = 5 kΩ | 1550 | | 1550 | | 1550 | | ns |
| | | 1.6 V ≤ V _{DD} < 1.8 V, C _b = 100 pF, R _b = 5 kΩ | — | | — | | 1850 | | ns |
| Data setup time (reception) | t _{SU: DAT} | 2.7 V ≤ V _{DD} ≤ 3.6 V, C _b = 50 pF, R _b = 2.7 kΩ | 1/f _{MCK} + 85 Note 2 | | 1/f _{MCK} + 145 Note 2 | | 1/f _{MCK} + 145 Note 2 | | ns |
| | | 1.8 V ≤ V _{DD} ≤ 3.6 V, C _b = 100 pF, R _b = 3 kΩ | 1/f _{MCK} + 145 Note 2 | | 1/f _{MCK} + 145 Note 2 | | 1/f _{MCK} + 145 Note 2 | | ns |
| | | 1.8 V ≤ V _{DD} < 2.7 V, C _b = 100 pF, R _b = 5 kΩ | 1/f _{MCK} + 230 Note 2 | | 1/f _{MCK} + 230 Note 2 | | 1/f _{MCK} + 230 Note 2 | | ns |
| | | 1.6 V ≤ V _{DD} < 1.8 V, C _b = 100 pF, R _b = 5 kΩ | — | | — | | 1/f _{MCK} + 290 Note 2 | | ns |
| Data hold time (transmission) | t _{HD: DAT} | 2.7 V ≤ V _{DD} ≤ 3.6 V, C _b = 50 pF, R _b = 2.7 kΩ | 0 | 305 | 0 | 305 | 0 | 305 | ns |
| | | 1.8 V ≤ V _{DD} ≤ 3.6 V, C _b = 100 pF, R _b = 3 kΩ | 0 | 355 | 0 | 355 | 0 | 355 | ns |
| | | 1.8 V ≤ V _{DD} < 2.7 V, C _b = 100 pF, R _b = 5 kΩ | 0 | 405 | 0 | 405 | 0 | 405 | ns |
| | | 1.6 V ≤ V _{DD} < 1.8 V, C _b = 100 pF, R _b = 5 kΩ | — | — | — | — | 0 | 405 | ns |

Note 1. The value must also be equal to or less than f_{MCK}/4.**Note 2.** Set the f_{MCK} value to keep the hold time of SCLr = "L" and SCLr = "H".**Caution** Select the normal input buffer and the N-ch open drain output (V_{DD} tolerance) mode for the SDAr pin and the normal output mode for the SCLr pin by using port input mode register g (PIMg) and port output mode register h (POMh).

Simplified I²C mode connection diagram (during communication at same potential)

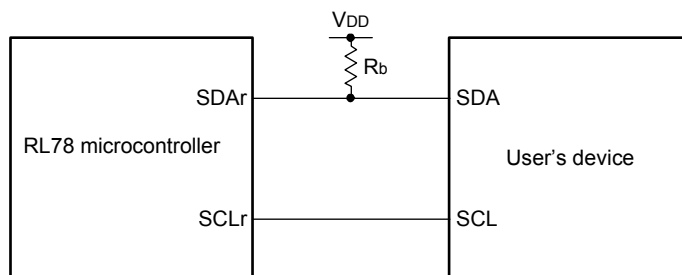

Simplified I²C mode serial transfer timing (during communication at same potential)

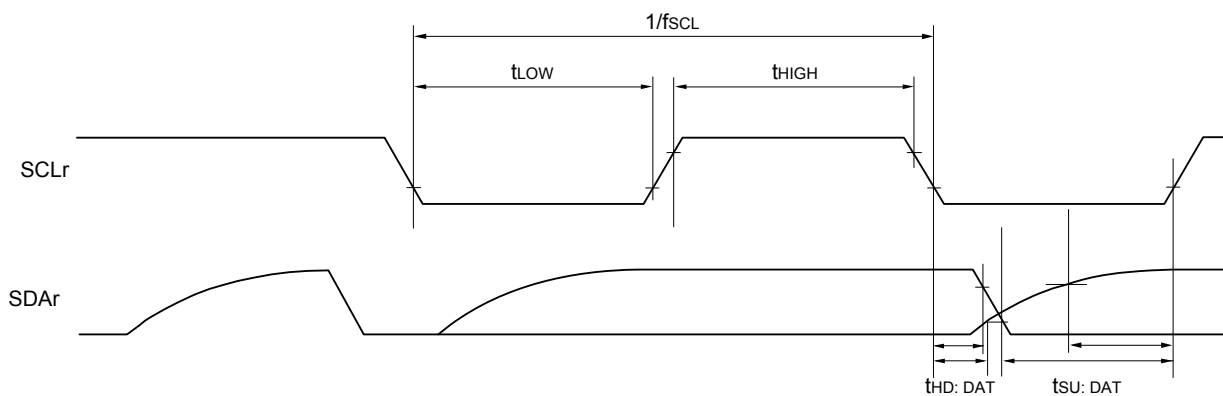

Remark 1. $R_b[\Omega]$: Communication line (SDAr) pull-up resistance, $C_b[F]$: Communication line (SDAr, SCLr) load capacitance

Remark 2. r: IIC number (r = 00, 10, 20, 30), g: PIM number (g = 0 to 3),
h: POM number (h = 0 to 3)

Remark 3. f_{mck} : Serial array unit operation clock frequency
(Operation clock to be set by the CKSmn bit of serial mode register mn (SMRmn). m: Unit number (m = 0, 1),
n: Channel number (n = 0, 2), mn = 00 to 03, 10 to 13)

(6) Communication at different potential (1.8 V, 2.5 V) (UART mode) (dedicated baud rate generator output)
(TA = -40 to +85 °C, 1.8 V ≤ VDD ≤ 3.6 V, VSS = 0 V) (1/2)

| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | LS (low-speed main) Mode | | LV (low-voltage main) Mode | | Unit | | | |
|-----------------------------|--------|------------|--|------|--------------------------|-------------------------|----------------------------|-------------------------|------|-------------------------|------|-----|
| | | | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | | | | |
| Transfer rate Notes 1, 2 | | reception | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V | | | fMCK/6 Note 1 | | fMCK/6 Note 1 | | fMCK/6 Note 1 | bps | |
| | | | Theoretical value of the maximum transfer rate fMCK = fCLK Note 4 | | | 4.0 | | 1.3 | | 0.6 | Mbps | |
| | | | 1.8 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V | | | fMCK/6 Notes 1, 2, 3 | | fMCK/6 Notes 1, 2, 3 | | fMCK/6 Notes 1, 2, 3 | | bps |
| | | | Theoretical value of the maximum transfer rate fMCK = fCLK Note 4 | | | 4.0 | | 1.3 | | 0.6 | Mbps | |

Note 1. Transfer rate in the SNOOZE mode is 4,800 bps only.

Note 2. Use it with VDD ≥ Vb.

Note 3. The following conditions are required for low voltage interface.

2.4 V ≤ VDD < 2.7 V: MAX. 2.6 Mbps

1.8 V ≤ VDD < 2.4 V: MAX. 1.3 Mbps

1.6 V ≤ VDD < 1.8 V: MAX. 0.6 Mbps

Note 4. The maximum operating frequencies of the CPU/peripheral hardware clock (fCLK) are:

HS (high-speed main) mode: 24 MHz (2.7 V ≤ VDD ≤ 3.6 V)

16 MHz (2.4 V ≤ VDD ≤ 3.6 V)

LS (low-speed main) mode: 8 MHz (1.8 V ≤ VDD ≤ 3.6 V)

LV (low-voltage main) mode: 4 MHz (1.6 V ≤ VDD ≤ 3.6 V)

Caution Select the TTL input buffer for the RxDq pin and the N-ch open drain output (VDD tolerance) mode for the TxDq pin by using port input mode register g (PIMg) and port output mode register g (POMg). For VIH and VIL, see the DC characteristics with TTL input buffer selected.

Remark 1. Vb[V]: Communication line voltage

Remark 2. q: UART number (q = 0 to 3), g: PIM and POM number (g = 0 to 3)

Remark 3. fMCK: Serial array unit operation clock frequency

(Operation clock to be set by the CKSmn bit of serial mode register mn (SMRmn). m: Unit number,

n: Channel number (mn = 00 to 03, 10 to 13)

(6) Communication at different potential (1.8 V, 2.5V) (UART mode) (dedicated baud rate generator output)**(TA = -40 to +85 °C, 1.8 ≤ VDD ≤ 3.6 V, VSS = 0 V)****(2/2)**

| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | LS (low-speed main) Mode | | LV (low-voltage main) Mode | | Unit | | |
|----------------------|--------|--------------|--|------|--------------------------|-------------|----------------------------|-------------|------|-------------|------|
| | | | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | | | |
| Transfer rate Note 2 | | transmission | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V | | | Note 1 | | Note 1 | | bps | |
| | | | Theoretical value of the maximum transfer rate Cb = 50 pF, Rb = 2.7 kΩ, Vb = 2.3 V | | | 1.2 Note 2 | | 1.2 Note 2 | | 1.2 Note 2 | Mbps |
| | | | 1.8 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V | | | Notes 3, 4 | | Notes 3, 4 | | Notes 3, 4 | bps |
| | | | Theoretical value of the maximum transfer rate Cb = 50 pF, Rb = 5.5 kΩ, Vb = 1.6 V | | | 0.43 Note 5 | | 0.43 Note 5 | | 0.43 Note 5 | Mbps |

Note 1. The smaller maximum transfer rate derived by using $f_{MCK}/6$ or the following expression is the valid maximum transfer rate. Expression for calculating the transfer rate when $2.7\text{ V} \leq V_{DD} < 3.6\text{ V}$ and $2.3\text{ V} \leq V_b \leq 2.7\text{ V}$

$$\text{Maximum transfer rate} = \frac{1}{\{-C_b \times R_b \times \ln(1 - \frac{2.0}{V_b})\} \times 3} \text{ [bps]}$$

$$\text{Baud rate error (theoretical value)} = \frac{\frac{1}{\text{Transfer rate} \times 2} - \{-C_b \times R_b \times \ln(1 - \frac{2.0}{V_b})\}}{\left(\frac{1}{\text{Transfer rate}}\right) \times \text{Number of transferred bits}} \times 100 \text{ [%]}$$

* This value is the theoretical value of the relative difference between the transmission and reception sides

Note 2. This value as an example is calculated when the conditions described in the "Conditions" column are met. Refer to Note 1 above to calculate the maximum transfer rate under conditions of the customer.

Note 3. Use it with $V_{DD} \geq V_b$.

Note 4. The smaller maximum transfer rate derived by using $f_{MCK}/6$ or the following expression is the valid maximum transfer rate. Expression for calculating the transfer rate when $1.8\text{ V} \leq V_{DD} < 3.3\text{ V}$ and $1.6\text{ V} \leq V_b \leq 2.0\text{ V}$

$$\text{Maximum transfer rate} = \frac{1}{\{-C_b \times R_b \times \ln(1 - \frac{1.5}{V_b})\} \times 3} \text{ [bps]}$$


$$\text{Baud rate error (theoretical value)} = \frac{\frac{1}{\text{Transfer rate} \times 2} - \{-C_b \times R_b \times \ln(1 - \frac{1.5}{V_b})\}}{\left(\frac{1}{\text{Transfer rate}}\right) \times \text{Number of transferred bits}} \times 100 \text{ [%]}$$

* This value is the theoretical value of the relative difference between the transmission and reception sides


Note 5. This value as an example is calculated when the conditions described in the "Conditions" column are met. Refer to Note 4 above to calculate the maximum transfer rate under conditions of the customer.

Caution Select the TTL input buffer for the RxDq pin and the N-ch open drain output (VDD tolerance) mode for the TxDq pin by using port input mode register g (PIMg) and port output mode register g (POMg). For VIH and VIL, see the DC characteristics with TTL input buffer selected.

UART mode connection diagram (during communication at different potential)

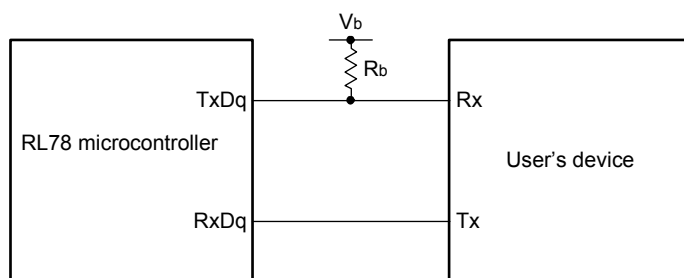

UART mode bit width (during communication at different potential) (reference)

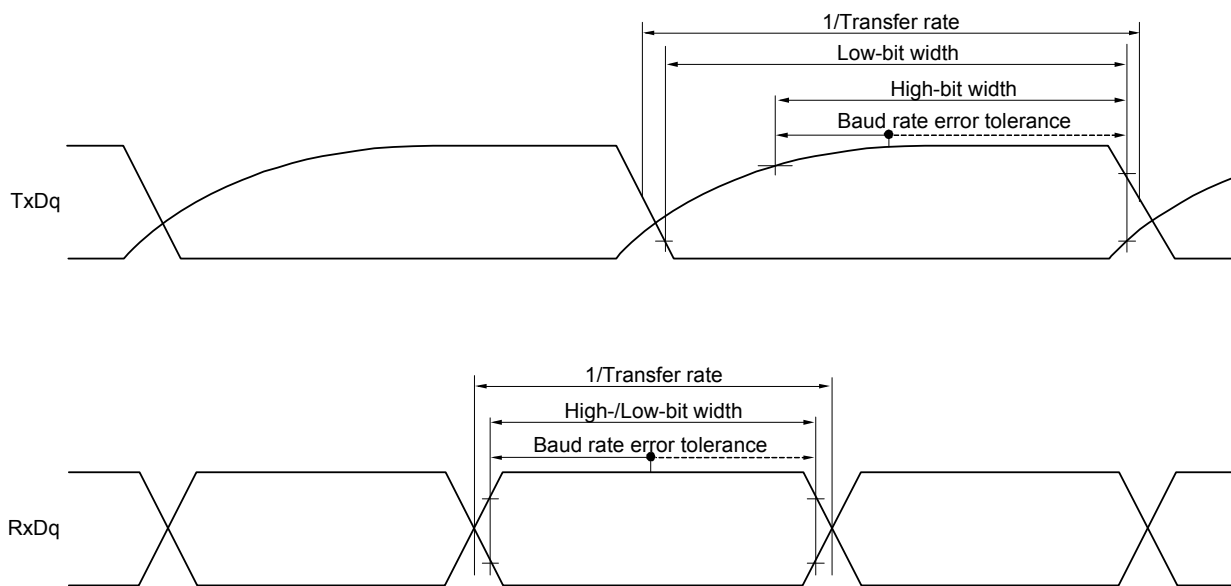

Remark 1. $R_b[\Omega]$: Communication line (TxDq) pull-up resistance, $C_b[F]$: Communication line (TxDq) load capacitance, $V_b[V]$: Communication line voltage

Remark 2. q: UART number (q = 0 to 3), g: PIM and POM number (g = 0 to 3)

Remark 3. f_{MCK} : Serial array unit operation clock frequency
 (Operation clock to be set by the CKSmn bit of serial mode register mn (SMRmn). m: Unit number, n: Channel number (mn = 00 to 03, 10 to 13))

(7) Communication at different potential (2.5 V) (CSI mode) (master mode, SCKp... internal clock output, corresponding CSI00 only)**(TA = -40 to +85 °C, 2.7 V ≤ VDD ≤ 3.6 V, VSS = 0 V)**

| Parameter | Symbol | Conditions | | HS (high-speed main) Mode | | LS (low-speed main) Mode | | LV (low-voltage main) Mode | | Unit |
|---|-------------------|---|--|----------------------------|------|----------------------------|------|----------------------------|------|------|
| | | | | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | |
| SCKp cycle time | t _{KCY1} | t _{KCY1} ≥ f _{CLK} /2 | 2.7V ≤ V _{DD} < 3.6 V, 2.3 V ≤ V _b ≤ 2.7 V, C _b = 20 pF, R _b = 2.7 kΩ | 300 | | 1150 | | 1150 | | ns |
| SCKp high-level width | t _{KH1} | | 2.7 V ≤ V _{DD} < 3.6 V, 2.3 V ≤ V _b ≤ 2.7 V, C _b = 20 pF, R _b = 2.7 kΩ | t _{KCY1} /2 - 120 | | t _{KCY1} /2 - 120 | | t _{KCY1} /2 - 120 | | ns |
| SCKp low-level width | t _{KL1} | | 2.7 V ≤ V _{DD} < 3.6 V, 2.3 V ≤ V _b ≤ 2.7 V, C _b = 20 pF, R _b = 1.4 kΩ | t _{KCY1} /2 - 10 | | t _{KCY1} /2 - 50 | | t _{KCY1} /2 - 50 | | ns |
| Slp setup time (to SCKp↑) <small>Note 1</small> | t _{SIK1} | | 2.7 V ≤ V _{DD} < 3.6 V, 2.3 V ≤ V _b ≤ 2.7 V, C _b = 20 pF, R _b = 2.7 kΩ | 121 | | 479 | | 479 | | ns |
| Slp hold time (from SCKp↑) <small>Note 1</small> | t _{KSI1} | | 2.7 V ≤ V _{DD} < 3.6 V, 2.3 V ≤ V _b ≤ 2.7 V, C _b = 20 pF, R _b = 1.4 kΩ | 10 | | 10 | | 10 | | ns |
| Delay time from SCKp↓ to SOp output <small>Note 1</small> | t _{KSO1} | | 2.7 V ≤ V _{DD} < 3.6 V, 2.3 V ≤ V _b ≤ 2.7 V, C _b = 20 pF, R _b = 1.4 kΩ | | 130 | | 130 | | 130 | ns |
| Slp setup time (to SCKp↓) <small>Note 2</small> | t _{SIK1} | | 2.7 V ≤ V _{DD} < 3.6 V, 2.3 V ≤ V _b ≤ 2.7 V, C _b = 20 pF, R _b = 2.7 kΩ | 33 | | 110 | | 110 | | ns |
| Slp hold time (from SCKp↓) <small>Note 2</small> | t _{KSI1} | | 2.7 V ≤ V _{DD} < 3.6 V, 2.3 V ≤ V _b ≤ 2.7 V, C _b = 20 pF, R _b = 2.7 kΩ | 10 | | 10 | | 10 | | ns |
| Delay time from SCKp↑ to SOp output <small>Note 2</small> | t _{KSO1} | | 2.7 V ≤ V _{DD} < 3.6 V, 2.3 V ≤ V _b ≤ 2.7 V, C _b = 20 pF, R _b = 2.7 kΩ | | 10 | | 10 | | 10 | ns |

Note 1. When DAP_{mn} = 0 and CKP_{mn} = 0, or DAP_{mn} = 1 and CKP_{mn} = 1.**Note 2.** When DAP_{mn} = 0 and CKP_{mn} = 1, or DAP_{mn} = 1 and CKP_{mn} = 0.

Caution Select the TTL input buffer for the Slp pin and the N-ch open drain output (V_{DD} tolerance) mode for the SOp pin and SCKp pin by using port input mode register g (PIMg) and port output mode register g (POMg). For V_{IH} and V_{IL}, see the DC characteristics with TTL input buffer selected.

Remark 1. R_b[i]: Communication line (SCKp, SOp) pull-up resistance, C_b[F]: Communication line (SCKp, SOp) load capacitance, V_b[V]: Communication line voltage

Remark 2. p: CSI number (p = 00), m: Unit number (m = 0),
n: Channel number (n = 0), g: PIM and POM number (g = 2)

Remark 3. f_{мск}: Serial array unit operation clock frequency
(Operation clock to be set by the CKS_{mn} bit of serial mode register mn (SMR_{mn}). m: Unit number,
n: Channel number (mn = 00))

(8) Communication at different potential (1.8 V, 2.5 V) (CSI mode) (master mode, SCKp... internal clock output)**(TA = -40 to +85 °C, 1.8 V ≤ VDD ≤ 3.6 V, VSS = 0 V)****(1/2)**

| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | LS (low-speed main) Mode | | LV (low-voltage main) Mode | | Unit |
|-----------------------|--------|--|---------------------------|------|--------------------------|------|----------------------------|------|------|
| | | | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | |
| SCKp cycle time | tkCY1 | tkCY1 ≥ fCLK/4 2.7V ≤ VDD < 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V, Cb = 30 pF, Rb = 2.7 kΩ | 500 | Note | 1150 | | 1150 | | ns |
| | | | 1150 | Note | 1150 | | 1150 | | ns |
| SCKp high-level width | tkH1 | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V, Cb = 30 pF, Rb = 2.7 kΩ | tkCY1/2 - | | tkCY1/2 - | | tkCY1/2 - | | ns |
| | | | 170 | | 170 | | 170 | | ns |
| SCKp low-level width | tkL1 | 1.8 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V, Cb = 30 pF, Rb = 5.5 kΩ | tkCY1/2 - | | tkCY1/2 - | | tkCY1/2 - | | ns |
| | | | 458 | | 458 | | 458 | | ns |
| SCKp low-level width | tkL1 | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V, Cb = 30 pF, Rb = 2.7 kΩ | tkCY1/2 - | | tkCY1/2 - | | tkCY1/2 - | | ns |
| | | | 18 | | 50 | | 50 | | ns |
| SCKp low-level width | tkL1 | 1.8 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V, Cb = 30 pF, Rb = 5.5 kΩ | tkCY1/2 - | | tkCY1/2 - | | tkCY1/2 - | | ns |
| | | | 50 | | 50 | | 50 | | ns |

Note Use it with VDD ≥ Vb.

Caution Select the TTL input buffer for the Slp pin and the N-ch open drain output (VDD tolerance) mode for the SOp pin and SCKp pin by using port input mode register g (PIMg) and port output mode register g (POMg). For VIH and VIL, see the DC characteristics with TTL input buffer selected.

(Remarks are listed on the page after the next page.)

(8) Communication at different potential (1.8 V, 2.5 V) (CSI mode) (master mode, SCKp... internal clock output)**(TA = -40 to +85 °C, 1.8 V ≤ VDD ≤ 3.6 V, VSS = 0 V)****(2/2)**

| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | LS (low-speed main) Mode | | LV (low-voltage main) Mode | | Unit |
|--|--------|---|---------------------------|------|--------------------------|------|----------------------------|------|------|
| | | | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | |
| Slp setup time (to SCKp↑) Note 1 | tSIK1 | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V, Cb = 30 pF, Rb = 2.7 kΩ | 177 | | 479 | | 479 | | ns |
| | | 1.8 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V Note 3, Cb = 30 pF, Rb = 5.5 kΩ | 479 | | 479 | | 479 | | ns |
| Slp hold time (from SCKp↑) Note 1 | tKS11 | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V, Cb = 30 pF, Rb = 2.7 kΩ | 19 | | 19 | | 19 | | ns |
| | | 1.8 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V Note 3, Cb = 30 pF, Rb = 5.5 kΩ | 19 | | 19 | | 19 | | ns |
| Delay time from SCKp↓ to SOp output Note 1 | tKSO1 | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V, Cb = 30 pF, Rb = 2.7 kΩ | | 195 | | 195 | | 195 | ns |
| | | 1.8 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V Note 3, Cb = 30 pF, Rb = 5.5 kΩ | | 483 | | 483 | | 483 | ns |
| Slp setup time (to SCKp↓) Note 2 | tSIK1 | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V, Cb = 30 pF, Rb = 2.7 kΩ | 44 | | 110 | | 110 | | ns |
| | | 1.8 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V Note 3, Cb = 30 pF, Rb = 5.5 kΩ | 110 | | 110 | | 110 | | ns |
| Slp hold time (from SCKp↓) Note 2 | tKS11 | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V, Cb = 30 pF, Rb = 2.7 kΩ | 19 | | 19 | | 19 | | ns |
| | | 1.8 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V Note 3, Cb = 30 pF, Rb = 5.5 kΩ | 19 | | 19 | | 19 | | ns |
| Delay time from SCKp↑ to SOp output Note 2 | tKSO1 | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V, Cb = 30 pF, Rb = 2.7 kΩ | | 25 | | 25 | | 25 | ns |
| | | 1.8 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V Note 3, Cb = 30 pF, Rb = 5.5 kΩ | | 25 | | 25 | | 25 | ns |


Note 1. When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1.

Note 2. When DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.

Note 3. Use it with VDD ≥ Vb.

Caution Select the TTL input buffer for the Slp pin and the N-ch open drain output (VDD tolerance) mode for the SOp pin and SCKp pin by using port input mode register g (PIMg) and port output mode register g (POMg). For VIH and VIL, see the DC characteristics with TTL input buffer selected.

(Remarks are listed on the next page.)

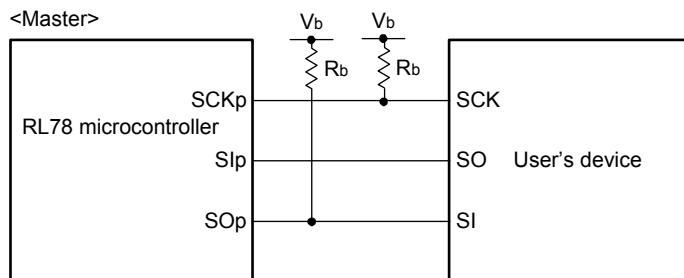
CSI mode connection diagram (during communication at different potential)

Remark 1. $R_b[\Omega]$: Communication line (SCKp, SOp) pull-up resistance, $C_b[F]$: Communication line (SCKp, SOp) load capacitance, $V_b[V]$: Communication line voltage


Remark 2. p: CSI number (p = 00, 10, 20, 30), m: Unit number (m = 0, 1), n: Channel number (n = 0 to 3), g: PIM and POM number (g = 0 to 3)

Remark 3. f_{mck} : Serial array unit operation clock frequency
(Operation clock to be set by the CKSmn bit of serial mode register mn (SMRmn). m: Unit number, n: Channel number (mn = 00))

**CSI mode serial transfer timing (master mode) (during communication at different potential)
(When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1.)**

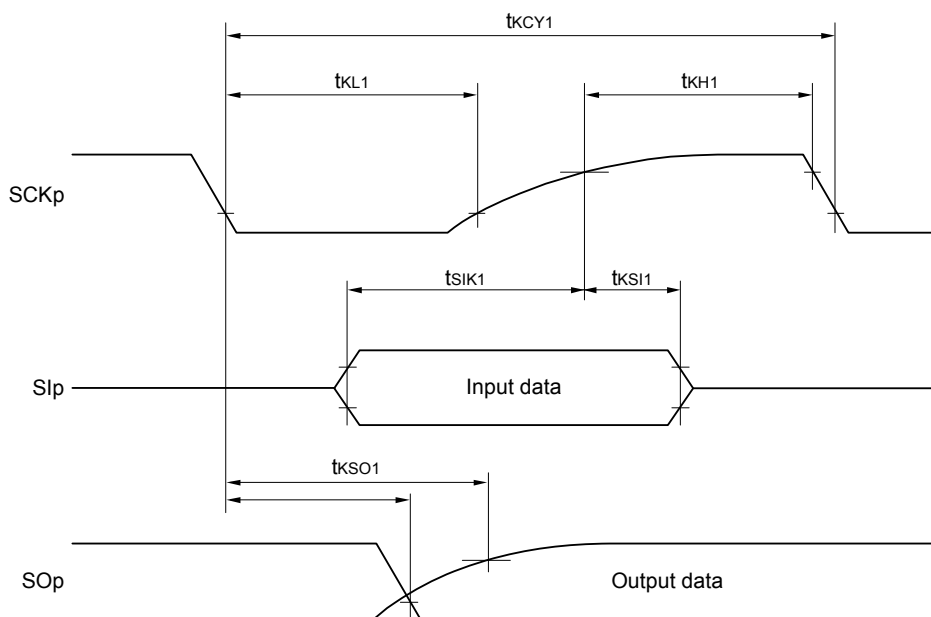

**CSI mode serial transfer timing (master mode) (during communication at different potential)
(When DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.)**

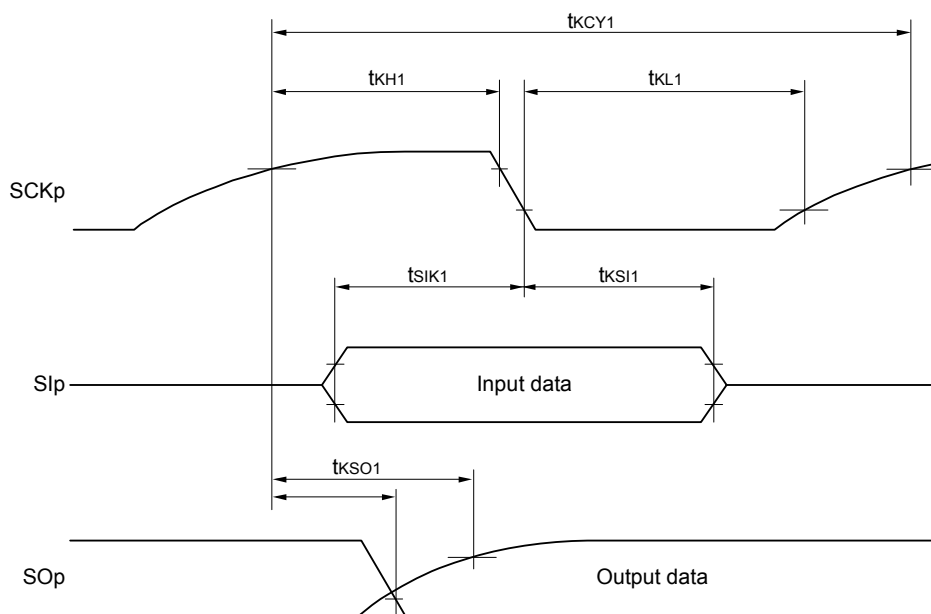

Remark p: CSI number (p = 00, 10, 20, 30), m: Unit number (m = 0, 1), n: Channel number (n = 0 to 3),
g: PIM and POM number (g = 0 to 3)


(9) Communication at different potential (1.8 V, 2.5 V) (CSI mode) (slave mode, SCKp... external clock input)**(TA = -40 to +85 °C, 1.8 V ≤ VDD ≤ 3.6 V, VSS = 0 V)**

| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | LS (low-speed main) Mode | | LV (low-voltage main) Mode | | Unit |
|--|------------|---|---------------------------|--------------|--------------------------|--------------|----------------------------|--------------|------|
| | | | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | |
| SCKp cycle time Note 1 | tkCY2 | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V | 20 MHz < fMCK ≤ 24 MHz | 16/fMCK | | — | | — | ns |
| | | | 16 MHz < fMCK ≤ 20 MHz | 14/fMCK | | — | | — | ns |
| | | | 8 MHz < fMCK ≤ 16 MHz | 12/fMCK | | — | | — | ns |
| | | | 4 MHz < fMCK ≤ 8 MHz | 8/fMCK | | 16/fMCK | | — | ns |
| | | | fMCK ≤ 4 MHz | 6/fMCK | | 10/fMCK | | 10/fMCK | ns |
| | | 1.8 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V Note 2 | 20 MHz < fMCK ≤ 24 MHz | 36/fMCK | | — | | — | ns |
| | | | 16 MHz < fMCK ≤ 20 MHz | 32/fMCK | | — | | — | ns |
| | | | 8 MHz < fMCK ≤ 16 MHz | 26/fMCK | | — | | — | ns |
| | | 4 MHz < fMCK ≤ 8 MHz | 16/fMCK | | 16/fMCK | | — | ns | |
| | | fMCK ≤ 4 MHz | 10/fMCK | | 10/fMCK | | 10/fMCK | ns | |
| SCKp high-/low-level width | tkH2, tkL2 | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V | tkCY2/2 - 18 | | tkCY2/2 - 50 | | tkCY2/2 - 50 | ns | |
| | | 1.8 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V Note 2 | tkCY2/2 - 50 | | tkCY2/2 - 50 | | tkCY2/2 - 50 | ns | |
| Slp setup time (to SCKp↑) Note 3 | tsIK2 | 2.7 V ≤ VDD ≤ 3.6 V | 1/fMCK + 20 | | 1/fMCK + 30 | | 1/fMCK + 30 | ns | |
| | | 1.8 V ≤ VDD < 3.3 V | 1/fMCK + 30 | | 1/fMCK + 30 | | 1/fMCK + 30 | ns | |
| Slp hold time (from SCKp↑) Note 4 | tkSI2 | | 1/fMCK + 31 | | 1/fMCK + 31 | | 1/fMCK + 31 | ns | |
| Delay time from SCKp↓ to SOp output Note 5 | tkSO2 | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V Cb = 30 pF, Rb = 2.7 kΩ | | 2/fMCK + 214 | | 2/fMCK + 573 | | 2/fMCK + 573 | ns |
| | | 1.8 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V Note 2 Cb = 30 pF, Rb = 5.5 kΩ | | 2/fMCK + 573 | | 2/fMCK + 573 | | 2/fMCK + 573 | ns |

(Notes and Caution are listed on the next page. Remarks are listed on the page after the next page.)

- Note 1.** Transfer rate in the SNOOZE mode: MAX. 1 Mbps
- Note 2.** Use it with $V_{DD} \geq V_b$.
- Note 3.** When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1. The SIp setup time becomes “to SCKp↓” when DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.
- Note 4.** When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1. The SIp hold time becomes “from SCKp↓” when DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.
- Note 5.** When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1. The delay time to SOp output becomes “from SCKp↑” when DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.
- Caution** **Select the TTL input buffer for the SIp pin and SCKp pin and the N-ch open drain output (V_{DD} tolerance) mode for the SOp pin by using port input mode register g (PIMg) and port output mode register g (POMg). For V_{IH} and V_{IL}, see the DC characteristics with TTL input buffer selected.**

(Remarks are listed on the next page.)

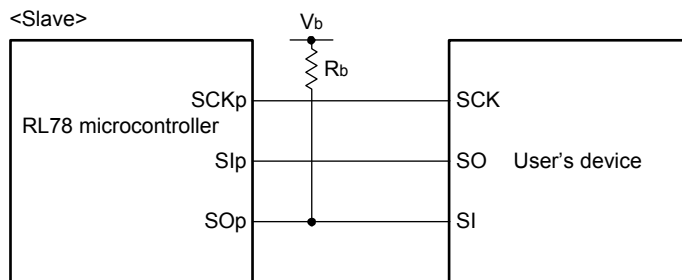
CSI mode connection diagram (during communication at different potential)

Remark 1. $R_b[\Omega]$: Communication line (SO_p) pull-up resistance, $C_b[F]$: Communication line (SO_p) load capacitance, $V_b[V]$: Communication line voltage


Remark 2. p: CSI number (p = 00, 10, 20, 30), m: Unit number (m = 0, 1), n: Channel number (n = 0 to 3), g: PIM and POM number (g = 0 to 3)

Remark 3. f_{MCK} : Serial array unit operation clock frequency
(Operation clock to be set by the CKSmn bit of serial mode register mn (SMRmn). m: Unit number, n: Channel number (mn = 00, 02, 10, 12))

**CSI mode serial transfer timing (slave mode) (during communication at different potential)
(When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1.)**

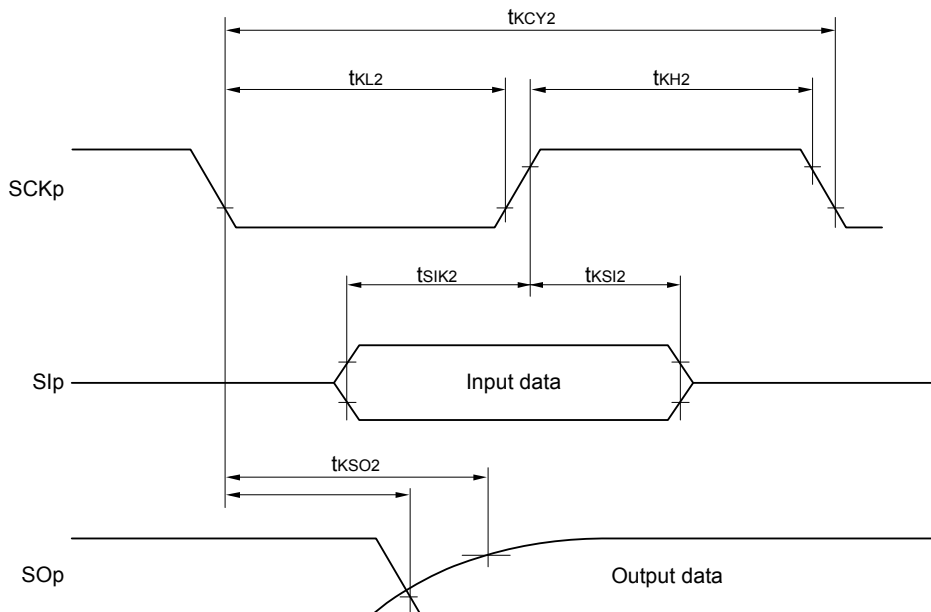

**CSI mode serial transfer timing (slave mode) (during communication at different potential)
(When DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.)**

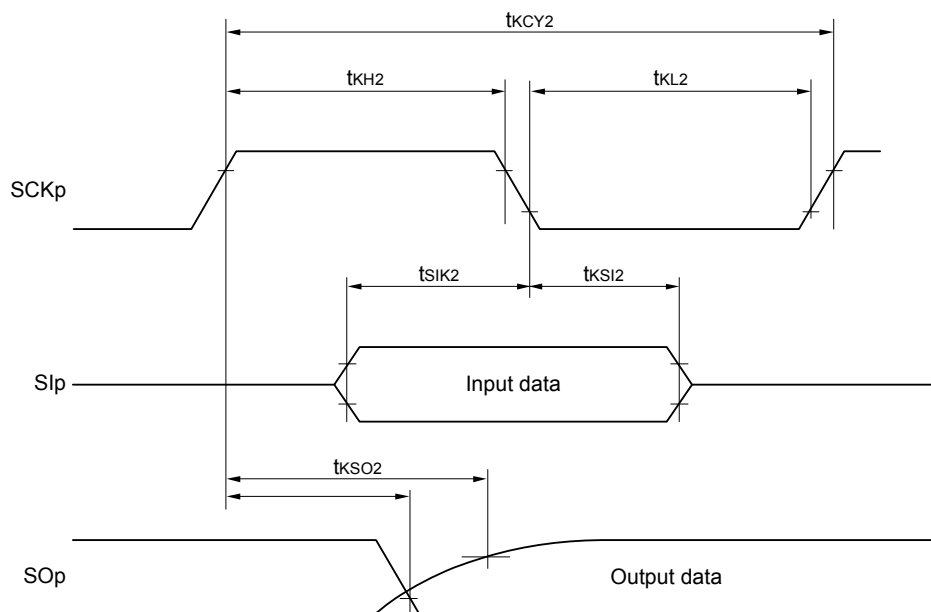

Remark p: CSI number (p = 00, 10, 20, 30), m: Unit number (m = 0, 1),
n: Channel number (n = 0 to 3), g: PIM and POM number (g = 0 to 3)

(10) Communication at different potential (1.8 V, 2.5 V) (simplified I²C mode)**(TA = -40 to +85 °C, 1.8 V ≤ V_{DD} ≤ 3.6 V, V_{SS} = 0 V)**

| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | LS (low-speed main) Mode | | LV (low-voltage main) Mode | | Unit |
|-------------------------------|---------------------|--|---------------------------------|----------------|---------------------------------|------------|---------------------------------|------------|------|
| | | | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | |
| SCLr clock frequency | f _{SCL} | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b < 2.7 V, C _b = 50 pF, R _b = 2.7 kΩ | | 1000 Note 1 | | 300 Note 1 | | 300 Note 1 | kHz |
| | | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b < 2.7 V, C _b = 100 pF, R _b = 2.7 kΩ | | 400 Note 1 | | 300 Note 1 | | 300 Note 1 | kHz |
| | | 1.8 V ≤ V _{DD} < 3.3 V, 1.6 V ≤ V _b ≤ 2.0 V Note 2, C _b = 100 pF, R _b = 5.5 kΩ | | 400 Note 1 | | 300 Note 1 | | 300 Note 1 | kHz |
| Hold time when SCLr = "L" | t _{LOW} | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b < 2.7 V, C _b = 50 pF, R _b = 2.7 kΩ | 475 | | 1550 | | 1550 | | ns |
| | | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b < 2.7 V, C _b = 100 pF, R _b = 2.7 kΩ | 1150 | | 1550 | | 1550 | | ns |
| | | 1.8 V ≤ V _{DD} < 3.3 V, 1.6 V ≤ V _b ≤ 2.0 V Note 2, C _b = 100 pF, R _b = 5.5 kΩ | 1550 | | 1550 | | 1550 | | ns |
| Hold time when SCLr = "H" | t _{HIGH} | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b < 2.7 V, C _b = 50 pF, R _b = 2.7 kΩ | 200 | | 610 | | 610 | | ns |
| | | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b < 2.7 V, C _b = 100 pF, R _b = 2.7 kΩ | 600 | | 610 | | 610 | | ns |
| | | 1.8 V ≤ V _{DD} < 3.3 V, 1.6 V ≤ V _b ≤ 2.0 V Note 2, C _b = 100 pF, R _b = 5.5 kΩ | 610 | | 610 | | 610 | | ns |
| Data setup time (reception) | t _{SU:DAT} | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b < 2.7 V, C _b = 50 pF, R _b = 2.7 kΩ | 1/f _{MCK} + 135 Note 3 | | 1/f _{MCK} + 190 Note 3 | | 1/f _{MCK} + 190 Note 3 | | ns |
| | | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b < 2.7 V, C _b = 100 pF, R _b = 2.7 kΩ | 1/f _{MCK} + 190 Note 3 | | 1/f _{MCK} + 190 Note 3 | | 1/f _{MCK} + 190 Note 3 | | ns |
| | | 1.8 V ≤ V _{DD} < 3.3 V, 1.6 V ≤ V _b ≤ 2.0 V Note 2, C _b = 100 pF, R _b = 5.5 kΩ | 1/f _{MCK} + 190 Note 3 | | 1/f _{MCK} + 190 Note 3 | | 1/f _{MCK} + 190 Note 3 | | ns |
| Data hold time (transmission) | t _{HD:DAT} | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b < 2.7 V, C _b = 50 pF, R _b = 2.7 kΩ | 0 | 305 | 0 | 305 | 0 | 305 | ns |
| | | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b < 2.7 V, C _b = 100 pF, R _b = 2.7 kΩ | 0 | 355 | 0 | 355 | 0 | 355 | ns |
| | | 1.8 V ≤ V _{DD} < 3.3 V, 1.6 V ≤ V _b ≤ 2.0 V Note 2, C _b = 100 pF, R _b = 5.5 kΩ | 0 | 405 | 0 | 405 | 0 | 405 | ns |

Note 1. The value must also be equal to or less than f_{MCK}/4.


Note 2. Use it with V_{DD} ≥ V_b.

Note 3. Set the f_{MCK} value to keep the hold time of SCLr = "L" and SCLr = "H".


Caution Select the TTL input buffer and the N-ch open drain output (V_{DD} tolerance) mode for the SDAr pin and the N-ch open drain output (V_{DD} tolerance) mode for the SCLr pin by using port input mode register g (PIMg) and port output mode register g (POMg). For V_{IH} and V_{IL}, see the DC characteristics with TTL input buffer selected.

(Remarks are listed on the next page.)

Simplified I²C mode connection diagram (during communication at different potential)

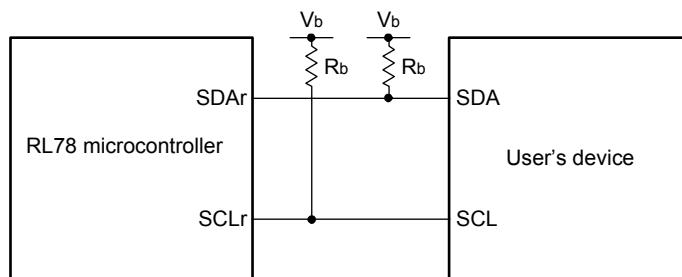

Simplified I²C mode serial transfer timing (during communication at different potential)

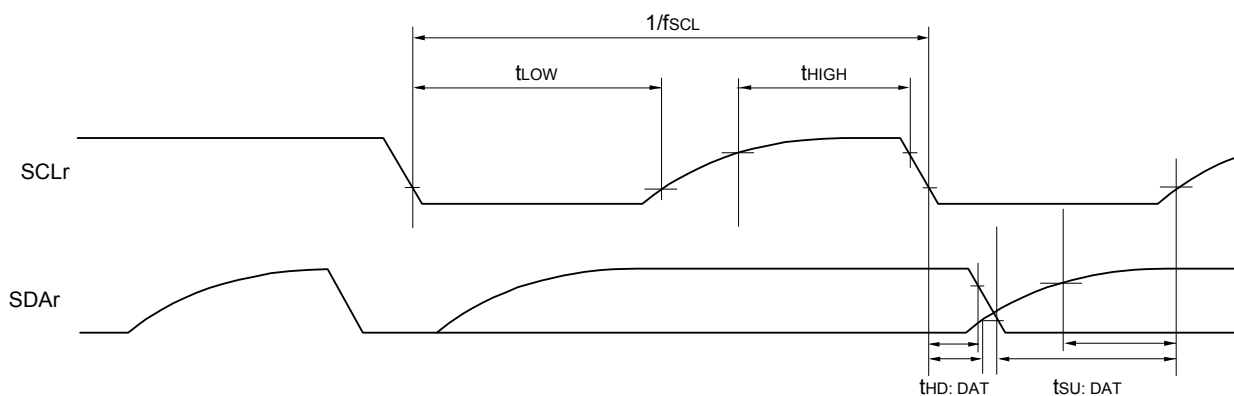

- Remark 1.** R_b[Ω]: Communication line (SDAr, SCLr) pull-up resistance, C_b[F]: Communication line (SDAr, SCLr) load capacitance, V_b[V]: Communication line voltage
- Remark 2.** r: IIC number (r = 00, 10, 20, 30), g: PIM, POM number (g = 0 to 3)
- Remark 3.** f_{MCK}: Serial array unit operation clock frequency
(Operation clock to be set by the CKSmn bit of serial mode register mn (SMRmn). m: Unit number (m = 0, 1), n: Channel number (n = 0, 2), mn = 00, 02, 10, 12)

2.5.2 Serial interface IICA

(1) I²C standard mode

(TA = -40 to +85 °C, 1.6 V ≤ V_{DD} ≤ 3.6 V, V_{SS} = 0 V)

| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | LS (low-speed main) Mode | | LV (low-voltage main) Mode | | Unit | |
|---|----------------------|--|---------------------------------|------|--------------------------|------|----------------------------|------|------|-----|
| | | | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | | |
| SCLA0 clock frequency | f _{SCL} | Standard mode: f _{CLK} ≥ 1 MHz | 2.7 V ≤ V _{DD} ≤ 3.6 V | 0 | 100 | 0 | 100 | 0 | 100 | kHz |
| | | | 1.8 V ≤ V _{DD} ≤ 3.6 V | — | — | 0 | 100 | 0 | 100 | kHz |
| | | | 1.6 V ≤ V _{DD} ≤ 3.6 V | — | — | — | — | 0 | 100 | kHz |
| Setup time of restart condition | t _{SU: STA} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 4.7 | | 4.7 | | 4.7 | | μs | |
| | | 1.8 V ≤ V _{DD} ≤ 3.6 V | — | | 4.7 | | 4.7 | | μs | |
| | | 1.6 V ≤ V _{DD} ≤ 3.6 V | — | | — | | 4.7 | | μs | |
| Hold time ^{Note 1} | t _{HD: STA} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 4.0 | | 4.0 | | 4.0 | | μs | |
| | | 1.8 V ≤ V _{DD} ≤ 3.6 V | — | | 4.0 | | 4.0 | | μs | |
| | | 1.6 V ≤ V _{DD} ≤ 3.6 V | — | | — | | 4.0 | | μs | |
| Hold time when SCLA0 = "L" | t _{LOW} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 4.7 | | 4.7 | | 4.7 | | μs | |
| | | 1.8 V ≤ V _{DD} ≤ 3.6 V | — | | 4.7 | | 4.7 | | μs | |
| | | 1.6 V ≤ V _{DD} ≤ 3.6 V | — | | — | | 4.7 | | μs | |
| Hold time when SCLA0 = "H" | t _{HIGH} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 4.0 | | 4.0 | | 4.0 | | μs | |
| | | 1.8 V ≤ V _{DD} ≤ 3.6 V | — | | 4.0 | | 4.0 | | μs | |
| | | 1.6 V ≤ V _{DD} ≤ 3.6 V | — | | — | | 4.0 | | μs | |
| Data setup time (reception) | t _{SU: DAT} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 250 | | 250 | | 250 | | ns | |
| | | 1.8 V ≤ V _{DD} ≤ 3.6 V | — | | 250 | | 250 | | ns | |
| | | 1.6 V ≤ V _{DD} ≤ 3.6 V | — | | — | | 250 | | ns | |
| Data hold time (transmission) ^{Note 2} | t _{HD: DAT} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 0 | 3.45 | 0 | 3.45 | 0 | 3.45 | μs | |
| | | 1.8 V ≤ V _{DD} ≤ 3.6 V | — | — | 0 | 3.45 | 0 | 3.45 | μs | |
| | | 1.6 V ≤ V _{DD} ≤ 3.6 V | — | — | — | — | 0 | 3.45 | μs | |
| Setup time of stop condition | t _{SU: STO} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 4.0 | | 4.0 | | 4.0 | | μs | |
| | | 1.8 V ≤ V _{DD} ≤ 3.6 V | — | | 4.0 | | 4.0 | | μs | |
| | | 1.6 V ≤ V _{DD} ≤ 3.6 V | — | | — | | 4.0 | | μs | |
| Bus-free time | t _{BUF} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 4.7 | | 4.7 | | 4.7 | | μs | |
| | | 1.8 V ≤ V _{DD} ≤ 3.6 V | — | | 4.7 | | 4.7 | | μs | |
| | | 1.6 V ≤ V _{DD} ≤ 3.6 V | — | | — | | 4.7 | | μs | |

Note 1. The first clock pulse is generated after this period when the start/restart condition is detected.

Note 2. The maximum value (MAX.) of t_{HD: DAT} is during normal transfer and a wait state is inserted in the ACK (acknowledge) timing.

Remark The maximum value of C_b (communication line capacitance) and the value of R_b (communication line pull-up resistor) at that time in each mode are as follows.

Standard mode: C_b = 400 pF, R_b = 2.7 kΩ

(2) I²C fast mode**(TA = -40 to +85 °C, 1.8 V ≤ V_{DD} ≤ 3.6 V, V_{SS} = 0 V)**

| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | LS (low-speed main) Mode | | LV (low-voltage main) Mode | | Unit | |
|---|----------------------|--|---------------------------------|------|--------------------------|------|----------------------------|------|------|-----|
| | | | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | | |
| SCLA0 clock frequency | f _{SCL} | Fast mode: f _{CLK} ≥ 3.5 MHz | 2.7 V ≤ V _{DD} ≤ 3.6 V | 0 | 400 | 0 | 400 | 0 | 400 | kHz |
| | | | 1.8 V ≤ V _{DD} ≤ 3.6 V | 0 | 400 | 0 | 400 | 0 | 400 | kHz |
| Setup time of restart condition | t _{SU: STA} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 0.6 | | 0.6 | | 0.6 | | μs | |
| | | 1.8 V ≤ V _{DD} ≤ 3.6 V | 0.6 | | 0.6 | | 0.6 | | μs | |
| Hold time ^{Note 1} | t _{HD: STA} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 0.6 | | 0.6 | | 0.6 | | μs | |
| | | 1.8 V ≤ V _{DD} ≤ 3.6 V | 0.6 | | 0.6 | | 0.6 | | μs | |
| Hold time when SCLA0 = "L" | t _{LOW} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 1.3 | | 1.3 | | 1.3 | | μs | |
| | | 1.8 V ≤ V _{DD} ≤ 3.6 V | 1.3 | | 1.3 | | 1.3 | | μs | |
| Hold time when SCLA0 = "H" | t _{HIGH} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 0.6 | | 0.6 | | 0.6 | | μs | |
| | | 1.8 V ≤ V _{DD} ≤ 3.6 V | 0.6 | | 0.6 | | 0.6 | | μs | |
| Data setup time (reception) | t _{SU: DAT} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 100 | | 100 | | 100 | | ns | |
| | | 1.8 V ≤ V _{DD} ≤ 3.6 V | 100 | | 100 | | 100 | | ns | |
| Data hold time (transmission) ^{Note 2} | t _{HD: DAT} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 0 | 0.9 | 0 | 0.9 | 0 | 0.9 | μs | |
| | | 1.8 V ≤ V _{DD} ≤ 3.6 V | 0 | 0.9 | 0 | 0.9 | 0 | 0.9 | μs | |
| Setup time of stop condition | t _{SU: STO} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 0.6 | | 0.6 | | 0.6 | | μs | |
| | | 1.8 V ≤ V _{DD} ≤ 3.6 V | 0.6 | | 0.6 | | 0.6 | | μs | |
| Bus-free time | t _{BUF} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 1.3 | | 1.3 | | 1.3 | | μs | |
| | | 1.8 V ≤ V _{DD} ≤ 3.6 V | 1.3 | | 1.3 | | 1.3 | | μs | |

Note 1. The first clock pulse is generated after this period when the start/restart condition is detected.

Note 2. The maximum value (MAX.) of t_{HD: DAT} is during normal transfer and a wait state is inserted in the ACK (acknowledge) timing.

Remark The maximum value of C_b (communication line capacitance) and the value of R_b (communication line pull-up resistor) at that time in each mode are as follows.

Fast mode: C_b = 320 pF, R_b = 1.1 kΩ

(3) I²C fast mode plus

(TA = -40 to +85 °C, 2.7 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | LS (low-speed main) Mode | | LV (low-voltage main) Mode | | Unit |
|--------------------------------------|----------------------|---|---------------------------|------|--------------------------|------|----------------------------|------|------|
| | | | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. | |
| SCLA0 clock frequency | f _{SCL} | Fast mode plus: f _{CLK} ≥ 10 MHz 2.7 V ≤ V _{DD} ≤ 3.6 V | 0 | 1000 | — | — | — | — | kHz |
| Setup time of restart condition | t _{SU: STA} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 0.26 | — | — | — | — | — | μs |
| Hold time Note 1 | t _{HD: STA} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 0.26 | — | — | — | — | — | μs |
| Hold time when SCLA0 = "L" | t _{LOW} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 0.5 | — | — | — | — | — | μs |
| Hold time when SCLA0 = "H" | t _{HIGH} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 0.26 | — | — | — | — | — | μs |
| Data setup time (reception) | t _{SU: DAT} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 50 | — | — | — | — | — | ns |
| Data hold time (transmission) Note 2 | t _{HD: DAT} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 0 | 0.45 | — | — | — | — | μs |
| Setup time of stop condition | t _{SU: STO} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 0.26 | — | — | — | — | — | μs |
| Bus-free time | t _{BUF} | 2.7 V ≤ V _{DD} ≤ 3.6 V | 0.5 | — | — | — | — | — | μs |


Note 1. The first clock pulse is generated after this period when the start/restart condition is detected.

Note 2. The maximum value (MAX.) of t_{HD: DAT} is during normal transfer and a wait state is inserted in the ACK (acknowledge) timing.

Remark The maximum value of C_b (communication line capacitance) and the value of R_b (communication line pull-up resistor) at that time in each mode are as follows.

Fast mode plus: C_b = 120 pF, R_b = 1.1 kΩ

I²C serial transfer timing

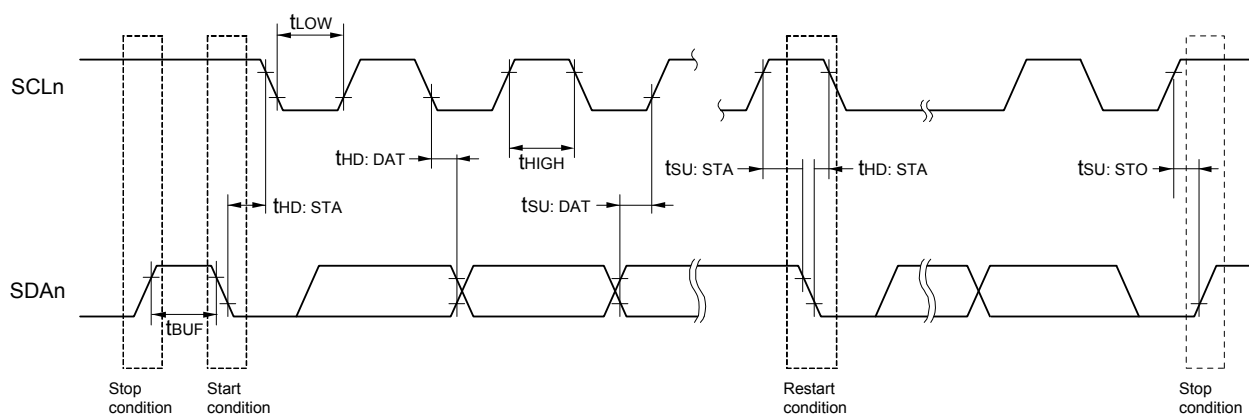

2.5.3 USB

(1) Electrical specifications

(TA = -40 to +85 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V, HS (High-speed main) mode only)

| Parameter | | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|-----------|-------------------------------------|--------|---|---------------------|------|------|------|
| UREGC | UREGC output voltage characteristic | UREGC | UVBUS = 4.0 to 5.5 V, PXXCON = VDDUSBE = 1 | 3.0 | 3.3 | 3.6 | V |
| UVBUS | UVBUS input voltage characteristic | UVBUS | Function | 4.35 (4.02 Note) | 5.00 | 5.25 | V |


Note Value of instantaneous voltage

(TA = -40 to +85 °C, 4.35 V ≤ UVBUS ≤ 5.25 V, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V, HS (High-speed main) mode only)

| Parameter | | Symbol | Conditions | MIN. | TYP. | MAX. | Unit | |
|---------------------------------------|------------------------------|---|---------------------------|---|-------|-------|------|----|
| Input characteristic (FS/LS receiver) | Input voltage | V _{IH} | | 2.0 | | | V | |
| | | V _{IL} | | | | 0.8 | V | |
| | Difference input sensitivity | V _{DI} | UDP voltage - UDM voltage | 0.2 | | | V | |
| | Difference common mode range | V _{CM} | | 0.8 | | 2.5 | V | |
| Output characteristic (FS driver) | Output voltage | V _{OH} | I _{OH} = -200 μA | 2.8 | | 3.6 | V | |
| | | V _{OL} | I _{OL} = 2 mA | 0 | | 0.3 | V | |
| | Transition time | Rising | t _{FR} | Rising: From 10% to 90% of amplitude, Falling: From 90% to 10% of amplitude, CL = 50 pF | 4 | | 20 | ns |
| | | Falling | t _{FF} | | 4 | | 20 | ns |
| | Matching (TFR/TFF) | V _{FRFM} | 90 | | | 111.1 | % | |
| | Crossover voltage | V _{FCRS} | 1.3 | | | 2.0 | V | |
| Output Impedance | Z _{DRV} | UREGC voltage = 3.3 V, Pin voltage = 1.65 V | 28 | | 44 | Ω | | |
| Output characteristic (LS driver) | Output voltage | V _{OH} | | 2.8 | | 3.6 | V | |
| | | V _{OL} | | 0 | | 0.3 | V | |
| | Transition time | Rising | t _{LR} | Rising: From 10% to 90% of amplitude, Falling: From 90% to 10% of amplitude, CL = 250 pF to 750 pF The UDP and UDM pins are individually pulled down via 15 kΩ | 75 | | 300 | ns |
| | | Falling | t _{LF} | | 75 | | 300 | ns |
| | Matching (TFR/TFF) Note | V _{LTFM} | 80 | | | 125 | % | |
| Crossover voltage Note | V _{LCRS} | 1.3 | | | 2.0 | V | | |
| Pull-up, Pull-down | Pull-down resistor | R _{PD} | | 14.25 | | 24.80 | kΩ | |
| | Pull-up resistor | Idle | R _{PUI} | 0.9 | | 1.575 | kΩ | |
| | | Reception | R _{PUA} | | 1.425 | | 3.09 | kΩ |
| UVBUS | UVBUS pull-down resistor | R _{VBUS} | UVBUS voltage = 5.5 V | | 1000 | | kΩ | |
| | | UVBUS input voltage | V _{IH} | 3.20 | | | V | |
| | | V _{IL} | | | | 0.8 | V | |

Note Excludes the first signal transition from the idle state.

Timing of UDP and UDM

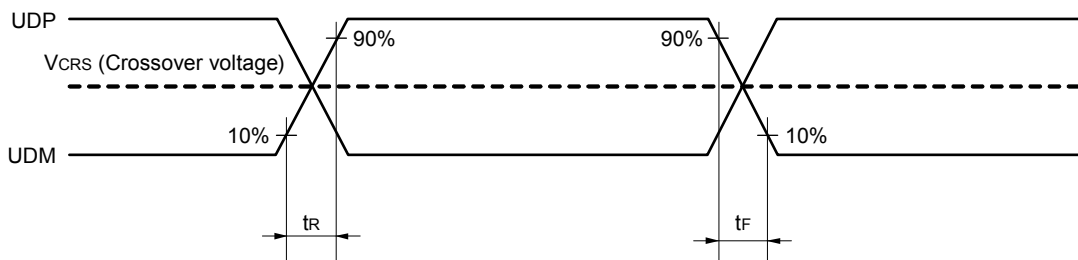

(2) BC standard

(TA = -40 to +85 °C, 4.35 V ≤ UVBUS ≤ 5.25 V, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V, HS (High-speed main) mode only)

| | Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|--------------------|------------------------|----------|-----------------------|------|-------|------|------|
| USB standard BC1.2 | UDP sink current | IDP_SINK | | 25 | 100 | 175 | μA |
| | UDM sink current | IDM_SINK | | 25 | 100 | 175 | μA |
| | DCD source current | IDP_SRC | | 7 | 10 | 13 | μA |
| | Data detection voltage | VDAT_REF | | 0.25 | 0.325 | 0.4 | V |
| | UDP source voltage | VDP_SRC | Output current 250 μA | 0.5 | 0.6 | 0.7 | V |
| | UDM source voltage | VDM_SRC | Output current 250 μA | 0.5 | 0.6 | 0.7 | V |

(3) BC option standard**(TA = -40 to +85 °C, 4.35 V ≤ UVBUS ≤ 5.25 V, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V, HS (High-speed main) mode only)**

| Parameter | | | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|--|-----------------------------|------|----------|------------|------|--------|------|--------|
| UDP/UDM input reference voltage (UVBUS divider ratio) (Function) | VDSELi [3: 0] (i = 0, 1) | 0000 | VDDDET0 | | 27 | 32 | 37 | %UVBUS |
| | | 0001 | VDDDET1 | | 29 | 34 | 39 | %UVBUS |
| | | 0010 | VDDDET2 | | 32 | 37 | 42 | %UVBUS |
| | | 0011 | VDDDET3 | | 35 | 40 | 45 | %UVBUS |
| | | 0100 | VDDDET4 | | 38 | 43 | 48 | %UVBUS |
| | | 0101 | VDDDET5 | | 41 | 46 | 51 | %UVBUS |
| | | 0110 | VDDDET6 | | 44 | 49 | 54 | %UVBUS |
| | | 0111 | VDDDET7 | | 47 | 52 | 57 | %UVBUS |
| | | 1000 | VDDDET8 | | 51 | 56 | 61 | %UVBUS |
| | | 1001 | VDDDET9 | | 55 | 60 | 65 | %UVBUS |
| | | 1010 | VDDDET10 | | 59 | 64 | 69 | %UVBUS |
| | | 1011 | VDDDET11 | | 63 | 68 | 73 | %UVBUS |
| | | 1100 | VDDDET12 | | 67 | 72 | 73 | %UVBUS |
| | | 1101 | VDDDET13 | | 71 | 76 | 81 | %UVBUS |
| | | 1110 | VDDDET14 | | 75 | 80 | 85 | %UVBUS |
| 1111 | VDDDET15 | | 79 | 84 | 89 | %UVBUS | | |

2.6 Analog Characteristics

2.6.1 A/D converter characteristics

Classification of A/D converter characteristics

| Reference Voltage Input Channel | Reference voltage (+) = AV _{REFP} Reference voltage (-) = AV _{REFM} | Reference voltage (+) = AV _{DD} Reference voltage (-) = AV _{SS} | Reference voltage (+) = Internal reference voltage Reference voltage (-) = AV _{SS} |
|---|--|--|---|
| High-accuracy channel; ANI0 to ANI6 (input buffer power supply: AV _{DD}) | Refer to 2.6.1 (1). Refer to 2.6.1 (2). | Refer to 2.6.1 (3). | Refer to 2.6.1 (6). |
| Standard channel; ANI16 to ANI21 (input buffer power supply: V _{DD}) | Refer to 2.6.1 (4). | Refer to 2.6.1 (5). | |
| Internal reference voltage, Temperature sensor output voltage | Refer to 2.6.1 (4). | Refer to 2.6.1 (5). | — |

(1) When reference voltage (+) = AV_{REFP}/ANI0 (ADREFP1 = 0, ADREFP0 = 1), reference voltage (-) = AV_{REFM}/ANI1 (ADREFM = 1), target for conversion: ANI2 to ANI6

(TA = -40 to +85 °C, 2.7 V ≤ AV_{REFP} ≤ AV_{DD} = V_{DD} ≤ 3.6 V, V_{SS} = 0 V, AV_{SS} = 0 V, reference voltage (+) = AV_{REFP}, reference voltage (-) = AV_{REFM} = 0 V, HALT mode)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|--|-------------------|------------------------------|-------|------|--------------------|------|
| Resolution | RES | | | | 12 | bit |
| Overall error Notes 1, 2, 3 | AINL | 12-bit resolution | | ±1.7 | ±3.3 | LSB |
| Conversion time | t _{CONV} | ADTYP = 0, 12-bit resolution | 3.375 | | | μs |
| Zero-scale error Notes 1, 2, 3 | E _{ZS} | 12-bit resolution | | ±1.3 | ±3.2 | LSB |
| Full-scale error Notes 1, 2, 3 | E _{FS} | 12-bit resolution | | ±0.7 | ±2.9 | LSB |
| Integral linearity error Notes 1, 2, 3 | ILE | 12-bit resolution | | ±1.0 | ±1.4 | LSB |
| Differential linearity error Notes 1, 2, 3 | DLE | 12-bit resolution | | ±0.9 | ±1.2 | LSB |
| Analog input voltage | V _{AIN} | | 0 | | AV _{REFP} | V |

Note 1. TYP. Value is the average value at AV_{DD} = AV_{REFP} = 3 V and TA = 25 °C. MAX. value is the average value ±3σ at normalized distribution.

Note 2. These values are the results of characteristic evaluation and are not checked for shipment.

Note 3. Excludes quantization error (±1/2 LSB).

Caution 1. Route the wiring so that noise will not be superimposed on each power line and ground line, and insert a capacitor to suppress noise.

In addition, separate the reference voltage line of AV_{REFP} from the other power lines to keep it free from the influences of noise.

Caution 2. During A/D conversion, keep a pulse, such as a digital signal, that abruptly changes its level from being input to or output from the pins adjacent to the converter pins and P150 to P156.

(2) When reference voltage (+) = $AV_{REFP}/ANI0$ ($ADREFP1 = 0$, $ADREFP0 = 1$), reference voltage (-) = $AV_{REFM}/ANI1$ ($ADREFM = 1$), conversion target: $ANI2$ to $ANI6$

(TA = -40 to +85 °C, $1.6\text{ V} \leq AV_{REFP} \leq AV_{DD} = V_{DD} \leq 3.6\text{ V}$, $V_{SS} = 0\text{ V}$, $AV_{SS} = 0\text{ V}$, Reference voltage (+) = AV_{REFP} , Reference voltage (-) = $AV_{REFM} = 0\text{ V}$)

| Parameter | Symbol | Conditions | | MIN. | TYP. | MAX. | Unit |
|-------------------------------------|--|--|--|----------|------|-------------|---------------|
| Resolution | RES | | $2.4\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | 8 | | 12 | bit |
| | | | $1.8\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | 8 | | 10 Note 1 | |
| | | | $1.6\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | 8 Note 2 | | | |
| Overall error Note 3 | AINL | 12-bit resolution | $2.4\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | | | ± 6.0 | LSB |
| | | 10-bit resolution | $1.8\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | | | ± 5.0 | |
| | | 8-bit resolution | $1.6\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | | | ± 2.5 | |
| Conversion time | tCONV | ADTYP = 0, 12-bit resolution | $2.4\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | 3.375 | | | μs |
| | | ADTYP = 0, 10-bit resolution Note 1 | $1.8\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | 6.75 | | | |
| | | ADTYP = 0, 8-bit resolution Note 2 | $1.6\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | 13.5 | | | |
| | | ADTYP = 1, 8-bit resolution | $2.4\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | 2.5625 | | | |
| | | | $1.8\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | 5.125 | | | |
| | $1.6\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | 10.25 | | | | | |
| Zero-scale error Note 3 | Ezs | 12-bit resolution | $2.4\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | | | ± 4.5 | LSB |
| | | 10-bit resolution | $1.8\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | | | ± 4.5 | |
| | | 8-bit resolution | $1.6\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | | | ± 2.0 | |
| Full-scale error Note 3 | Efs | 12-bit resolution | $2.4\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | | | ± 4.5 | LSB |
| | | 10-bit resolution | $1.8\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | | | ± 4.5 | |
| | | 8-bit resolution | $1.6\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | | | ± 2.0 | |
| Integral linearity error Note 3 | ILE | 12-bit resolution | $2.4\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | | | ± 2.0 | LSB |
| | | 10-bit resolution | $1.8\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | | | ± 1.5 | |
| | | 8-bit resolution | $1.6\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | | | ± 1.0 | |
| Differential linearity error Note 3 | DLE | 12-bit resolution | $2.4\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | | | ± 1.5 | LSB |
| | | 10-bit resolution | $1.8\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | | | ± 1.5 | |
| | | 8-bit resolution | $1.6\text{ V} \leq AV_{REFP} \leq AV_{DD} \leq 3.6\text{ V}$ | | | ± 1.0 | |
| Analog input voltage | VAIN | | | 0 | | AV_{REFP} | V |

Note 1. Cannot be used for lower 2 bit of ADCR register

Note 2. Cannot be used for lower 4 bit of ADCR register

Note 3. Excludes quantization error ($\pm 1/2$ LSB).

Caution Always use AV_{DD} pin with the same potential as the V_{DD} pin.

(3) When reference voltage (+) = AVDD (ADREFP1 = 0, ADREFP0 = 0), reference voltage (-) = AVSS (ADREFM = 0), conversion target: ANI0 to ANI6

(TA = -40 to +85 °C, 1.6 V ≤ AVDD = VDD ≤ 3.6 V, VSS = 0 V, AVSS = 0 V, Reference voltage (+) = AVDD, Reference voltage (-) = AVSS = 0 V)

| Parameter | Symbol | Conditions | | MIN. | TYP. | MAX. | Unit |
|-------------------------------------|----------------------|--|----------------------|----------|------|-----------|------|
| Resolution | RES | | 2.4 V ≤ AVDD ≤ 3.6 V | 8 | | 12 | bit |
| | | | 1.8 V ≤ AVDD ≤ 3.6 V | 8 | | 10 Note 1 | |
| | | | 1.6 V ≤ AVDD ≤ 3.6 V | 8 Note 2 | | | |
| Overall error Note 3 | AINL | 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | | | ±7.5 | LSB |
| | | 10-bit resolution | 1.8 V ≤ AVDD ≤ 3.6 V | | | ±5.5 | |
| | | 8-bit resolution | 1.6 V ≤ AVDD ≤ 3.6 V | | | ±3.0 | |
| Conversion time | tCONV | ADTYP = 0, 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | 3.375 | | | μs |
| | | ADTYP = 0, 10-bit resolution Note 1 | 1.8 V ≤ AVDD ≤ 3.6 V | 6.75 | | | |
| | | ADTYP = 0, 8-bit resolution Note 2 | 1.6 V ≤ AVDD ≤ 3.6 V | 13.5 | | | |
| | | ADTYP = 1, 8-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | 2.5625 | | | |
| | | | 1.8 V ≤ AVDD ≤ 3.6 V | 5.125 | | | |
| | 1.6 V ≤ AVDD ≤ 3.6 V | 10.25 | | | | | |
| Zero-scale error Note 3 | Ezs | 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | | | ±6.0 | LSB |
| | | 10-bit resolution | 1.8 V ≤ AVDD ≤ 3.6 V | | | ±5.0 | |
| | | 8-bit resolution | 1.6 V ≤ AVDD ≤ 3.6 V | | | ±2.5 | |
| Full-scale error Note 3 | EFS | 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | | | ±6.0 | LSB |
| | | 10-bit resolution | 1.8 V ≤ AVDD ≤ 3.6 V | | | ±5.0 | |
| | | 8-bit resolution | 1.6 V ≤ AVDD ≤ 3.6 V | | | ±2.5 | |
| Integral linearity error Note 3 | ILE | 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | | | ±3.0 | LSB |
| | | 10-bit resolution | 1.8 V ≤ AVDD ≤ 3.6 V | | | ±2.0 | |
| | | 8-bit resolution | 1.6 V ≤ AVDD ≤ 3.6 V | | | ±1.5 | |
| Differential linearity error Note 3 | DLE | 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | | | ±2.0 | LSB |
| | | 10-bit resolution | 1.8 V ≤ AVDD ≤ 3.6 V | | | ±2.0 | |
| | | 8-bit resolution | 1.6 V ≤ AVDD ≤ 3.6 V | | | ±1.5 | |
| Analog input voltage | VAIN | ANI0 to ANI6 | | 0 | | AVDD | V |

Note 1. Cannot be used for lower 2 bit of ADCR register

Note 2. Cannot be used for lower 4 bit of ADCR register

Note 3. Excludes quantization error (±1/2 LSB).

Caution Always use AVDD pin with the same potential as the VDD pin.

- (4) When reference voltage (+) = AVREFF/ANI0 (ADREFF1 = 0, ADREFF0 = 1), reference voltage (-) = AVREFM/ANI1 (ADREFM = 1), conversion target: ANI16 to ANI21, internal reference voltage, temperature sensor output voltage

(TA = -40 to +85 °C, 1.6 V ≤ VDD ≤ 3.6 V, 1.6 V ≤ AVREFF ≤ AVDD = VDD ≤ 3.6 V, VSS = 0 V, AVSS = 0 V,

Reference voltage (+) = AVREFF, Reference voltage (-) = AVREFM = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|-------------------------------------|--------|---|-------------------------------|--------|-----------|------|
| Resolution | RES | 2.4 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | 8 | | 12 | bit |
| | | 1.8 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | 8 | | 10 Note 1 | |
| | | 1.6 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | 8 Note 2 | | | |
| Overall error Note 3 | AINL | 12-bit resolution | 2.4 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | | ±7.0 | LSB |
| | | 10-bit resolution | 1.8 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | | ±5.5 | |
| | | 8-bit resolution | 1.6 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | | ±3.0 | |
| Conversion time | tCONV | ADTYP = 0, 12-bit resolution | 2.4 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | 4.125 | | μs |
| | | ADTYP = 0, 10-bit resolution Note 1 | 1.8 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | 9.5 | | |
| | | ADTYP = 0, 8-bit resolution Note 2 | 1.6 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | 57.5 | | |
| | | ADTYP = 1, 8-bit resolution | 2.4 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | 3.3125 | | |
| | | | 1.8 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | 7.875 | | |
| Zero-scale error Note 3 | Ezs | 12-bit resolution | 2.4 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | | ±5.0 | LSB |
| | | 10-bit resolution | 1.8 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | | ±5.0 | |
| | | 8-bit resolution | 1.6 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | | ±2.5 | |
| Full-scale error Note 3 | Efs | 12-bit resolution | 2.4 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | | ±5.0 | LSB |
| | | 10-bit resolution | 1.8 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | | ±5.0 | |
| | | 8-bit resolution | 1.6 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | | ±2.5 | |
| Integral linearity error Note 3 | ILE | 12-bit resolution | 2.4 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | | ±3.0 | LSB |
| | | 10-bit resolution | 1.8 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | | ±2.0 | |
| | | 8-bit resolution | 1.6 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | | ±1.5 | |
| Differential linearity error Note 3 | DLE | 12-bit resolution | 2.4 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | | ±2.0 | LSB |
| | | 10-bit resolution | 1.8 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | | ±2.0 | |
| | | 8-bit resolution | 1.6 V ≤ AVREFF ≤ AVDD ≤ 3.6 V | | ±1.5 | |
| Analog input voltage | VAIN | | 0 | | AVREFF | V |
| | | Internal reference voltage (2.4 V ≤ VDD ≤ 3.6 V, HS (high-speed main) mode) | VBGR Note 4 | | | |
| | | Temperature sensor output voltage (2.4 V ≤ VDD ≤ 3.6 V, HS (high-speed main) mode) | VTMP25 Note 4 | | | |

Note 1. Cannot be used for lower 2 bits of ADCR register

Note 2. Cannot be used for lower 4 bits of ADCR register

Note 3. Excludes quantization error (±1/2 LSB).

Note 4. Refer to 2.6.2 Temperature sensor, internal reference voltage output characteristics.

Caution Always use AVDD pin with the same potential as the VDD pin.

(5) When reference voltage (+) = AVDD (ADREFP1 = 0, ADREFP0 = 0), reference voltage (-) = AVSS (ADREFM = 0), conversion target: ANI16 to ANI21, internal reference voltage, temperature sensor output voltage

(TA = -40 to +85 °C, 1.6 V ≤ VDD ≤ 3.6 V, 1.6 V ≤ AVDD = VDD ≤ 3.6 V, VSS = 0 V, AVSS = 0 V, Reference voltage (+) = AVDD, Reference voltage (-) = AVSS = 0 V)

| Parameter | Symbol | Conditions | | MIN. | TYP. | MAX. | Unit |
|-------------------------------------|----------------------|---|----------------------|---------------|------|-----------|------|
| Resolution | RES | | 2.4 V ≤ AVDD ≤ 3.6 V | 8 | | 12 | bit |
| | | | 1.8 V ≤ AVDD ≤ 3.6 V | 8 | | 10 Note 1 | |
| | | | 1.6 V ≤ AVDD ≤ 3.6 V | 8 Note 2 | | | |
| Overall error Note 3 | AINL | 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | | | ±8.5 | LSB |
| | | 10-bit resolution | 1.8 V ≤ AVDD ≤ 3.6 V | | | ±6.0 | |
| | | 8-bit resolution | 1.6 V ≤ AVDD ≤ 3.6 V | | | ±3.5 | |
| Conversion time | tCONV | ADTYP = 0, 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | 4.125 | | | μs |
| | | ADTYP = 0, 10-bit resolution Note 1 | 1.8 V ≤ AVDD ≤ 3.6 V | 9.5 | | | |
| | | ADTYP = 0, 8-bit resolution Note 2 | 1.6 V ≤ AVDD ≤ 3.6 V | 57.5 | | | |
| | | ADTYP = 1, 8-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | 3.3125 | | | |
| | | | 1.8 V ≤ AVDD ≤ 3.6 V | 7.875 | | | |
| | 1.6 V ≤ AVDD ≤ 3.6 V | 54.25 | | | | | |
| Zero-scale error Note 3 | Ezs | 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | | | ±8.0 | LSB |
| | | 10-bit resolution | 1.8 V ≤ AVDD ≤ 3.6 V | | | ±5.5 | |
| | | 8-bit resolution | 1.6 V ≤ AVDD ≤ 3.6 V | | | ±3.0 | |
| Full-scale error Note 3 | EFS | 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | | | ±8.0 | LSB |
| | | 10-bit resolution | 1.8 V ≤ AVDD ≤ 3.6 V | | | ±5.5 | |
| | | 8-bit resolution | 1.6 V ≤ AVDD ≤ 3.6 V | | | ±3.0 | |
| Integral linearity error Note 3 | ILE | 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | | | ±3.5 | LSB |
| | | 10-bit resolution | 1.8 V ≤ AVDD ≤ 3.6 V | | | ±2.5 | |
| | | 8-bit resolution | 1.6 V ≤ AVDD ≤ 3.6 V | | | ±1.5 | |
| Differential linearity error Note 3 | DLE | 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | | | ±2.5 | LSB |
| | | 10-bit resolution | 1.8 V ≤ AVDD ≤ 3.6 V | | | ±2.5 | |
| | | 8-bit resolution | 1.6 V ≤ AVDD ≤ 3.6 V | | | ±2.0 | |
| Analog input voltage | VAIN | | | 0 | | AVDD | V |
| | | Internal reference voltage (2.4 V ≤ VDD ≤ 3.6 V, HS (high-speed main) mode) | | VBGR Note 4 | | | |
| | | Temperature sensor output voltage (2.4 V ≤ VDD ≤ 3.6 V, HS (high-speed main) mode) | | VTMP25 Note 4 | | | |

Note 1. Cannot be used for lower 2 bits of ADCR register

Note 2. Cannot be used for lower 4 bits of ADCR register

Note 3. Excludes quantization error (±1/2 LSB).

Note 4. Refer to 2.6.2 Temperature sensor, internal reference voltage output characteristics.

Caution Always use AVDD pin with the same potential as the VDD pin.

(6) When reference voltage (+) = Internal reference voltage (1.45 V) (ADREFP1 = 1, ADREFP0 = 0), reference voltage (-) = AVss (ADREFM = 0), conversion target: ANI0 to ANI6, ANI16 to ANI21

(TA = -40 to +85 °C, 2.4 V ≤ VDD ≤ 3.6 V, 1.6 V ≤ VDD, 1.6 V ≤ AVDD = VDD, VSS = 0 V, AVSS = 0 V, Reference voltage (+) = internal reference voltage, Reference voltage (-) = AVSS = 0 V, HS (high-speed main) mode)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|-----------------------------------|----------|-------------------------------------|------|------|------|------|
| Resolution | RES | | 8 | | | bit |
| Conversion time | tCONV | 8-bit resolution | 16 | | | μs |
| Zero-scale error Note | EZS | 8-bit resolution | | | ±4.0 | LSB |
| Integral linearity error Note | ILE | 8-bit resolution | | | ±2.0 | LSB |
| Differential linearity error Note | DLE | 8-bit resolution | | | ±2.5 | LSB |
| Reference voltage (+) | AVREF(+) | = Internal reference voltage (VBGR) | 1.38 | 1.45 | 1.5 | V |
| Analog input voltage | VAIN | | 0 | | VBGR | V |

Note Excludes quantization error (±1/2 LSB).

Caution Always use AVDD pin with the same potential as the VDD pin.

2.6.2 Temperature sensor, internal reference voltage output characteristics

(TA = -40 to +85 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V (HS (high-speed main) mode))

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|-----------------------------------|---------|---|------|------|------|-------|
| Temperature sensor output voltage | VTMPS25 | Setting ADS register = 80H, TA = +25°C | | 1.05 | | V |
| Internal reference voltage | VBGR | Setting ADS register = 81H | 1.38 | 1.45 | 1.5 | V |
| Temperature coefficient | FVTMPS | Temperature sensor output voltage that depends on the temperature | | -3.6 | | mV/°C |
| Operation stabilization wait time | tAMP | | 10 | | | μs |

2.6.3 D/A converter characteristics

(TA = -40 to +85 °C, 1.6 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|---------------|--------|---------------|---------------------|------|------|------|
| Resolution | RES | | | | 8 | bit |
| Overall error | AINL | Rload = 4 MΩ | 1.8 V ≤ VDD ≤ 3.6 V | | ±2.5 | LSB |
| | | Rload = 8 MΩ | 1.8 V ≤ VDD ≤ 3.6 V | | ±2.5 | LSB |
| Settling time | tSET | Cload = 20 pF | 2.7 V ≤ VDD ≤ 3.6 V | | 3 | μs |
| | | | 1.6 V ≤ VDD < 2.7 V | | 6 | μs |

2.6.4 Comparator

(TA = -40 to +85 °C, 1.6 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|--|--------|---|--|----------|-----------|------|
| Input voltage range | Ivref | | 0 | | VDD - 1.4 | V |
| | Ivcmp | | -0.3 | | VDD + 0.3 | V |
| Output delay | td | VDD = 3.0 V Input slew rate > 50 mV/μs | High-speed comparator mode, standard mode | | 1.2 | μs |
| | | | High-speed comparator mode, window mode | | 2.0 | μs |
| | | | Low-speed comparator mode, standard mode | 3 | 5.0 | μs |
| High-electric-potential judgment voltage | VTW+ | High-speed comparator mode, window mode | | 0.76 VDD | | V |
| Low-electric-potential judgment voltage | VTW- | High-speed comparator mode, window mode | | 0.24 VDD | | V |
| Operation stabilization wait time | tcMP | | 100 | | | μs |
| Internal reference voltage <small>Note</small> | VBGR | | 1.38 | 1.45 | 1.50 | V |


Note Not usable in LS (low-speed main) mode, LV (low-voltage main) mode, sub-clock operation, or STOP mode.

2.6.5 POR circuit characteristics

(TA = -40 to +85 °C, VSS = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|---------------------|--------|--|------|------|------|------|
| Detection voltage | VPOR | Power supply rise time | 1.47 | 1.51 | 1.55 | V |
| | VPDR | Power supply fall time <small>Note</small> | 1.46 | 1.50 | 1.54 | V |
| Minimum pulse width | TPW | | 300 | | | μs |

Note Minimum time required for a POR reset when VDD exceeds below VPDR. This is also the minimum time required for a POR reset from when VDD exceeds below 0.7 V to when VDD exceeds VPOR while STOP mode is entered or the main system clock is stopped through setting bit 0 (HIOSTOP) and bit 7 (MSTOP) in the clock operation status control register (CSC).

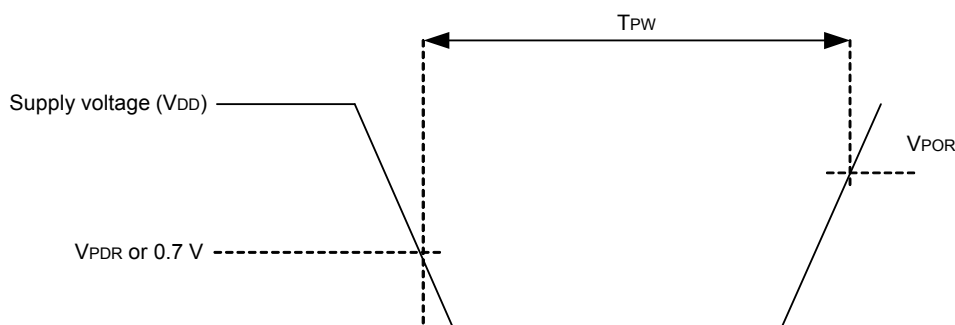

2.6.6 LVD circuit characteristics

(TA = -40 to +85 °C, VPDR ≤ VDD ≤ 3.6 V ≤ VSS = 0 V)

| Parameter | | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|----------------------|----------------------|--------|------------------------|------|------|------|------|
| Detection voltage | Supply voltage level | VLVD2 | Power supply rise time | 3.07 | 3.13 | 3.19 | V |
| | | | Power supply fall time | 3.00 | 3.06 | 3.12 | V |
| | | VLVD3 | Power supply rise time | 2.96 | 3.02 | 3.08 | V |
| | | | Power supply fall time | 2.90 | 2.96 | 3.02 | V |
| | | VLVD4 | Power supply rise time | 2.86 | 2.92 | 2.97 | V |
| | | | Power supply fall time | 2.80 | 2.86 | 2.91 | V |
| | | VLVD5 | Power supply rise time | 2.76 | 2.81 | 2.87 | V |
| | | | Power supply fall time | 2.70 | 2.75 | 2.81 | V |
| | | VLVD6 | Power supply rise time | 2.66 | 2.71 | 2.76 | V |
| | | | Power supply fall time | 2.60 | 2.65 | 2.70 | V |
| | | VLVD7 | Power supply rise time | 2.56 | 2.61 | 2.66 | V |
| | | | Power supply fall time | 2.50 | 2.55 | 2.60 | V |
| | | VLVD8 | Power supply rise time | 2.45 | 2.50 | 2.55 | V |
| | | | Power supply fall time | 2.40 | 2.45 | 2.50 | V |
| | | VLVD9 | Power supply rise time | 2.05 | 2.09 | 2.13 | V |
| | | | Power supply fall time | 2.00 | 2.04 | 2.08 | V |
| | | VLVD10 | Power supply rise time | 1.94 | 1.98 | 2.02 | V |
| | | | Power supply fall time | 1.90 | 1.94 | 1.98 | V |
| | | VLVD11 | Power supply rise time | 1.84 | 1.88 | 1.91 | V |
| | | | Power supply fall time | 1.80 | 1.84 | 1.87 | V |
| | | VLVD12 | Power supply rise time | 1.74 | 1.77 | 1.81 | V |
| | | | Power supply fall time | 1.70 | 1.73 | 1.77 | V |
| | | VLVD13 | Power supply rise time | 1.64 | 1.67 | 1.70 | V |
| | | | Power supply fall time | 1.60 | 1.63 | 1.66 | V |
| Minimum pulse width | | tLW | | 300 | | | μs |
| Detection delay time | | | | | | 300 | μs |

Caution Set the detection voltage (VLVD) to be within the operating voltage range. The operating voltage range depends on the setting of the user option byte (00C2H/010C2H). The following shows the operating voltage range.

HS (high-speed main) mode: VDD = 2.7 to 3.6 V at 1 MHz to 24 MHz

VDD = 2.4 to 3.6 V at 1 MHz to 16 MHz

LS (low-speed main) mode: VDD = 1.8 to 3.6 V at 1 MHz to 8 MHz

LV (low-voltage main) mode: VDD = 1.6 to 3.6 V at 1 MHz to 4 MHz

LVD Detection Voltage of Interrupt & Reset Mode

(TA = -40 to +85 °C, VPDR ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit | |
|--------------------------|---|---|------------------------------|------|------|------|---|
| Interrupt and reset mode | VLVDA0 | VPOC0, VPOC1, VPOC2 = 0, 0, 0, falling reset voltage: 1.6 V | 1.60 | 1.63 | 1.66 | V | |
| | VLVDA1 | LVIS0, LVIS1 = 1, 0 | Rising release reset voltage | 1.74 | 1.77 | 1.81 | V |
| | | | Falling interrupt voltage | 1.70 | 1.73 | 1.77 | V |
| | VLVDA2 | LVIS0, LVIS1 = 0, 1 | Rising release reset voltage | 1.84 | 1.88 | 1.91 | V |
| | | | Falling interrupt voltage | 1.80 | 1.84 | 1.87 | V |
| | VLVDA3 | LVIS0, LVIS1 = 0, 0 | Rising release reset voltage | 2.86 | 2.92 | 2.97 | V |
| | | | Falling interrupt voltage | 2.80 | 2.86 | 2.91 | V |
| | VLVDB0 | VPOC0, VPOC1, VPOC2 = 0, 0, 1, falling reset voltage: 1.8 V | 1.80 | 1.84 | 1.87 | V | |
| | VLVDB1 | LVIS0, LVIS1 = 1, 0 | Rising release reset voltage | 1.94 | 1.98 | 2.02 | V |
| | | | Falling interrupt voltage | 1.90 | 1.94 | 1.98 | V |
| | VLVDB2 | LVIS0, LVIS1 = 0, 1 | Rising release reset voltage | 2.05 | 2.09 | 2.13 | V |
| | | | Falling interrupt voltage | 2.00 | 2.04 | 2.08 | V |
| VLVDB3 | LVIS0, LVIS1 = 0, 0 | Rising release reset voltage | 3.07 | 3.13 | 3.19 | V | |
| | | Falling interrupt voltage | 3.00 | 3.06 | 3.12 | V | |
| VLVDC0 | VPOC0, VPOC1, VPOC2 = 0, 1, 0, falling reset voltage: 2.4 V | 2.40 | 2.45 | 2.50 | V | | |
| VLVDC1 | LVIS0, LVIS1 = 1, 0 | Rising release reset voltage | 2.56 | 2.61 | 2.66 | V | |
| | | Falling interrupt voltage | 2.50 | 2.55 | 2.60 | V | |
| VLVDC2 | LVIS0, LVIS1 = 0, 1 | Rising release reset voltage | 2.66 | 2.71 | 2.76 | V | |
| | | Falling interrupt voltage | 2.60 | 2.65 | 2.70 | V | |
| VLVDD0 | VPOC0, VPOC1, VPOC2 = 0, 1, 1, falling reset voltage: 2.7 V | 2.70 | 2.75 | 2.81 | V | | |
| VLVDD1 | LVIS0, LVIS1 = 1, 0 | Rising release reset voltage | 2.86 | 2.92 | 2.97 | V | |
| | | Falling interrupt voltage | 2.80 | 2.86 | 2.91 | V | |
| VLVDD2 | LVIS0, LVIS1 = 0, 1 | Rising release reset voltage | 2.96 | 3.02 | 3.08 | V | |
| | | Falling interrupt voltage | 2.90 | 2.96 | 3.02 | V | |

2.7 Power supply voltage rising slope characteristics

(TA = -40 to +85 °C, VSS = 0 V)

| Parameter | Conditions | MIN. | TYP. | MAX. | Unit |
|-----------------------------------|------------|------|------|------|------|
| Power supply voltage rising slope | SVDD | | | 54 | V/ms |

Caution Make sure to keep the internal reset state by the LVD circuit or an external reset until VDD reaches the operating voltage range shown in 2.4 AC Characteristics.

2.8 LCD Characteristics

2.8.1 Resistance division method

(1) Static display mode

(TA = -40 to +85 °C, VL4 (MIN.) ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|-------------------|--------|------------|------|------|------|------|
| LCD drive voltage | VL4 | | 2.0 | | VDD | V |

(2) 1/2 bias method, 1/4 bias method

(TA = -40 to +85 °C, VL4 (MIN.) ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|-------------------|--------|------------|------|------|------|------|
| LCD drive voltage | VL4 | | 2.7 | | VDD | V |

(3) 1/3 bias method

(TA = -40 to +85 °C, VL4 (MIN.) ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|-------------------|--------|------------|------|------|------|------|
| LCD drive voltage | VL4 | | 2.5 | | VDD | V |

2.8.2 Internal voltage boosting method

(1) 1/3 bias method

(TA = -40 to +85 °C, 1.8 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit | |
|--|--------------------|---|--------------|-------|-------|------|---|
| LCD output voltage variation range | VL1 | C1 to C4 ^{Note 1} = 0.47 μF ^{Note 2} | VLCD = 04H | 0.90 | 1.00 | 1.08 | V |
| | | | VLCD = 05H | 0.95 | 1.05 | 1.13 | V |
| | | | VLCD = 06H | 1.00 | 1.10 | 1.18 | V |
| | | | VLCD = 07H | 1.05 | 1.15 | 1.23 | V |
| | | | VLCD = 08H | 1.10 | 1.20 | 1.28 | V |
| | | | VLCD = 09H | 1.15 | 1.25 | 1.33 | V |
| | | | VLCD = 0AH | 1.20 | 1.30 | 1.38 | V |
| | | | VLCD = 0BH | 1.25 | 1.35 | 1.43 | V |
| | | | VLCD = 0CH | 1.30 | 1.40 | 1.48 | V |
| | | | VLCD = 0DH | 1.35 | 1.45 | 1.53 | V |
| | | | VLCD = 0EH | 1.40 | 1.50 | 1.58 | V |
| | | | VLCD = 0FH | 1.45 | 1.55 | 1.63 | V |
| | | | VLCD = 10H | 1.50 | 1.60 | 1.68 | V |
| | | | VLCD = 11H | 1.55 | 1.65 | 1.73 | V |
| VLCD = 12H | 1.60 | 1.70 | 1.78 | V | | | |
| VLCD = 13H | 1.65 | 1.75 | 1.83 | V | | | |
| Doubler output voltage | VL2 | C1 to C4 ^{Note 1} = 0.47 μF | 2 VL1 - 0.1 | 2 VL1 | 2 VL1 | V | |
| Tripler output voltage | VL3 | C1 to C4 ^{Note 1} = 0.47 μF | 3 VL1 - 0.15 | 3 VL1 | 3 VL1 | V | |
| Reference voltage setup time ^{Note 2} | t _{WAIT1} | | 5 | | | ms | |
| Voltage boost wait time ^{Note 3} | t _{WAIT2} | C1 to C4 ^{Note 1} = 0.47 μF | 500 | | | ms | |

Note 1. This is a capacitor that is connected between voltage pins used to drive the LCD.

C1: A capacitor connected between CAPH and CAPL

C2: A capacitor connected between VL1 and GND

C3: A capacitor connected between VL2 and GND

C4: A capacitor connected between VL3 and GND

C1 = C2 = C3 = C4 = 0.47 μF ± 30%

Note 2. This is the time required to wait from when the reference voltage is specified by using the VLCD register (or when the internal voltage boosting method is selected (by setting the MDSET1 and MDSET0 bits of the LCDM0 register to 01B) if the default value reference voltage is used) until voltage boosting starts (VLCON = 1).

Note 3. This is the wait time from when voltage boosting is started (VLCON = 1) until display is enabled (LCDON = 1).

(2) 1/4 bias method**(TA = -40 to +85 °C, 1.8 V ≤ VDD ≤ 3.6 V, VSS = 0 V)**

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit | |
|--|---------|---|--------------|-------|-------|------|---|
| LCD output voltage variation range | VL1 | C1 to C4 ^{Note 1} = 0.47 μF ^{Note 2} | VLCD = 04H | 0.90 | 1.00 | 1.08 | V |
| | | | VLCD = 05H | 0.95 | 1.05 | 1.13 | V |
| | | | VLCD = 06H | 1.00 | 1.10 | 1.18 | V |
| | | | VLCD = 07H | 1.05 | 1.15 | 1.23 | V |
| | | | VLCD = 08H | 1.10 | 1.20 | 1.28 | V |
| | | | VLCD = 09H | 1.15 | 1.25 | 1.33 | V |
| | | | VLCD = 0AH | 1.20 | 1.30 | 1.38 | V |
| Doubler output voltage | VL2 | C1 to C4 ^{Note 1} = 0.47 μF | 2 VL1 - 0.08 | 2 VL1 | 2 VL1 | V | |
| Tripler output voltage | VL3 | C1 to C4 ^{Note 1} = 0.47 μF | 3 VL1 - 0.12 | 3 VL1 | 3 VL1 | V | |
| Quadruply output voltage | VL4 | C1 to C5 ^{Note 1} = 0.47 μF | 4 VL1 - 0.16 | 4 VL1 | 4 VL1 | V | |
| Reference voltage setup time ^{Note 2} | tVWAIT1 | | 5 | | | ms | |
| Voltage boost wait time ^{Note 3} | tVWAIT2 | C1 to C5 ^{Note 1} = 0.47 μF | 500 | | | ms | |

Note 1. This is a capacitor that is connected between voltage pins used to drive the LCD.

C1: A capacitor connected between CAPH and CAPL

C2: A capacitor connected between VL1 and GND

C3: A capacitor connected between VL2 and GND

C4: A capacitor connected between VL3 and GND

C5: A capacitor connected between VL4 and GND

C1 = C2 = C3 = C4 = 0.47 μF ± 30%

Note 2. This is the time required to wait from when the reference voltage is specified by using the VLCD register (or when the internal voltage boosting method is selected (by setting the MDSET1 and MDSET0 bits of the LCDM0 register to 01B) if the default value reference voltage is used) until voltage boosting starts (VLCON = 1).

Note 3. This is the wait time from when voltage boosting is started (VLCON = 1) until display is enabled (LCDON = 1).

2.8.3 Capacitor split method

(1) 1/3 bias method

(TA = -40 to +85 °C, 2.2 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|----------------------------------|-------------------|---------------------------|---------------------------|---------------------|---------------------------|------|
| V _{L4} voltage | V _{L4} | C1 to C4 = 0.47 μF Note 2 | | V _{DD} | | V |
| V _{L2} voltage | V _{L2} | C1 to C4 = 0.47 μF Note 2 | 2/3 V _{L4} - 0.1 | 2/3 V _{L4} | 2/3 V _{L4} + 0.1 | V |
| V _{L1} voltage | V _{L1} | C1 to C4 = 0.47 μF Note 2 | 1/3 V _{L4} - 0.1 | 1/3 V _{L4} | 1/3 V _{L4} + 0.1 | V |
| Capacitor split wait time Note 1 | t _{WAIT} | | 100 | | | ms |

Note 1. This is the wait time from when voltage bucking is started (VLCON = 1) until display is enabled (LCDON = 1).

Note 2. This is a capacitor that is connected between voltage pins used to drive the LCD.

C1: A capacitor connected between CAPH and CAPL

C2: A capacitor connected between V_{L1} and GND

C3: A capacitor connected between V_{L2} and GND

C4: A capacitor connected between V_{L4} and GND


C1 = C2 = C3 = C4 = 0.47 μF±30%

2.9 Data Memory STOP Mode Low Supply Voltage Data Retention Characteristics

(TA = -40 to +85 °C, Vss = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|-------------------------------|--------|------------|-----------|------|------|------|
| Data retention supply voltage | VDDDR | | 1.46 Note | | 3.6 | V |

Note The value depends on the POR detection voltage. When the voltage drops, the data is retained before a POR reset is effected, but data is not retained when a POR reset is effected.

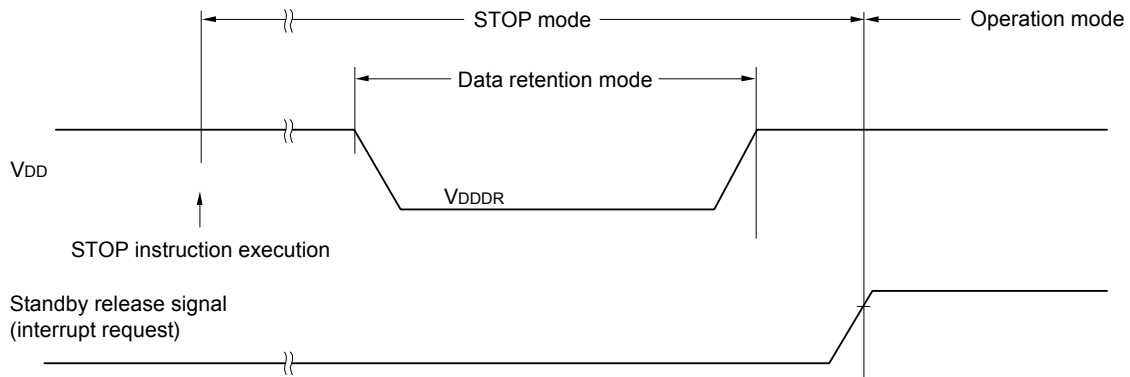

2.10 Flash Memory Programming Characteristics

(TA = -40 to +85 °C, 1.8 V ≤ VDD ≤ 3.6 V, Vss = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|--|--------|------------------------------------|---------|-----------|------|-------|
| CPU/peripheral hardware clock frequency | fCLK | 2.4 V ≤ VDD ≤ 3.6 V | 1 | | 24 | MHz |
| Number of code flash rewrites Notes 1, 2, 3 | Cenwr | Retained for 20 years TA = 85°C | 1,000 | | | Times |
| Number of data flash rewrites Notes 1, 2, 3 | | Retained for 1 year TA = 25°C | | 1,000,000 | | |
| | | Retained for 5 years TA = 85°C | 100,000 | | | |
| | | Retained for 20 years TA = 85°C | 10,000 | | | |

- Note 1.** 1 erase + 1 write after the erase is regarded as 1 rewrite. The retaining years are until next rewrite after the rewrite.
- Note 2.** When using flash memory programmer and Renesas Electronics self programming library
- Note 3.** These are the characteristics of the flash memory and the results obtained from reliability testing by Renesas Electronics Corporation.

2.11 Dedicated Flash Memory Programmer Communication (UART)


(TA = -40 to +85 °C, 1.8 V ≤ VDD ≤ 3.6 V, Vss = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|---------------|--------|---------------------------|---------|------|-----------|------|
| Transfer rate | | During serial programming | 115,200 | | 1,000,000 | bps |

2.12 Timing Specs for Switching Modes

(TA = -40 to +85 °C, 1.8 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|---|---------|--|------|------|------|------|
| How long from when an external reset ends until the initial communication settings are specified | tsuINIT | POR and LVD reset must end before the external reset ends. | | | 100 | ms |
| How long from when the TOOL0 pin is placed at the low level until an external reset ends | tsu | POR and LVD reset must end before the external reset ends. | 10 | | | μs |
| Time to hold the TOOL0 pin at the low level after an external reset is released (excluding the processing time of the firmware to control the flash memory) | tHD | POR and LVD reset must end before the external reset ends. | 1 | | | ms |

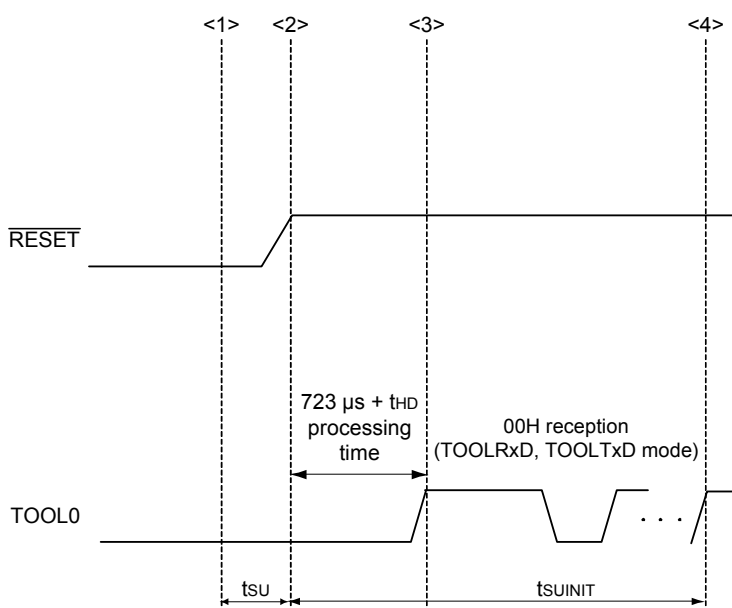

- <1> The low level is input to the TOOL0 pin.
- <2> The external reset ends (POR and LVD reset must end before the external reset ends.).
- <3> The TOOL0 pin is set to the high level.
- <4> Setting of the flash memory programming mode by UART reception and complete the baud rate setting.

Remark tsuINIT: The segment shows that it is necessary to finish specifying the initial communication settings within 100 ms from when the resets end.
 tsu: How long from when the TOOL0 pin is placed at the low level until a external reset ends
 tHD: How long to keep the TOOL0 pin at the low level from when the external and internal resets end (except soft processing time)

3. ELECTRICAL SPECIFICATIONS (G: TA = -40 to +105 °C)

This chapter describes the electrical specifications for the products “G: Industrial applications (TA = -40 to +105 °C)”.

Caution 1. The RL78 microcontroller has an on-chip debug function, which is provided for development and evaluation. Do not use the on-chip debug function in products designated for mass production, because the guaranteed number of rewritable times of the flash memory may be exceeded when this function is used, and product reliability therefore cannot be guaranteed. Renesas Electronics is not liable for problems occurring when the on-chip debug function is used.

Caution 2. The pins mounted depend on the product. Refer to 1.3.1 80-pin products (with USB) to 1.3.4 100-pin products (without USB).

Caution 3. Please contact Renesas Electronics sales office for derating of operation under TA = +85 °C to +105 °C. Derating is the systematic reduction of load for the sake of improved reliability.

Remark When the RL78 microcontroller is used in the range of TA = -40 to +85 °C, see 2. ELECTRICAL SPECIFICATIONS (A: TA = -40 to +85 °C).

The following functions differ between the products “G: Industrial applications (TA = -40 to +105 °C)” and the products “A: Consumer applications and G: Industrial applications (when used in the range of TA = -40 to +85 °C)”.

| Parameter | A: Consumer applications | G: Industrial applications |
|---|--|---|
| Operating ambient temperature | TA = -40 to +85 °C | TA = -40 to +105 °C |
| Operating mode Operating voltage range | HS (high-speed main) mode: 2.7 V ≤ V _{DD} ≤ 3.6 V@1 MHz to 24 MHz 2.4 V ≤ V _{DD} ≤ 3.6 V@1 MHz to 16 MHz LS (low-speed main) mode: 1.8 V ≤ V _{DD} ≤ 3.6 V@1 MHz to 8 MHz LV (low-voltage main) mode: 1.6 V ≤ V _{DD} ≤ 3.6 V@1 MHz to 4 MHz | HS (high-speed main) mode only: 2.7 V ≤ V _{DD} ≤ 3.6 V@1 MHz to 24 MHz 2.4 V ≤ V _{DD} ≤ 3.6 V@1 MHz to 16 MHz |
| High-speed on-chip oscillator clock accuracy | 1.8 V ≤ V _{DD} ≤ 3.6 V: ±1.0% @ TA = -20 to +85 °C ±1.5% @ TA = -40 to -20 °C 1.6 V ≤ V _{DD} ≤ 1.8 V: ±5.0% @ TA = -20 to +85 °C ±5.5% @ TA = -40 to -20 °C | 2.4 V ≤ V _{DD} ≤ 3.6 V: ±2.0% @ TA = +85 to +105 °C ±1.0% @ TA = -20 to +85 °C ±1.5% @ TA = -40 to -20 °C |
| Serial array unit | UART CSI: f _{CLK} /4 Simplified I ² C communication | UART CSI: f _{CLK} /4 Simplified I ² C communication |
| IICA | Normal mode Fast mode Fast mode plus | Normal mode Fast mode |
| Voltage detector | • Rise detection voltage: 1.67 V to 3.13 V (12 levels) • Fall detection voltage: 1.63 V to 3.06 V (12 levels) | • Rise detection voltage: 2.61 V to 3.13 V (6 levels) • Fall detection voltage: 2.55 V to 3.06 V (6 levels) |

Remark The electrical characteristics of the products G: Industrial applications (TA = -40 to +105 °C) are different from those of the products “A: Consumer applications”. For details, refer to 3.1 to 3.12.

3.1 Absolute Maximum Ratings

Absolute Maximum Ratings (TA = 25°C)

(1/3)

| Parameter | Symbols | Conditions | Ratings | Unit |
|-------------------------|----------------------|---|---|------|
| Supply voltage | V _{DD} | | -0.5 to + 6.5 | V |
| | UV _{BUS} | | -0.5 to + 6.5 | V |
| | AV _{DD} | AV _{DD} ≤ V _{DD} | -0.5 to + 4.6 | V |
| REGC pin input voltage | V _I REGC | REGC | -0.3 to + 2.8 and -0.3 to V _{DD} + 0.3 Note 1 | V |
| UREGC pin input voltage | V _I UREGC | UREGC | -0.3 to UV _{BUS} + 0.3 Note 2 | V |
| Input voltage | V _{I1} | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P70 to P77, P80 to P83, P125 to P127, P137, P140 to P143, EXCLK, EXCLKS, $\overline{\text{RESET}}$ | -0.3 to V _{DD} + 0.3 Note 3 | V |
| | V _{I2} | P60, P61 (N-ch open-drain) | -0.3 to + 6.5 | V |
| | V _{I3} | UDP, UDM | -0.3 to + 6.5 | V |
| | V _{I4} | P150 to P156 | -0.3 to AV _{DD} + 0.3 Note 4 | V |
| Output voltage | V _{O1} | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P60, P61, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | -0.3 to V _{DD} + 0.3 Note 3 | V |
| | V _{O2} | P130, P150 to P156 | -0.3 to AV _{DD} + 0.3 Note 3 | V |
| | V _{O3} | UDP, UDM | -0.3 to + 3.8 | V |
| Analog input voltage | V _{A1} 1 | ANI16 to ANI21 | -0.3 to V _{DD} + 0.3 and AV _{REF(+)} + 0.3 Notes 3, 5 | V |
| | V _{A1} 2 | ANI0 to ANI6 | -0.3 to AV _{DD} + 0.3 and AV _{REF(+)} + 0.3 Notes 3, 5 | V |

Note 1. Connect the REGC pin to V_{ss} via a capacitor (0.47 to 1 μF). This value regulates the absolute maximum rating of the REGC pin. Do not use this pin with voltage applied to it.

Note 2. Connect the UREGC pin to V_{ss} via a capacitor (0.33 μF). This value regulates the absolute maximum rating of the UREGC pin. Do not use this pin with voltage applied to it.

Note 3. Must be 6.5 V or lower.

Note 4. Must be 4.6 V or lower.

Note 5. Do not exceed AV_{REF(+)} + 0.3 V in case of A/D conversion target pin.

Caution Product quality may suffer if the absolute maximum rating is exceeded even momentarily for any parameter. That is, the absolute maximum ratings are rated values at which the product is on the verge of suffering physical damage, and therefore the product must be used under conditions that ensure that the absolute maximum ratings are not exceeded.

Remark 1. Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.

Remark 2. AV_{REF(+)}: + side reference voltage of the A/D converter.

Remark 3. V_{ss}: Reference voltage

Absolute Maximum Ratings (TA = 25°C)**(2/3)**

| Parameter | Symbols | Conditions | Ratings | Unit | |
|----------------------------------|---------|---|--|---|---|
| LCD voltage | VL11 | VL1 input voltage <small>Note 1</small> | -0.3 to +2.8 | V | |
| | VL12 | VL2 input voltage <small>Note 1</small> | -0.3 to +6.5 | V | |
| | VL13 | VL3 input voltage <small>Note 1</small> | -0.3 to +6.5 | V | |
| | VL14 | VL4 input voltage <small>Note 1</small> | -0.3 to +6.5 | V | |
| | VL15 | CAPL, CAPH input voltage <small>Note 1</small> | -0.3 to +6.5 | V | |
| | VLO1 | VL1 output voltage | -0.3 to +2.8 | V | |
| | VLO2 | VL2 output voltage | -0.3 to +6.5 | V | |
| | VLO3 | VL3 output voltage | -0.3 to +6.5 | V | |
| | VLO4 | VL4 output voltage | -0.3 to +6.5 | V | |
| | VLO5 | CAPL, CAPH output voltage | -0.3 to +6.5 | V | |
| | VL06 | COM0 to COM7 SEG0 to SEG55 output voltage | External resistance division method | -0.3 to VDD + 0.3 <small>Note 2</small> | V |
| | | | Capacitor split method | -0.3 to VDD + 0.3 <small>Note 2</small> | V |
| Internal voltage boosting method | | | -0.3 to VL14 + 0.3 <small>Note 2</small> | V | |

Note 1. This value only indicates the absolute maximum ratings when applying voltage to the VL1, VL2, VL3, and VL4 pins; it does not mean that applying voltage to these pins is recommended. When using the internal voltage boosting method or capacitance split method, connect these pins to Vss via a capacitor (0.47 ± 30%) and connect a capacitor (0.47 ± 30%) between the CAPL and CAPH pins.

Note 2. Must be 6.5 V or lower.

Caution Product quality may suffer if the absolute maximum rating is exceeded even momentarily for any parameter. That is, the absolute maximum ratings are rated values at which the product is on the verge of suffering physical damage, and therefore the product must be used under conditions that ensure that the absolute maximum ratings are not exceeded.

Absolute Maximum Ratings (TA = 25 °C)

(3/3)

| Parameter | Symbols | Conditions | | Ratings | Unit |
|-------------------------------|---------|----------------------------------|--|-------------|------|
| Output current, high | IOH1 | Per pin | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | -40 | mA |
| | | Total of all pins -170 mA | P40 to P46 | -70 | mA |
| | | | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P50 to P57, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | -100 | mA |
| | IOH2 | Per pin | P130, P150 to P156 | -0.1 | mA |
| | | Total of all pins | | -0.8 | mA |
| | IOH3 | Per pin | UDP, UDM | -3 | mA |
| Output current, low | IOL1 | Per pin | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P60, P61, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | 40 | mA |
| | | Total of all pins 170 mA | P40 to P46 | 70 | mA |
| | | | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P50 to P57, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | 100 | mA |
| | IOL2 | Per pin | P130, P150 to P156 | 0.4 | mA |
| | | Total of all pins | | 3.2 | mA |
| | IOL3 | Per pin | UDP, UDM | 3 | mA |
| Operating ambient temperature | TA | In normal operation mode | | -40 to +105 | °C |
| | | In flash memory programming mode | | -40 to +85 | |
| Storage temperature | Tstg | | | -65 to +150 | °C |

Caution Product quality may suffer if the absolute maximum rating is exceeded even momentarily for any parameter. That is, the absolute maximum ratings are rated values at which the product is on the verge of suffering physical damage, and therefore the product must be used under conditions that ensure that the absolute maximum ratings are not exceeded.

Remark Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.

3.2 Oscillator Characteristics

3.2.1 X1 and XT1 oscillator characteristics

(TA = -40 to +105 °C, 2.4 V ≤ V_{DD} ≤ 3.6 V, V_{SS} = 0 V)

| Parameter | Resonator | Conditions | MIN. | TYP. | MAX. | Unit |
|--|-------------------------------------|---------------------------------|------|--------|------|------|
| X1 clock oscillation frequency (fx) Note | Ceramic resonator/crystal resonator | 2.7 V ≤ V _{DD} ≤ 3.6 V | 1.0 | | 20.0 | MHz |
| | | 2.4 V ≤ V _{DD} < 2.7 V | 1.0 | | 16.0 | |
| XT1 clock oscillation frequency (fx _T) Note | Crystal resonator | | 32 | 32.768 | 35 | kHz |

Note Indicates only permissible oscillator frequency ranges. Refer to **AC Characteristics** for instruction execution time. Request evaluation by the manufacturer of the oscillator circuit mounted on a board to check the oscillator characteristics.

Caution Since the CPU is started by the high-speed on-chip oscillator clock after a reset release, check the X1 clock oscillation stabilization time using the oscillation stabilization time counter status register (OSTC) by the user. Determine the oscillation stabilization time of the OSTC register and the oscillation stabilization time select register (OSTS) after sufficiently evaluating the oscillation stabilization time with the resonator to be used.

Remark When using the X1 and XT1 oscillator, refer to **5.4 System Clock Oscillator in the RL78/L1C User's Manual Hardware**.

3.2.2 On-chip oscillator characteristics

(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Oscillators | Parameters | Conditions | MIN. | TYP. | MAX. | Unit |
|--|------------|----------------|------|------|------|------|
| High-speed on-chip oscillator clock frequency Notes 1, 2 | fHOCO | | 1 | | 24 | MHz |
| High-speed on-chip oscillator clock frequency accuracy | | -20 to +85 °C | -1.0 | | +1.0 | % |
| | | -40 to -20 °C | -1.5 | | +1.5 | % |
| | | +85 to +105 °C | -2.0 | | +2.0 | % |
| Low-speed on-chip oscillator clock frequency | fIL | | | 15 | | kHz |
| Low-speed on-chip oscillator clock frequency accuracy | | | -15 | | +15 | % |

Note 1. High-speed on-chip oscillator frequency is selected with bits 0 to 4 of the option byte (000C2H) and bits 0 to 2 of the HOCODIV register.

Note 2. This only indicates the oscillator characteristics. Refer to **AC Characteristics** for instruction execution time.

3.2.3 PLL oscillator characteristics

(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Oscillators | Parameters | Conditions | MIN. | TYP. | MAX. | Unit |
|---------------------------|------------|-------------------------|------|-------|-------|------|
| PLL input frequency Note | fPLLIN | High-speed system clock | 6.00 | | 16.00 | MHz |
| PLL output frequency Note | fPLL | | | 48.00 | | MHz |

Note Indicates only oscillator characteristics. Refer to **AC Characteristics** for instruction execution time.

3.3 DC Characteristics

3.3.1 Pin characteristics

(TA = -40 to +105 °C, 2.4 V ≤ AVDD = VDD ≤ 3.6 V, VSS = 0 V)

| Items | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|--|--------|---|---------------------|------|-------------------------|------|
| Output current, high ^{Note 1} | IOH1 | Per pin for P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | | | -10.0 ^{Note 2} | mA |
| | | Total of P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P70 to P77, P80 to P83, P125 to P127, P140 to P143 (When duty = 70% ^{Note 3}) | 2.7 V ≤ VDD ≤ 3.6 V | | -15.0 | mA |
| | | | 2.4 V ≤ VDD < 2.7 V | | -7.0 | mA |
| | IOH2 | Per pin for P130, P150 to P156 | | | -0.1 ^{Note 2} | mA |
| | | Total of all pins | 2.4 V ≤ VDD ≤ 3.6 V | | -0.8 | mA |

Note 1. Value of current at which the device operation is guaranteed even if the current flows from the VDD pin to an output pin.

Note 2. However, do not exceed the total current value.

Note 3. Specification under conditions where the duty factor is 70%.

The output current value that has changed the duty ratio can be calculated with the following expression (when changing the duty factor from 70% to n%).

• Total output current of pins = (IOH × 0.7)/(n × 0.01)

<Example> Where n = 50% and IOH = -10.0 mA

Total output current of pins = (-10.0 × 0.7)/(50 × 0.01) = -14.0 mA

However, the current that is allowed to flow into one pin does not vary depending on the duty factor. A current higher than the absolute maximum rating must not flow into one pin.

Caution P00 to P02, P10 to P12, P24 to P26, P33 to P35, and P42 to P44 do not output high level in N-ch open-drain mode.

Remark Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.

(TA = -40 to +105 °C, 2.4 V ≤ AVDD = VDD ≤ 3.6 V, VSS = 0 V)

| Items | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|---|---|--|---------------------------------|------|----------------|------|
| Output current, I _{OL} Note 1 | I _{OL1} | Per pin for P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P60, P61, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | | | 20.0 Note 2 | mA |
| | | Per pin for P60 and P61 | | | 15.0 Note 2 | mA |
| | | Total of P40 to P46 (When duty = 70% Note 3) | 2.7 V ≤ V _{DD} ≤ 3.6 V | | 15.0 | mA |
| | | | 2.4 V ≤ V _{DD} < 2.7 V | | 9.0 | mA |
| | | Total of P00 to P07, P10 to P17, P20 to P27, P30 to P37, P50 to P57, P60, P61, P70 to P77, P80 to P83, P125 to P127, P140 to P143 (When duty = 70% Note 3) | 2.7 V ≤ V _{DD} ≤ 3.6 V | | 35.0 | mA |
| | | | 2.4 V ≤ V _{DD} < 2.7 V | | 20.0 | mA |
| | Total of all pins (When duty = 70% Note 3) | | | 50.0 | mA | |
| | I _{OL2} | Per pin for P130, P150 to P156 | | | 0.4 Note 2 | mA |
| Total of all pins | | 2.4 V ≤ V _{DD} ≤ 3.6 V | | 3.2 | mA | |

Note 1. Value of current at which the device operation is guaranteed even if the current flows from an output pin to the VSS pin.

Note 2. However, do not exceed the total current value.

Note 3. Specification under conditions where the duty factor is 70%.

The output current value that has changed the duty ratio can be calculated with the following expression (when changing the duty factor from 70% to n%).

• Total output current of pins = (I_{OL} × 0.7)/(n × 0.01)

<Example> Where n = 50% and I_{OL} = 10.0 mA

Total output current of pins = (10.0 × 0.7)/(50 × 0.01) = 14.0 mA

However, the current that is allowed to flow into one pin does not vary depending on the duty factor. A current higher than the absolute maximum rating must not flow into one pin.

Remark Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.

(TA = -40 to +105 °C, 2.4 V ≤ AVDD = VDD ≤ 3.6 V, VSS = 0 V)

| Items | Symbol | Conditions | MIN. | TYP. | MAX. | Unit | |
|---------------------|------------------|--|---|----------------------|------|----------------------|---|
| Input voltage, high | V _{IH1} | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | Normal input buffer | 0.8 V _{DD} | | V _{DD} | V |
| | V _{IH2} | P00, P01, P10, P11, P24, P25, P33, P34, P43, P44 | TTL input buffer 3.3 V ≤ V _{DD} ≤ 3.6 V | 2.0 | | V _{DD} | V |
| | | | TTL input buffer 2.4 V ≤ V _{DD} < 3.3 V | 1.50 | | V _{DD} | V |
| | V _{IH3} | P150 to P156 | | 0.7 AV _{DD} | | AV _{DD} | V |
| | V _{IH4} | P60, P61 | | 0.7 V _{DD} | | 6.0 | V |
| | V _{IH5} | P121 to P124, P137, EXCLK, EXCLKS, $\overline{\text{RESET}}$ | | 0.8 V _{DD} | | V _{DD} | V |
| Input voltage, low | V _{IL1} | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | Normal input buffer | 0 | | 0.2 V _{DD} | V |
| | V _{IL2} | P00, P01, P10, P11, P24, P25, P33, P34, P43, P44 | TTL input buffer 3.3 V ≤ V _{DD} ≤ 3.6 V | 0 | | 0.5 | V |
| | | | TTL input buffer 2.4 V ≤ V _{DD} < 3.3 V | 0 | | 0.32 | V |
| | V _{IL3} | P150 to P156 | | 0 | | 0.3 AV _{DD} | V |
| | V _{IL4} | P60, P61 | | 0 | | 0.3 V _{DD} | V |
| | V _{IL5} | P121 to P124, P137, EXCLK, EXCLKS, $\overline{\text{RESET}}$ | | 0 | | 0.2 V _{DD} | V |

Caution The maximum value of V_{IH} of pins P00 to P02, P10 to P12, P24 to P26, P33 to P35, and P42 to P44 is V_{DD}, even in the N-ch open-drain mode.

Remark Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.

(TA = -40 to +105 °C, 2.4 V ≤ AVDD = VDD ≤ 3.6 V, VSS = 0 V)

| Items | Symbol | Conditions | MIN. | TYP. | MAX. | Unit | |
|----------------------|--------|--|-------------------------------------|------------|------|------|---|
| Output voltage, high | VOH1 | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | 2.7 V ≤ VDD ≤ 3.6 V, IOH1 = -2.0 mA | VDD - 0.6 | | | V |
| | | | 2.4 V ≤ VDD ≤ 3.6 V, IOH1 = -1.5 mA | VDD - 0.5 | | | V |
| | VOH2 | P130, P150 to P156 | 2.4 V ≤ VDD ≤ 3.6 V, IOH2 = -100 μA | AVDD - 0.5 | | | V |
| Output voltage, low | VOL1 | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P70 to P77, P80 to P83, P125 to P127, P140 to P143 | 2.7 V ≤ VDD ≤ 3.6 V, IOL1 = 3.0 mA | | | 0.6 | V |
| | | | 2.4 V ≤ VDD ≤ 3.6 V, IOL1 = 1.5 mA | | | 0.4 | V |
| | | | 2.4 V ≤ VDD ≤ 3.6 V, IOL1 = 0.6 mA | | | 0.4 | V |
| | VOL2 | P130, P150 to P156 | 2.4 V ≤ VDD ≤ 3.6 V, IOL2 = 400 μA | | | 0.4 | V |
| | VOL3 | P60, P61 | 2.7 V ≤ VDD ≤ 3.6 V, IOL3 = 3.0 mA | | | 0.4 | V |
| | | | 2.4 V ≤ VDD ≤ 3.6 V, IOL3 = 2.0 mA | | | 0.4 | V |

Caution P00 to P02, P10 to P12, P24 to P26, P33 to P35, and P42 to P44 do not output high level in N-ch open-drain mode.

Remark Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.

(TA = -40 to +105 °C, 2.4 V ≤ AVDD = VDD ≤ 3.6 V, VSS = 0 V)

| Items | Symbol | Conditions | MIN. | TYP. | MAX. | Unit | | |
|-----------------------------|--------------|---|----------|---------------------------------------|------|------|-----|----|
| Input leakage current, high | LIH1 | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P60, P61, P70 to P77, P80 to P83, P125 to P127, P137, P140 to P143, $\overline{\text{RESET}}$ | Vi = VDD | | 1 | μA | | |
| | LIH2 | P20, P21, P140 to P143 | Vi = VDD | | 1 | μA | | |
| | LIH3 | P121 to P124 (X1, X2, EXCLK, XT1, XT2, EXCLKS) | Vi = VDD | In input port or external clock input | | 1 | μA | |
| | | | | In resonator connection | | 10 | μA | |
| LIH4 | P150 to P156 | Vi = AVDD | | 1 | μA | | | |
| Input leakage current, low | LI11 | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P40 to P46, P50 to P57, P60, P61, P70 to P77, P80 to P83, P125 to P127, P137, P140 to P143, $\overline{\text{RESET}}$ | Vi = VSS | | -1 | μA | | |
| | LI12 | P20, P21, P140 to P143 | Vi = VSS | | -1 | μA | | |
| | LI13 | P121 to P124 (X1, X2, EXCLK, XT1, XT2, EXCLKS) | Vi = VSS | In input port or external clock input | | -1 | μA | |
| | | | | In resonator connection | | -10 | μA | |
| LI14 | P150 to P156 | Vi = AVSS | | -1 | μA | | | |
| On-chip pull-up resistance | RU1 | P00 to P07, P10 to P17, P20 to P27, P30 to P37, P50 to P57, P70 to P77, P140 to P143, P125 to P127 | Vi = VSS | 2.4 V ≤ VDD ≤ 3.6 V | 10 | 20 | 100 | kΩ |
| | RU2 | P40 to P46, P80 to P83 | Vi = VSS | | 10 | 20 | 100 | kΩ |

Remark Unless specified otherwise, the characteristics of alternate-function pins are the same as those of the port pins.

3.3.2 Supply current characteristics

(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

(1/2)

| Parameter | Symbol | Conditions | | | | MIN. | TYP. | MAX. | Unit | |
|---|--|---|---|--|----------------------|----------------------|------|------|------|----|
| Supply current ^{Note 1} | IDD1 | Operating mode | HS (high-speed main) mode ^{Note 5} | fHOCO = 48 MHz ^{Note 3} , fIH = 24 MHz ^{Note 3} | Basic operation | VDD = 3.6 V | | 2.2 | 2.9 | mA |
| | | | | | | VDD = 3.0 V | | 2.2 | 2.9 | |
| | | | | Normal operation | VDD = 3.6 V | | 4.4 | 9.2 | | |
| | | | | | VDD = 3.0 V | | 4.4 | 9.2 | | |
| | | | | Basic operation | VDD = 3.6 V | | 2.0 | 2.6 | | |
| | | | | | VDD = 3.0 V | | 2.0 | 2.6 | | |
| | | | Normal operation | VDD = 3.6 V | | 4.2 | 7.0 | | | |
| | | | | VDD = 3.0 V | | 4.2 | 7.0 | | | |
| | | | Normal operation | VDD = 3.6 V | | 3.1 | 5.0 | | | |
| | | | | VDD = 3.0 V | | 3.1 | 5.0 | | | |
| | | | HS (high-speed main) mode ^{Note 5} | fMX = 20 MHz ^{Note 2} , VDD = 3.6 V | Normal operation | Square wave input | | 3.5 | 5.9 | mA |
| | | | | | | Resonator connection | | 3.6 | 6.0 | |
| | | fMX = 20 MHz ^{Note 2} , VDD = 3.0 V | | Normal operation | Square wave input | | 3.5 | 5.9 | | |
| | | | | | Resonator connection | | 3.6 | 6.0 | | |
| | | fMX = 16 MHz ^{Note 2} , VDD = 3.6 V | | Normal operation | Square wave input | | 2.9 | 4.5 | | |
| | | | | | Resonator connection | | 3.1 | 4.6 | | |
| | | fMX = 16 MHz ^{Note 2} , VDD = 3.0 V | | Normal operation | Square wave input | | 2.9 | 4.5 | | |
| | | | | | Resonator connection | | 3.1 | 4.6 | | |
| | | fMX = 10 MHz ^{Note 2} , VDD = 3.6 V | | Normal operation | Square wave input | | 2.1 | 3.5 | | |
| | | | | | Resonator connection | | 2.2 | 3.5 | | |
| | | fMX = 10 MHz ^{Note 2} , VDD = 3.0 V | | Normal operation | Square wave input | | 2.1 | 3.5 | | |
| | | | | | Resonator connection | | 2.2 | 3.5 | | |
| | | HS (High-speed main) mode (PLL operation) | fPLL = 48 MHz, fCLK = 24 MHz ^{Note 2} | Normal operation | VDD = 3.6 V | | 4.7 | 7.6 | mA | |
| | | | | | VDD = 3.0 V | | 4.7 | 7.6 | | |
| fPLL = 48 MHz, fCLK = 12 MHz ^{Note 2} | Normal operation | | VDD = 3.6 V | | 3.1 | 5.2 | | | | |
| | | | VDD = 3.0 V | | 3.1 | 5.1 | | | | |
| fPLL = 48 MHz, fCLK = 6 MHz ^{Note 2} | Normal operation | | VDD = 3.6 V | | 2.3 | 3.9 | | | | |
| | | | VDD = 3.0 V | | 2.3 | 3.9 | | | | |
| Subsystem clock operation | fSUB = 32.768 kHz ^{Note 4} TA = -40°C | Normal operation | Square wave input | | 4.6 | 6.9 | μA | | | |
| | | | Resonator connection | | 4.7 | 6.9 | | | | |
| | fSUB = 32.768 kHz ^{Note 4} TA = +25°C | Normal operation | Square wave input | | 4.9 | 7.0 | | | | |
| | | | Resonator connection | | 5.0 | 7.2 | | | | |
| | fSUB = 32.768 kHz ^{Note 4} TA = +50°C | Normal operation | Square wave input | | 5.2 | 7.6 | | | | |
| | | | Resonator connection | | 5.2 | 7.7 | | | | |
| | fSUB = 32.768 kHz ^{Note 4} TA = +70°C | Normal operation | Square wave input | | 5.5 | 9.3 | | | | |
| | | | Resonator connection | | 5.6 | 9.4 | | | | |
| | fSUB = 32.768 kHz ^{Note 4} TA = +85°C | Normal operation | Square wave input | | 6.2 | 13.3 | | | | |
| | | | Resonator connection | | 6.2 | 13.4 | | | | |
| | fSUB = 32.768 kHz ^{Note 4} TA = +105°C | Normal operation | Square wave input | | 8.3 | 46.0 | | | | |
| | | | Resonator connection | | 8.4 | 46.0 | | | | |

(Notes and Remarks are listed on the next page.)

- Note 1.** Total current flowing into V_{DD}, including the input leakage current flowing when the level of the input pin is fixed to V_{DD}, or V_{SS}. The values below the MAX. column include the peripheral operation current. However, not including the current flowing into the LCD controller/driver, A/D converter, D/A converter, comparator, LVD circuit, USB 2.0 function module, I/O port, and on-chip pull-up/pull-down resistors and the current flowing during data flash rewrite.
- Note 2.** When high-speed on-chip oscillator and subsystem clock are stopped.
- Note 3.** When high-speed system clock and subsystem clock are stopped.
- Note 4.** When high-speed on-chip oscillator and high-speed system clock are stopped. When AMPHS1 = 1 (Ultra-low power consumption oscillation). However, not including the current flowing into the high accuracy RTC, 12-bit interval timer, and watchdog timer.
- Note 5.** Relationship between operation voltage width, operation frequency of CPU and operation mode is as below.
 HS (high-speed main) mode: $2.7\text{ V} \leq V_{DD} \leq 3.6\text{ V}@1\text{ MHz to }24\text{ MHz}$
 $2.4\text{ V} \leq V_{DD} \leq 3.6\text{ V}@1\text{ MHz to }16\text{ MHz}$
- Remark 1.** f_{MX}: High-speed system clock frequency (X1 clock oscillation frequency or external main system clock frequency)
- Remark 2.** f_{HOCO}: High-speed on-chip oscillator clock frequency (48 MHz max.)
- Remark 3.** f_{IH}: Main system clock source frequency when the high-speed on-chip oscillator clock divided 1, 2, 4, or 8, or the PLL clock divided by 2, 4, or 8 is selected (24 MHz max.)
- Remark 4.** f_{SUB}: Subsystem clock frequency (XT1 clock oscillation frequency)
- Remark 5.** Except subsystem clock operation, temperature condition of the TYP. value is TA = 25°C

(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

(2/2)

| Parameter | Symbol | Conditions | | MIN. | TYP. | MAX. | Unit | | |
|---------------------------|---|---|---------------------------------------|---|----------------------|-------|------|------|----|
| Supply current Note 1 | IDD2 Note 2 | HALT mode | HS (high-speed main) mode Note 7 | fHOCO = 48 MHz Note 4, fIH = 24 MHz Note 4 | VDD = 3.6 V | | 0.77 | 3.4 | mA |
| | | | | | VDD = 3.0 V | | 0.77 | 3.4 | |
| | | | | fHOCO = 24 MHz Note 4, fIH = 24 MHz Note 4 | VDD = 3.6 V | | 0.55 | 2.7 | |
| | | | | | VDD = 3.0 V | | 0.55 | 2.7 | |
| | | | | fHOCO = 16 MHz Note 4, fIH = 16 MHz Note 4 | VDD = 3.6 V | | 0.48 | 1.9 | |
| | | | | | VDD = 3.0 V | | 0.47 | 1.9 | |
| | | | HS (high-speed main) mode Note 7 | fMX = 20 MHz Note 3, VDD = 3.6 V | Square wave input | | 0.35 | 2.10 | mA |
| | | | | | Resonator connection | | 0.51 | 2.20 | |
| | | | | fMX = 20 MHz Note 3, VDD = 3.0 V | Square wave input | | 0.34 | 2.10 | |
| | | | | | Resonator connection | | 0.51 | 2.20 | |
| | | | | fMX = 16 MHz Note 3, VDD = 3.6 V | Square wave input | | 0.30 | 1.25 | |
| | | | | | Resonator connection | | 0.45 | 1.41 | |
| | | fMX = 16 MHz Note 3, VDD = 3.0 V | | Square wave input | | 0.29 | 1.23 | | |
| | | | | Resonator connection | | 0.45 | 1.41 | | |
| | | fMX = 10 MHz Note 3, VDD = 3.6 V | | Square wave input | | 0.23 | 1.10 | | |
| | | | | Resonator connection | | 0.30 | 1.20 | | |
| | | fMX = 10 MHz Note 3, VDD = 3.0 V | | Square wave input | | 0.22 | 1.10 | | |
| | | | | Resonator connection | | 0.30 | 1.20 | | |
| | | HS (High-speed main) mode (PLL operation) | fMX = 48 MHz, fCLK = 24 MHz Note 3 | VDD = 3.6 V | | 0.99 | 2.93 | mA | |
| | | | | VDD = 3.0 V | | 0.99 | 2.92 | | |
| | | | fMX = 48 MHz, fCLK = 12 MHz Note 3 | VDD = 3.6 V | | 0.89 | 2.51 | | |
| | | | | VDD = 3.0 V | | 0.89 | 2.50 | | |
| | | | fMX = 48 MHz, fCLK = 6 MHz Note 3 | VDD = 3.6 V | | 0.84 | 2.30 | | |
| VDD = 3.0 V | | | | 0.84 | 2.29 | | | | |
| Subsystem clock operation | fsUB = 32.768 kHz Note 5 TA = -40°C | | Square wave input | | 0.32 | 0.61 | μA | | |
| | | | Resonator connection | | 0.51 | 0.80 | | | |
| | fsUB = 32.768 kHz Note 5 TA = +25°C | Square wave input | | 0.41 | 0.74 | | | | |
| | | Resonator connection | | 0.62 | 0.91 | | | | |
| | fsUB = 32.768 kHz Note 5 TA = +50°C | Square wave input | | 0.52 | 2.30 | | | | |
| | | Resonator connection | | 0.75 | 2.49 | | | | |
| | fsUB = 32.768 kHz Note 5 TA = +70°C | Square wave input | | 0.82 | 4.03 | | | | |
| | | Resonator connection | | 1.08 | 4.22 | | | | |
| | fsUB = 32.768 kHz Note 5 TA = +85°C | Square wave input | | 1.38 | 8.04 | | | | |
| | | Resonator connection | | 1.62 | 8.23 | | | | |
| | fsUB = 32.768 kHz Note 5 TA = +105°C | Square wave input | | 3.29 | 41.00 | | | | |
| | | Resonator connection | | 3.63 | 41.00 | | | | |
| IDD3 Note 6 | STOP mode Note 8 | TA = -40°C | | | 0.18 | 0.52 | μA | | |
| | | TA = +25°C | | | 0.25 | 0.52 | | | |
| | | TA = +50°C | | | 0.34 | 2.21 | | | |
| | | TA = +70°C | | | 0.64 | 3.94 | | | |
| | | TA = +85°C | | | 1.18 | 7.95 | | | |
| | | TA = +105°C | | | 2.92 | 40.00 | | | |

(Notes and Remarks are listed on the next page.)

- Note 1.** Total current flowing into V_{DD}, including the input leakage current flowing when the level of the input pin is fixed to V_{DD} or V_{SS}. The values below the MAX. column include the peripheral operation current. However, not including the current flowing into the LCD controller/driver, A/D converter, D/A converter, comparator, LVD circuit, USB 2.0 function module, I/O port, and on-chip pull-up/pull-down resistors and the current flowing during data flash rewrite.
- Note 2.** During HALT instruction execution by flash memory.
- Note 3.** When high-speed on-chip oscillator and subsystem clock are stopped.
- Note 4.** When high-speed system clock and subsystem clock are stopped.
- Note 5.** When high-speed on-chip oscillator and high-speed system clock are stopped. When RTCLPC = 1 and setting ultra-low current consumption (AMPHS1 = 1). The current flowing into the high accuracy RTC is included. However, not including the current flowing into the 12-bit interval timer and watchdog timer.
- Note 6.** Not including the current flowing into the high accuracy RTC, 12-bit interval timer, and watchdog timer.
- Note 7.** Relationship between operation voltage width, operation frequency of CPU and operation mode is as below.
 HS (high-speed main) mode: $2.7\text{ V} \leq V_{DD} \leq 3.6\text{ V}@1\text{ MHz to }24\text{ MHz}$
 $2.4\text{ V} \leq V_{DD} \leq 3.6\text{ V}@1\text{ MHz to }16\text{ MHz}$
- Note 8.** Regarding the value for current to operate the subsystem clock in STOP mode, refer to that in HALT mode.
- Remark 1.** f_{MX}: High-speed system clock frequency (X1 clock oscillation frequency or external main system clock frequency)
- Remark 2.** f_{HOCO}: High-speed on-chip oscillator clock frequency (48 MHz max.)
- Remark 3.** f_{IH}: Main system clock source frequency when the high-speed on-chip oscillator clock divided 1, 2, 4, or 8, or the PLL clock divided by 2, 4, or 8 is selected (24 MHz max.)
- Remark 4.** f_{SUB}: Subsystem clock frequency (XT1 clock oscillation frequency)
- Remark 5.** Except subsystem clock operation, temperature condition of the TYP. value is TA = 25°C

(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | | | | MIN. | TYP. | MAX. | Unit | | |
|--|------------------------|--|--|---|--------------------------|---|------|-------|------|--|----|
| Low-speed on-chip oscillator operating current | IFIL Note 1 | | | | | | 0.20 | | μA | | |
| High-accuracy RTC operating current | IRTC Notes 1, 3 | | | | | | 0.02 | | μA | | |
| 12-bit interval timer operating current | ITMKA Notes 1, 2, 4 | | | | | | 0.02 | | μA | | |
| Watchdog timer operating current | IWDT Notes 1, 4 | fIL = 15 kHz | | | | | 0.22 | | μA | | |
| A/D converter operating current | IADC Notes 6, 7 | AVDD = 3.0 V, when conversion at maximum speed | | | | | 422 | 720 | μA | | |
| AVREF (+) current | IAVREF Note 8 | AVDD = 3.0 V, ADREFP1 = 0, ADREFP0 = 0 Note 7 | | | | | 14.0 | 25.0 | μA | | |
| | | AVREFF = 3.0 V, ADREFP1 = 0, ADREFP0 = 1 Note 10 | | | | | 14.0 | 25.0 | | | |
| | | ADREFP1 = 1, ADREFP0 = 0 Note 1 | | | | | 14.0 | 25.0 | | | |
| A/D converter reference voltage current | IADREF Notes 1, 9 | VDD = 3.0 V | | | | | 75.0 | | μA | | |
| Temperature sensor operating current | ITMPS Note 1 | | | | | | 78 | | μA | | |
| D/A converter operating current | IDAC Notes 1, 11 | Per D/A converter channel | | | | | 0.53 | 1.5 | mA | | |
| Comparator operating current | ICMP Notes 1, 12 | VDD = 3.6 V, Regulator output voltage = 2.1 V | | Window mode | | | 12.5 | | μA | | |
| | | | | Comparator high-speed mode | | | 4.5 | | μA | | |
| | | | | Comparator low-speed mode | | | 1.2 | | μA | | |
| LVD operating current | ILVI Notes 1, 13 | | | | | | 0.06 | | μA | | |
| Self-programming operating current | IFSP Notes 1, 14 | | | | | | 2.50 | 12.20 | mA | | |
| BGO operating current | IBGO Notes 1, 15 | | | | | | 1.68 | 12.20 | mA | | |
| SNOOZE operating current | ISNOZ Note 1 | ADC operation | | The mode is performed Note 16 | | | 0.34 | 1.10 | mA | | |
| | | | | The A/D conversion operations are performed, Low voltage mode, AVREFF = VDD = 3.0 V | | | 0.53 | 2.04 | | | |
| | | CSI/UART operation | | | 0.70 | 1.54 | mA | | | | |
| LCD operating current | ILCD1 Notes 17, 18 | External resistance division method | | fLCD = fSUB LCD clock = 128 Hz | 1/3 bias 4-time slice | VDD = 3.6 V, LV4 = 3.6 V | | | 0.14 | | μA |
| | | Internal voltage boosting method | | fLCD = fSUB LCD clock = 128 Hz | 1/3 bias 4-time slice | VDD = 3.0 V, LV4 = 3.0 V (VLCD = 04H) | | | 0.61 | | μA |
| | | Capacitor split method | | fLCD = fSUB LCD clock = 128 Hz | 1/3 bias 4-time slice | VDD = 3.0 V, LV4 = 3.0 V | | | 0.12 | | μA |
| USB current Note 19 | IUSB Note 20 | Operating current during USB communication | | | | | 4.88 | | mA | | |
| | IUSB Note 21 | Operating current in the USB suspended state | | | | | 0.04 | | mA | | |

(Notes and Remarks are listed on the next page.)

- Note 1.** Current flowing to VDD.
- Note 2.** When high speed on-chip oscillator and high-speed system clock are stopped.
- Note 3.** Current flowing only to the high accuracy real-time clock (excluding the operating current of the low-speed on-chip oscillator and the XT1 oscillator). The supply current of the RL78 microcontrollers is the sum of the values of either IDD1 or IDD2, and IRTC, when the high accuracy real-time clock operates in operation mode or HALT mode. When the low-speed on-chip oscillator is selected, IFIL should be added. IDD2 subsystem clock operation includes the operational current of the high accuracy real-time clock.
- Note 4.** Current flowing only to the 12-bit interval timer (excluding the operating current of the low-speed on-chip oscillator and the XT1 oscillator). The supply current of the RL78 microcontrollers is the sum of the values of either IDD1 or IDD2, and ITMKA, when the 12-bit interval timer operates in operation mode or HALT mode. When the low-speed on-chip oscillator is selected, IFIL should be added. IDD2 subsystem clock operation includes the operational current of the 12-bit interval timer.
- Note 5.** Current flowing only to the watchdog timer (including the operating current of the low-speed on-chip oscillator). The current value of the RL78 microcontrollers is the sum of IDD1, IDD2 or IDD3 and IWDT when the watchdog timer operates in STOP mode.
- Note 6.** Current flowing only to the A/D converter. The supply current of the RL78 microcontrollers is the sum of IDD1 or IDD2 and IADC, IAVREF, IADREF when the A/D converter operates in an operation mode or the HALT mode.
- Note 7.** Current flowing to the AVDD.
- Note 8.** Current flowing from the reference voltage source of A/D converter.
- Note 9.** Operation current flowing to the internal reference voltage.
- Note 10.** Current flowing to the AVREFP.
- Note 11.** Current flowing only to the D/A converter. The current value of the RL78 microcontrollers is the sum of IDD1 or IDD2 and IDA when the D/A converter operates in an operation mode or the HALT mode.
- Note 12.** Current flowing only to the comparator circuit. The current value of the RL78 microcontrollers is the sum of IDD1, IDD2 or IDD3 and ICMP when the comparator circuit operates in the Operating, HALT or STOP mode.
- Note 13.** Current flowing only to the LVD circuit. The current value of the RL78 microcontrollers is the sum of IDD1, IDD2 or IDD3 and ILVI when the LVD circuit operates in the Operating, HALT or STOP mode.
- Note 14.** Current flowing only during self-programming.
- Note 15.** Current flowing only during data flash rewrite.
- Note 16.** For shift time to the SNOOZE mode, see **23.3.3 SNOOZE mode in the RL78/L1C User's Manual Hardware.**
- Note 17.** Current flowing only to the LCD controller/driver (VDD pin). The current value of the RL78 microcontrollers is the sum of the LCD operating current (ILCD1, ILCD2 or ILCD3) to the supply current (IDD1, or IDD2) when the LCD controller/driver operates in an operation mode or HALT mode. Not including the current that flows through the LCD panel.
- Note 18.** Not including the current that flows through the external divider resistor divider resistor.
- Note 19.** Current flowing to the UVBUS.
- Note 20.** Including the operating current when fPLL = 48 MHz.
- Note 21.** Including the current supplied from the pull-up resistor of the UDP pin to the pull-down resistor of the host device, in addition to the current consumed by this MCU during the suspended state.

- Remark 1.** fIL: Low-speed on-chip oscillator clock frequency
- Remark 2.** fSUB: Subsystem clock frequency (XT1 clock oscillation frequency)
- Remark 3.** fCLK: CPU/peripheral hardware clock frequency
- Remark 4.** Temperature condition of the TYP. value is TA = 25°C

3.4 AC Characteristics

3.4.1 Basic operation

(TA = -40 to +105 °C, 2.4 V ≤ AVDD = VDD ≤ 3.6 V, VSS = 0 V)

(1/2)

| Items | Symbol | Conditions | | MIN. | TYP. | MAX. | Unit | |
|--|---------------------|---|------------------------------|---------------------|--------|------|------|----|
| Instruction cycle (minimum instruction execution time) | Tcy | Main system clock (fMAIN) operation | HS (high-speed main) mode | 2.7 V ≤ VDD ≤ 3.6 V | 0.0417 | | 1 | μs |
| | | | | 2.4 V ≤ VDD < 2.7 V | 0.0625 | | 1 | μs |
| | | Subsystem clock (fSUB) operation | | 2.4 V ≤ VDD ≤ 3.6 V | 28.5 | 30.5 | 31.3 | μs |
| | | In the self- programming mode | HS (high-speed main) mode | 2.7 V ≤ VDD ≤ 3.6 V | 0.0417 | | 1 | μs |
| | 2.4 V ≤ VDD < 2.7 V | | 0.0625 | | 1 | μs | | |
| External main system clock frequency | fEX | 2.7 V ≤ VDD ≤ 3.6 V | | 1.0 | | 20.0 | MHz | |
| | | 2.4 V ≤ VDD < 2.7 V | | 1.0 | | 16.0 | MHz | |
| | fEXT | | | 32 | | 35 | kHz | |
| External main system clock input high-level width, low-level width | tEXH, | 2.7 V ≤ VDD ≤ 3.6 V | | 24 | | | ns | |
| | tEXL | 2.4 V ≤ VDD < 2.7 V | | 30 | | | ns | |
| | tEXHS, tEXLS | | | 13.7 | | | μs | |
| T100 to T107 input high-level width, low-level width | tTIH, tTIL | | | 1/fMCK + 10 | | | ns | |

Remark fMCK: Timer array unit operation clock frequency
(Operation clock to be set by the CKSmn bit of timer mode register mn (TMRmn). m: Unit number (m = 0),
n: Channel number (n = 0 to 7))


(TA = -40 to +105 °C, 2.4 V ≤ AVDD = VDD ≤ 3.6 V, VSS = 0 V)

(2/2)


| Items | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|---|---------------------------------------|---------------------------------|---------------------------------|------|------|------------------|
| TO00 to TO07, TKBO00, TKBO01, TKBO10, TKBO11, TKBO20, TKBO21 output frequency | f _{ro} | HS (high-speed main) mode | 2.7 V ≤ V _{DD} ≤ 3.6 V | | 8 | MHz |
| | | | 2.4 V ≤ V _{DD} < 2.7 V | | 8 | MHz |
| PCLBUZ0, PCLBUZ1 output frequency | f _{PCL} | HS (high-speed main) mode | 2.7 V ≤ V _{DD} ≤ 3.6 V | | 8 | MHz |
| | | | 2.4 V ≤ V _{DD} < 2.7 V | | 8 | MHz |
| Interrupt input high-level width, low-level width | t _{INTH} , t _{INTL} | INTP0 to INTP7 | 2.4 V ≤ V _{DD} ≤ 3.6 V | 1 | | μs |
| Key interrupt input low-level width | t _{KR} | 2.4 V ≤ V _{DD} ≤ 3.6 V | | 250 | | ns |
| TMKB2 forced output stop input high-level width | t _{HR} | INTP0 to INTP7 | f _{CLK} > 16 MHz | 125 | | ns |
| | | | f _{CLK} ≤ 16 MHz | 2 | | f _{CLK} |
| RESET low-level width | t _{RSL} | | 10 | | | μs |

Minimum Instruction Execution Time during Main System Clock Operation


T_{CY} vs V_{DD} (HS (high-speed main) mode)

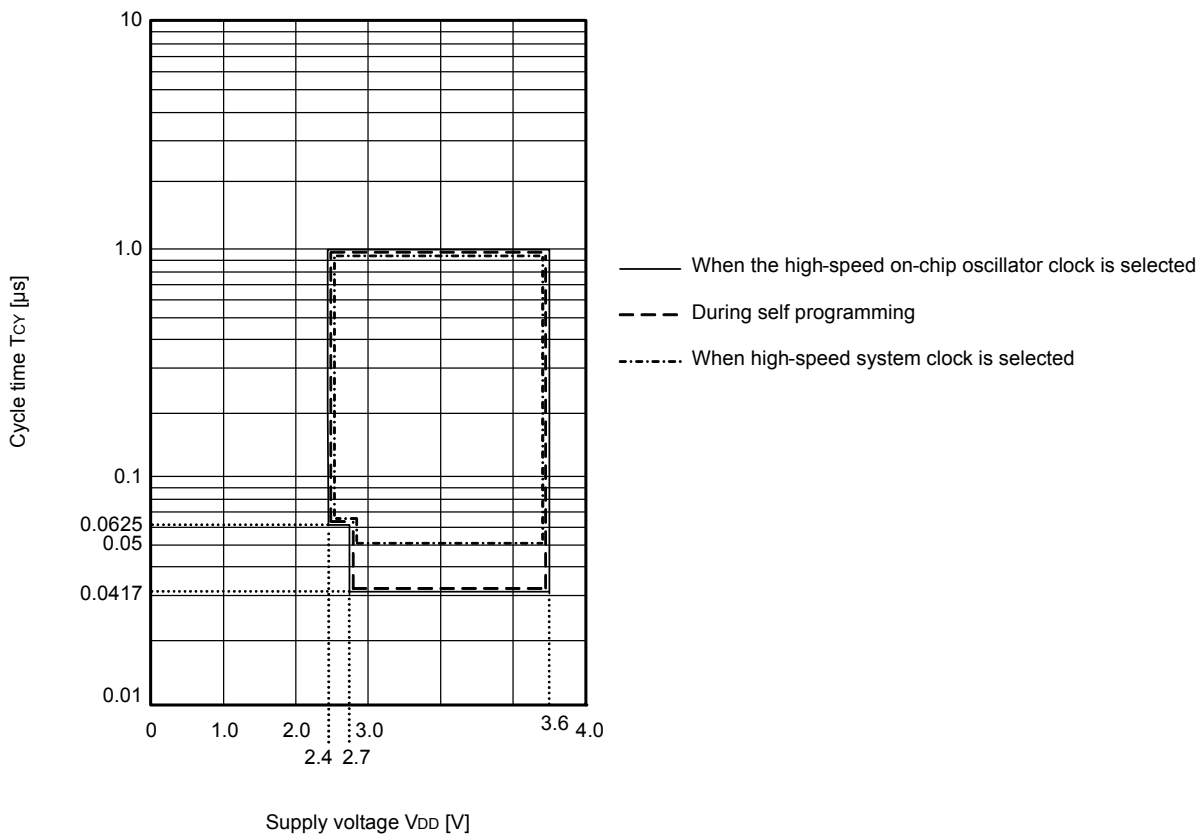



AC Timing Test Points




External System Clock Timing

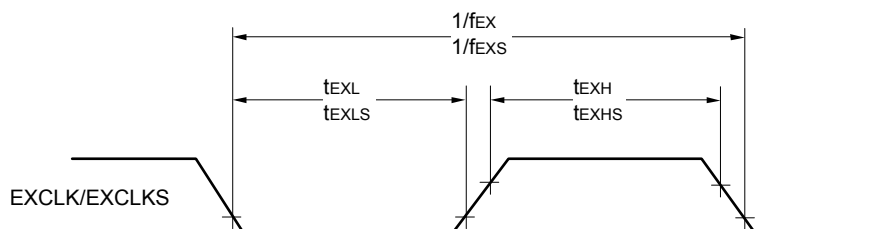


TI/TO Timing

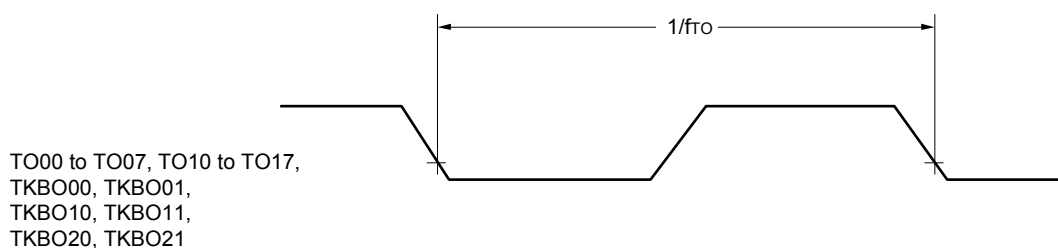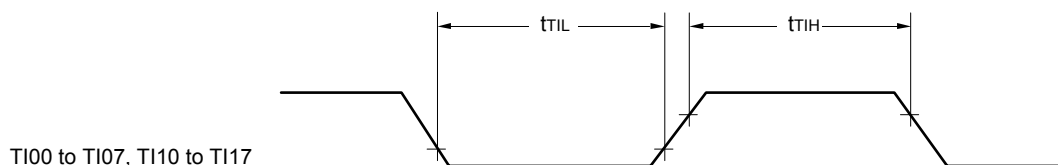


Interrupt Request Input Timing

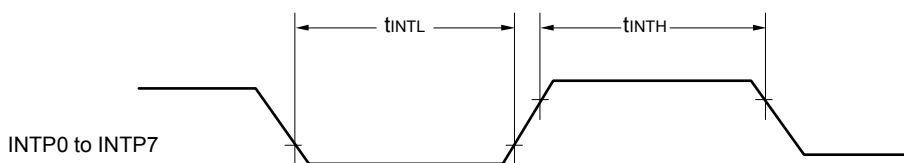


Key Interrupt Input Timing

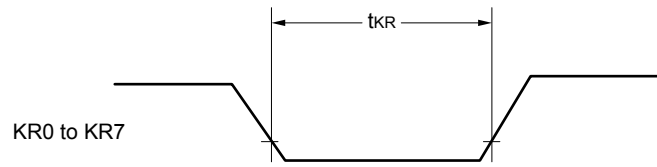


Timer KB2 Input Timing

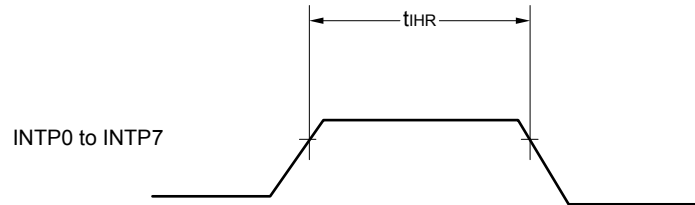

$\overline{\text{RESET}}$ Input Timing

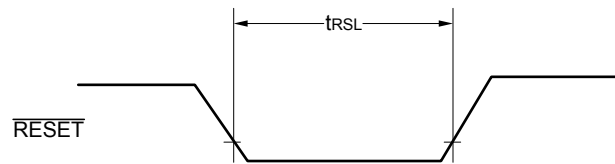

3.5 Peripheral Functions Characteristics



3.5.1 Serial array unit

(1) During communication at same potential (UART mode)

(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | Unit |
|---------------------------------|--------|---|---------------------------|---------------------------|------|
| | | | MIN. | MAX. | |
| Transfer rate ^{Note 1} | | 2.4 V ≤ VDD ≤ 3.6 V | | fMCK/12 ^{Note 2} | bps |
| | | Theoretical value of the maximum transfer rate fMCK = fCLK ^{Note 3} | | 2.0 | Mbps |

Note 1. Transfer rate in the SNOOZE mode is 4800 bps only.

Note 2. The following conditions are required for low voltage interface.

2.4 V ≤ VDD < 2.7 V: MAX. 1.3 Mbps


Note 3. The maximum operating frequencies of the CPU/peripheral hardware clock (fCLK) are:

HS (high-speed main) mode: 24 MHz (2.7 V ≤ VDD ≤ 3.6 V)


16 MHz (2.4 V ≤ VDD ≤ 3.6 V)

Caution Select the normal input buffer for the RxDq pin and the normal output mode for the TxDq pin by using port input mode register g (PIMg) and port output mode register g (POMg).

UART mode connection diagram (during communication at same potential)

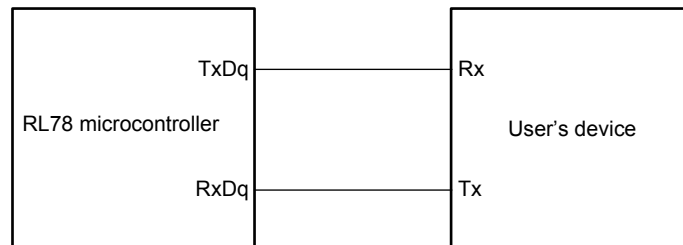

UART mode bit width (during communication at same potential) (reference)

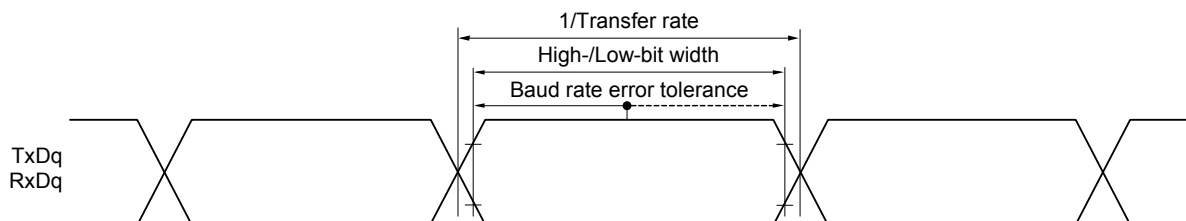

Remark 1. q: UART number (q = 0 to 3), g: PIM and POM number (g = 0 to 3)

Remark 2. fMCK: Serial array unit operation clock frequency

(Operation clock to be set by the CKSmn bit of serial mode register mn (SMRmn). m: Unit number, n: Channel number (mn = 00 to 03, 10 to 13))

(2) During communication at same potential (CSI mode) (master mode, SCKp... internal clock output)
(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | Unit |
|--|------------|---------------------|---------------------------|------|------|
| | | | MIN. | MAX. | |
| SCKp cycle time | tkCY1 | tkCY1 ≥ fCLK/4 | 2.7 V ≤ VDD ≤ 3.6 V | 250 | ns |
| | | | 2.4 V ≤ VDD ≤ 3.6 V | 500 | ns |
| SCKp high-/low-level width | tkH1, tkL1 | 2.7 V ≤ VDD ≤ 3.6 V | tkCY1/2 - 36 | ns | |
| | | 2.4 V ≤ VDD ≤ 3.6 V | tkCY1/2 - 76 | ns | |
| Slp setup time (to SCKp↑) Note 1 | tSIK1 | 2.7 V ≤ VDD ≤ 3.6 V | 66 | ns | |
| | | 2.4 V ≤ VDD ≤ 3.6 V | 133 | ns | |
| Slp hold time (from SCKp↑) Note 2 | tKSI1 | | 38 | ns | |
| Delay time from SCKp↓ to SOp output Note 3 | tKSO1 | C = 30 pF Note 4 | | 50 | ns |

Note 1. When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1. The Slp setup time becomes “to SCKp↓” when DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.

Note 2. When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1. The Slp hold time becomes “from SCKp↓” when DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.

Note 3. When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1. The delay time to SOp output becomes “from SCKp↑” when DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.

Note 4. C is the load capacitance of the SCKp and SOp output lines.

Caution Select the normal input buffer for the Slp pin and the normal output mode for the SOp pin and SCKp pin by using port input mode register g (PIMg) and port output mode register g (POMg).

Remark 1. p: CSI number (p = 00, 10, 20, 30), m: Unit number (m = 0, 1), n: Channel number (n = 0 to 3), g: PIM number (g = 0 to 3)

Remark 2. fMCK: Serial array unit operation clock frequency
 (Operation clock to be set by the CKSmn bit of serial mode register mn (SMRmn). m: Unit number, n: Channel number (mn = 00 to 03, 10 to 13))

(3) During communication at same potential (CSI mode) (slave mode, SCKp... external clock input)
(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | Unit | |
|---|------------|-----------------------------|---------------------------|---------|--------------|----|
| | | | MIN. | MAX. | | |
| SCKp cycle time ^{Note 5} | tkCY2 | 2.7 V ≤ VDD < 3.6 V | fMCK > 16 MHz | 16/fMCK | ns | |
| | | | fMCK ≤ 16 MHz | 12/fMCK | ns | |
| | | 2.4 V ≤ VDD < 3.6 V | 12/fMCK and 1000 | ns | | |
| SCKp high-/low-level width | tkH2, tkL2 | 2.7 V ≤ VDD ≤ 3.6 V | tkCY2/2 - 16 | | ns | |
| | | 2.4 V ≤ VDD ≤ 3.6 V | tkCY2/2 - 36 | | ns | |
| Slp setup time (to SCKp↑) ^{Note 1} | tsIK2 | 2.7 V ≤ VDD ≤ 3.6 V | 1/fMCK + 40 | | ns | |
| | | 2.4 V ≤ VDD ≤ 3.6 V | 1/fMCK + 60 | | ns | |
| Slp hold time (from SCKp↑) ^{Note 2} | tkSI2 | | 1/fMCK + 62 | | ns | |
| Delay time from SCKp↓ to SOp output ^{Note 3} | tkSO2 | C = 30 pF ^{Note 4} | 2.7 V ≤ VDD ≤ 3.6 V | | 2/fMCK + 66 | ns |
| | | | 2.4 V ≤ VDD < 3.6 V | | 2/fMCK + 113 | ns |

Note 1. When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1. The Slp setup time becomes “to SCKp↓” when DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.

Note 2. When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1. The Slp hold time becomes “from SCKp↓” when DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.

Note 3. When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1. The delay time to SOp output becomes “from SCKp↑” when DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.


Note 4. C is the load capacitance of the SOp output lines.

Note 5. The maximum transfer rate when using the SNOOZE mode is 1 Mbps.

Caution Select the normal input buffer for the Slp pin and the normal output mode for the SOp pin by using port input mode register g (PIMg) and port output mode register g (POMg).

Remark 1. p: CSI number (p = 00, 10, 20, 30), m: Unit number (m = 0, 1), n: Channel number (n = 0 to 3), g: PIM number (g = 0 to 3)


Remark 2. fMCK: Serial array unit operation clock frequency
 (Operation clock to be set by the CKSmn bit of serial mode register mn (SMRmn). m: Unit number, n: Channel number (mn = 00 to 03, 10 to 13))

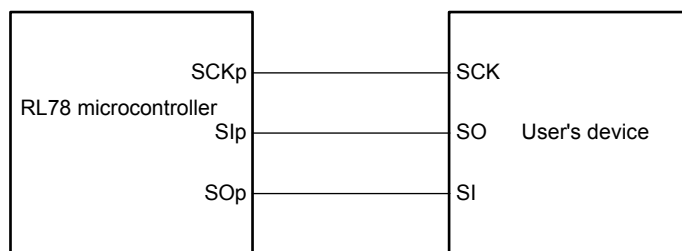CSI mode connection diagram (during communication at same potential)


Remark 1. p: CSI number (p = 00, 10, 20, 30)

Remark 2. m: Unit number, n: Channel number (mn = 00 to 03, 10 to 13)

**CSI mode serial transfer timing (during communication at same potential)
(When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1.)**

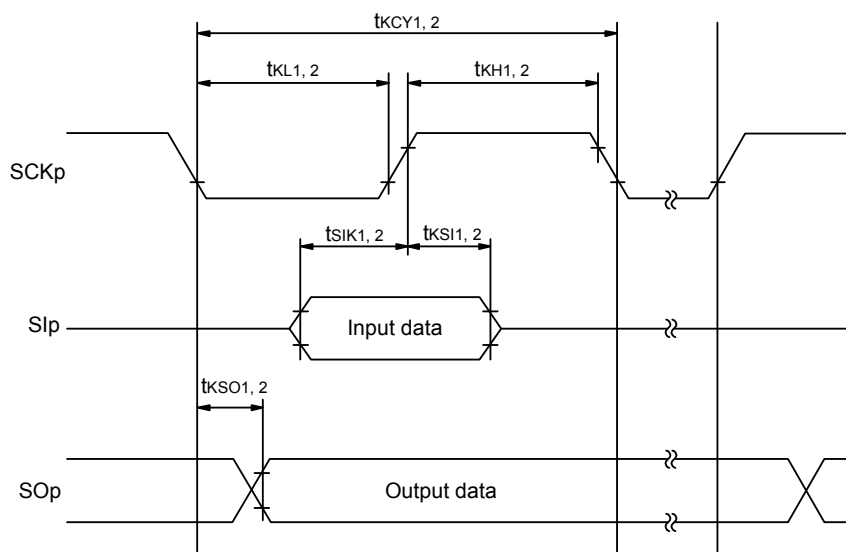

**CSI mode serial transfer timing (during communication at same potential)
(When DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.)**

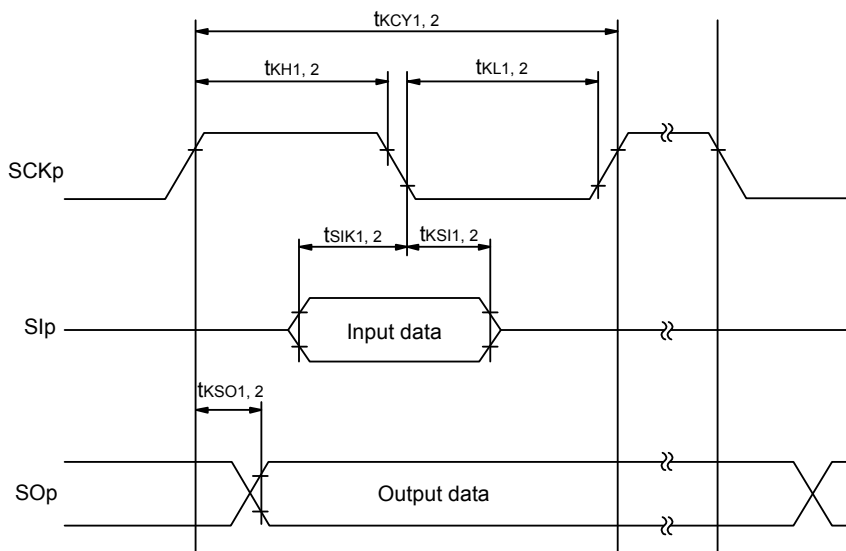

Remark 1. p: CSI number (p = 00, 10, 20, 30)


Remark 2. m: Unit number, n: Channel number (mn = 00 to 03, 10 to 13)


(4) During communication at same potential (simplified I²C mode)**(TA = -40 to +105 °C, 2.4 V ≤ V_{DD} ≤ 3.6 V, V_{SS} = 0 V)**

| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | Unit |
|-------------------------------|----------------------|---|---------------------------------|------------|------|
| | | | MIN. | MAX. | |
| SCLr clock frequency | f _{SCL} | 2.7 V ≤ V _{DD} ≤ 3.6 V, C _b = 50 pF, R _b = 2.7 kΩ | | 400 Note 1 | kHz |
| | | 2.4 V ≤ V _{DD} ≤ 3.6 V, C _b = 100 pF, R _b = 3 kΩ | | 100 Note 1 | |
| Hold time when SCLr = "L" | t _{LOW} | 2.7 V ≤ V _{DD} ≤ 3.6 V, C _b = 50 pF, R _b = 2.7 kΩ | 1200 | | ns |
| | | 2.4 V ≤ V _{DD} ≤ 3.6 V, C _b = 100 pF, R _b = 3 kΩ | 4600 | | |
| Hold time when SCLr = "H" | t _{HIGH} | 2.7 V ≤ V _{DD} ≤ 3.6 V, C _b = 50 pF, R _b = 2.7 kΩ | 1200 | | ns |
| | | 2.4 V ≤ V _{DD} ≤ 3.6 V, C _b = 100 pF, R _b = 3 kΩ | 4600 | | |
| Data setup time (reception) | t _{SU: DAT} | 2.7 V ≤ V _{DD} ≤ 3.6 V, C _b = 50 pF, R _b = 2.7 kΩ | 1/f _{MCK} + 200 Note 2 | | ns |
| | | 2.4 V ≤ V _{DD} ≤ 3.6 V, C _b = 100 pF, R _b = 3 kΩ | 1/f _{MCK} + 580 Note 2 | | |
| Data hold time (transmission) | t _{HD: DAT} | 2.7 V ≤ V _{DD} ≤ 3.6 V, C _b = 50 pF, R _b = 2.7 kΩ | 0 | 770 | ns |
| | | 2.4 V ≤ V _{DD} ≤ 3.6 V, C _b = 100 pF, R _b = 3 kΩ | 0 | 1420 | |

Note 1. The value must also be equal to or less than f_{MCK}/4.**Note 2.** Set the f_{MCK} value to keep the hold time of SCLr = "L" and SCLr = "H".

Caution Select the normal input buffer and the N-ch open drain output (V_{DD} tolerance) mode for the SDAr pin and the normal output mode for the SCLr pin by using port input mode register g (PIMg) and port output mode register h (POMh).

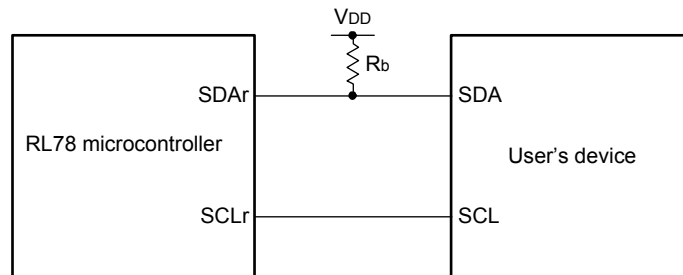Simplified I²C mode connection diagram (during communication at same potential)

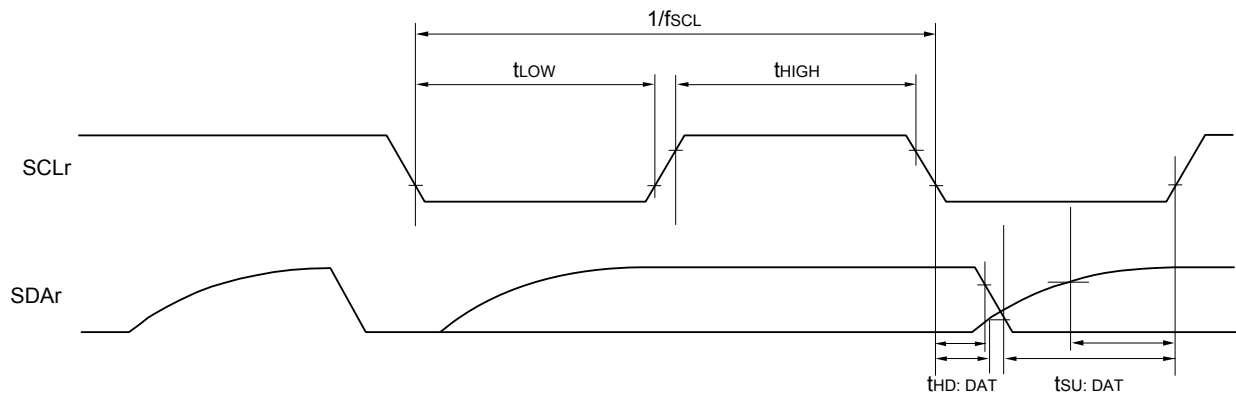Simplified I²C mode serial transfer timing (during communication at same potential)

Remark 1. $R_b[\Omega]$: Communication line (SDAr) pull-up resistance, $C_b[F]$: Communication line (SDAr, SCLr) load capacitance

Remark 2. r: IIC number (r = 00, 10, 20, 30), g: PIM number (g = 0 to 3),
h: POM number (h = 0 to 3)

Remark 3. f_{mck} : Serial array unit operation clock frequency
(Operation clock to be set by the CKSmn bit of serial mode register mn (SMRmn). m: Unit number (m = 0, 1),
n: Channel number (n = 0, 2), mn = 00 to 03, 10 to 13)

(5) Communication at different potential (1.8 V, 2.5 V) (UART mode) (dedicated baud rate generator output)
(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V) **(1/2)**

| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | Unit | |
|--------------------------|--------|------------|--|------|-----------------------|------|
| | | | MIN. | MAX. | | |
| Transfer rate Notes 1, 2 | | Reception | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V | | fMCK/12 Note 1 | bps |
| | | | Theoretical value of the maximum transfer rate fMCK = fCLK Note 4 | | 2.0 | Mbps |
| | | | 1.8 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V | | fMCK/12 Notes 1, 2, 3 | bps |
| | | | Theoretical value of the maximum transfer rate fMCK = fCLK Note 4 | | 1.3 | Mbps |

Note 1. Transfer rate in the SNOOZE mode is 4,800 bps only.

Note 2. Use it with VDD ≥ Vb.

Note 3. The following conditions are required for low voltage interface.

2.4 V ≤ VDD < 2.7 V: MAX. 2.6 Mbps

Note 4. The maximum operating frequencies of the CPU/peripheral hardware clock (fCLK) are:

HS (high-speed main) mode: 24 MHz (2.7 V ≤ VDD ≤ 3.6 V)

16 MHz (2.4 V ≤ VDD ≤ 3.6 V)

Caution Select the TTL input buffer for the RxDq pin and the N-ch open drain output (VDD tolerance) mode for the TxDq pin by using port input mode register g (PIMg) and port output mode register g (POMg). For VIH and VIL, see the DC characteristics with TTL input buffer selected.

Remark 1. Vb[V]: Communication line voltage

Remark 2. q: UART number (q = 0 to 3), g: PIM and POM number (g = 0 to 3)

Remark 3. fMCK: Serial array unit operation clock frequency

(Operation clock to be set by the CKSmn bit of serial mode register mn (SMRmn). m: Unit number,

n: Channel number (mn = 00 to 03, 10 to 13)

(5) Communication at different potential (1.8 V, 2.5V) (UART mode) (dedicated baud rate generator output)**(TA = -40 to +105 °C, 2.4 ≤ V_{DD} ≤ 3.6 V, V_{SS} = 0 V)****(2/2)**

| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | Unit | |
|---------------------------------|--------|--------------|---|------|-------------|------|
| | | | MIN. | MAX. | | |
| Transfer rate ^{Note 2} | | Transmission | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b ≤ 2.7 V | | Note 1 | bps |
| | | | Theoretical value of the maximum transfer rate C _b = 50 pF, R _b = 2.7 kΩ, V _b = 2.3 V | | 1.2 Note 2 | Mbps |
| | | | 1.8 V ≤ V _{DD} < 3.3 V, 1.6 V ≤ V _b ≤ 2.0 V | | Notes 3, 4 | bps |
| | | | Theoretical value of the maximum transfer rate C _b = 50 pF, R _b = 5.5 kΩ, V _b = 1.6 V | | 0.43 Note 5 | Mbps |

Note 1. The smaller maximum transfer rate derived by using $f_{MCK}/6$ or the following expression is the valid maximum transfer rate. Expression for calculating the transfer rate when $2.7 \text{ V} \leq V_{DD} < 3.6 \text{ V}$ and $2.3 \text{ V} \leq V_b \leq 2.7 \text{ V}$

$$\text{Maximum transfer rate} = \frac{1}{\{-C_b \times R_b \times \ln(1 - \frac{2.0}{V_b})\} \times 3} \text{ [bps]}$$

$$\text{Baud rate error (theoretical value)} = \frac{\frac{1}{\text{Transfer rate} \times 2} - \{-C_b \times R_b \times \ln(1 - \frac{2.0}{V_b})\}}{(\frac{1}{\text{Transfer rate}}) \times \text{Number of transferred bits}} \times 100 \text{ [%]}$$

* This value is the theoretical value of the relative difference between the transmission and reception sides

Note 2. This value as an example is calculated when the conditions described in the "Conditions" column are met. Refer to Note 1 above to calculate the maximum transfer rate under conditions of the customer.

Note 3. Use it with $V_{DD} \geq V_b$.

Note 4. The smaller maximum transfer rate derived by using $f_{MCK}/6$ or the following expression is the valid maximum transfer rate. Expression for calculating the transfer rate when $2.4 \text{ V} \leq V_{DD} < 3.3 \text{ V}$ and $1.6 \text{ V} \leq V_b \leq 2.0 \text{ V}$

$$\text{Maximum transfer rate} = \frac{1}{\{-C_b \times R_b \times \ln(1 - \frac{1.5}{V_b})\} \times 3} \text{ [bps]}$$


$$\text{Baud rate error (theoretical value)} = \frac{\frac{1}{\text{Transfer rate} \times 2} - \{-C_b \times R_b \times \ln(1 - \frac{1.5}{V_b})\}}{(\frac{1}{\text{Transfer rate}}) \times \text{Number of transferred bits}} \times 100 \text{ [%]}$$

* This value is the theoretical value of the relative difference between the transmission and reception sides


Note 5. This value as an example is calculated when the conditions described in the "Conditions" column are met. Refer to Note 4 above to calculate the maximum transfer rate under conditions of the customer.

Caution Select the TTL input buffer for the RxDq pin and the N-ch open drain output (V_{DD} tolerance) mode for the TxDq pin by using port input mode register g (PIMg) and port output mode register g (POMg). For V_{IH} and V_{IL}, see the DC characteristics with TTL input buffer selected.

UART mode connection diagram (during communication at different potential)

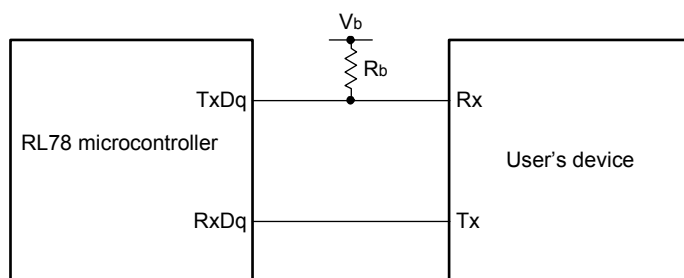

UART mode bit width (during communication at different potential) (reference)

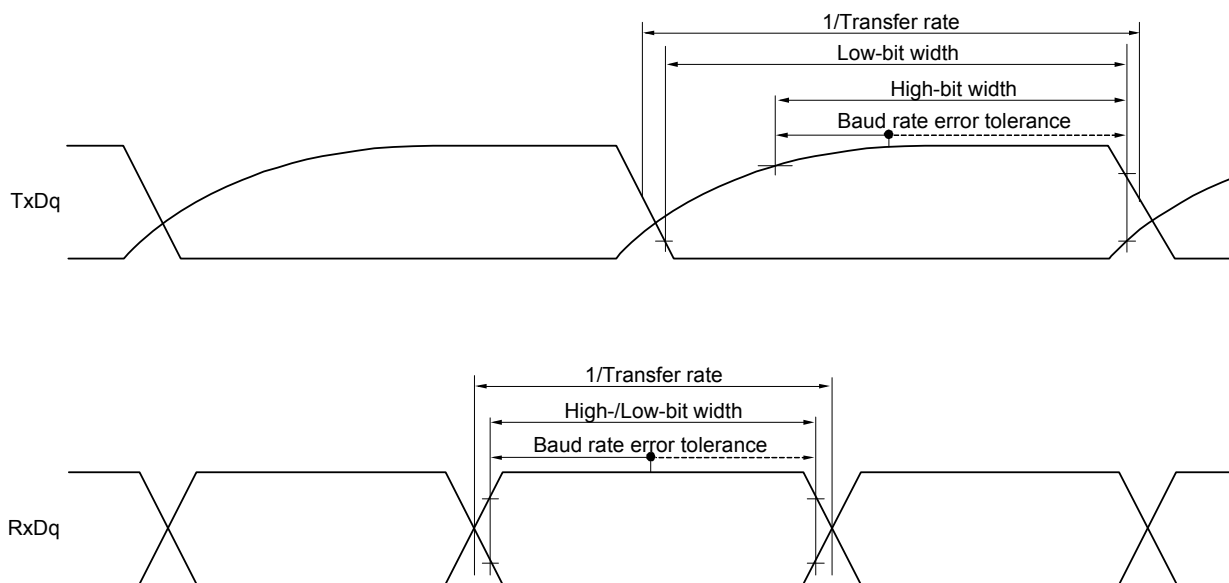

Remark 1. $R_b[\Omega]$: Communication line (TxDq) pull-up resistance, $C_b[F]$: Communication line (TxDq) load capacitance, $V_b[V]$: Communication line voltage

Remark 2. q: UART number (q = 0 to 3), g: PIM and POM number (g = 0 to 3)

Remark 3. f_{MCK} : Serial array unit operation clock frequency
 (Operation clock to be set by the CKSmn bit of serial mode register mn (SMRmn). m: Unit number, n: Channel number (mn = 00 to 03, 10 to 13))

(6) Communication at different potential (1.8 V, 2.5 V) (CSI mode) (master mode, SCKp... internal clock output)**(TA = -40 to +105 °C, 2.4 V ≤ V_{DD} ≤ 3.6 V, V_{SS} = 0 V)****(1/2)**

| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | Unit |
|-----------------------|--------|---|---------------------------|------|------|
| | | | MIN. | MAX. | |
| SCKp cycle time | tkCY1 | tkCY1 ≥ fCLK/4 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b ≤ 2.7 V, C _b = 30 pF, R _b = 2.7 kΩ | 1000 Note | | ns |
| | | | 2300 Note | | ns |
| SCKp high-level width | tkH1 | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b ≤ 2.7 V, C _b = 30 pF, R _b = 2.7 kΩ | tkCY1/2 - 340 | | ns |
| | | 2.4 V ≤ V _{DD} < 3.3 V, 1.6 V ≤ V _b ≤ 2.0 V, C _b = 30 pF, R _b = 5.5 kΩ | tkCY1/2 - 916 | | ns |
| SCKp low-level width | tkL1 | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b ≤ 2.7 V, C _b = 30 pF, R _b = 2.7 kΩ | tkCY1/2 - 36 | | ns |
| | | 2.4 V ≤ V _{DD} < 3.3 V, 1.6 V ≤ V _b ≤ 2.0 V, C _b = 30 pF, R _b = 5.5 kΩ | tkCY1/2 - 100 | | ns |

Note Use it with V_{DD} ≥ V_b.**Caution** Select the TTL input buffer for the SIp pin and the N-ch open drain output (V_{DD} tolerance) mode for the SOp pin and SCKp pin by using port input mode register g (PIMg) and port output mode register g (POMg). For V_{IH} and V_{IL}, see the DC characteristics with TTL input buffer selected.

(Remarks are listed on the page after the next page.)


(6) Communication at different potential (1.8 V, 2.5 V) (CSI mode) (master mode, SCKp... internal clock output)**(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V)****(2/2)**

| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | Unit |
|--|--------|--|---------------------------|------|------|
| | | | MIN. | MAX. | |
| Slp setup time (to SCKp↑) Note 1 | tSIK1 | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V, Cb = 30 pF, Rb = 2.7 kΩ | 354 | | ns |
| | | 2.4 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V Note 3, Cb = 30 pF, Rb = 5.5 kΩ | 958 | | ns |
| Slp hold time (from SCKp↑) Note 1 | tKSI1 | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V, Cb = 30 pF, Rb = 2.7 kΩ | 38 | | ns |
| | | 2.4 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V Note 3, Cb = 30 pF, Rb = 5.5 kΩ | 38 | | ns |
| Delay time from SCKp↓ to SOp output Note 1 | tKSO1 | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V, Cb = 30 pF, Rb = 2.7 kΩ | | 390 | ns |
| | | 2.4 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V Note 3, Cb = 30 pF, Rb = 5.5 kΩ | | 966 | ns |
| Slp setup time (to SCKp↓) Note 2 | tSIK1 | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V, Cb = 30 pF, Rb = 2.7 kΩ | 88 | | ns |
| | | 2.4 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V Note 3, Cb = 30 pF, Rb = 5.5 kΩ | 220 | | ns |
| Slp hold time (from SCKp↓) Note 2 | tKSI1 | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V, Cb = 30 pF, Rb = 2.7 kΩ | 38 | | ns |
| | | 2.4 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V Note 3, Cb = 30 pF, Rb = 5.5 kΩ | 38 | | ns |
| Delay time from SCKp↑ to SOp output Note 2 | tKSO1 | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V, Cb = 30 pF, Rb = 2.7 kΩ | | 50 | ns |
| | | 2.4 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V Note 3, Cb = 30 pF, Rb = 5.5 kΩ | | 50 | ns |

Note 1. When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1.**Note 2.** When DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.**Note 3.** Use it with VDD ≥ Vb.

Caution Select the TTL input buffer for the Slp pin and the N-ch open drain output (VDD tolerance) mode for the SOp pin and SCKp pin by using port input mode register g (PIMg) and port output mode register g (POMg). For VIH and VIL, see the DC characteristics with TTL input buffer selected.

(Remarks are listed on the next page.)

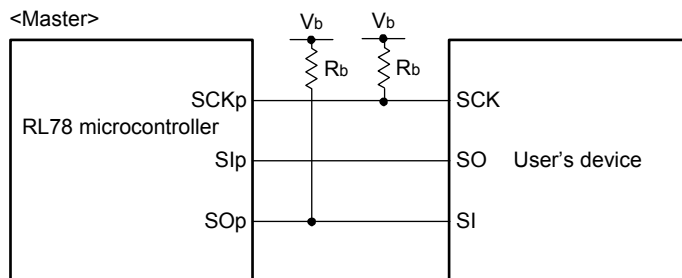
CSI mode connection diagram (during communication at different potential)

Remark 1. $R_b[\Omega]$: Communication line (SCKp, SOp) pull-up resistance, $C_b[F]$: Communication line (SCKp, SOp) load capacitance, $V_b[V]$: Communication line voltage


Remark 2. p: CSI number (p = 00, 10, 20, 30), m: Unit number (m = 0, 1), n: Channel number (n = 0 to 3), g: PIM and POM number (g = 0 to 3)

Remark 3. f_{mck} : Serial array unit operation clock frequency
(Operation clock to be set by the CKSmn bit of serial mode register mn (SMRmn). m: Unit number, n: Channel number (mn = 00))

**CSI mode serial transfer timing (master mode) (during communication at different potential)
(When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1.)**

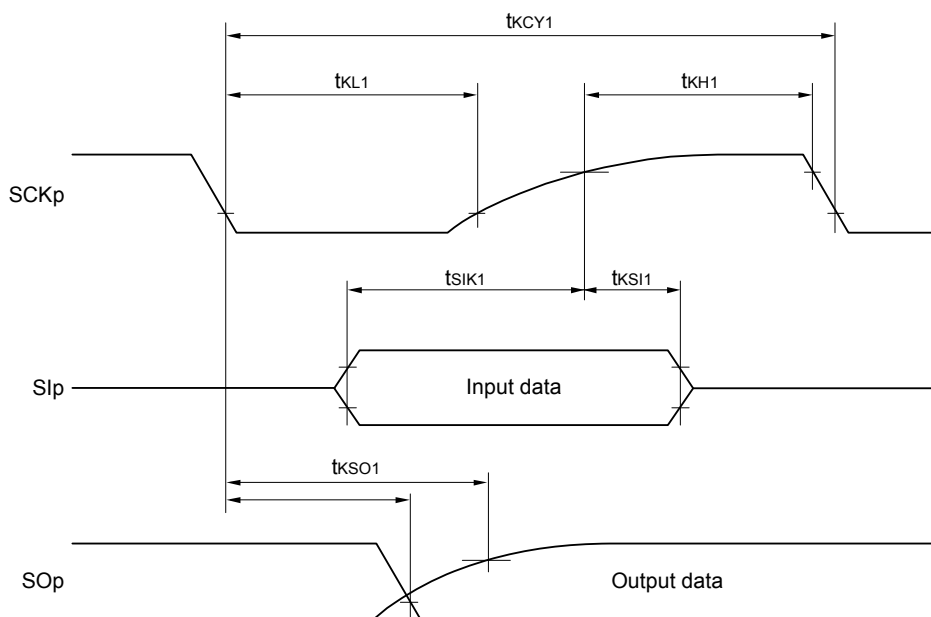

**CSI mode serial transfer timing (master mode) (during communication at different potential)
(When DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.)**

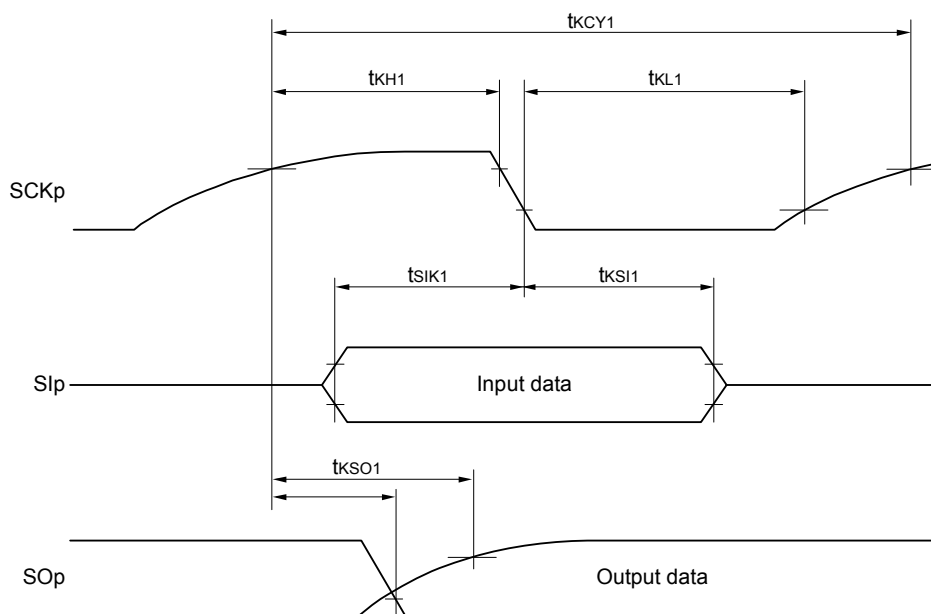

Remark p: CSI number (p = 00, 10, 20, 30), m: Unit number (m = 0, 1), n: Channel number (n = 0 to 3),
g: PIM and POM number (g = 0 to 3)

(7) Communication at different potential (1.8 V, 2.5 V) (CSI mode) (slave mode, SCKp... external clock input)

(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V)


| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | Unit | |
|--|------------|---|---------------------------|---------------|------|----|
| | | | MIN. | MAX. | | |
| SCKp cycle time Note 1 | tkcy2 | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V | 20 MHz < fMCK ≤ 24 MHz | 32/fMCK | | ns |
| | | | 16 MHz < fMCK ≤ 20 MHz | 28/fMCK | | ns |
| | | | 8 MHz < fMCK ≤ 16 MHz | 24/fMCK | | ns |
| | | | 4 MHz < fMCK ≤ 8 MHz | 16/fMCK | | ns |
| | | | fMCK ≤ 4 MHz | 12/fMCK | | ns |
| | | 2.4 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V Note 2 | 20 MHz < fMCK ≤ 24 MHz | 72/fMCK | | ns |
| | | | 16 MHz < fMCK ≤ 20 MHz | 64/fMCK | | ns |
| | | | 8 MHz < fMCK ≤ 16 MHz | 52/fMCK | | ns |
| | | | 4 MHz < fMCK ≤ 8 MHz | 32/fMCK | | ns |
| | | | fMCK ≤ 4 MHz | 20/fMCK | | ns |
| SCKp high-/low-level width | tkH2, tkL2 | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V | tkcy2/2 - 36 | | ns | |
| | | 2.4 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V Note 2 | tkcy2/2 - 100 | | ns | |
| Slp setup time (to SCKp↑) Note 3 | tsIK2 | 2.7 V ≤ VDD ≤ 3.6 V | 1/fMCK + 40 | | ns | |
| | | 2.4 V ≤ VDD < 3.3 V | 1/fMCK + 60 | | ns | |
| Slp hold time (from SCKp↑) Note 4 | tkSI2 | | 1/fMCK + 62 | | ns | |
| Delay time from SCKp↓ to SOp output Note 5 | tkSO2 | 2.7 V ≤ VDD ≤ 3.6 V, 2.3 V ≤ Vb ≤ 2.7 V Cb = 30 pF, Rb = 2.7 kΩ | | 2/fMCK + 428 | ns | |
| | | 2.4 V ≤ VDD < 3.3 V, 1.6 V ≤ Vb ≤ 2.0 V Note 2 Cb = 30 pF, Rb = 5.5 kΩ | | 2/fMCK + 1146 | ns | |

(Notes and Caution are listed on the next page. Remarks are listed on the page after the next page.)

- Note 1.** Transfer rate in the SNOOZE mode: MAX. 1 Mbps
- Note 2.** Use it with $V_{DD} \geq V_b$.
- Note 3.** When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1. The SIp setup time becomes “to SCKp↓” when DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.
- Note 4.** When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1. The SIp hold time becomes “from SCKp↓” when DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.
- Note 5.** When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1. The delay time to SOp output becomes “from SCKp↑” when DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.
- Caution** **Select the TTL input buffer for the SIp pin and SCKp pin and the N-ch open drain output (V_{DD} tolerance) mode for the SOp pin by using port input mode register g (PIMg) and port output mode register g (POMg). For V_{IH} and V_{IL}, see the DC characteristics with TTL input buffer selected.**

(Remarks are listed on the next page.)

CSI mode connection diagram (during communication at different potential)

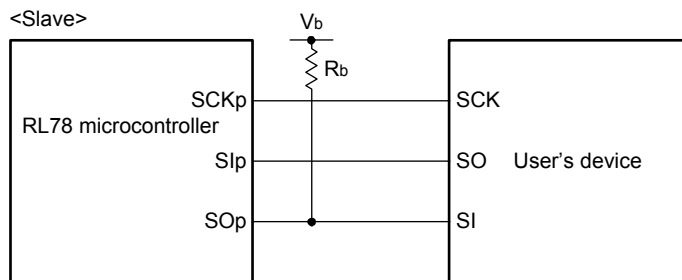


Remark 1. R_b[Ω]: Communication line (SO_p) pull-up resistance, C_b[F]: Communication line (SO_p) load capacitance, V_b[V]: Communication line voltage


Remark 2. p: CSI number (p = 00, 10, 20, 30), m: Unit number (m = 0, 1), n: Channel number (n = 0 to 3), g: PIM and POM number (g = 0 to 3)

Remark 3. f_{MCK}: Serial array unit operation clock frequency
(Operation clock to be set by the CKS_{mn} bit of serial mode register mn (SMR_{mn}). m: Unit number, n: Channel number (mn = 00, 02, 10, 12))

**CSI mode serial transfer timing (slave mode) (during communication at different potential)
(When DAPmn = 0 and CKPmn = 0, or DAPmn = 1 and CKPmn = 1.)**

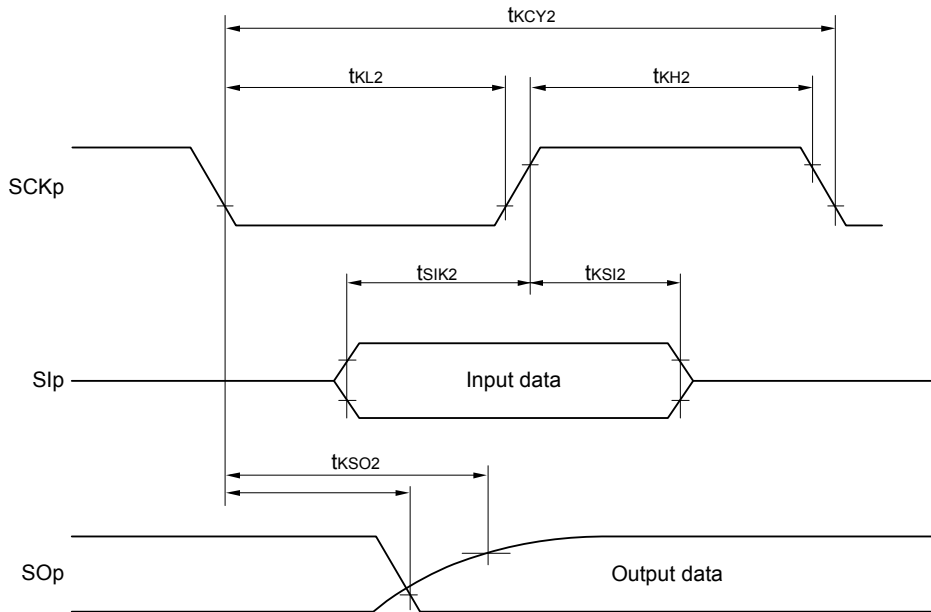

**CSI mode serial transfer timing (slave mode) (during communication at different potential)
(When DAPmn = 0 and CKPmn = 1, or DAPmn = 1 and CKPmn = 0.)**

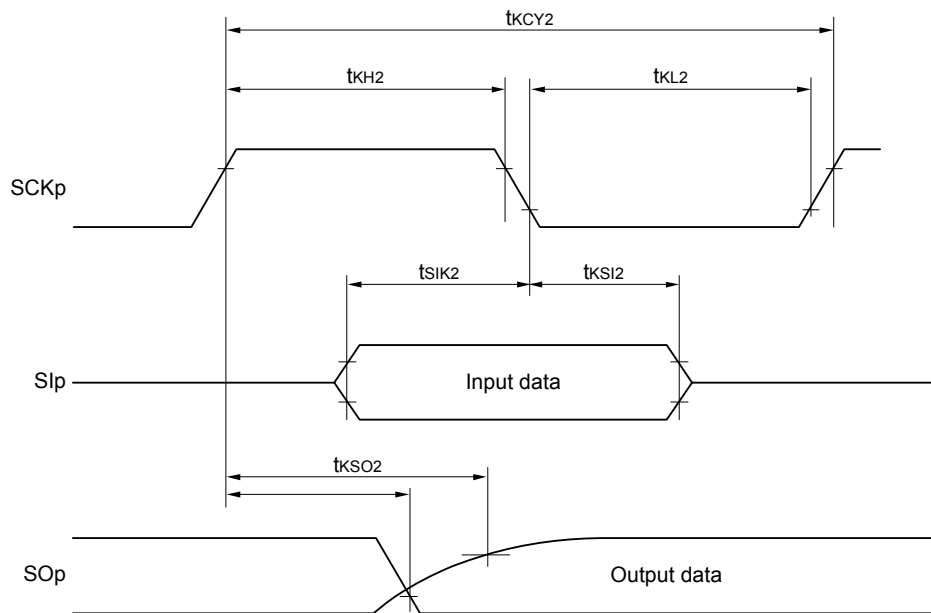

Remark p: CSI number (p = 00, 10, 20, 30), m: Unit number (m = 0, 1),
n: Channel number (n = 0 to 3), g: PIM and POM number (g = 0 to 3)

(8) Communication at different potential (1.8 V, 2.5 V) (simplified I²C mode)**(TA = -40 to +105 °C, 2.4 V ≤ V_{DD} ≤ 3.6 V, V_{SS} = 0 V)**


| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | Unit |
|-------------------------------|---------------------|---|---------------------------------|------------|------|
| | | | MIN. | MAX. | |
| SCLr clock frequency | f _{SCL} | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b < 2.7 V, C _b = 50 pF, R _b = 2.7 kΩ | | 400 Note 1 | kHz |
| | | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b < 2.7 V, C _b = 100 pF, R _b = 2.7 kΩ | | 100 Note 1 | |
| | | 2.4 V ≤ V _{DD} < 3.3 V, 1.6 V ≤ V _b ≤ 2.0 V Note 2, C _b = 100 pF, R _b = 5.5 kΩ | | 100 Note 1 | |
| Hold time when SCLr = "L" | t _{LOW} | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b < 2.7 V, C _b = 50 pF, R _b = 2.7 kΩ | 1200 | | ns |
| | | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b < 2.7 V, C _b = 100 pF, R _b = 2.7 kΩ | 4600 | | |
| | | 2.4 V ≤ V _{DD} < 3.3 V, 1.6 V ≤ V _b ≤ 2.0 V Note 2, C _b = 100 pF, R _b = 5.5 kΩ | 4650 | | |
| Hold time when SCLr = "H" | t _{HIGH} | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b < 2.7 V, C _b = 50 pF, R _b = 2.7 kΩ | 500 | | ns |
| | | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b < 2.7 V, C _b = 100 pF, R _b = 2.7 kΩ | 2400 | | |
| | | 2.4 V ≤ V _{DD} < 3.3 V, 1.6 V ≤ V _b ≤ 2.0 V Note 2, C _b = 100 pF, R _b = 5.5 kΩ | 1830 | | |
| Data setup time (reception) | t _{SU:DAT} | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b < 2.7 V, C _b = 50 pF, R _b = 2.7 kΩ | 1/f _{MCK} + 340 Note 3 | | ns |
| | | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b < 2.7 V, C _b = 100 pF, R _b = 2.7 kΩ | 1/f _{MCK} + 760 Note 3 | | |
| | | 2.4 V ≤ V _{DD} < 3.3 V, 1.6 V ≤ V _b ≤ 2.0 V Note 2, C _b = 100 pF, R _b = 5.5 kΩ | 1/f _{MCK} + 570 Note 3 | | |
| Data hold time (transmission) | t _{HD:DAT} | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b < 2.7 V, C _b = 50 pF, R _b = 2.7 kΩ | 0 | 770 | ns |
| | | 2.7 V ≤ V _{DD} ≤ 3.6 V, 2.3 V ≤ V _b < 2.7 V, C _b = 100 pF, R _b = 2.7 kΩ | 0 | 1420 | |
| | | 2.4 V ≤ V _{DD} < 3.3 V, 1.6 V ≤ V _b ≤ 2.0 V Note 2, C _b = 100 pF, R _b = 5.5 kΩ | 0 | 1215 | |

Note 1. The value must also be equal to or less than f_{MCK}/4.**Note 2.** Use it with V_{DD} ≥ V_b.**Note 3.** Set the f_{MCK} value to keep the hold time of SCLr = "L" and SCLr = "H".


Caution Select the TTL input buffer and the N-ch open drain output (V_{DD} tolerance) mode for the SDAr pin and the N-ch open drain output (V_{DD} tolerance) mode for the SCLr pin by using port input mode register g (PIMg) and port output mode register g (POMg). For V_{IH} and V_{IL}, see the DC characteristics with TTL input buffer selected.

(Remarks are listed on the next page.)

Simplified I²C mode connection diagram (during communication at different potential)

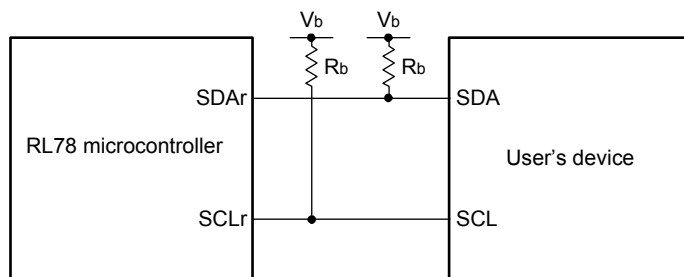

Simplified I²C mode serial transfer timing (during communication at different potential)

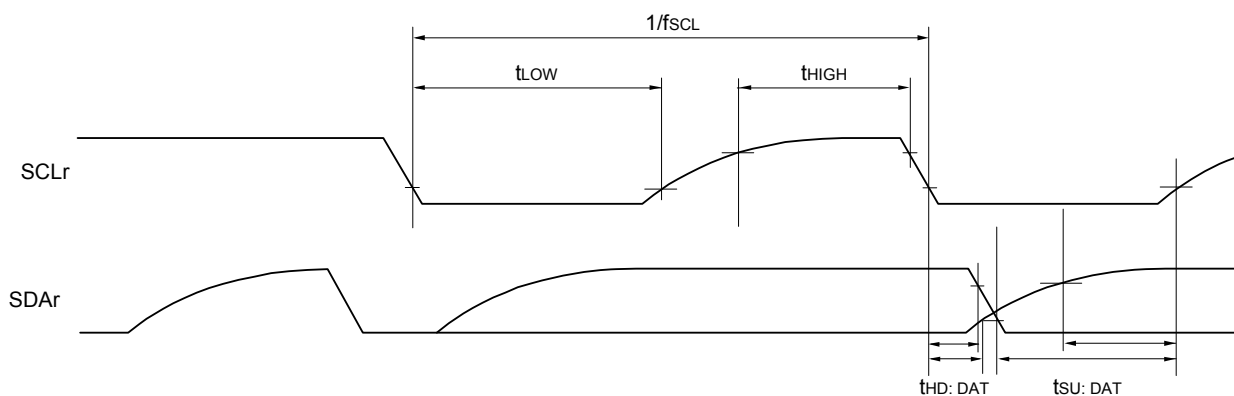

- Remark 1.** $R_b[\Omega]$: Communication line (SDAr, SCLr) pull-up resistance, $C_b[F]$: Communication line (SDAr, SCLr) load capacitance, $V_b[V]$: Communication line voltage
- Remark 2.** r: IIC number (r = 00, 10, 20, 30), g: PIM, POM number (g = 0 to 3)
- Remark 3.** f_{mck} : Serial array unit operation clock frequency
(Operation clock to be set by the CKSmn bit of serial mode register mn (SMRmn). m: Unit number (m = 0, 1), n: Channel number (n = 0, 2), mn = 00, 02, 10, 12)

3.5.2 Serial interface IICA

(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | HS (high-speed main) Mode | | | | Unit |
|--------------------------------------|----------|-----------------------------|---------------------------|------|-----------|------|------|
| | | | Standard mode | | Fast mode | | |
| | | | MIN. | MAX. | MIN. | MAX. | |
| SCLA0 clock frequency | fSCL | Fast mode: fCLK ≥ 3.5 MHz | — | — | 0 | 400 | kHz |
| | | Standard mode: fCLK ≥ 1 MHz | 0 | 100 | — | — | kHz |
| Setup time of restart condition | tSU: STA | | 4.7 | | 0.6 | | μs |
| Hold time Note 1 | tHD: STA | | 4.0 | | 0.6 | | μs |
| Hold time when SCLA0 = "L" | tLOW | | 4.7 | | 1.3 | | μs |
| Hold time when SCLA0 = "H" | tHIGH | | 4.0 | | 0.6 | | μs |
| Data setup time (reception) | tSU: DAT | | 250 | | 100 | | ns |
| Data hold time (transmission) Note 2 | tHD: DAT | | 0 | 3.45 | 0 | 0.9 | μs |
| Setup time of stop condition | tSU: STO | | 4.0 | | 0.6 | | μs |
| Bus-free time | tBUF | | 4.7 | | 1.3 | | μs |

Note 1. The first clock pulse is generated after this period when the start/restart condition is detected.


Note 2. The maximum value (MAX.) of tHD:DAT is during normal transfer and a wait state is inserted in the ACK (acknowledge) timing.

Remark The maximum value of Cb (communication line capacitance) and the value of Rb (communication line pull-up resistor) at that time in each mode are as follows.

Standard mode: Cb = 400 pF, Rb = 2.7 kΩ

Fast mode: Cb = 320 pF, Rb = 1.1 kΩ

IICA serial transfer timing

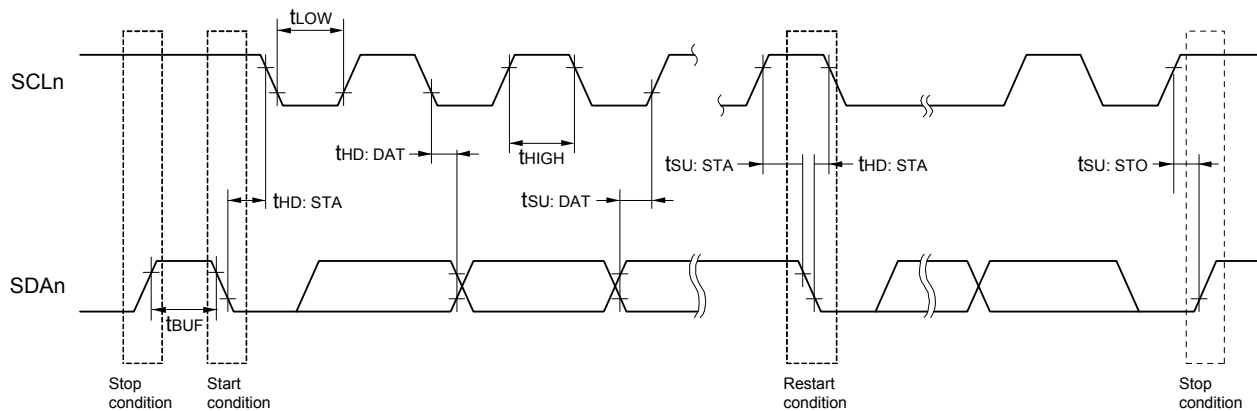

3.5.3 USB

(1) Electrical specifications

(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V, HS (High-speed main) mode only)

| Parameter | | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|-----------|-------------------------------------|--------|---|---------------------|------|------|------|
| UREGC | UREGC output voltage characteristic | UREGC | UVBUS = 4.0 to 5.5 V, PXXCON = VDDUSBE = 1 | 3.0 | 3.3 | 3.6 | V |
| UVBUS | UVBUS input voltage characteristic | UVBUS | Function | 4.35 (4.02 Note) | 5.00 | 5.25 | V |


Note Value of instantaneous voltage

(TA = -40 to +105 °C, 4.35 V ≤ UVBUS ≤ 5.25 V, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V, HS (High-speed main) mode only)

| Parameter | | Symbol | Conditions | MIN. | TYP. | MAX. | Unit | |
|--|------------------------------|-------------------|---|--|------|-------|-------|----|
| Input characteristic (FS/LS receiver) | Input voltage | V _{IH} | | 2.0 | | | V | |
| | | V _{IL} | | | | 0.8 | V | |
| | Difference input sensitivity | V _{DI} | UDP voltage - UDM voltage | 0.2 | | | V | |
| | Difference common mode range | V _{CM} | | 0.8 | | 2.5 | V | |
| Output characteristic (FS driver) | Output voltage | V _{OH} | I _{OH} = -200 μA | 2.8 | | 3.6 | V | |
| | | V _{OL} | I _{OL} = 2 mA | 0 | | 0.3 | V | |
| | Transition time | Rising | t _{FR} | Rising: From 10% to 90% of amplitude, Falling: From 90% to 10% of amplitude, CL = 50 pF | 4 | | 20 | ns |
| | | Falling | t _{FF} | | 4 | | 20 | ns |
| | Matching (TFR/TFF) | | V _{FRFM} | | 90 | | 111.1 | % |
| | Crossover voltage | | V _{FCRS} | | 1.3 | | 2.0 | V |
| Output Impedance | | Z _{DRV} | UREGC voltage = 3.3 V, Pin voltage = 1.65 V | 28 | | 44 | Ω | |
| Output characteristic (LS driver) | Output voltage | V _{OH} | | 2.8 | | 3.6 | V | |
| | | V _{OL} | | 0 | | 0.3 | V | |
| | Transition time | Rising | t _{LR} | Rising: From 10% to 90% of amplitude, Falling: From 90% to 10% of amplitude, CL = 250 pF to 750 pF | 75 | | 300 | ns |
| | | Falling | t _{LF} | | 75 | | 300 | ns |
| | Matching (TFR/TFF) Note | | V _{LTFM} | | 80 | | 125 | % |
| Crossover voltage Note | | V _{LCRS} | The UDP and UDM pins are individually pulled down via 15 kΩ | 1.3 | | 2.0 | V | |
| Pull-up, Pull-down | Pull-down resistor | | R _{PD} | | | 24.80 | kΩ | |
| | Pull-up resistor | Idle | R _{PUI} | 0.9 | | 1.575 | kΩ | |
| | | Reception | R _{PUA} | 1.425 | | 3.09 | kΩ | |
| UVBUS | UVBUS pull-down resistor | | R _{VBUS} | | 1000 | | kΩ | |
| | UVBUS input voltage | | V _{IH} | 3.20 | | | V | |
| | | | V _{IL} | | | 0.8 | V | |

Note Excludes the first signal transition from the idle state.

Timing of UDP and UDM

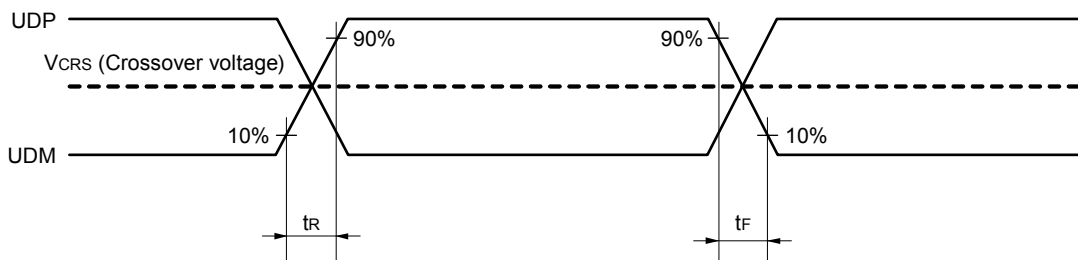

(2) BC standard

(TA = -40 to +105 °C, 4.35 V ≤ UVBUS ≤ 5.25 V, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V, HS (High-speed main) mode only)

| | Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|--------------------|------------------------|----------|-----------------------|------|-------|------|------|
| USB standard BC1.2 | UDP sink current | IDP_SINK | | 25 | 100 | 175 | μA |
| | UDM sink current | IDM_SINK | | 25 | 100 | 175 | μA |
| | DCD source current | IDP_SRC | | 7 | 10 | 13 | μA |
| | Data detection voltage | VDAT_REF | | 0.25 | 0.325 | 0.4 | V |
| | UDP source voltage | VDP_SRC | Output current 250 μA | 0.5 | 0.6 | 0.7 | V |
| | UDM source voltage | VDM_SRC | Output current 250 μA | 0.5 | 0.6 | 0.7 | V |

(3) BC option standard

(TA = -40 to +105 °C, 4.35 V ≤ UVBUS ≤ 5.25 V, 2.4 V ≤ VDD ≤ 3.6, VSS = 0 V)

| Parameter | | | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|--|-----------------------------|------|----------|------------|------|--------|------|--------|
| UDP/UDM input reference voltage (UVBUS divider ratio) (Function) | VDSELi [3: 0] (i = 0, 1) | 0000 | VDDDET0 | | 27 | 32 | 37 | %UVBUS |
| | | 0001 | VDDDET1 | | 29 | 34 | 39 | %UVBUS |
| | | 0010 | VDDDET2 | | 32 | 37 | 42 | %UVBUS |
| | | 0011 | VDDDET3 | | 35 | 40 | 45 | %UVBUS |
| | | 0100 | VDDDET4 | | 38 | 43 | 48 | %UVBUS |
| | | 0101 | VDDDET5 | | 41 | 46 | 51 | %UVBUS |
| | | 0110 | VDDDET6 | | 44 | 49 | 54 | %UVBUS |
| | | 0111 | VDDDET7 | | 47 | 52 | 57 | %UVBUS |
| | | 1000 | VDDDET8 | | 51 | 56 | 61 | %UVBUS |
| | | 1001 | VDDDET9 | | 55 | 60 | 65 | %UVBUS |
| | | 1010 | VDDDET10 | | 59 | 64 | 69 | %UVBUS |
| | | 1011 | VDDDET11 | | 63 | 68 | 73 | %UVBUS |
| | | 1100 | VDDDET12 | | 67 | 72 | 73 | %UVBUS |
| | | 1101 | VDDDET13 | | 71 | 76 | 81 | %UVBUS |
| | | 1110 | VDDDET14 | | 75 | 80 | 85 | %UVBUS |
| 1111 | VDDDET15 | | 79 | 84 | 89 | %UVBUS | | |

3.6 Analog Characteristics

3.6.1 A/D converter characteristics

Classification of A/D converter characteristics

| Reference Voltage Input Channel | Reference voltage (+) = AV _{REFP} Reference voltage (-) = AV _{REFM} | Reference voltage (+) = AV _{DD} Reference voltage (-) = AV _{SS} | Reference voltage (+) = Internal reference voltage Reference voltage (-) = AV _{SS} |
|---|--|--|---|
| High-accuracy channel; ANI0 to ANI6 (input buffer power supply: AV _{DD}) | Refer to 3.6.1 (1). | Refer to 3.6.1 (2). | Refer to 3.6.1 (5). |
| Standard channel; ANI16 to ANI21 (input buffer power supply: V _{DD}) | Refer to 3.6.1 (3). | Refer to 3.6.1 (4). | |
| Internal reference voltage, Temperature sensor output voltage | Refer to 3.6.1 (3). | Refer to 3.6.1 (4). | — |

(1) When reference voltage (+) = AV_{REFP}/ANI0 (ADREFP1 = 0, ADREFP0 = 1), reference voltage (-) = AV_{REFM}/ANI1 (ADREFM = 1), conversion target: ANI2 to ANI6

(TA = -40 to +105 °C, 2.4 V ≤ AV_{REFP} ≤ AV_{DD} = V_{DD} ≤ 3.6 V, V_{SS} = 0 V, AV_{SS} = 0 V, Reference voltage (+) = AV_{REFP}, Reference voltage (-) = AV_{REFM} = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|--|-------------------|--|-------|------|--------------------|------|
| Resolution | RES | 2.4 V ≤ AV _{REFP} ≤ AV _{DD} ≤ 3.6 V | 8 | | 12 | bit |
| Overall error ^{Note} | AINL | 12-bit resolution 2.4 V ≤ AV _{REFP} ≤ AV _{DD} ≤ 3.6 V | | | ±6.0 | LSB |
| Conversion time | t _{CONV} | ADTYP = 0, 12-bit resolution 2.4 V ≤ AV _{REFP} ≤ AV _{DD} ≤ 3.6 V | 3.375 | | | μs |
| Zero-scale error ^{Note} | E _{ZS} | 12-bit resolution 2.4 V ≤ AV _{REFP} ≤ AV _{DD} ≤ 3.6 V | | | ±4.5 | LSB |
| Full-scale error ^{Note} | E _{FS} | 12-bit resolution 2.4 V ≤ AV _{REFP} ≤ AV _{DD} ≤ 3.6 V | | | ±4.5 | LSB |
| Integral linearity error ^{Note} | ILE | 12-bit resolution 2.4 V ≤ AV _{REFP} ≤ AV _{DD} ≤ 3.6 V | | | ±2.0 | LSB |
| Differential linearity error ^{Note} | DLE | 12-bit resolution 2.4 V ≤ AV _{REFP} ≤ AV _{DD} ≤ 3.6 V | | | ±1.5 | LSB |
| Analog input voltage | V _{AIN} | | 0 | | AV _{REFP} | V |

Note Excludes quantization error (±1/2 LSB).

Caution Always use AV_{DD} pin with the same potential as the V_{DD} pin.

(2) When reference voltage (+) = AVDD (ADREFP1 = 0, ADREFP0 = 0), reference voltage (-) = AVSS (ADREFM = 0), conversion target: ANI0 to ANI6

(TA = -40 to +105 °C, 2.4 V ≤ AVDD = VDD ≤ 3.6 V, VSS = 0 V, AVSS = 0 V, Reference voltage (+) = AVDD, Reference voltage (-) = AVSS = 0 V)

| Parameter | Symbol | Conditions | | MIN. | TYP. | MAX. | Unit |
|--|--------|---------------------------------|----------------------|-------|------|------|------|
| Resolution | RES | | 2.4 V ≤ AVDD ≤ 3.6 V | 8 | | 12 | bit |
| Overall error ^{Note} | AINL | 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | | | ±7.5 | LSB |
| Conversion time | tCONV | ADTYP = 0, 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | 3.375 | | | μs |
| Zero-scale error ^{Note} | Ezs | 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | | | ±6.0 | LSB |
| Full-scale error ^{Note} | EFS | 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | | | ±6.0 | LSB |
| Integral linearity error ^{Note} | ILE | 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | | | ±3.0 | LSB |
| Differential linearity error ^{Note} | DLE | 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | | | ±2.0 | LSB |
| Analog input voltage | VAIN | | | 0 | | AVDD | V |

Note Excludes quantization error (±1/2 LSB).

Caution Always use AVDD pin with the same potential as the VDD pin.

- (3) When reference voltage (+) = $AV_{REFP}/ANI0$ (ADREFP1 = 0, ADREFP0 = 1), reference voltage (-) = $AV_{REFM}/ANI1$ (ADREFM = 1), conversion target ANI16 to ANI21, internal reference voltage, temperature sensor output voltage

(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, 2.4 V ≤ AVREFP ≤ AVDD = VDD ≤ 3.6 V, VSS = 0 V, AVSS = 0 V,

Reference voltage (+) = AVREFP, Reference voltage (-) = AVREFM = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|-------------------------------------|--------|---|---------------|------|--------|------|
| Resolution | RES | 2.4 V ≤ AVREFP ≤ AVDD ≤ 3.6 V | 8 | | 12 | bit |
| Overall error Note 1 | AINL | 12-bit resolution 2.4 V ≤ AVREFP ≤ AVDD ≤ 3.6 V | | | ±7.0 | LSB |
| Conversion time | tCONV | ADTYP = 0, 12-bit resolution 2.4 V ≤ AVREFP ≤ AVDD ≤ 3.6 V | 4.125 | | | μs |
| Zero-scale error Note 1 | Ezs | 12-bit resolution 2.4 V ≤ AVREFP ≤ AVDD ≤ 3.6 V | | | ±5.0 | LSB |
| Full-scale error Note 1 | EFS | 12-bit resolution 2.4 V ≤ AVREFP ≤ AVDD ≤ 3.6 V | | | ±5.0 | LSB |
| Integral linearity error Note 1 | ILE | 12-bit resolution 2.4 V ≤ AVREFP ≤ AVDD ≤ 3.6 V | | | ±3.0 | LSB |
| Differential linearity error Note 1 | DLE | 12-bit resolution 2.4 V ≤ AVREFP ≤ AVDD ≤ 3.6 V | | | ±2.0 | LSB |
| Analog input voltage | VAIN | | 0 | | AVREFP | V |
| | | Internal reference voltage (2.4 V ≤ VDD ≤ 3.6 V, HS (high-speed main) mode) | VBGR Note 2 | | | |
| | | Temperature sensor output voltage (2.4 V ≤ VDD ≤ 3.6 V, HS (high-speed main) mode) | VTMP25 Note 2 | | | |

Note 1. Excludes quantization error (±1/2 LSB).

Note 2. Refer to 3.6.2 Temperature sensor, internal reference voltage output characteristics.

Caution Always use AVDD pin with the same potential as the VDD pin.

(4) When reference voltage (+) = AVDD (ADREFP1 = 0, ADREFP0 = 0), reference voltage (-) = AVSS (ADREFM = 0), conversion target: ANI16 to ANI21, internal reference voltage, temperature sensor output voltage

(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, 2.4 V ≤ AVDD = VDD ≤ 3.6 V, VSS = 0 V, AVSS = 0 V, Reference voltage (+) = AVDD, Reference voltage (-) = AVSS = 0)

| Parameter | Symbol | Conditions | | MIN. | TYP. | MAX. | Unit |
|-------------------------------------|--------|---|----------------------|---------------|------|------|------|
| Resolution | RES | | 2.4 V ≤ AVDD ≤ 3.6 V | 8 | | 12 | bit |
| Overall error Note 1 | AINL | 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | | | ±8.5 | LSB |
| Conversion time | tCONV | ADTYP = 0, 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | 4.125 | | | μs |
| Zero-scale error Note 1 | Ezs | 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | | | ±8.0 | LSB |
| Full-scale error Note 1 | EFS | 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | | | ±8.0 | LSB |
| Integral linearity error Note 1 | ILE | 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | | | ±3.5 | LSB |
| Differential linearity error Note 1 | DLE | 12-bit resolution | 2.4 V ≤ AVDD ≤ 3.6 V | | | ±2.5 | LSB |
| Analog input voltage | VAIN | | | 0 | | AVDD | V |
| | | Internal reference voltage (2.4 V ≤ VDD ≤ 3.6 V, HS (high-speed main) mode) | | VBGR Note 2 | | | |
| | | Temperature sensor output voltage (2.4 V ≤ VDD ≤ 3.6 V, HS (high-speed main) mode) | | VTMP25 Note 2 | | | |

Note 1. Excludes quantization error (±1/2 LSB).

Note 2. Refer to 3.6.2 Temperature sensor, internal reference voltage output characteristics.

Caution Always use AVDD pin with the same potential as the VDD pin.

(5) When reference voltage (+) = Internal reference voltage (1.45 V) (ADREFP1 = 1, ADREFP0 = 0), reference voltage (-) = AVSS (ADREFM = 0), conversion target: ANI0 to ANI6, ANI16 to ANI21

(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, 2.4 V ≤ VDD, 2.4 V ≤ AVDD = VDD, VSS = 0 V, AVSS = 0 V,

Reference voltage (+) = internal reference voltage, Reference voltage (-) = AVSS = 0 V, HS (high-speed main) mode)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|--|----------|-------------------------------------|------|------|------|------|
| Resolution | RES | | 8 | | | bit |
| Conversion time | tCONV | 8-bit resolution | 16.0 | | | μs |
| Zero-scale error ^{Note} | EZS | 8-bit resolution | | | ±4.0 | LSB |
| Integral linearity error ^{Note} | ILE | 8-bit resolution | | | ±2.0 | LSB |
| Differential linearity error ^{Note} | DLE | 8-bit resolution | | | ±2.5 | LSB |
| Reference voltage (+) | AVREF(+) | = Internal reference voltage (VBGR) | 1.38 | 1.45 | 1.5 | V |
| Analog input voltage | VAIN | | 0 | | VBGR | V |

Note Excludes quantization error (±1/2 LSB).

Caution Always use AVDD pin with the same potential as the VDD pin.

3.6.2 Temperature sensor, internal reference voltage output characteristics

(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V (HS (high-speed main) mode))

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|-----------------------------------|---------|---|------|------|------|-------|
| Temperature sensor output voltage | VTMPS25 | Setting ADS register = 80H, TA = +25°C | | 1.05 | | V |
| Internal reference voltage | VBGR | Setting ADS register = 81H | 1.38 | 1.45 | 1.5 | V |
| Temperature coefficient | FVTMPS | Temperature sensor output voltage that depends on the temperature | | -3.6 | | mV/°C |
| Operation stabilization wait time | tAMP | | 10 | | | μs |

3.6.3 D/A converter characteristics

(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit | |
|---------------|--------|---------------|---------------------|------|------|------|-----|
| Resolution | RES | | | | 8 | bit | |
| Overall error | AINL | Rload = 4 MΩ | 2.4 V ≤ VDD ≤ 3.6 V | | | ±2.5 | LSB |
| | | Rload = 8 MΩ | 2.4 V ≤ VDD ≤ 3.6 V | | | ±2.5 | LSB |
| Settling time | tSET | Cload = 20 pF | 2.7 V ≤ VDD ≤ 3.6 V | | | 3 | μs |
| | | | 2.4 V ≤ VDD < 2.7 V | | | 6 | μs |

3.6.4 Comparator

(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|--|--------|--|---|----------|-----------|------|
| Input voltage range | Ivref | | 0 | | VDD - 1.4 | V |
| | Ivcmp | | -0.3 | | VDD + 0.3 | V |
| Output delay | td | VDD = 3.0 V Input slew rate > 50 mV/μs | High-speed comparator mode, standard mode | | 1.2 | μs |
| | | | High-speed comparator mode, window mode | | 2.0 | μs |
| | | | Low-speed comparator mode, standard mode | | 3 | 5.0 |
| High-electric-potential judgment voltage | VTW+ | High-speed comparator mode, window mode | | 0.76 VDD | | V |
| Low-electric-potential judgment voltage | VTW- | High-speed comparator mode, window mode | | 0.24 VDD | | V |
| Operation stabilization wait time | tcMP | | 100 | | | μs |
| Internal reference voltage <small>Note</small> | VBGR | 2.4 V ≤ VDD ≤ 3.6 V, HS (high-speed main) mode | 1.38 | 1.45 | 1.50 | V |


Note Not usable in sub-clock operation or STOP mode.

3.6.5 POR circuit characteristics

(TA = -40 to +105 °C, VSS = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|---------------------|--------|--|------|------|------|------|
| Detection voltage | VPOR | Power supply rise time | 1.45 | 1.51 | 1.57 | V |
| | VPDR | Power supply fall time <small>Note</small> | 1.44 | 1.50 | 1.56 | V |
| Minimum pulse width | TPW | | 300 | | | μs |

Note Minimum time required for a POR reset when VDD exceeds below VPDR. This is also the minimum time required for a POR reset from when VDD exceeds below 0.7 V to when VDD exceeds VPOR while STOP mode is entered or the main system clock is stopped through setting bit 0 (HIOSTOP) and bit 7 (MSTOP) in the clock operation status control register (CSC).

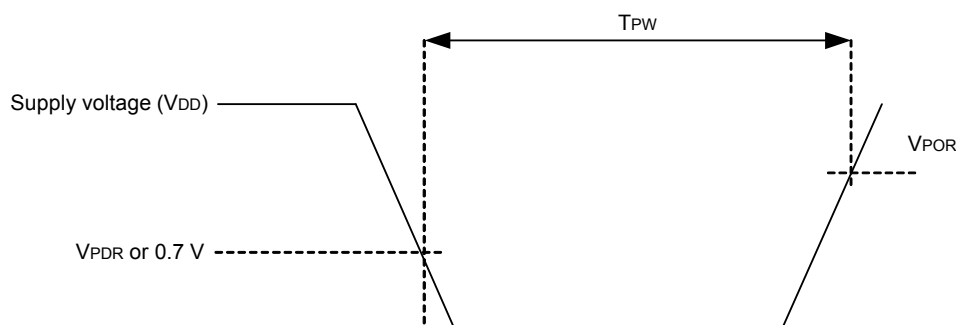

3.6.6 LVD circuit characteristics

(TA = -40 to +105 °C, VPDR ≤ VDD ≤ 3.6 V ≤ VSS = 0 V)

| Parameter | | Symbol | Conditions | MIN. | TYP. | MAX. | Unit | | |
|-------------------|----------------------|----------------------|------------------------|------|------|------|------|-----|----|
| Detection voltage | Supply voltage level | VLVD2 | Power supply rise time | 3.01 | 3.13 | 3.25 | V | | |
| | | | Power supply fall time | 2.94 | 3.06 | 3.18 | V | | |
| | | VLVD3 | Power supply rise time | 2.90 | 3.02 | 3.14 | V | | |
| | | | Power supply fall time | 2.85 | 2.96 | 3.07 | V | | |
| | | VLVD4 | Power supply rise time | 2.81 | 2.92 | 3.03 | V | | |
| | | | Power supply fall time | 2.75 | 2.86 | 2.97 | V | | |
| | | VLVD5 | Power supply rise time | 2.71 | 2.81 | 2.92 | V | | |
| | | | Power supply fall time | 2.64 | 2.75 | 2.86 | V | | |
| | | VLVD6 | Power supply rise time | 2.61 | 2.71 | 2.81 | V | | |
| | | | Power supply fall time | 2.55 | 2.65 | 2.75 | V | | |
| | | VLVD7 | Power supply rise time | 2.51 | 2.61 | 2.71 | V | | |
| | | | Power supply fall time | 2.45 | 2.55 | 2.65 | V | | |
| | | Minimum pulse width | | tLW | | 300 | | | μs |
| | | Detection delay time | | | | | | 300 | μs |

Caution Set the detection voltage (VLVD) to be within the operating voltage range. The operating voltage range depends on the setting of the user option byte (000C2H/010C2H). The following shows the operating voltage range.

HS (high-speed main) mode: VDD = 2.7 to 3.6 V at 1 MHz to 24 MHz

VDD = 2.4 to 3.6 V at 1 MHz to 16 MHz

LVD Detection Voltage of Interrupt & Reset Mode**(TA = -40 to +105 °C, VPDR ≤ VDD ≤ 3.6 V, VSS = 0 V)**

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit | |
|--------------------------|--------|---|------------------------------|------|------|------|---|
| Interrupt and reset mode | VLVDD0 | VPOC0, VPOC1, VPOC2 = 0, 1, 1, falling reset voltage: 2.7 V | 2.64 | 2.75 | 2.86 | V | |
| | VLVDD1 | LVIS0, LVIS1 = 1, 0 | Rising release reset voltage | 2.81 | 2.92 | 3.03 | V |
| | | | Falling interrupt voltage | 2.75 | 2.86 | 2.97 | V |
| | VLVDD2 | LVIS0, LVIS1 = 0, 1 | Rising release reset voltage | 2.90 | 3.02 | 3.14 | V |
| | | | Falling interrupt voltage | 2.85 | 2.96 | 3.07 | V |

3.7 Power supply voltage rising slope characteristics**(TA = -40 to +105 °C, VSS = 0 V)**

| Parameter | Conditions | MIN. | TYP. | MAX. | Unit |
|-----------------------------------|------------|------|------|------|------|
| Power supply voltage rising slope | SVDD | | | 54 | V/ms |

Caution Make sure to keep the internal reset state by the LVD circuit or an external reset until VDD reaches the operating voltage range shown in 3.4 AC Characteristics.

3.8 LCD Characteristics

3.8.1 Resistance division method

(1) Static display mode

(TA = -40 to +105 °C, VL4 (MIN.) ≤ VDD ≤ 3.6 V, Vss = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|-------------------|--------|------------|------|------|------|------|
| LCD drive voltage | VL4 | | 2.0 | | VDD | V |

(2) 1/2 bias method, 1/4 bias method

(TA = -40 to +105 °C, VL4 (MIN.) ≤ VDD ≤ 3.6 V, Vss = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|-------------------|--------|------------|------|------|------|------|
| LCD drive voltage | VL4 | | 2.7 | | VDD | V |

(3) 1/3 bias method

(TA = -40 to +105 °C, VL4 (MIN.) ≤ VDD ≤ 3.6 V, Vss = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|-------------------|--------|------------|------|------|------|------|
| LCD drive voltage | VL4 | | 2.5 | | VDD | V |

3.8.2 Internal voltage boosting method

(1) 1/3 bias method

(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit | |
|--|--------------------|---|--------------|-------|-------|------|---|
| LCD output voltage variation range | VL1 | C1 to C4 ^{Note 1} = 0.47 μF ^{Note 2} | VLCD = 04H | 0.90 | 1.00 | 1.08 | V |
| | | | VLCD = 05H | 0.95 | 1.05 | 1.13 | V |
| | | | VLCD = 06H | 1.00 | 1.10 | 1.18 | V |
| | | | VLCD = 07H | 1.05 | 1.15 | 1.23 | V |
| | | | VLCD = 08H | 1.10 | 1.20 | 1.28 | V |
| | | | VLCD = 09H | 1.15 | 1.25 | 1.33 | V |
| | | | VLCD = 0AH | 1.20 | 1.30 | 1.38 | V |
| | | | VLCD = 0BH | 1.25 | 1.35 | 1.43 | V |
| | | | VLCD = 0CH | 1.30 | 1.40 | 1.48 | V |
| | | | VLCD = 0DH | 1.35 | 1.45 | 1.53 | V |
| | | | VLCD = 0EH | 1.40 | 1.50 | 1.58 | V |
| | | | VLCD = 0FH | 1.45 | 1.55 | 1.63 | V |
| | | | VLCD = 10H | 1.50 | 1.60 | 1.68 | V |
| | | | VLCD = 11H | 1.55 | 1.65 | 1.73 | V |
| VLCD = 12H | 1.60 | 1.70 | 1.78 | V | | | |
| VLCD = 13H | 1.65 | 1.75 | 1.83 | V | | | |
| Doubler output voltage | VL2 | C1 to C4 ^{Note 1} = 0.47 μF | 2 VL1 - 0.1 | 2 VL1 | 2 VL1 | V | |
| Tripler output voltage | VL3 | C1 to C4 ^{Note 1} = 0.47 μF | 3 VL1 - 0.15 | 3 VL1 | 3 VL1 | V | |
| Reference voltage setup time ^{Note 2} | t _{WAIT1} | | 5 | | | ms | |
| Voltage boost wait time ^{Note 3} | t _{WAIT2} | C1 to C4 ^{Note 1} = 0.47 μF | 500 | | | ms | |

Note 1. This is a capacitor that is connected between voltage pins used to drive the LCD.

C1: A capacitor connected between CAPH and CAPL

C2: A capacitor connected between VL1 and GND

C3: A capacitor connected between VL2 and GND

C4: A capacitor connected between VL3 and GND

C1 = C2 = C3 = C4 = 0.47 μF ± 30%

Note 2. This is the time required to wait from when the reference voltage is specified by using the VLCD register (or when the internal voltage boosting method is selected (by setting the MDSET1 and MDSET0 bits of the LCDM0 register to 01B) if the default value reference voltage is used) until voltage boosting starts (VLCON = 1).

Note 3. This is the wait time from when voltage boosting is started (VLCON = 1) until display is enabled (LCDON = 1).

(2) 1/4 bias method**(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V)**

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit | |
|-------------------------------------|---------|-------------------------------------|--------------|-------|-------|------|---|
| LCD output voltage variation range | VL1 | C1 to C4 Note 1 = 0.47 μF Note 2 | VLCD = 04H | 0.90 | 1.00 | 1.08 | V |
| | | | VLCD = 05H | 0.95 | 1.05 | 1.13 | V |
| | | | VLCD = 06H | 1.00 | 1.10 | 1.18 | V |
| | | | VLCD = 07H | 1.05 | 1.15 | 1.23 | V |
| | | | VLCD = 08H | 1.10 | 1.20 | 1.28 | V |
| | | | VLCD = 09H | 1.15 | 1.25 | 1.33 | V |
| | | | VLCD = 0AH | 1.20 | 1.30 | 1.38 | V |
| Doubler output voltage | VL2 | C1 to C4 Note 1 = 0.47 μF | 2 VL1 - 0.08 | 2 VL1 | 2 VL1 | V | |
| Tripler output voltage | VL3 | C1 to C4 Note 1 = 0.47 μF | 3 VL1 - 0.12 | 3 VL1 | 3 VL1 | V | |
| Quadruply output voltage | VL4 | C1 to C5 Note 1 = 0.47 μF | 4 VL1 - 0.16 | 4 VL1 | 4 VL1 | V | |
| Reference voltage setup time Note 2 | tVWAIT1 | | 5 | | | ms | |
| Voltage boost wait time Note 3 | tVWAIT2 | C1 to C5 Note 1 = 0.47 μF | 500 | | | ms | |

Note 1. This is a capacitor that is connected between voltage pins used to drive the LCD.

C1: A capacitor connected between CAPH and CAPL

C2: A capacitor connected between VL1 and GND

C3: A capacitor connected between VL2 and GND

C4: A capacitor connected between VL3 and GND

C5: A capacitor connected between VL4 and GND

C1 = C2 = C3 = C4 = 0.47 μF±30%

Note 2. This is the time required to wait from when the reference voltage is specified by using the VLCD register (or when the internal voltage boosting method is selected (by setting the MDSET1 and MDSET0 bits of the LCDM0 register to 01B) if the default value reference voltage is used) until voltage boosting starts (VLCON = 1).

Note 3. This is the wait time from when voltage boosting is started (VLCON = 1) until display is enabled (LCDON = 1).

3.8.3 Capacitor split method

(1) 1/3 bias method

(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|----------------------------------|-------------------|---------------------------|----------------------------|---------------------|----------------------------|------|
| V _{L4} voltage | V _{L4} | C1 to C4 = 0.47 μF Note 2 | | V _{DD} | | V |
| V _{L2} voltage | V _{L2} | C1 to C4 = 0.47 μF Note 2 | 2/3 V _{L4} - 0.07 | 2/3 V _{L4} | 2/3 V _{L4} + 0.07 | V |
| V _{L1} voltage | V _{L1} | C1 to C4 = 0.47 μF Note 2 | 1/3 V _{L4} - 0.08 | 1/3 V _{L4} | 1/3 V _{L4} + 0.08 | V |
| Capacitor split wait time Note 1 | t _{WAIT} | | 100 | | | ms |

Note 1. This is the wait time from when voltage bucking is started (VLCON = 1) until display is enabled (LCDON = 1).

Note 2. This is a capacitor that is connected between voltage pins used to drive the LCD.

C1: A capacitor connected between CAPH and CAPL

C2: A capacitor connected between V_{L1} and GND

C3: A capacitor connected between V_{L2} and GND

C4: A capacitor connected between V_{L4} and GND


C1 = C2 = C3 = C4 = 0.47 μF±30%

3.9 Data Memory STOP Mode Low Supply Voltage Data Retention Characteristics

(TA = -40 to +105 °C, VSS = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|-------------------------------|--------|------------|-----------|------|------|------|
| Data retention supply voltage | VDDDR | | 1.44 Note | | 3.6 | V |

Note The value depends on the POR detection voltage. When the voltage drops, the data is retained before a POR reset is effected, but data is not retained when a POR reset is effected.

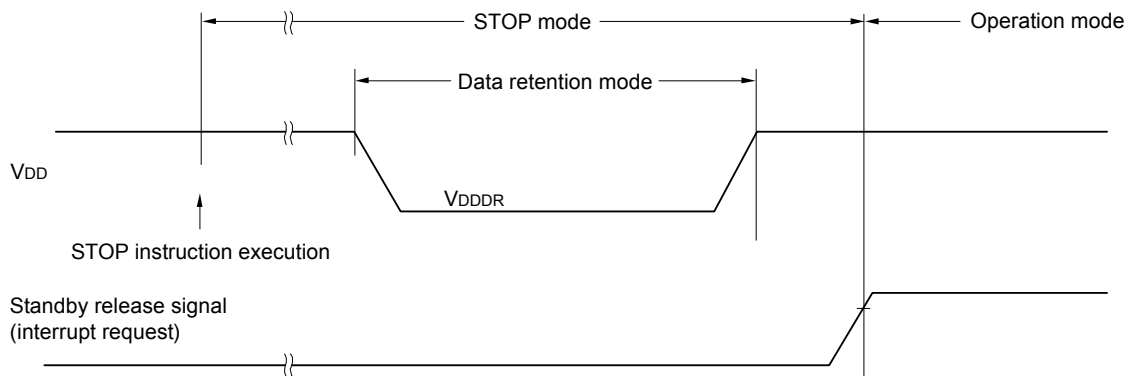

3.10 Flash Memory Programming Characteristics

(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|--|--------|------------------------------------|---------|-----------|------|-------|
| CPU/peripheral hardware clock frequency | fCLK | 2.4 V ≤ VDD ≤ 3.6 V | 1 | | 24 | MHz |
| Number of code flash rewrites Notes 1, 2, 3 | Cenwr | Retained for 20 years TA = 85°C | 1,000 | | | Times |
| Number of data flash rewrites Notes 1, 2, 3 | | Retained for 1 year TA = 25°C | | 1,000,000 | | |
| | | Retained for 5 years TA = 85°C | 100,000 | | | |
| | | Retained for 20 years TA = 85°C | 10,000 | | | |

- Note 1.** 1 erase + 1 write after the erase is regarded as 1 rewrite. The retaining years are until next rewrite after the rewrite.
- Note 2.** When using flash memory programmer and Renesas Electronics self programming library
- Note 3.** These are the characteristics of the flash memory and the results obtained from reliability testing by Renesas Electronics Corporation.

3.11 Dedicated Flash Memory Programmer Communication (UART)


(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|---------------|--------|---------------------------|---------|------|-----------|------|
| Transfer rate | | During serial programming | 115,200 | | 1,000,000 | bps |

3.12 Timing Specs for Switching Modes

(TA = -40 to +105 °C, 2.4 V ≤ VDD ≤ 3.6 V, VSS = 0 V)

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|---|---------|--|------|------|------|------|
| How long from when an external reset ends until the initial communication settings are specified | tsuINIT | POR and LVD reset must end before the external reset ends. | | | 100 | ms |
| How long from when the TOOL0 pin is placed at the low level until an external reset ends | tsu | POR and LVD reset must end before the external reset ends. | 10 | | | μs |
| Time to hold the TOOL0 pin at the low level after an external reset is released (excluding the processing time of the firmware to control the flash memory) | tHD | POR and LVD reset must end before the external reset ends. | 1 | | | ms |

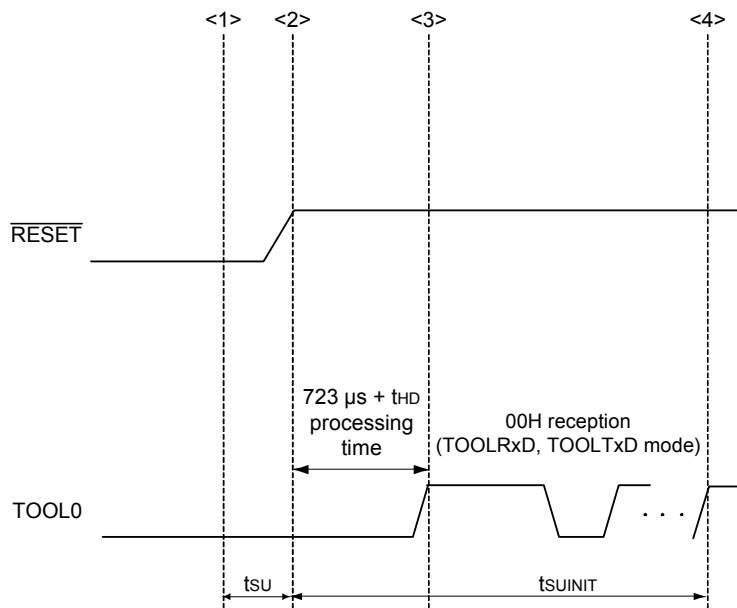


- <1> The low level is input to the TOOL0 pin.
- <2> The external reset ends (POR and LVD reset must end before the external reset ends.).
- <3> The TOOL0 pin is set to the high level.
- <4> Setting of the flash memory programming mode by UART reception and complete the baud rate setting.

Remark tsuINIT: The segment shows that it is necessary to finish specifying the initial communication settings within 100 ms from when the resets end.
 tsu: How long from when the TOOL0 pin is placed at the low level until a external reset ends
 tHD: How long to keep the TOOL0 pin at the low level from when the external and internal resets end (except soft processing time)

4. PACKAGE DRAWINGS


4.1 80-pin products

R5F110MEAFB, R5F110MFAFB, R5F110MGAFB, R5F110MHAFB, R5F110MJAFB
 R5F111MEAFB, R5F111MFAFB, R5F111MGAFB, R5F111MHAFB, R5F111MJAFB

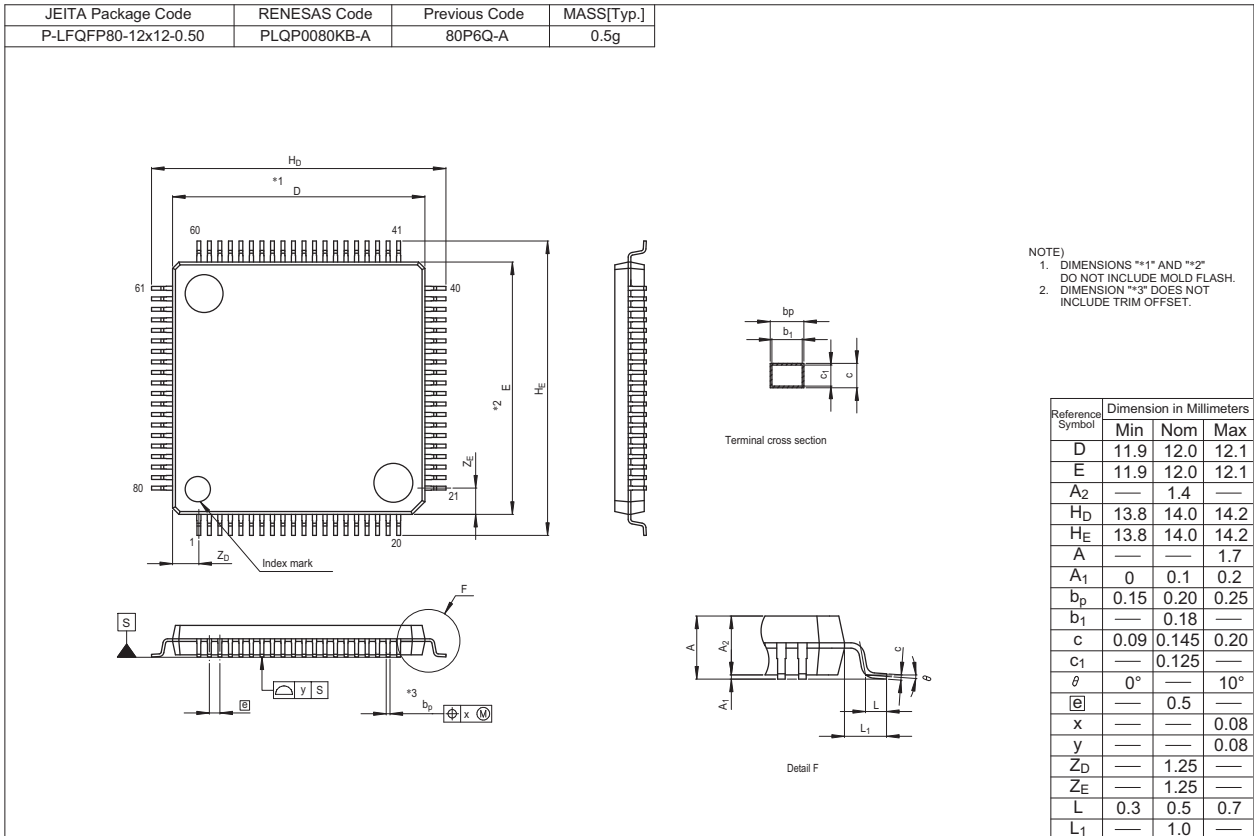

4.2 100-pin products

R5F110PEAFB, R5F110PFAFB, R5F110PGAFA, R5F110PHAFB, R5F110PJAFB
 R5F111PEAFB, R5F111PFAFB, R5F111PGAFA, R5F111PHAFB, R5F111PJAFB

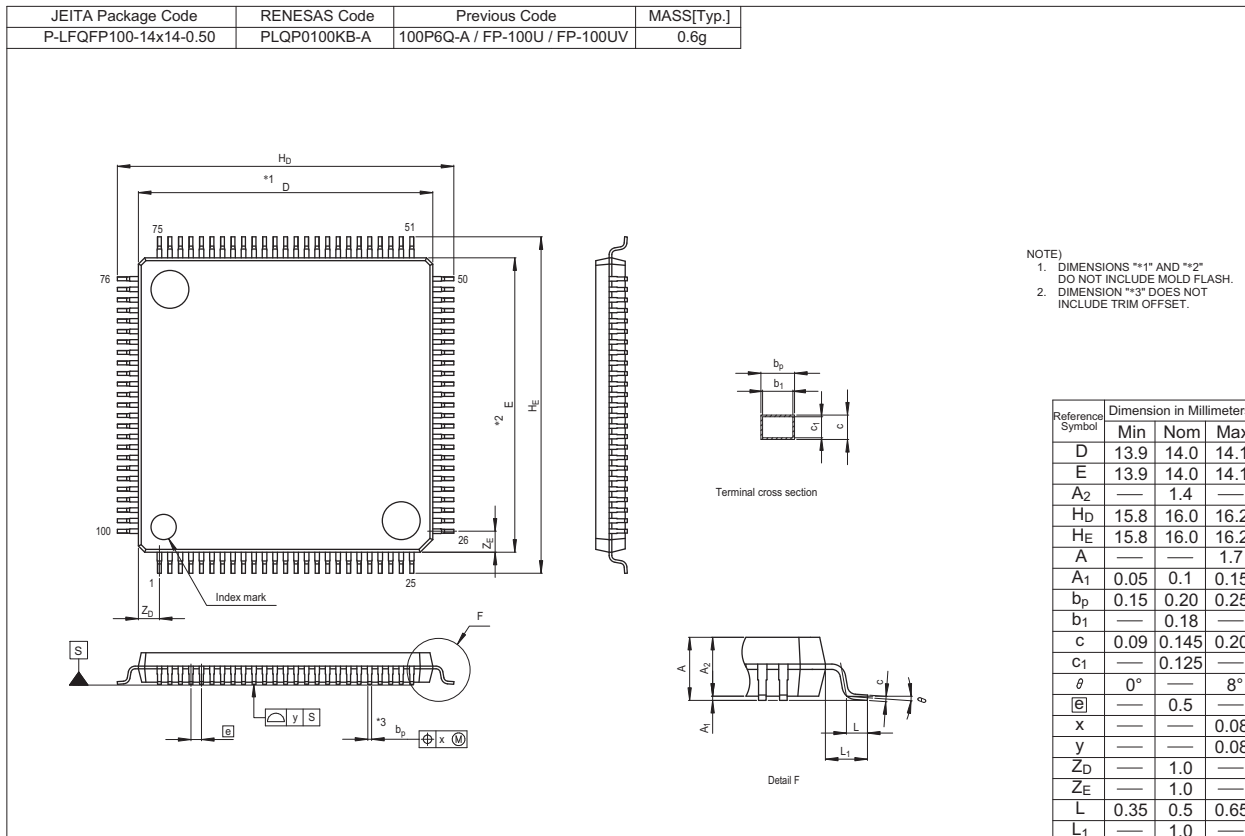

REVISION HISTORY

RL78/L1C Datasheet

| Rev. | Date | Description | |
|------|--------------|-------------|--|
| | | Page | Summary |
| 0.01 | Oct 15, 2012 | — | First Edition issued |
| 1.00 | Nov 18, 2013 | 1, 2 | Modification of 1.1 Features |
| | | 3, 4 | Modification of 1.2 Ordering Information |
| | | 5 to 8 | Modification of package type in 1.3 Pin Configuration (Top View) |
| | | 14 to 17 | Modification of vectored interrupt sources in 1.6 Outline of Functions |
| | | 14 to 17 | Modification of operating ambient temperature in 1.6 Outline of Functions |
| | | 19 to 21 | Modification of description in tables in 2.1 Absolute Maximum Ratings |
| | | 22, 23 | Modification of description in 2.2 Oscillator Characteristics |
| | | 25 | Modification of low-level output current in 2.3.1 Pin characteristics |
| | | 26 | Modification of error of high-level input voltage conditions in 2.3.1 Pin characteristics |
| | | 26 | Modification of error of low-level input voltage conditions in 2.3.1 Pin characteristics |
| | | 27 | Modification of low-level output voltage in 2.3.1 Pin characteristics |
| | | 28 | Modification of error of internal pull-up resistor conditions in 2.3.1 Pin characteristics |
| | | 29 to 34 | Modification of 2.3.2 Supply current characteristics |
| | | 35, 36 | Modification of 2.4 AC Characteristics |
| | | 37, 38 | Addition of minimum instruction execution time during main system clock operation |
| | | 41 to 63 | Addition of LS mode and LV mode characteristics in 2.5.1 Serial array unit |
| | | 64 to 66 | Addition of LS mode and LV mode characteristics in 2.5.2 Serial interface IICA |
| | | 67, 68 | Modification of conditions in 2.5.3 USB |
| | | 69 | Addition of (3) BC option standard in 2.5.3 USB |
| | | 70 to 75 | Addition of characteristics about conversion of internal reference voltage and temperature sensor in 2.6.1 A/D converter characteristics |
| | | 76 | Addition of characteristic in 2.6.4 Comparator |
| | | 76 | Deletion of detection delay in 2.6.5 POR circuit characteristics |
| | | 78 | Modification of 2.7 Power supply voltage rising slope characteristics |
| | | 79 to 82 | Modification of 2.8 LCD Characteristics |
| | | 83 | Modification of 2.9 Data Memory STOP Mode Low Supply Voltage Data Retention Characteristics |
| | | 83 | Modification of 2.10 Flash Memory Programming Characteristics |
| | | 84 | Addition of 2.12 Timing Specs for Switching Modes |
| | | 85 to 144 | Addition of 3. ELECTRICAL SPECIFICATIONS (G: TA = -40 to +105°C) |

SuperFlash is a registered trademark of Silicon Storage Technology, Inc. in several countries including the United States and Japan.

Caution: This product uses SuperFlash® technology licensed from Silicon Storage Technology, Inc.

All trademarks and registered trademarks are the property of their respective owners.

NOTES FOR CMOS DEVICES

- (1) **VOLTAGE APPLICATION WAVEFORM AT INPUT PIN:** Waveform distortion due to input noise or a reflected wave may cause malfunction. If the input of the CMOS device stays in the area between VIL (MAX) and VIH (MIN) due to noise, etc., the device may malfunction. Take care to prevent chattering noise from entering the device when the input level is fixed, and also in the transition period when the input level passes through the area between VIL (MAX) and VIH (MIN).
- (2) **HANDLING OF UNUSED INPUT PINS:** Unconnected CMOS device inputs can be cause of malfunction. If an input pin is unconnected, it is possible that an internal input level may be generated due to noise, etc., causing malfunction. CMOS devices behave differently than Bipolar or NMOS devices. Input levels of CMOS devices must be fixed high or low by using pull-up or pull-down circuitry. Each unused pin should be connected to VDD or GND via a resistor if there is a possibility that it will be an output pin. All handling related to unused pins must be judged separately for each device and according to related specifications governing the device.
- (3) **PRECAUTION AGAINST ESD:** A strong electric field, when exposed to a MOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop generation of static electricity as much as possible, and quickly dissipate it when it has occurred. Environmental control must be adequate. When it is dry, a humidifier should be used. It is recommended to avoid using insulators that easily build up static electricity. Semiconductor devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work benches and floors should be grounded. The operator should be grounded using a wrist strap. Semiconductor devices must not be touched with bare hands. Similar precautions need to be taken for PW boards with mounted semiconductor devices.
- (4) **STATUS BEFORE INITIALIZATION:** Power-on does not necessarily define the initial status of a MOS device. Immediately after the power source is turned ON, devices with reset functions have not yet been initialized. Hence, power-on does not guarantee output pin levels, I/O settings or contents of registers. A device is not initialized until the reset signal is received. A reset operation must be executed immediately after power-on for devices with reset functions.
- (5) **POWER ON/OFF SEQUENCE:** In the case of a device that uses different power supplies for the internal operation and external interface, as a rule, switch on the external power supply after switching on the internal power supply. When switching the power supply off, as a rule, switch off the external power supply and then the internal power supply. Use of the reverse power on/off sequences may result in the application of an overvoltage to the internal elements of the device, causing malfunction and degradation of internal elements due to the passage of an abnormal current. The correct power on/off sequence must be judged separately for each device and according to related specifications governing the device.
- (6) **INPUT OF SIGNAL DURING POWER OFF STATE :** Do not input signals or an I/O pull-up power supply while the device is not powered. The current injection that results from input of such a signal or I/O pull-up power supply may cause malfunction and the abnormal current that passes in the device at this time may cause degradation of internal elements. Input of signals during the power off state must be judged separately for each device and according to related specifications governing the device.

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
3. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from such alteration, modification, copy or otherwise misappropriation of Renesas Electronics product.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots etc.
"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; and safety equipment etc.
Renesas Electronics products are neither intended nor authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems, surgical implantations etc.), or may cause serious property damages (nuclear reactor control systems, military equipment etc.). You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application for which it is not intended. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for which the product is not intended by Renesas Electronics.
6. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You should not use Renesas Electronics products or technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. When exporting the Renesas Electronics products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, who distributes, disposes of, or otherwise places the product with a third party, to notify such third party in advance of the contents and conditions set forth in this document, Renesas Electronics assumes no responsibility for any losses incurred by you or third parties as a result of unauthorized use of Renesas Electronics products.
11. This document may not be reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.
(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.
(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.



SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

Renesas Electronics America Inc.
2880 Scott Boulevard Santa Clara, CA 95050-2554, U.S.A.
Tel: +1-408-588-6000, Fax: +1-408-588-6130

Renesas Electronics Canada Limited
1101 Nicholson Road, Newmarket, Ontario L3Y 9C3, Canada
Tel: +1-905-898-5441, Fax: +1-905-898-3220

Renesas Electronics Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.
Tel: +44-1628-651-700, Fax: +44-1628-651-804

Renesas Electronics Europe GmbH
Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-65030, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.
7th Floor, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100083, P.R.China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.
Unit 204, 205, AZIA Center, No.1233 Lujiazui Ring Rd., Pudong District, Shanghai 200120, China
Tel: +86-21-5877-1818, Fax: +86-21-6887-7858 / -7898

Renesas Electronics Hong Kong Limited
Unit 1601-1613, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2886-9318, Fax: +852 2886-9022/9044

Renesas Electronics Taiwan Co., Ltd.
13F, No. 363, Fu Shing North Road, Taipei, Taiwan
Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

Renesas Electronics Singapore Pte. Ltd.
80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.
Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-3390, Fax: +60-3-7955-9510

Renesas Electronics Korea Co., Ltd.
11F., Samik Laviel' or Bldg., 720-2 Yeoksam-Dong, Kangnam-Ku, Seoul 135-080, Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5141