

M-981-01 Precise Call Progress Tone Detector

- Precise detection of call progress tones
- Linear (analog) input
- Digital (CMOS compatible), tri-state outputs
- 22-pin DIP
- Single supply 5 V CMOS (low power)
- Inexpensive 3.58 MHz time base
- Wide dynamic range (24 dB)
- Applications include: automatic dialers, dialing modems, traffic measurement systems, test equipment, service evaluation, billing systems

The Teltone M-981-01 is an integrated circuit precise tone detector for special purpose use in automatic following of switched telephone calls. The circuit uses low-power CMOS techniques to provide the complete filtering and control required for this function. The basic timing of the M-981-01 is designed to permit operation with almost any progress tone system.

The use of integrated circuit techniques allows the M-981-01 to pack the four filters and amplitude detectors for call progress following into a single 22-pin DIP. A 3.58 MHz crystal-controlled time base guarantees accuracy and repeatability.

Call Progress Tone Detection

Call progress tones are audible tones sent from switching systems to calling parties to show the status of calls. Calling parties can identify the success of a call placed by what is heard after dialing. The type of tone used and its timing vary from system to system, and though intended for human ears these signals can provide valuable information for automated calling systems.

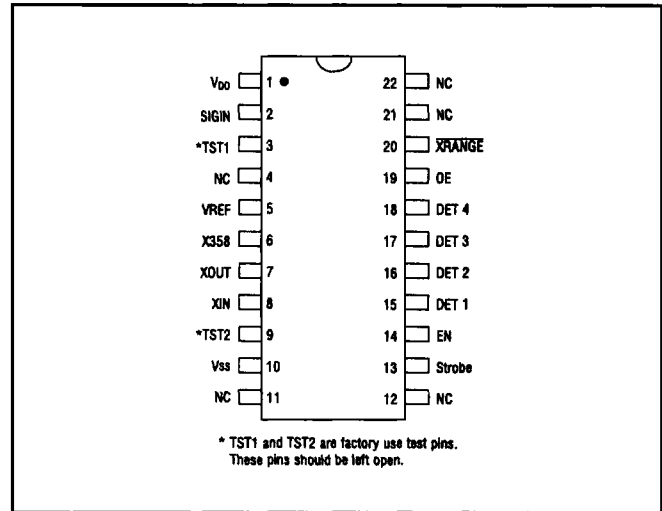


Figure 1 Pin Diagram

The M-981-01 contains four signal detectors sensitive to the frequencies often used for these progress tones. Electronic equipment monitoring the DET n outputs of the M-981-01 can determine the natures of signals present by measuring their duty cycle. See Figure 4 for a diagram of a circuit that could be used to permit a microcomputer to directly monitor tones on the telephone line. Much of the character of the progress tones is in their duty cycle or cadence (sometimes referred to as interruption rate). This information, coupled with level and frequency indication from the M-981-01, can be used to decide what progress tones have been encountered.

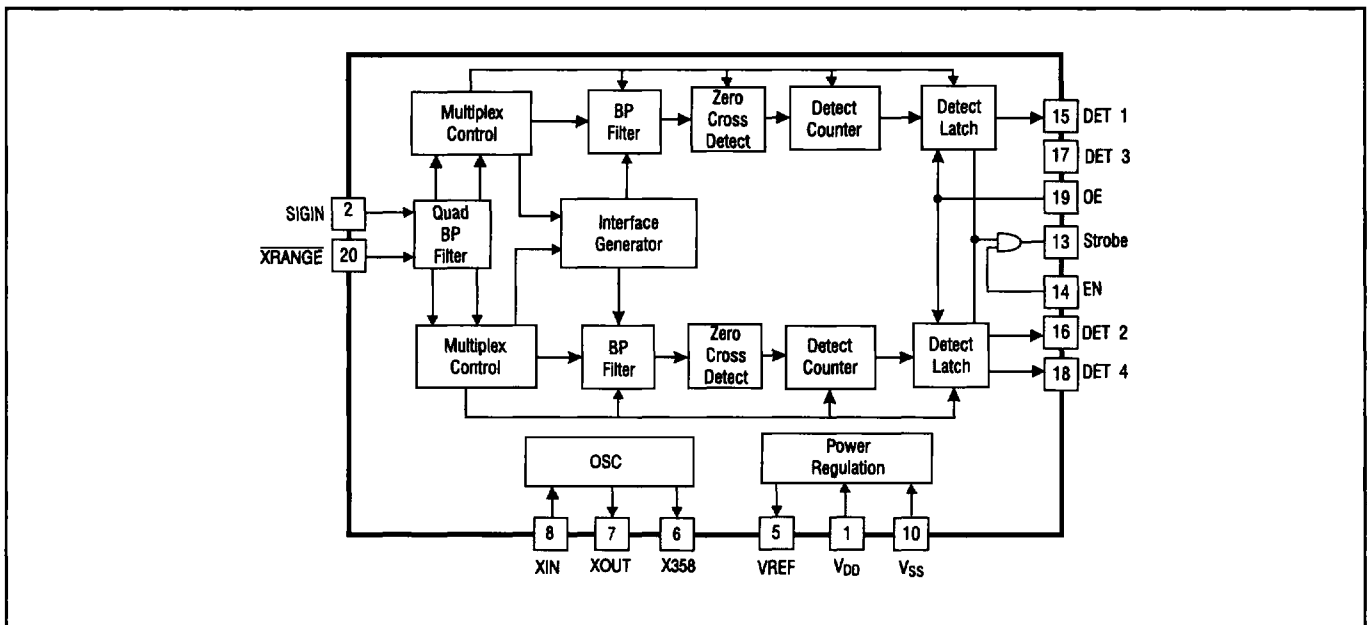


Figure 2 Block Diagram

For example, dial tones as shown in the table are usually "on" continuously and last until the first dial digit is received by the switching system. Line Busy, on the other hand, is turned off and on at a rate of 1 Hz with a 50% duty cycle, or an interruption rate of 60 times per minute (60 IPM). The tones can be distinguished in this way. It should be noted that while such techniques will usually be effective, there are some circumstances in which the M-981-01 cannot be accurately used. Examples include situations where ring back tone may be short or not even encountered. Ring back may be provided at ringing voltage frequency (20 or 30 Hz) with some harmonics and may not fall in the detect range, and speech or other strong noise may obscure tones making cadence measurement difficult.

The tones used for the same purposes in different systems may not be the same. Standards do exist and should be consulted for your particular application. In North America AT&T's "Notes on the Network" or EIA's RS-464 PBX standard should be re-

Table 1 Pin Functions

Pin	Function
DET1	Active high tri-state output, detect for 350 Hz.
DET2	Active high tri-state output, detect for 400 Hz.
DET3	Active high tri-state output, detect for 440 Hz.
DET4	Active high tri-state output, detect for 480 Hz.
EN	Active high enabled, when low drives STROBE low.
OE	Active high input. When low tri-states DET n pins.
SIGIN	Analog signal input (internally capacitive coupled).
STROBE	Active high output, indicates valid DET n.
V _{DD}	Most positive power supply input pin.
V _{REF}	Internally generated mid-power supply voltage (output).
V _{SS}	Most negative power supply input pin.
X358	Buffered oscillator output (3.58 MHz).
XIN	Crystal oscillator or digital clock input.
XOUT	Crystal oscillator output.
XRANGE	Active low input. Adds 10 dB of gain to input stage.

viewed. In Europe tone plans may vary with locale, in which case the CEPT administration in each country must be consulted. Outside these areas, national PTT organizations can provide information on the systems within their borders.

Ordering Information

M-981-01 22-pin plastic DIP

Table 2 Truth Table

Signal Present (fo)	DET1	DET2	DET3	DET4	Strobe	OE	EN
350 Hz	1	X	X	X	1	1	1
400 Hz	X	1	X	X	1	1	1
440 Hz	X	X	1	X	1	1	1
480 Hz	X	X	X	1	1	1	1
Other In-Band	0	0	0	0	0	1	1
Any	High Impedance				X	0	1
Any	High Impedance				0	0	0

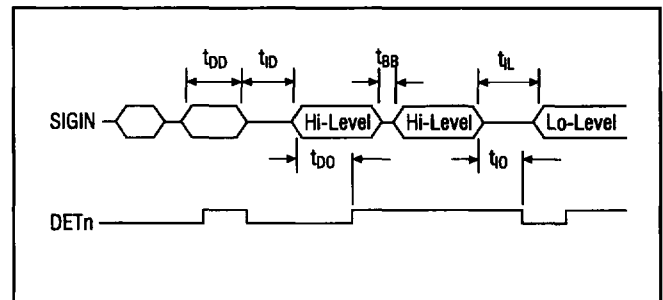


Figure 3 Signal Timing (See Table 3)

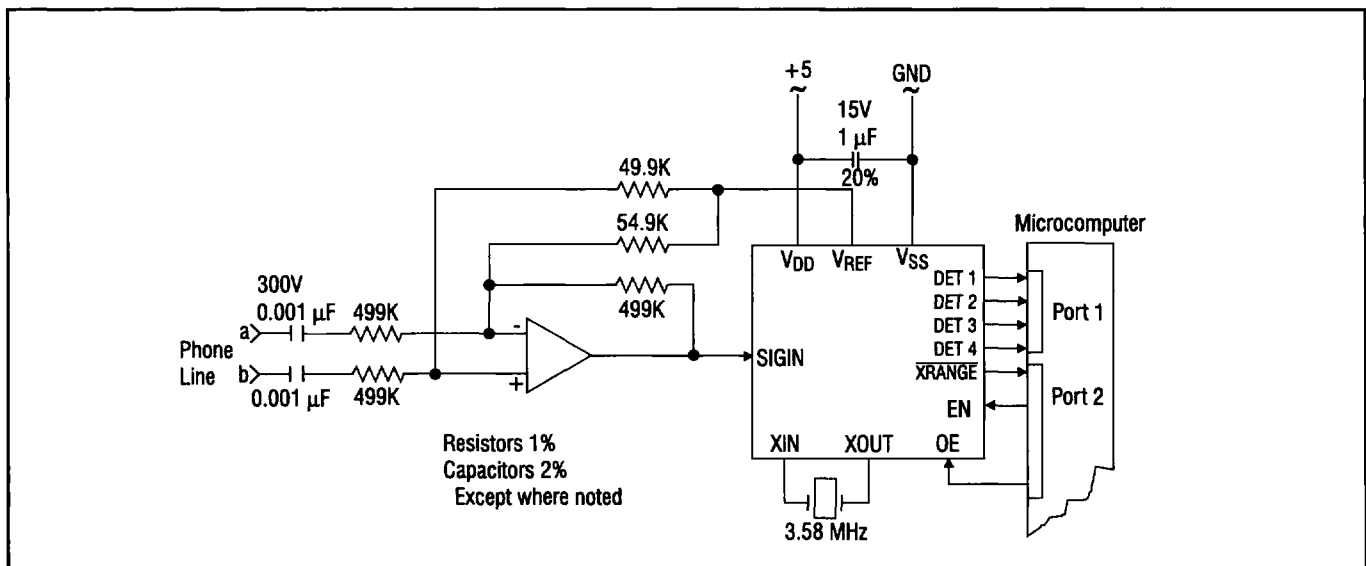


Figure 4 Telephone Line Circuit Application

Table 3 Specifications

Parameter		Conditions	Min	Max	Units	Notes
Operating Conditions	V _{DD}	—	4.75	5.25	V	1
	Power supply noise	0.1 - 5 kHz	—	20	mV p-p	
Power	Current drain (I _{DD})	—	—	20	mA	
Signal Detection	Frequency range	in-band signal	-1	+1	% of f ₀	2, 6
	Level	—	-24	0	dBm	
	Duration (t _{DD})	—	200	—	ms	
	Bridge time (t _{BB})	—	—	30	ms	3
	Level skew between adjacent inband signals	for detection of both	—	6	dB	
	High level to low level signal for detection of both (t _{HL})	high = 0 dBm / low = -30 dBm	1	—	s	
	Time to output (t _{DO})	—	—	200	ms	
Signal Rejection	Level	noise at SIGIN / 0.2 - 3.4 kHz	—	-50	dBm	4, 5, 6
	Interval duration (t _{ID})	—	160	—	ms	
	Time to output (t _{IO})	—	—	200	ms	
Outputs	DETECT pins (DET n):					
	V _{OL}	I _{SINK} = -1mA	—	0.5	V	
	V _{OH}	I _{SOURCE} = 1mA	V _{DD} - 0.5	—	V	
	I _{OZ}	V _O = V _{DD} , V _{SS}	—	1	μA	
Inputs	STROBE pin:	I _{SINK} = -1mA	—	0.5	V	
	VOL					
	EN, OE, X RANGE pins:					
	V _{IL}	—	—	0.5	V	
	V _{IH}	—	V _{DD} - 2.0	—	V	
Pullup current	EN, OE, X RANGE = V _{SS}	—	1	μA		
SIGIN pin:	Voltage range	—	V _{DD} - 18	V _{DD}	V	
	Input impedance	f = 500 Hz	80	—	kΩ	
Gain		X RANGE = 0	9.9	10.1	dB	
Clock	External clock:	XOUT open				
	V _{IL}	—	—	0.2	V	
	V _{IH}	—	V _{DD} - 0.2	—	V	
	Duty cycle	—	40	60	%	
	XIN, XOUT loading	Crystal osc. active				
	Capacitance	—	—	10	pF	
	Resistance	—	20	—	MΩ	
	X358 pin:	CL = 20 pF				
	V _{OL}	I _{SINK} = -10 μA	—	0.2	V	
	V _{OH}	I _{SOURCE} = 10 μA	V _{DD} - 0.2	—	V	
Duty cycle	—	40	60	%		
tri-state Operation	Enable time, T _{EN} , Z to lo or hi	CL = 50 pF	—	450	ns	
	Disable time, T _{DE} , lo or hi to Z	RL = 100 KΩ	—	450	ns	


Unless otherwise noted, V_{DD} - V_{SS} = 5V and Ta = 25°C

Notes:

- All parameters are specified at V_{DD} = 5 volts and X RANGE at a logical "hi" state (i.e., unity front-end gain). Power levels are in dBm referenced to 600Ω. All DC voltages are referenced to V_{SS}.
- A post-filter AGC is employed to enhance end-of-tone detection for high-level signals. A drop in amplitude of the input tone may cause an end-of-tone (interval) indication.
- Any tone 40 Hz from center frequency must adhere to this specification.
- Large input voltage transients may cause excessive ringing in the highly selective filter, causing spurious detection. The detects are not considered as incorrect circuit operation.
- Frequency 6% away from center frequency.
- Per tone.

Drawing not to scale.
Does not reflect actual part marking.

22-Pin DIP

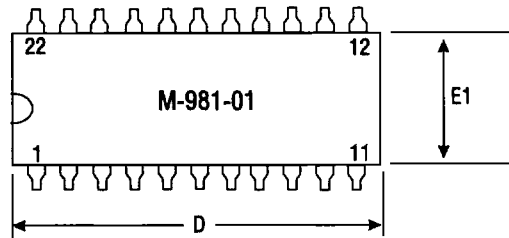

	Tolerances			
	(inches)		Metric (mm)	
	Min	Max	Min	Max
A		.210		5.33
A1	.015		.381	
b	.014	.022	.356	.559
b2	.045	.065	1.143	1.651
C	.009	.015	.229	.381
D	1.065	1.120	27.051	28.448
E	.390	.425	9.906	10.795
E1	.330	.390	8.382	9.906
e	.100 BSC		2.54 BSC	
ec	0°	15°	0°	15°
L	.115	.160	2.921	4.064

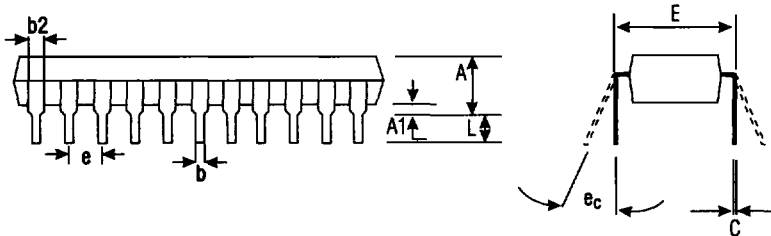


Figure 5 Package Dimensions

Table 4 Call Progress Tones

Frequency (HZ)		Use
1	2	
350	440	Dial Tone
400	Off	Special
440	Off	Alert Tone
440	480	Audible Ring
440	620	Pre-empt
480	Off	Bell High Tone
480	620	Reorder (Bell Low)
350	Off	Special
620	Off	Special
941	1209	DTMF "*"

Table 5 Absolute Maximum Ratings

Storage Temperature	-40 to 125°C
Operating Ambient Temperature	-0 to 70°C
V _{DD}	15V
Input Voltage on SIGIN	V _{SS} - 22 to V _{DD} + 0.5V
Input Voltages (except SIGIN)	V _{SS} - 0.3 to V _{DD} + 0.3V
Lead Soldering Temperature	260°C for 5 seconds
Note: Exceeding these ratings may permanently damage the M-981-01	