


**Detector/Amplifier Hybrids Without Feedback Resistor
BLUE ENHANCED
SD 100-42-22-231**

Precision – Control – Results

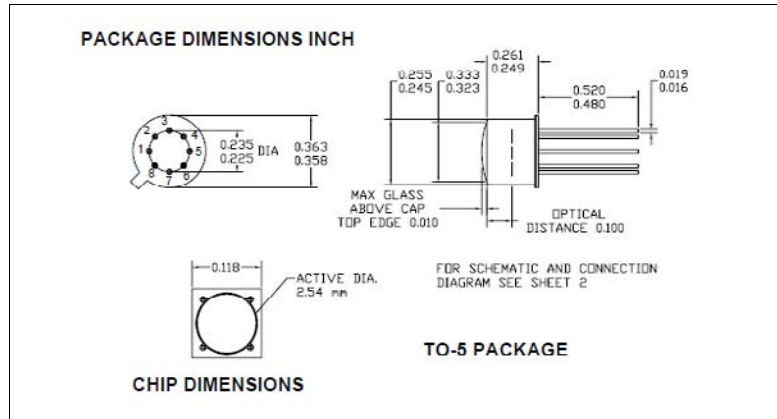

DESCRIPTION

The **SD 100-42-21-231** is a red enhanced detector/amplifier that combines a silicon photodiode with an opamp without a feedback network, Packaged in a hermetic TO-5 metal can package.

FEATURES

- Low Noise
- Red Enhanced
- Custom Feedback
- High Speed

RELIABILITY

Contact Luna for recommendations on specific test conditions and procedures.

APPLICATIONS

- Instrumentation
- Industrial
- Medical



ABSOLUTE MAXIMUM RATINGS

T_a = 23°C UNLESS OTHERWISE NOTED

SYMBOL	MIN	TYPE	MAX	UNITS
Voltage Supplies	±5	±15	±18	V
Input Offset Voltage	-	1	2	mV
Input Voltage Noise@ f=10KHz	-	12	-	nV/√Hz
Input Bias Current	-	15	40	pA
Input Current Noise @ f=10KHz	-	20	30	fA/√Hz
Gain Bandwidth Product	-	18	-	MHz
Supply Current	-	6.5	7	mA
Storage Temperature	-65	-	+125	°C
Operating Temperature	-40	-	-85	°C

Information in this technical datasheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice.

REV 01-04-16
© 2016 Luna Optoelectronics. All rights reserved.

Detector/Amplifier Hybrids Without Feedback Resistor
BLUE ENHANCED
SD 100-42-22-231

Precision – Control – Results


T_a = 23°C UNLESS NOTED OTHERWISE

OPTO-ELECTRICAL PARAMETERS

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Dark Current	V _R = 10 V	-	-	10	nA
Shunt Resistance	V _R = 0 mV	300	-	-	MΩ
Junction Capacitance	V _R = 0V; f = 1 MHz	-	87	-	pF
	V _R = 10V; f = 1 MHz	-	18	-	
Spectral Application Range	Spot Scan	250	-	1100	nm
Responsivity	λ = 450nm, V _R = 0 V	-	.20	-	A/W

TYPICAL PERFORMANCE

SPECTRAL RESPONSE

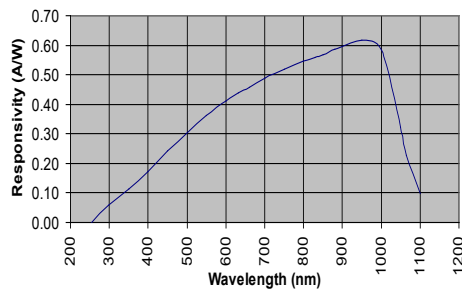

Information in this technical datasheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice.

REV 01-04-16


© 2016 Luna Optoelectronics. All rights reserved.

Detector/Amplifier Hybrids Without Feedback Resistor
BLUE ENHANCED
SD 100-42-22-231

Precision – Control – Results


SCHEMATIC AND CONNECTION DIAGRAM

PHOTOVOLTAIC MODE

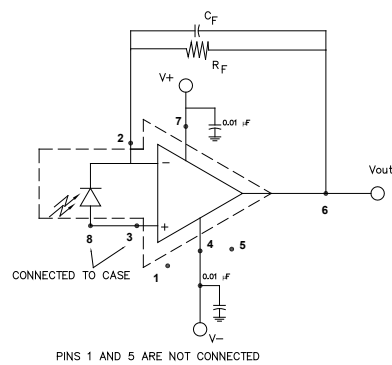

Note: Components shown outside the dashed area are external to the device, and must be supplied by the user.

PHOTOCONDUCTIVE MODE

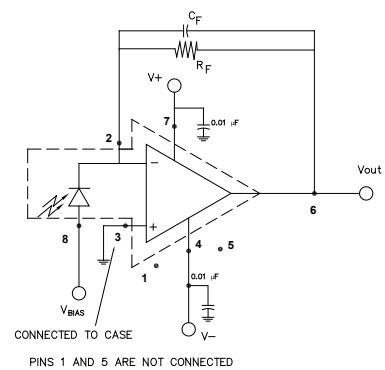

Note: Components shown outside the dashed area are external to the device, and must be supplied by the user.

Information in this technical datasheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice.

REV 01-04-16

© 2016 Luna Optoelectronics. All rights reserved.