

Mustang Series

Gigabit Ethernet, TFOCA II®,
1000Base-T/LX Media Converter,
Single Mode, 1310nM, 3.3VDC

Dual Port, Jam Nut

FEATURES

- Compliant with IEEE-802.3:2005 Gigabit Ethernet 1000Base-T and 1000Base-LX
- Optical fiber link distances up to 10.0 Kilometers
- Copper link distances up to 100 Meters (EIA/TIA Cat-5E)
- Operating temperature range from -40°C to +85°C
- Shock, vibration and immersion resistant per MIL-STD-810
- Zinc Nickel plating meets stringent EMI / RFI and corrosion resistance performance specifications
- Aluminum housings are strong, durable and light weight
- TFOCA II® compliant optical fiber connector interface
- Samtec SMT electrical connector for simple interface to backplanes or motherboards

APPLICATIONS

Mustang series bulkhead mounted Gigabit Ethernet media converters enable high speed network communications over long distances in harsh environments.

- Gigabit Ethernet switches and peripherals
- Telecom and datacom switch / router rack-to-rack links
- Storage or computation clusters

The TFOCA II® shell provides a sealed optical interface that is water-tight to MIL-STD-810 when mated.

The single mode optical fiber interface supports applications where copper cable link distance, bandwidth, weight or bulk make the use of twisted pair, twinax or quadrx copper conductors unacceptable.

*TFOCA-II® is a registered trademark of Amphenol Fiber Systems International.



TFOCAII® to Samtec SMT Optical to Electrical Media Converter

DESCRIPTION

Mustang series Gigabit Ethernet media converters consist of optoelectronic transmitter and receiver functions integrated along with the 1000Base-T electrical to 1000Base-LX optical media conversion circuitry into a jam-nut TFOCA II® fiber optic connector assembly.

The optical transmitters are high output 1310nM devices. The optical receivers consist of InGaAs PIN and preamplifier assemblies and limiting post-amplifiers.

The electrical interface to the Mustang series optical media converters is a Samtec SMT electrical connector for interface to backplanes or motherboards.

Mustang series Gigabit Ethernet media converters are vibration isolated, environmentally hardened components designed for use in harsh environment applications.

- Sealed against liquid and solid contaminants
- Shock and vibration resistant

ORDERING INFORMATION

Application	Product Number
Dual Port 1000Base-T / LX - 3.3VDC	P51J-4L2T-Fx-Lxxx
See page 10 for standard part number / cable length options	

Dual Port Mustang Series *TFOCA II® Connector, 1000Base-T to
1000Base-LX Media Converter, Single Mode, 1310nm

ABSOLUTE MAXIMUM RATINGS

Absolute maximum limits mean that no catastrophic damage will occur if the product is subjected to these ratings for short periods, provided each limiting parameter is in isolation and all other parameters have values within the performance specification. It should not be assumed that limiting values of more than one parameter can be applied to the product at the same time.

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Storage Temperature	T_s	-55		+100	°C

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Operating Temperature	T_A	-40		+85	°C
Supply Voltage	V_{CC}	+3.135		+3.465	V
Power Supply Noise (p-p)	N_p			200	mV

SPECIFICATIONS COMPLIANCE

Requirement	Feature	Condition	Notes
MIL-STD-883	ESD	Class II	2200V
MIL-STD-810	Vibration	3.8g ² /Hz	43G rms
MIL-STD-810	Shock	40.0g	6-9mS
MIL-STD-810	Immersion	1.0 meter	2 .0Hours
MIL-STD-1344	Flame Resistance	Method 1012	30 Seconds
MIL-STD-1344	Damp Heat	10 Cycles	24 Hours
FDA / CDRH / IEC-825-1	Eye Safety	Class 1	No Safety Interlocks Required

MATERIALS

Item	Detail	Notes
Shell	Aluminum Alloy	
Shell Plating	OD CD, Nickel, Zinc Nickel	SAE-AMS-2417
Insert	Aluminum Alloy	
Interfacial Seal	Elastomer	
Alignment Sleeves	Zirconia	
Printed Circuits	FR-4	

Dual Port Mustang Series *TFOCA II® Connector, 1000Base-T to
1000Base-LX Media Converter, Single Mode, 1310nm

TRANSMITTERS $T_A = \text{Operating Temperature Range}$

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Optical Output Power	P_o	-9.5		-3.0	dBm
Optical Output Wavelength	λ_{OUT}	1285	1310	1335	nm

RECEIVERS $T_A = \text{Operating Temperature Range}$

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Optical Sensitivity	P_i	-19.0		0.0	dBm
Optical Wavelength	λ_{IN}	1100		1590	nm

SUPPLY CURRENT $T_A = \text{Operating Temperature Range}$

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Supply Current per Port	I_{CCT}		400	650	mA


OPTICAL FIBER LINK DISTANCES

Application	Fiber Specification	Distance
Gigabit Ethernet - 1000Base-LX IEEE 802.3:2005	9/125 μ SMF	10.0Km

Dual Port Mustang Series *TFOCA II® Connector, 1000Base-T to
1000Base-LX Media Converter, Single Mode, 1310nm

Outline Dimensions

Dimensions are shown as: inches (mm)

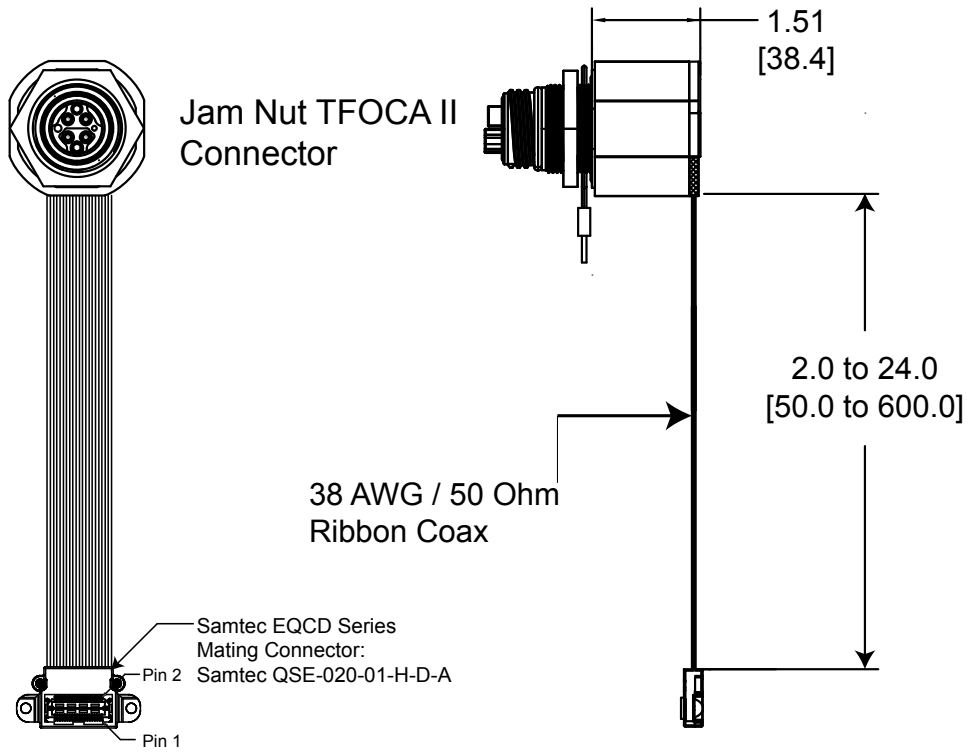


Part Number = P51J-xxxx-xx-Lxxx*

* See page 7 for standard cable length options

TFOCA II Panel Cutout Dimensions


Rear Panel Mounting Only

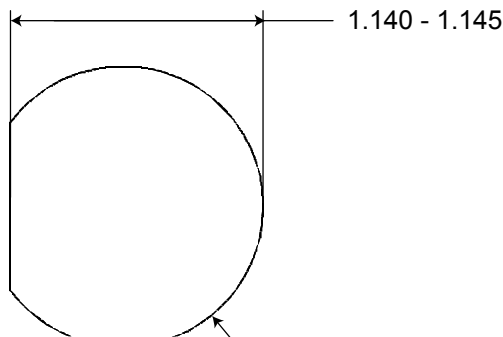

Dual Port Mustang Series *TFOCA II® Connector, 1000Base-T to
1000Base-LX Media Converter, Single Mode, 1310nm

MEDIA CONVERTER OPTICAL INSERT PIN / Port ARRANGEMENT

TOP Optical Interface

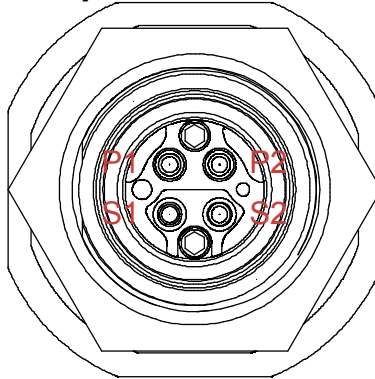

Front view of the TFOCA II media converter optical insert shown - fiber optic cable plug opposite - see Appendix A1 for details


Optical Pin / Port Assignments

Port Number	RX	TX
0	P2	S2
1	P1	S1

Dual Port Mustang Series *TFOCA II® Connector, 1000Base-T to
1000Base-LX Media Converter, Single Mode, 1310nm

PRINTED CIRCUIT BOARD FOOTPRINT

All dimensions shown are for reference only: inches [mm]

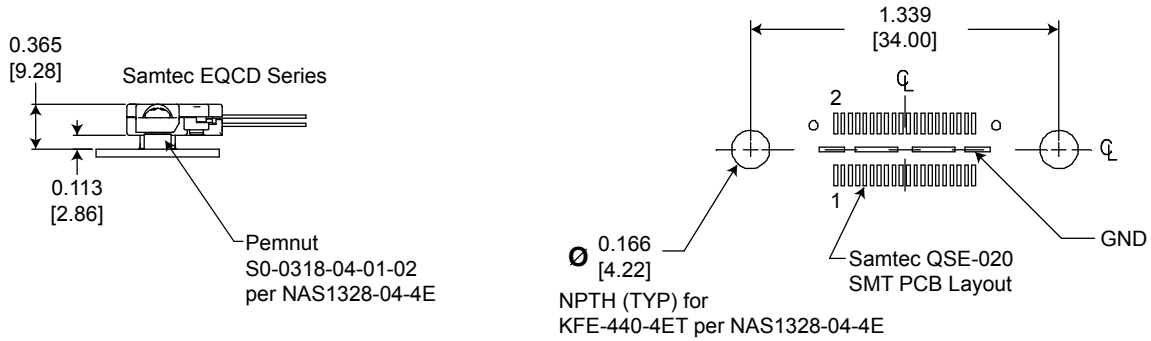

Samtec EQCD PIN ASSIGNMENTS


PIN #	PORT #	FUNCTION	Input / Output	RJ-45 PIN#	Logic Family
1	0	MDA+	Input / Output	1	IEEE-802.3:2005 1000Base-T
2	1	MDA+	Input / Output	1	IEEE-802.3:2005 1000Base-T
3	0	MDA-	Input / Output	2	IEEE-802.3:2005 1000Base-T
4	1	MDA-	Input / Output	2	IEEE-802.3:2005 1000Base-T
5	0	MDB+	Input / Output	3	IEEE-802.3:2005 1000Base-T
6	1	MDB+	Input / Output	3	IEEE-802.3:2005 1000Base-T
7	0	MDB-	Input / Output	6	IEEE-802.3:2005 1000Base-T
8	1	MDB-	Input / Output	6	IEEE-802.3:2005 1000Base-T
9	0	MDC+	Input / Output	4	IEEE-802.3:2005 1000Base-T
10	1	MDC+	Input / Output	4	IEEE-802.3:2005 1000Base-T
11	0	MDC-	Input / Output	5	IEEE-802.3:2005 1000Base-T
12	1	MDC-	Input / Output	5	IEEE-802.3:2005 1000Base-T
13	0	MDD+	Input / Output	7	IEEE-802.3:2005 1000Base-T
14	1	MDD+	Input / Output	7	IEEE-802.3:2005 1000Base-T
15	0	MDD-	Input / Output	8	IEEE-802.3:2005 1000Base-T
16	1	MDD-	Input / Output	8	IEEE-802.3:2005 1000Base-T
17	0	*Reset_Low	$\overline{\text{Input}}$	N/A	LVTTTL with Internal Pullup
18	1	*Reset_Low	$\overline{\text{Input}}$	N/A	LVTTTL with Internal Pullup
19	0-1	V _{CC}	Input	N/A	3.135 to 3.465VDC
20	0-1	V _{CC}	Input	N/A	3.135 to 3.465VDC
21	0-1	V _{CC}	Input	N/A	3.135 to 3.465VDC
22	0-1	V _{CC}	Input	N/A	3.135 to 3.465VDC

*Reset Function: Logic "0" Input = Restart, registers initialized; Logic "1", Open or High Z Input = Normal Operation, center slug is Ground, all other pins are N/C

Dual Port Mustang Series *TFOCA II® Connector, 1000Base-T to
1000Base-LX Media Converter, Single Mode, 1310nm

OUTLINE DRAWING

Cable Length Options

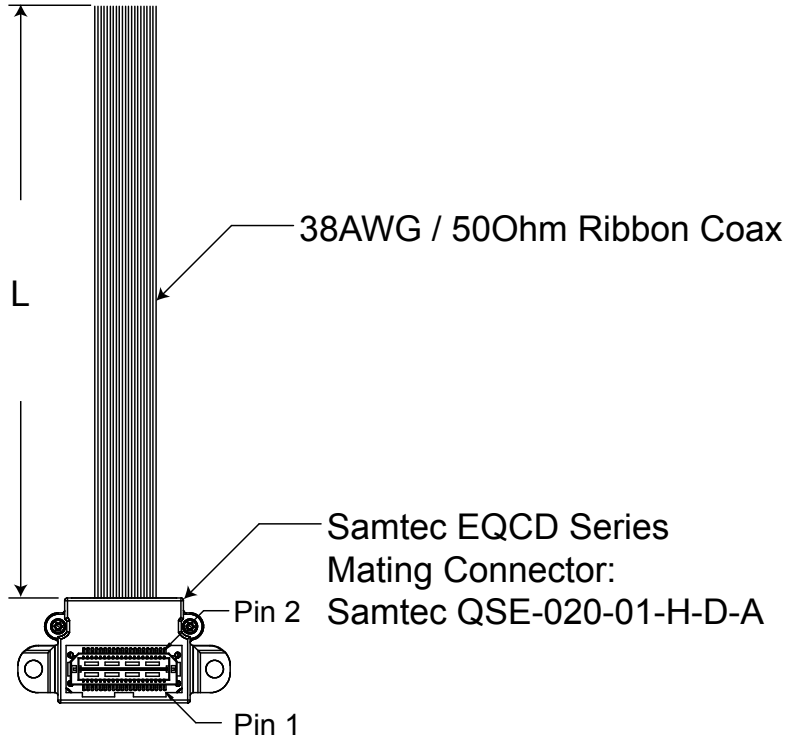


Ribbon Coax Cable Length Options

L (mm) +/- 6.0	ITEM #
50	xxxx-xxxx-xx-L050
100	xxxx-xxxx-xx-L100
150	xxxx-xxxx-xx-L150
200	xxxx-xxxx-xx-L200
250	xxxx-xxxx-xx-L250

Dual Port Mustang Series *TFOCAII® Connector, 1000Base-T to
1000Base-LX Media Converter, Single Mode, 1310nm

APPLICATION SCHEMATIC

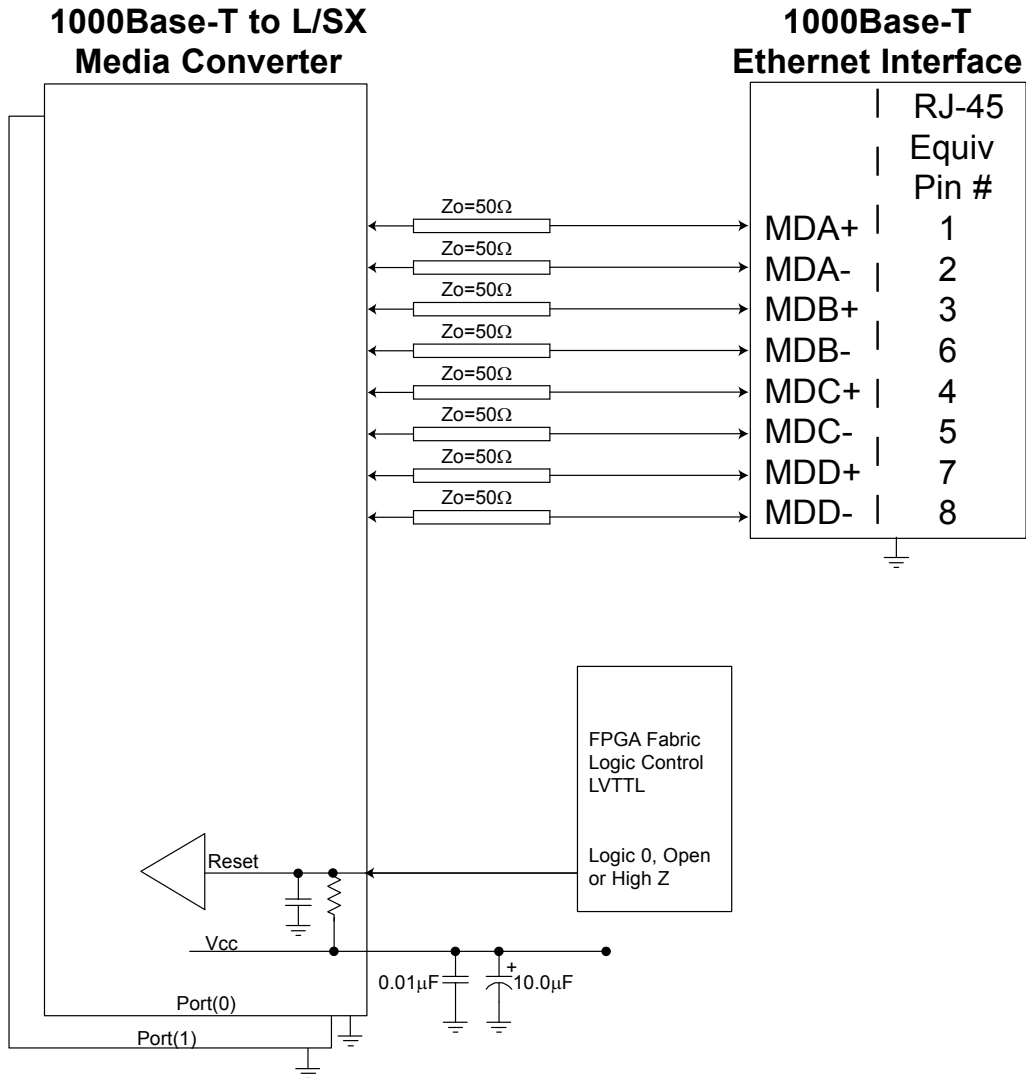


Dual Port Mustang Series *TFOCA II® Connector, 1000Base-T to
1000Base-LX Media Converter, Single Mode, 1310nm

APPENDIX A1

TFOCA-II® 4 Channel Fiber Optic Cable Plug

Dimensions are shown as: inches

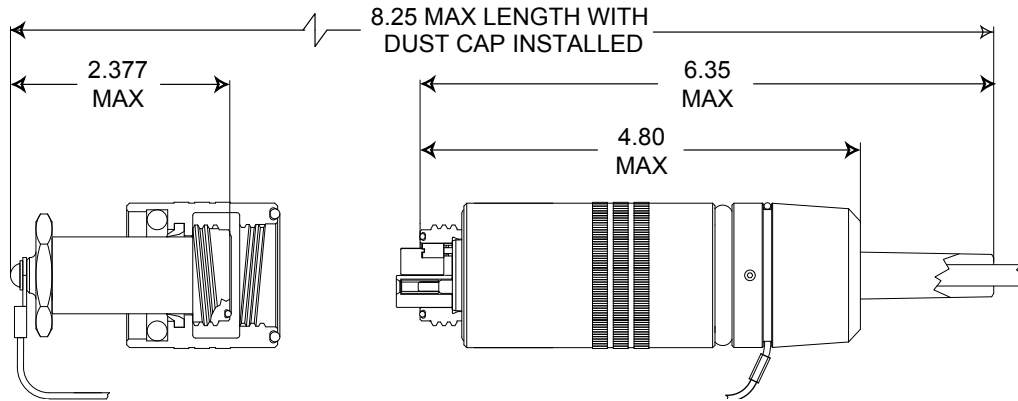


Amphenol Fiber Systems International® TFOCA-II® 4-Channel Connector Part Numbers*

*Contact Amphenol Fiber Systems International for more information

TFOCA II® RECEPTACLE PROTECTION CAPS


RECEPTACLE CAP P/N

Contact Amphenol Fiber Systems International



Dual Port Mustang Series *TFOCA II® Connector, 1000Base-T to
1000Base-LX Media Converter, Single Mode, 1310nm

APPENDIX A1 PART NUMBER OPTIONS

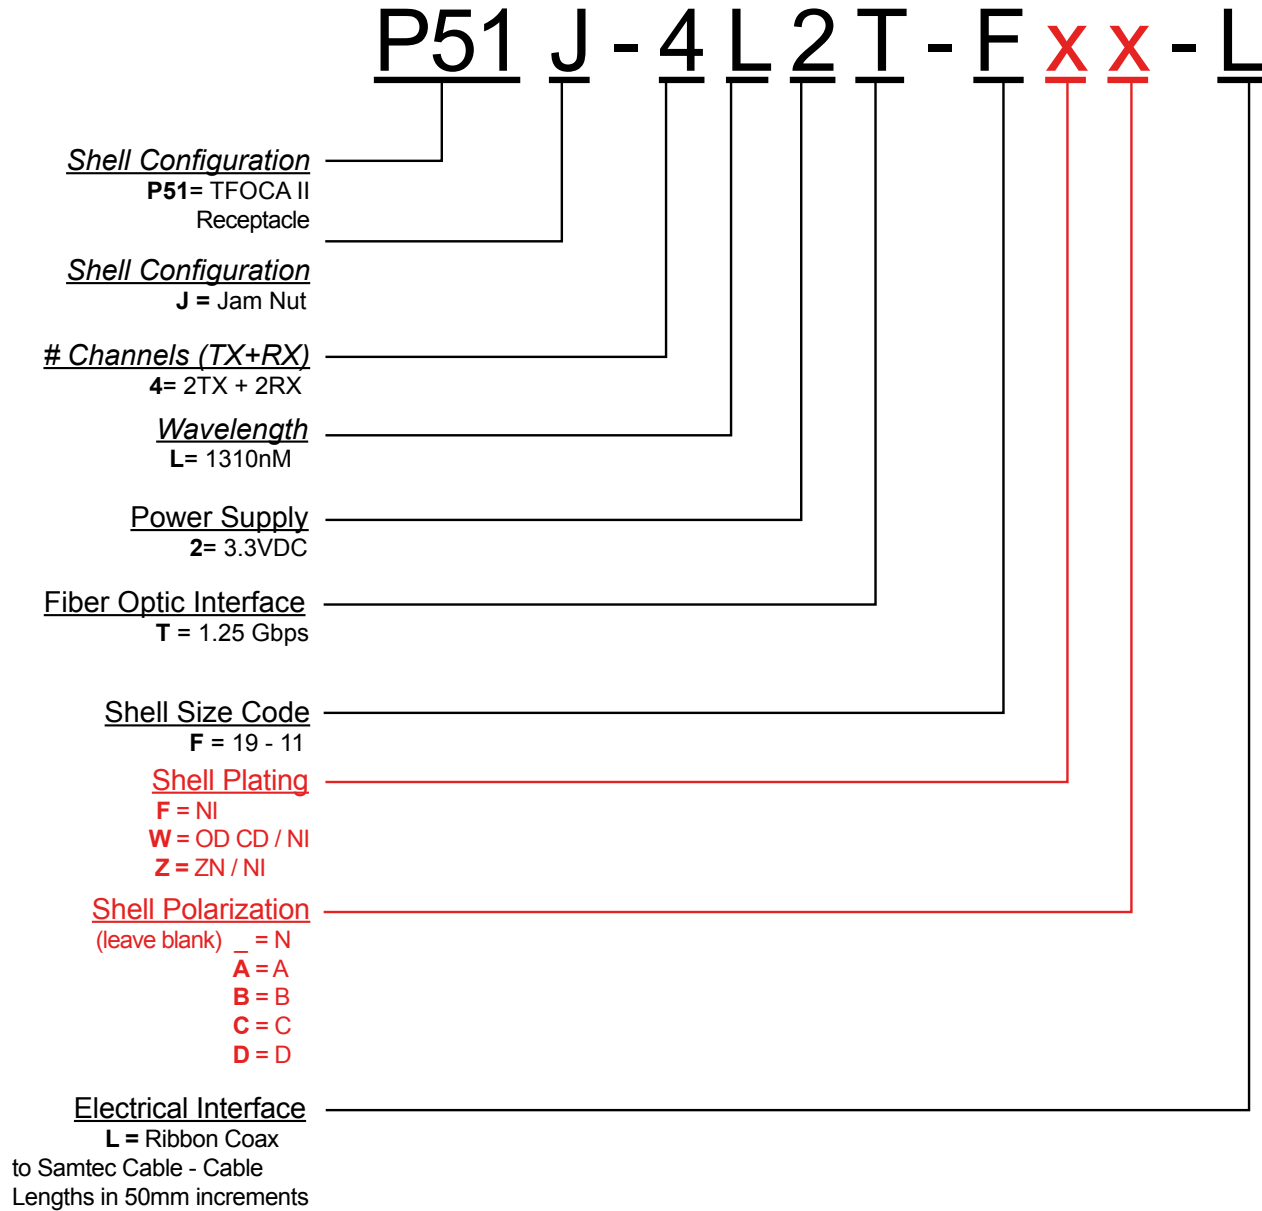

Other wavelength, mounting and port count options are available.
Please consult the Protokraft website for alternate configurations.



192 Bob Fitz Road, Johnson City, TN 37615
salesmp@moog.com
moogprotokraft.com